


PROJECT: _____	UNIT TAG: _____	QUANTITY: _____
REPRESENTATIVE: _____	TYPE OF SERVICE: _____	DATE: _____
ENGINEER: _____	SUBMITTED BY: _____	DATE: _____
CONTRACTOR: _____	APPROVED BY: _____	DATE: _____
	ORDER NO.: _____	DATE: _____





10 SQ10-290

Submersible pumps

Product photo could vary from the actual product

Conditions of Service		Pump Data		Motor Data	
Flow:	8.83 US gpm	Approvals:	UL, cUL	Rated voltage:	200-240 V
Head:	356.1 ft	Approvals motor:	UL,CUL	Main frequency:	50 Hz
Efficiency:		Product number:	96160143	Enclosure class:	IP68
Liquid:	Water			Insulation class:	F
Temperature:	68 °F			Motor protection:	Y
NPSH required:	11.52 ft			Thermal protection:	internal
Viscosity:				Motor type:	MS3
Specific Gravity:	1.000				

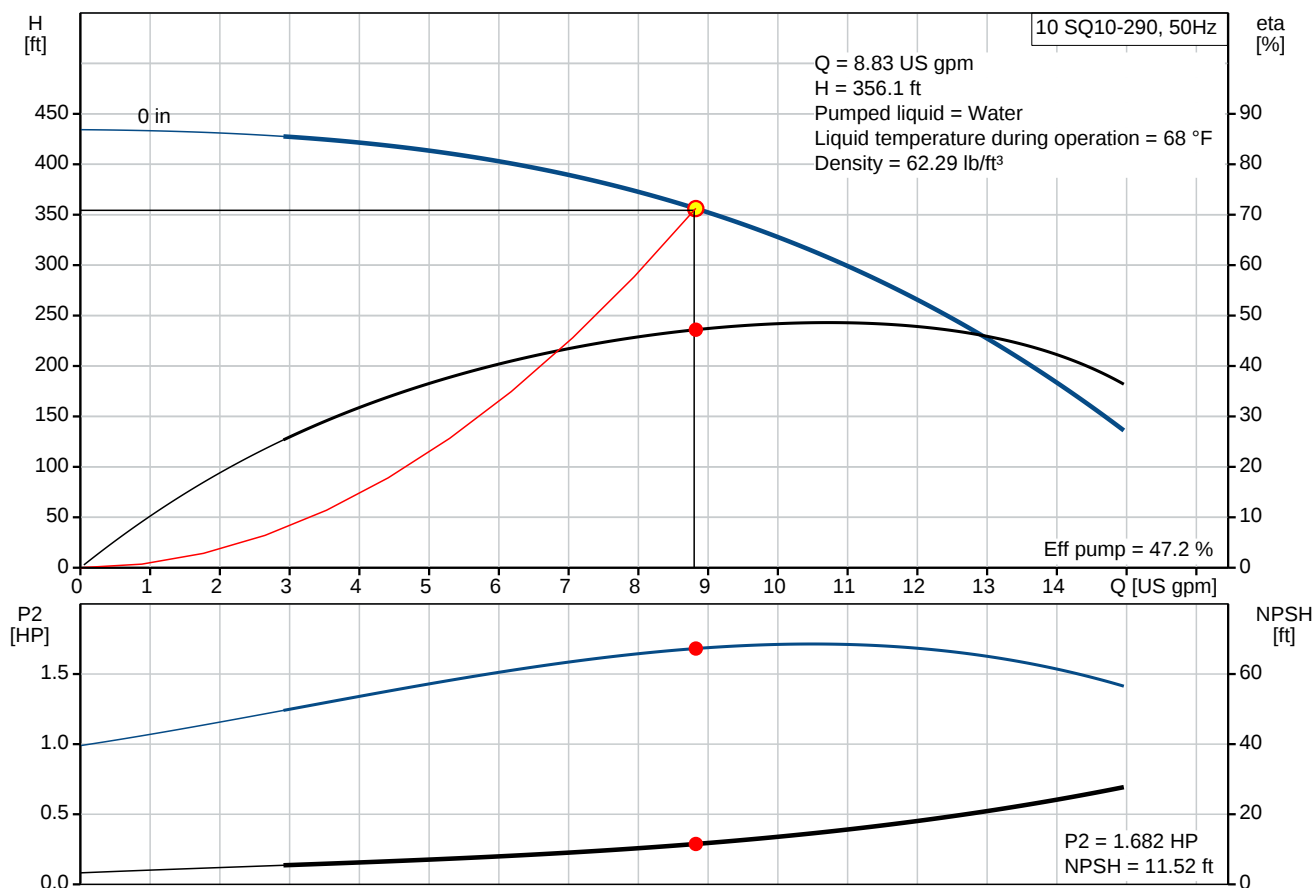

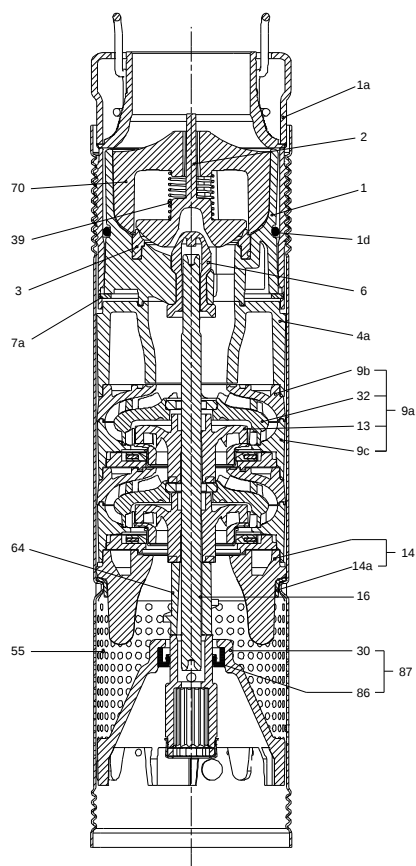


Materials:

Pump: Polyethylene / Stainless steel
DIN W.-Nr. 1.4301

Motor: Stainless steel
1.4301 EN
AISI 304

Tender Text



Product photo could vary from the actual product

Product No.: [96160143](#)

10 SQ10-290

3" multi-stage, submersible pump designed for domestic water supply, liquid transfer in tanks, irrigation and environmental applications. The pump has "floating" impellers, each with its own tungsten carbide/ceramic bearing.

The pump features soft starting and protection against dry-running, upthrust, overvoltage, undervoltage, overload and overtemperature.

The motor is a one-phase motor of the permanent magnet rotor type ensuring optimum efficiency within a wide load range.
The motor is fitted with a replaceable cable plug.

Liquid:

Pumped liquid: Water
Maximum liquid temperature: 95 °F
Max liquid temperature at 0.15 m/sec: 95 °F
Liquid temperature during operation: 68 °F
Density: 62.29 lb/ft³

Technical:

Speed for pump data: 10700 rpm
Actual calculated flow: 8.83 US gpm
Resulting head of the pump: 356.1 ft
Approvals on nameplate: UL, cUL
Approvals on motor nameplate: UL, CUL
Curve tolerance: ISO9906:2012 3B

Materials:

Pump: Polyethylene / Stainless steel
DIN W.-Nr. 1.4301
Motor: Stainless steel
1.4301 EN
AISI 304

Installation:

Pump outlet: NPT 1 1/4
Minimum borehole diameter: 2.99 in

Electrical data:

Motor type: MS3



Company name:


Created by:

Phone:

Date:

2/22/2018

Power input - P1:	2.32 kW
Rated power - P2:	2.253 HP
Main frequency:	50 Hz
Rated voltage:	1 x 200-240 V
Rated current:	11.2 A
Power factor:	1,00
Rated speed:	10700 rpm
Start. method:	direct-on-line
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	F
Length of cable:	4.922 ft

Position	Count	Description
	1	10 SQ10-290  Product photo could vary from the actual product Product No.: 96160143 3" multi-stage, submersible pump designed for domestic water supply, liquid transfer in tanks, irrigation and environmental applications. The pump has "floating" impellers, each with its own tungsten carbide/ceramic bearing. The pump features soft starting and protection against dry-running, upthrust, overvoltage, undervoltage, overload and overtemperature. The motor is a one-phase motor of the permanent magnet rotor type ensuring optimum efficiency within a wide load range. The motor is fitted with a replaceable cable plug. Liquid: Pumped liquid: Water Maximum liquid temperature: 95 °F Max liquid temperature at 0.15 m/sec: 95 °F Liquid temperature during operation: 68 °F Density: 62.29 lb/ft³ Technical: Speed for pump data: 10700 rpm Actual calculated flow: 8.83 US gpm Resulting head of the pump: 356.1 ft Approvals on nameplate: UL, cUL Approvals on motor nameplate: UL, CUL Curve tolerance: ISO9906:2012 3B Materials: Pump: Polyethylene / Stainless steel DIN W.-Nr. 1.4301 Motor: Stainless steel 1.4301 EN AISI 304 Installation: Pump outlet: NPT 1 1/4 Minimum borehole diameter: 2.99 in Electrical data: Motor type: MS3 Power input - P1: 2.32 kW Rated power - P2: 2.253 HP



Company name:

Created by:


Phone:

Date:



2/22/2018

Position	Count	Description
		Main frequency: 50 Hz Rated voltage: 1 x 200-240 V Rated current: 11.2 A Power factor: 1,00 Rated speed: 10700 rpm Start. method: direct-on-line Enclosure class (IEC 34-5): IP68 Insulation class (IEC 85): F Length of cable: 4.922 ft


96160143 10 SQ10-290 50 Hz

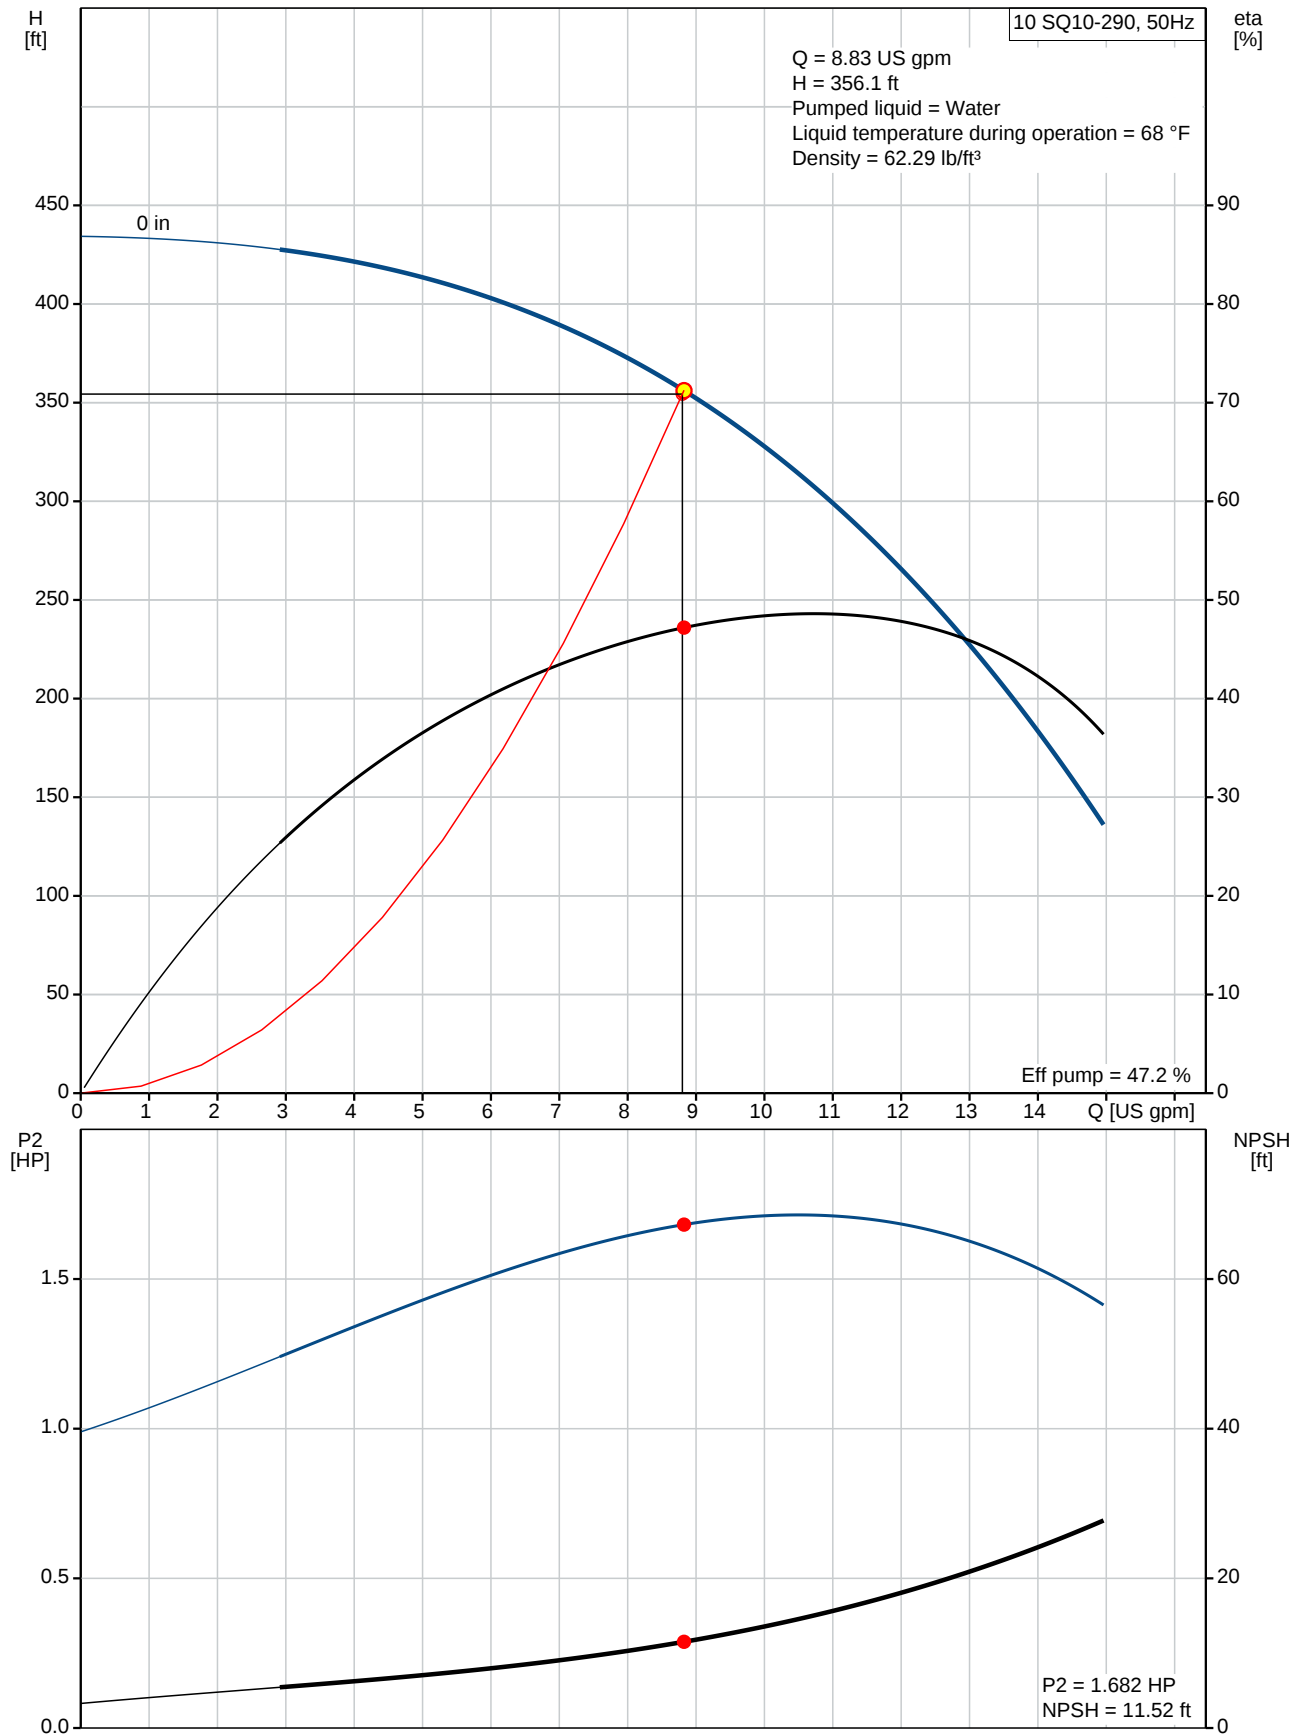

Description	Value
General information:	
Product name:	10 SQ10-290
Product No.:	96160143
EAN:	5700398694267
Technical:	
Speed for pump data:	10700 rpm
Actual calculated flow:	8.83 US gpm
Resulting head of the pump:	356.1 ft
Stages:	6
Approvals on nameplate:	UL, cUL
Approvals on motor nameplate:	UL, CUL
Curve tolerance:	ISO9906:2012 3B
Pump Number:	96397373
Model:	B
Valve:	pump with built-in non-return valve
Materials:	
Pump:	Polyethylene / Stainless steel
	DIN W.-Nr. 1.4301
Motor:	Stainless steel
	1.4301 EN
	AISI 304
Installation:	
Pump outlet:	NPT 1 1/4
Minimum borehole diameter:	2.99 in
Liquid:	
Pumped liquid:	Water
Maximum liquid temperature:	95 °F
Max liquid temperature at 0.15 m/sec:	95 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft³
Electrical data:	
Motor type:	MS3
Power input - P1:	2.32 kW
Rated power - P2:	2.253 HP
Main frequency:	50 Hz
Rated voltage:	1 x 200-240 V
Rated current:	11.2 A
Power factor:	1,00
Rated speed:	10700 rpm
Start. method:	direct-on-line
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	F
Motor protection:	Y
Thermal protec:	internal
Length of cable:	4.922 ft
Motor Number:	96160537
Controls:	
CU 300/CU 301:	no communication possible
Others:	
Sales region:	Namreg

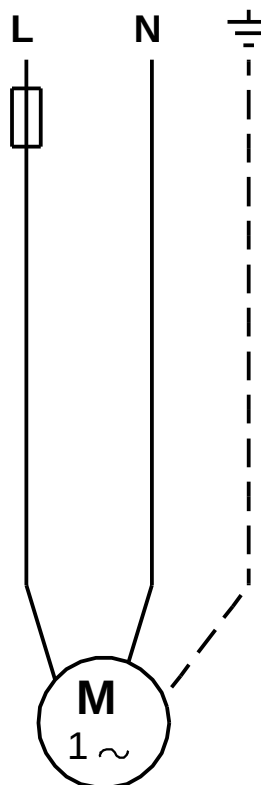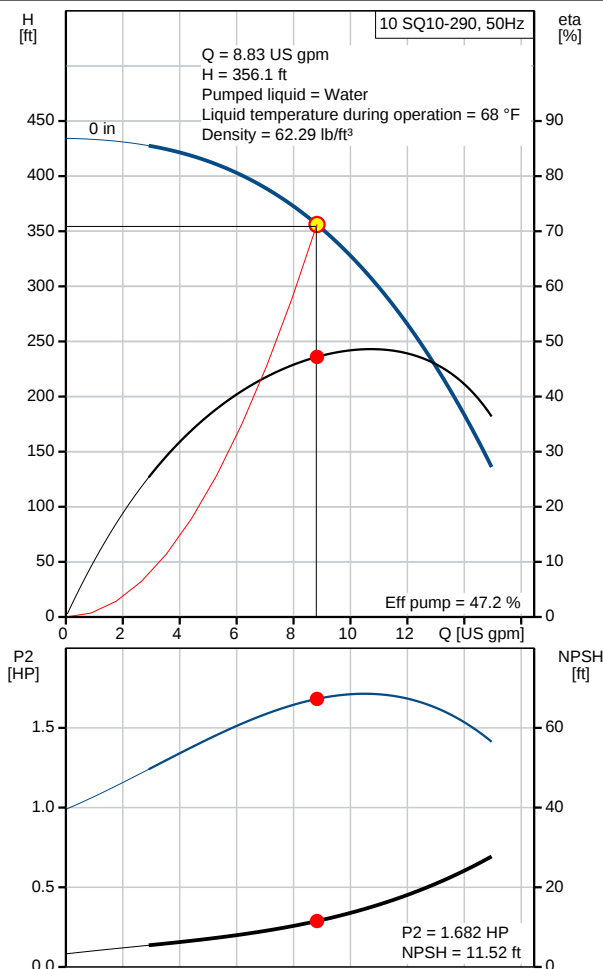

96160143 10 SQ10-290 50 Hz

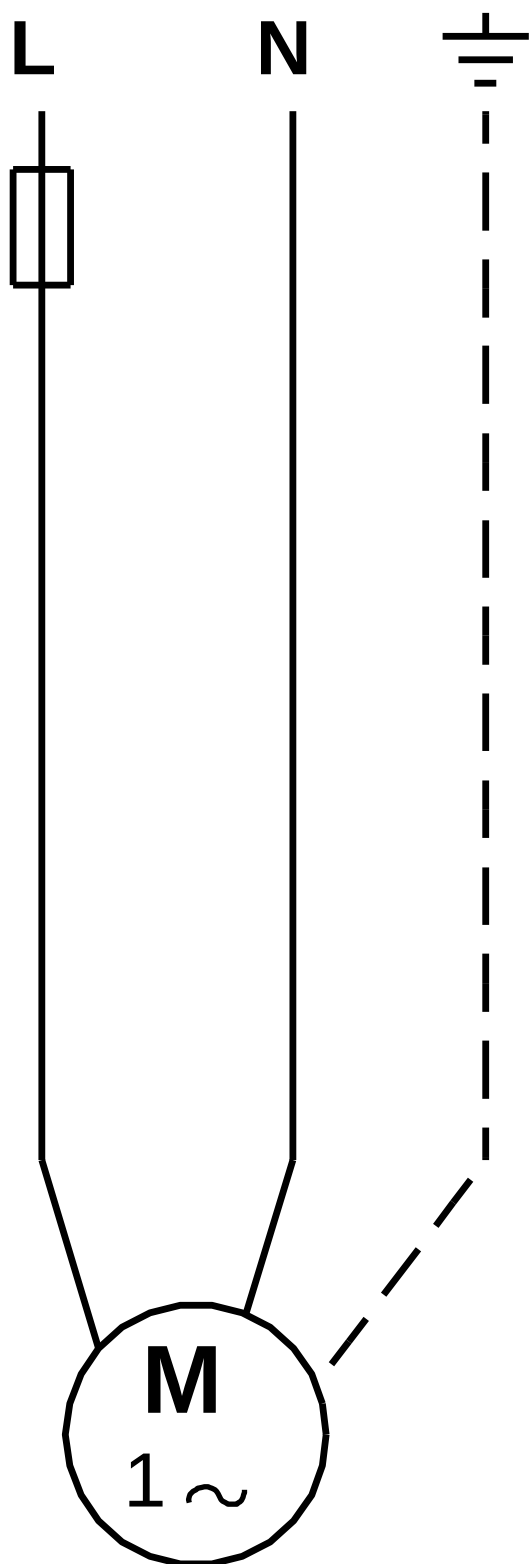

All units are [mm] unless otherwise presented.



Company name:

Created by:

Phone:

Date:

2/22/2018

Order Data:


Product name: 10 SQ10-290

Amount: 1


Product No.: 96160143

Total: Price on request


Exploded view (tm021901 2401)

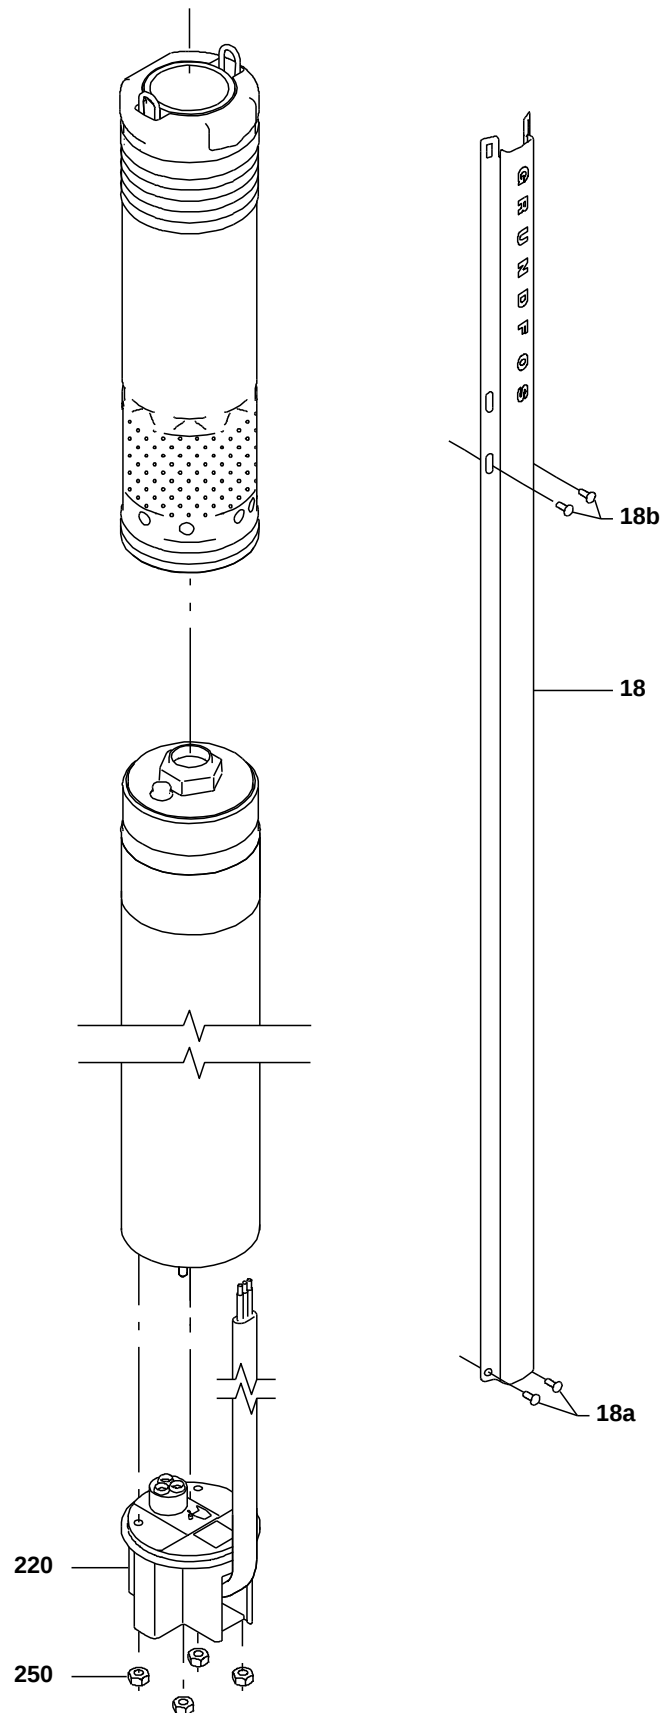

Exploded view (tm024206 0202)

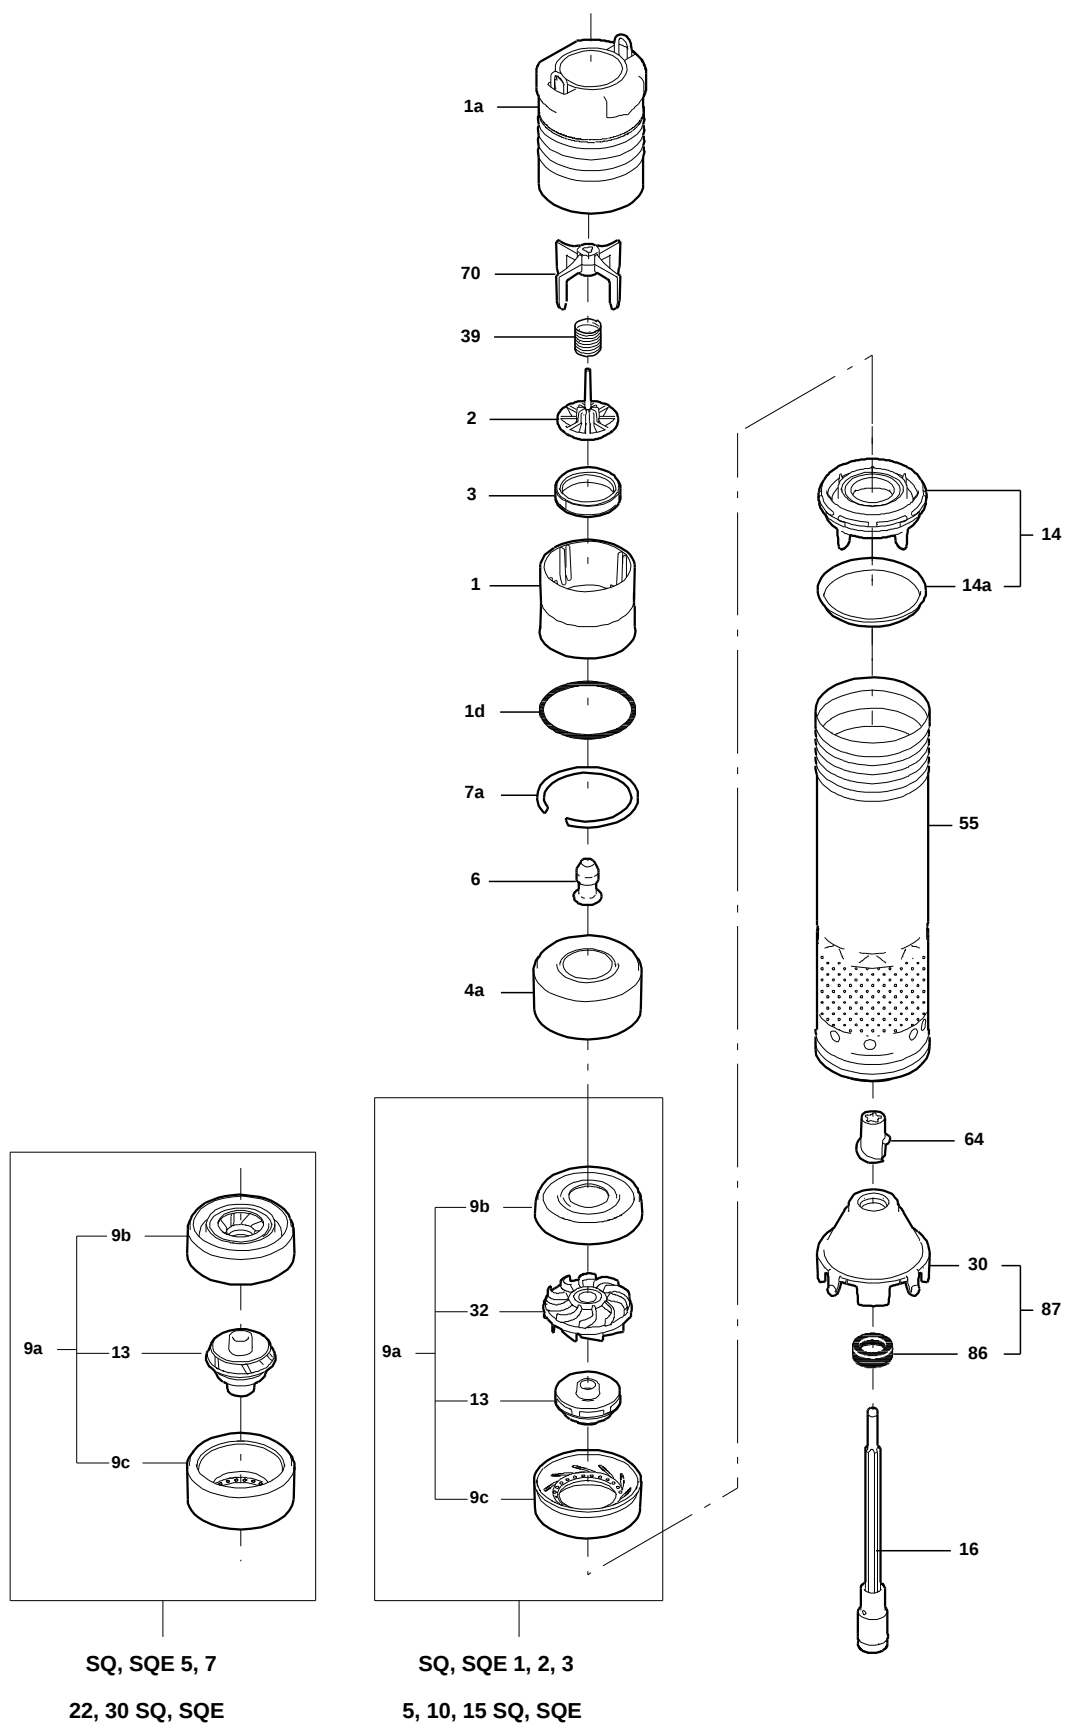


Sectional drawing (tm024207 0202)

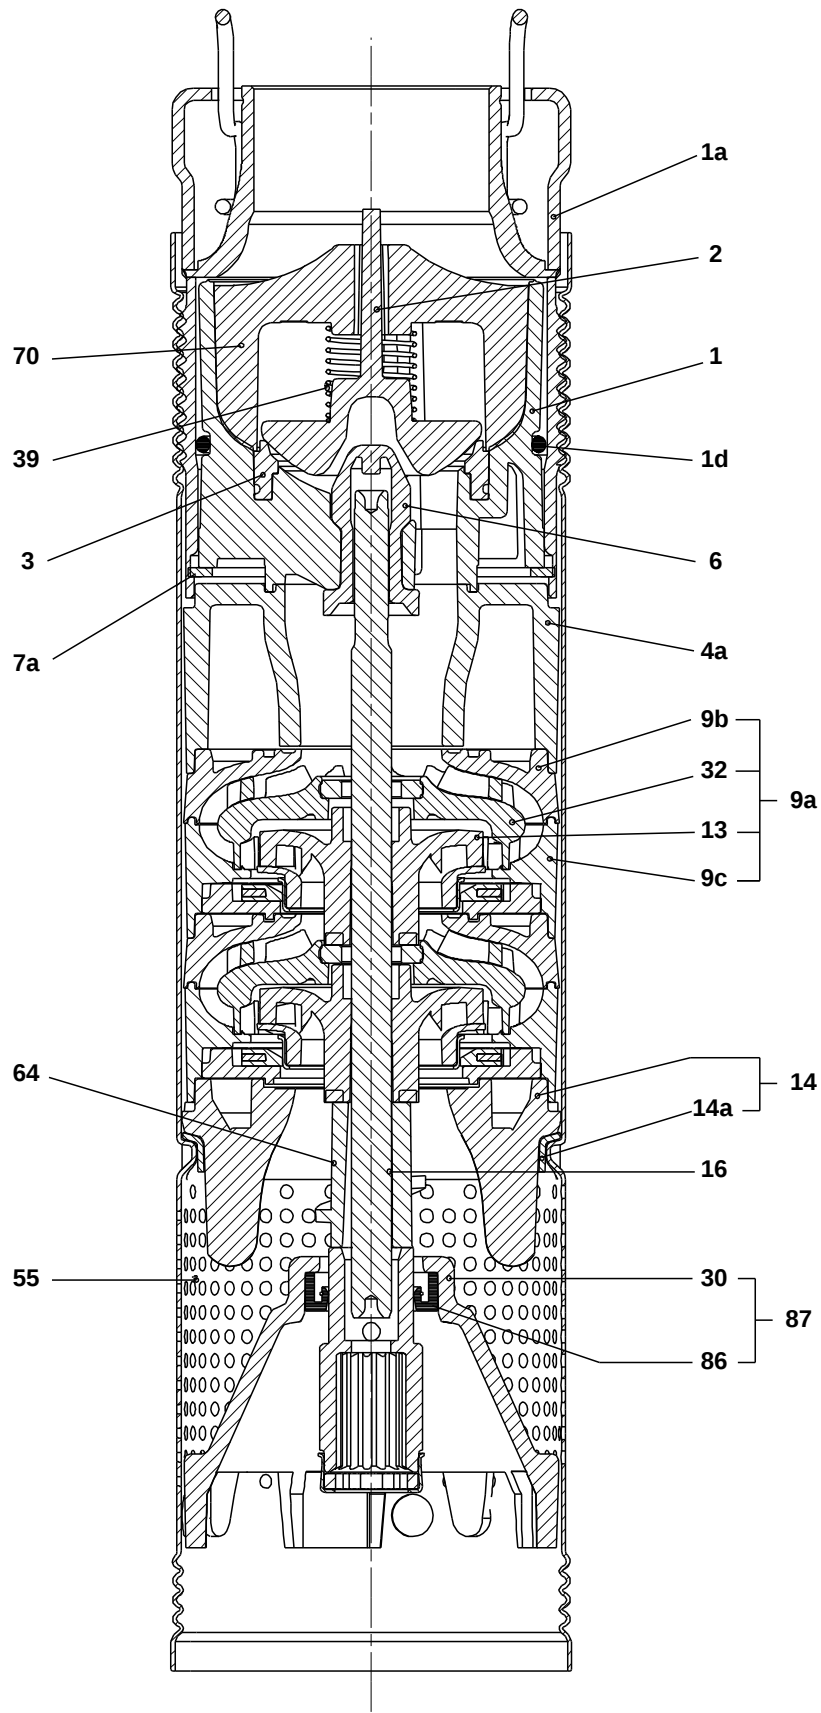


TM024207


Exploded view (TM012016 3504)

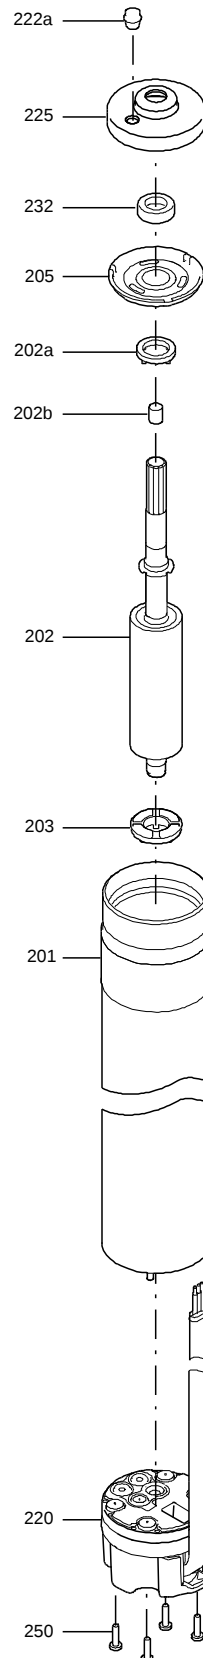

Sectional drawing (TM038215)

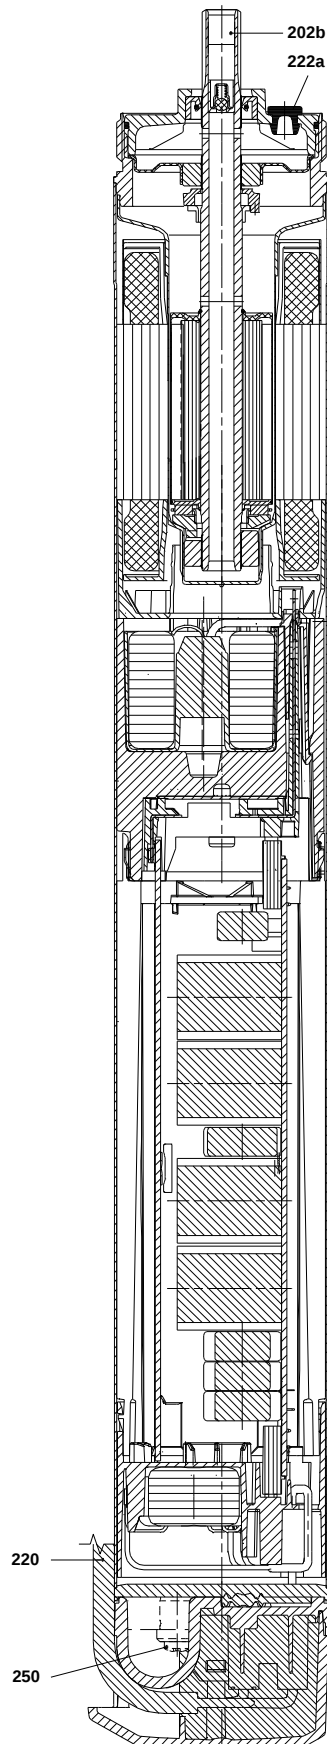

Sectional drawing (TM011953 3504)

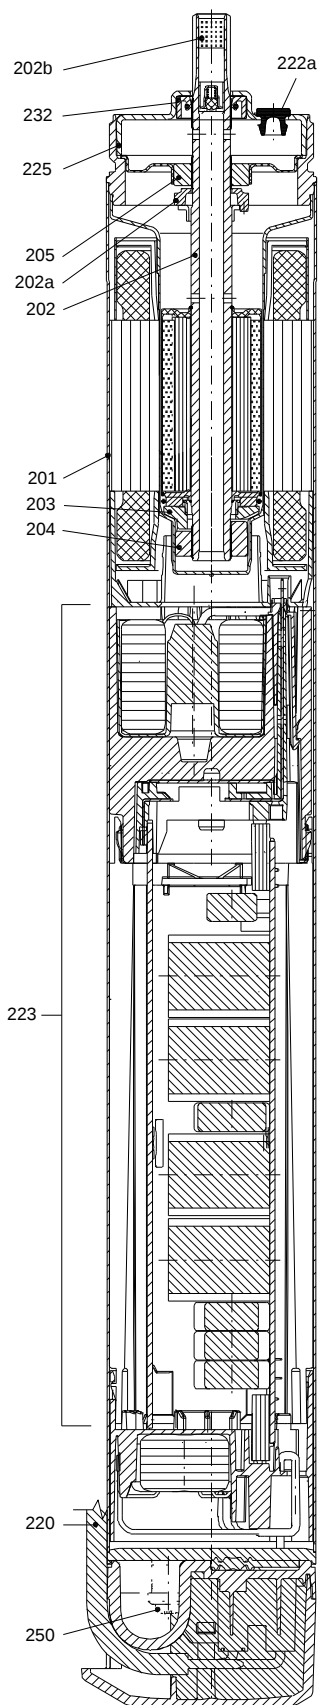



Company name:

Created by:

Phone:

Date:

2/22/2018

Parts list 10 SQ10-290, Prod number 96160143

Valid from 3.12.2012 (1249)

Position	Description	Annotation	Classification data	Part No.	Count	Unit
-	Pump w/o motor				1	pcs
1a	Discharge chamber		Thread: NPT 1 1/4"		1	
16	Shaft cpl.		Length: 205,6		1	
55	Pump sleeve				1	
-	Motor				1	pcs
	Cable w/plug				1	
250	Pan head screw				4	
18	Rail for cable guard				1	pcs