PARTS BREAKDOWN SHEET

TWO HANDLE LAVATORY FAUCET



L-7570 SHOWN **ADA**

Model #: _____

Specific Features: _____

Project Name: _____

Submitted For: _____

Date: _____


- Lever Handles
- J Style Rigid Spout
- 4-1/16” Reach, 3-11/16” From Deck to Aerator
- Ceramic Disc Cartridges
- 3-Hole 4” Installation
- 50/50 Pop-Up Drain Assembly
- With 1.5 GPM Flow Rate

Model #	Features	Finish	
L-7570*		CP	
L-7570-BN*		PVD BN	
L-7570-ORB*		ORB	
L-7570B*	Builder Tract Pack	CP	
L-7570B-BN*	Builder Tract Pack	PVD BN	

* Aerator limited to 1.5 GPM Flow Rate

Olympia products are engineered and manufactured to meet the following standards and codes:

ASME A112.18.1
ANSI A117.1
ANSI / NSF 61, SECTION 9
CONTAINS NO MORE THAN 0.25% WEIGHTED AVERAGE LEAD CONTENT

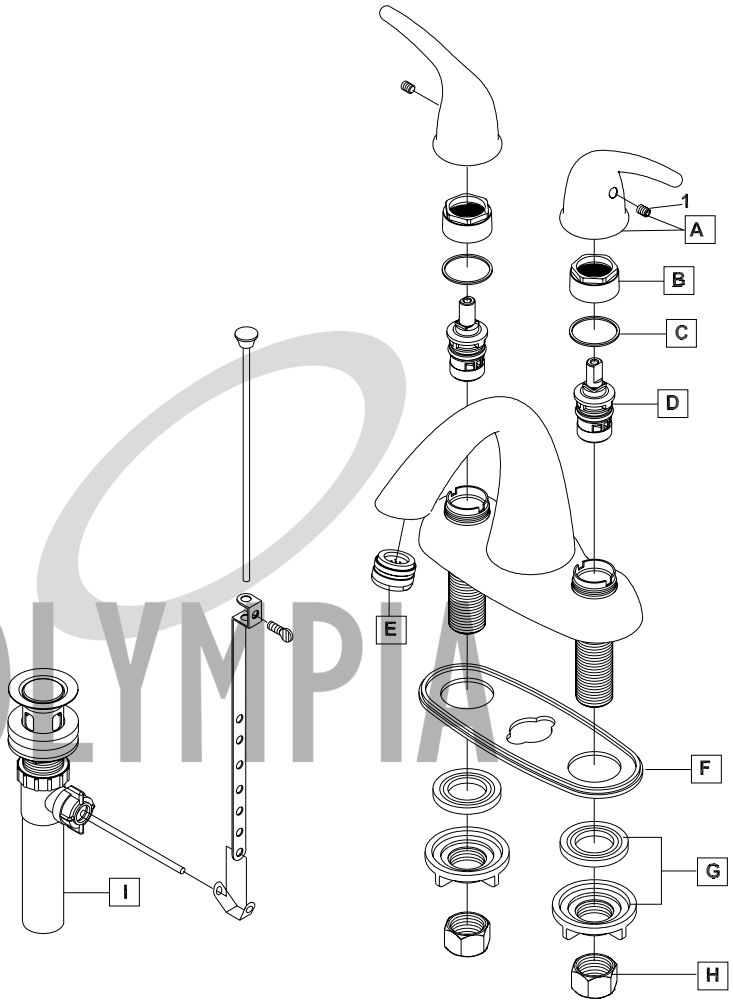

	ITEM #	DESCRIPTION
A	OP-190015C,H*	Lever Handle-Cold, Hot
B	OP-450002	Bonnet Nut
C	OP-430029	Gasket
D	OP-330002C,H	Ceramic Disc Cartridge-Cold,Hot
E	OP-490010*	1.5 GPM Aerator
F	OP-450005	Base Gasket
G	OP-590003	Mounting Kit
H	OP-590001	Supply Nut
I	OP-630004*	50/50 Pop-Up Drain Assembly
1	OP-490029	Allen Screw

* Note- Please Specify finish\color code while ordering.

Nashville, TN
www.olympiafaucets.com
Olympia Faucets, Inc. © 2015
A Pioneer Industries Inc. Brand
DMPBL-7570/REV. 04.15