

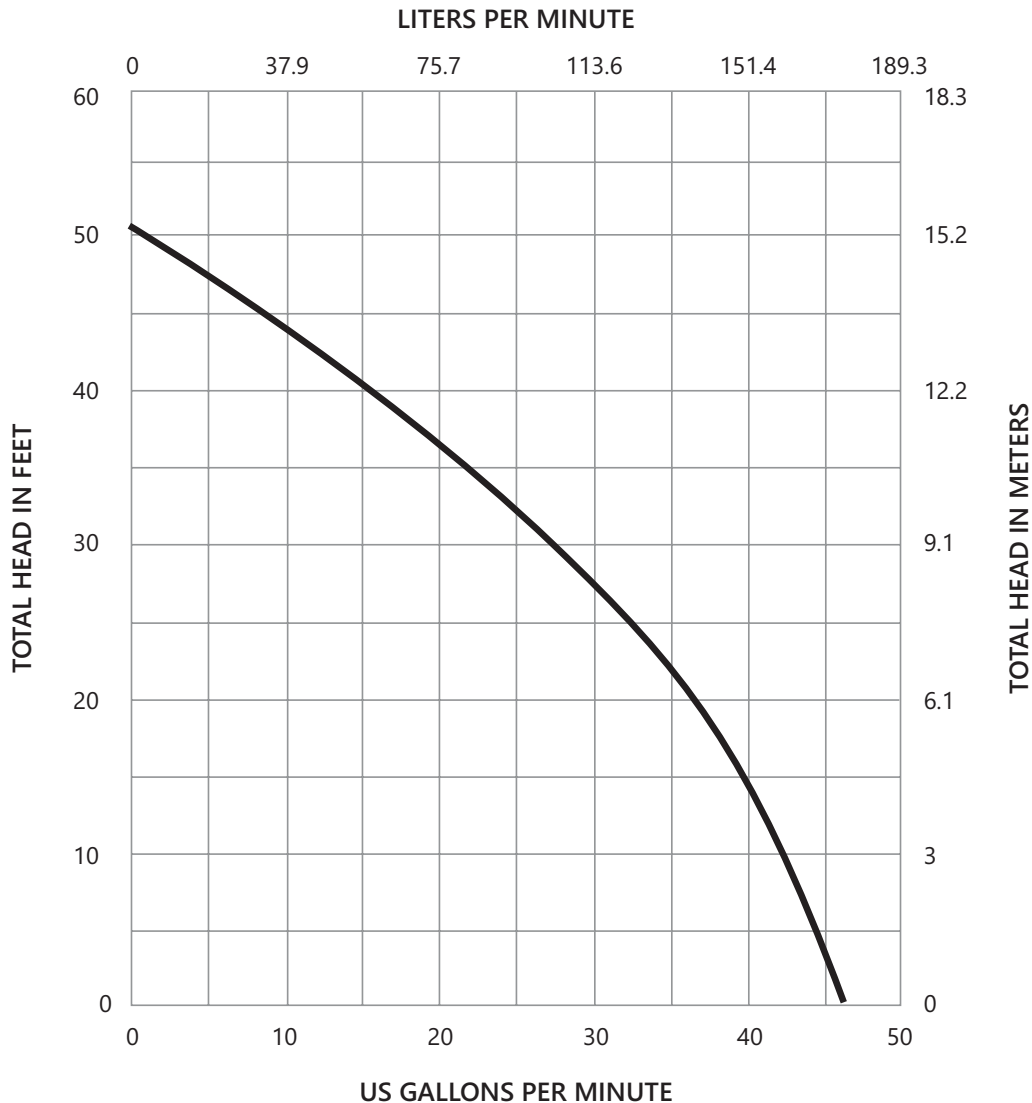
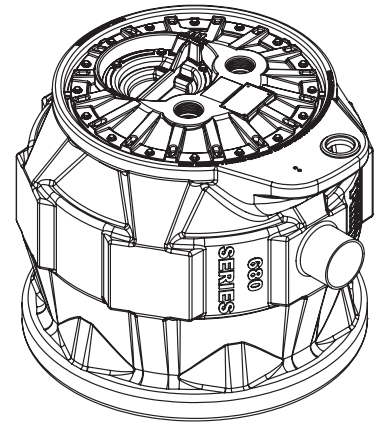


Product Specification

ProVore® 380/ProVore® 680-Series Residential Grinder Packages

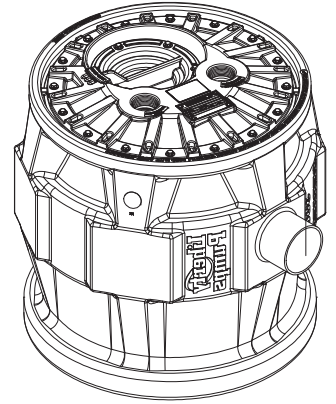


P380 SYSTEM

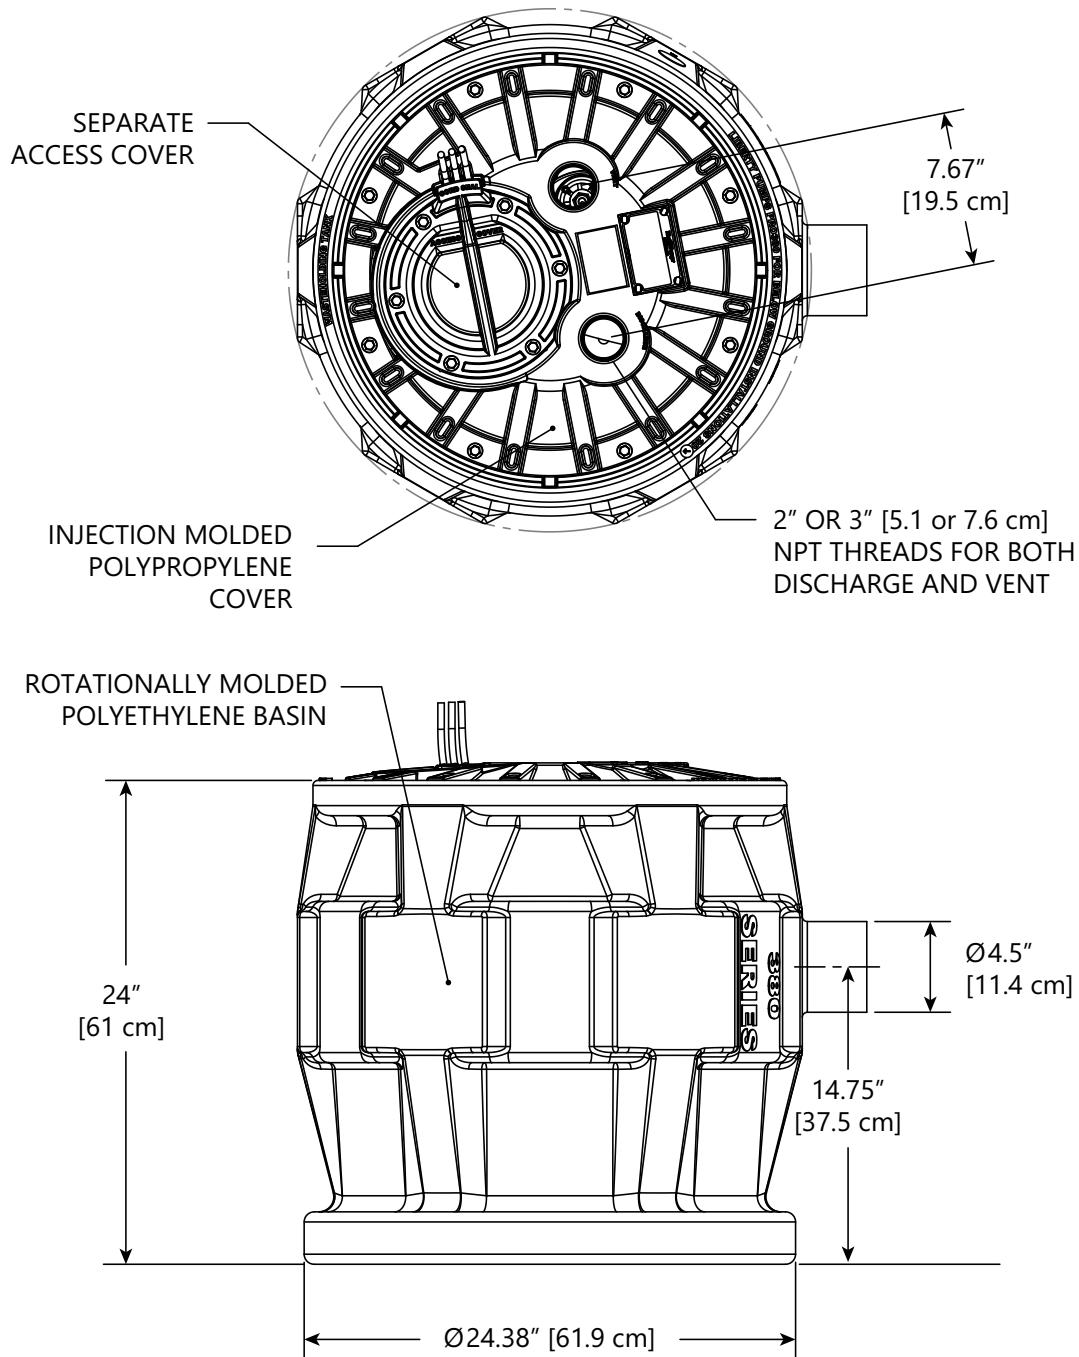


ProVore 380/ProVore 680-Series Dimensional Data

P680 SYSTEM


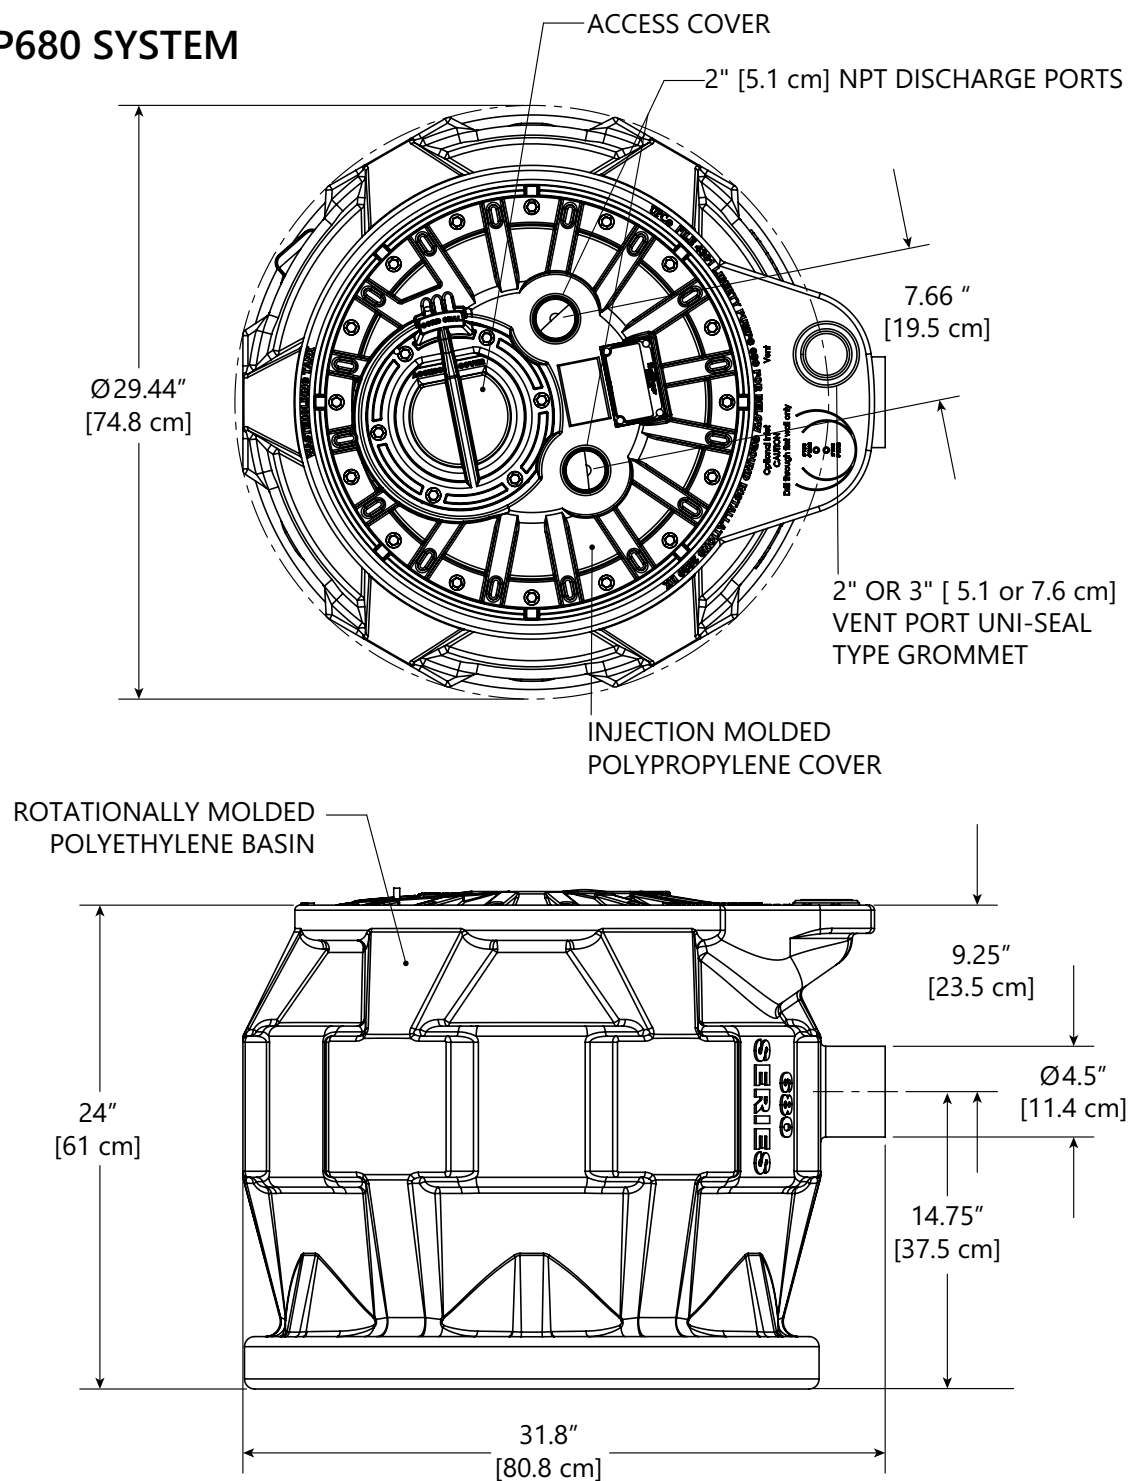


ProVore 380/ProVore 680-Series Dimensional Data


P380 SYSTEM

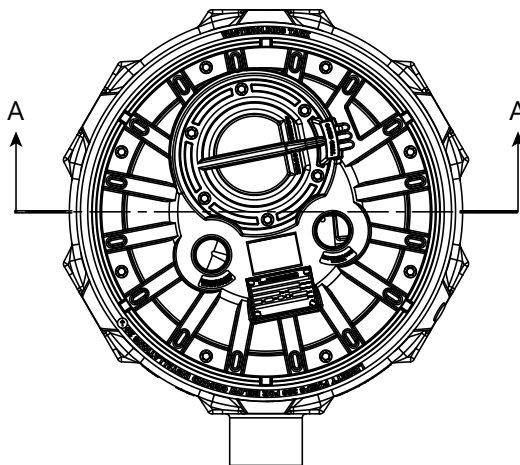


P680 SYSTEM

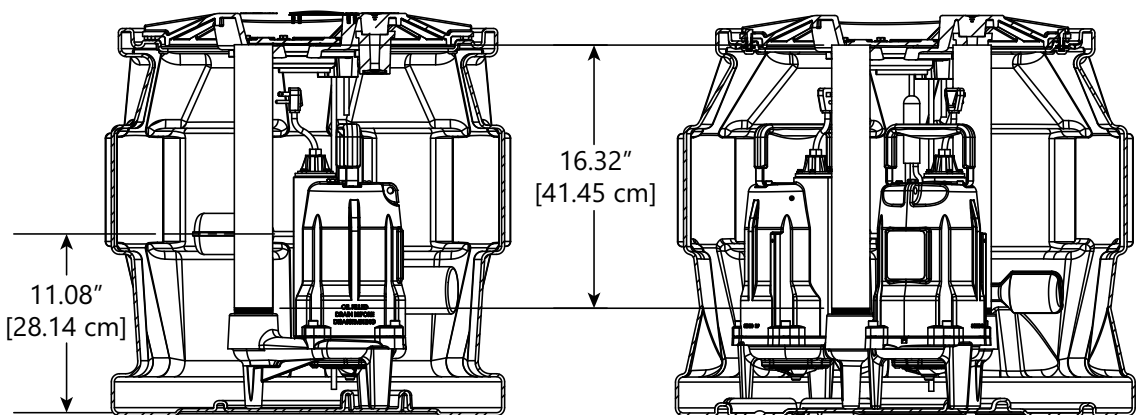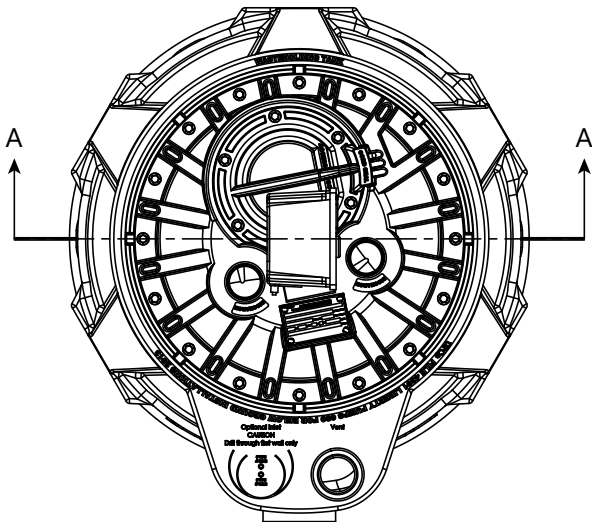


ProVore 380/ProVore 680-Series Dimensional Data

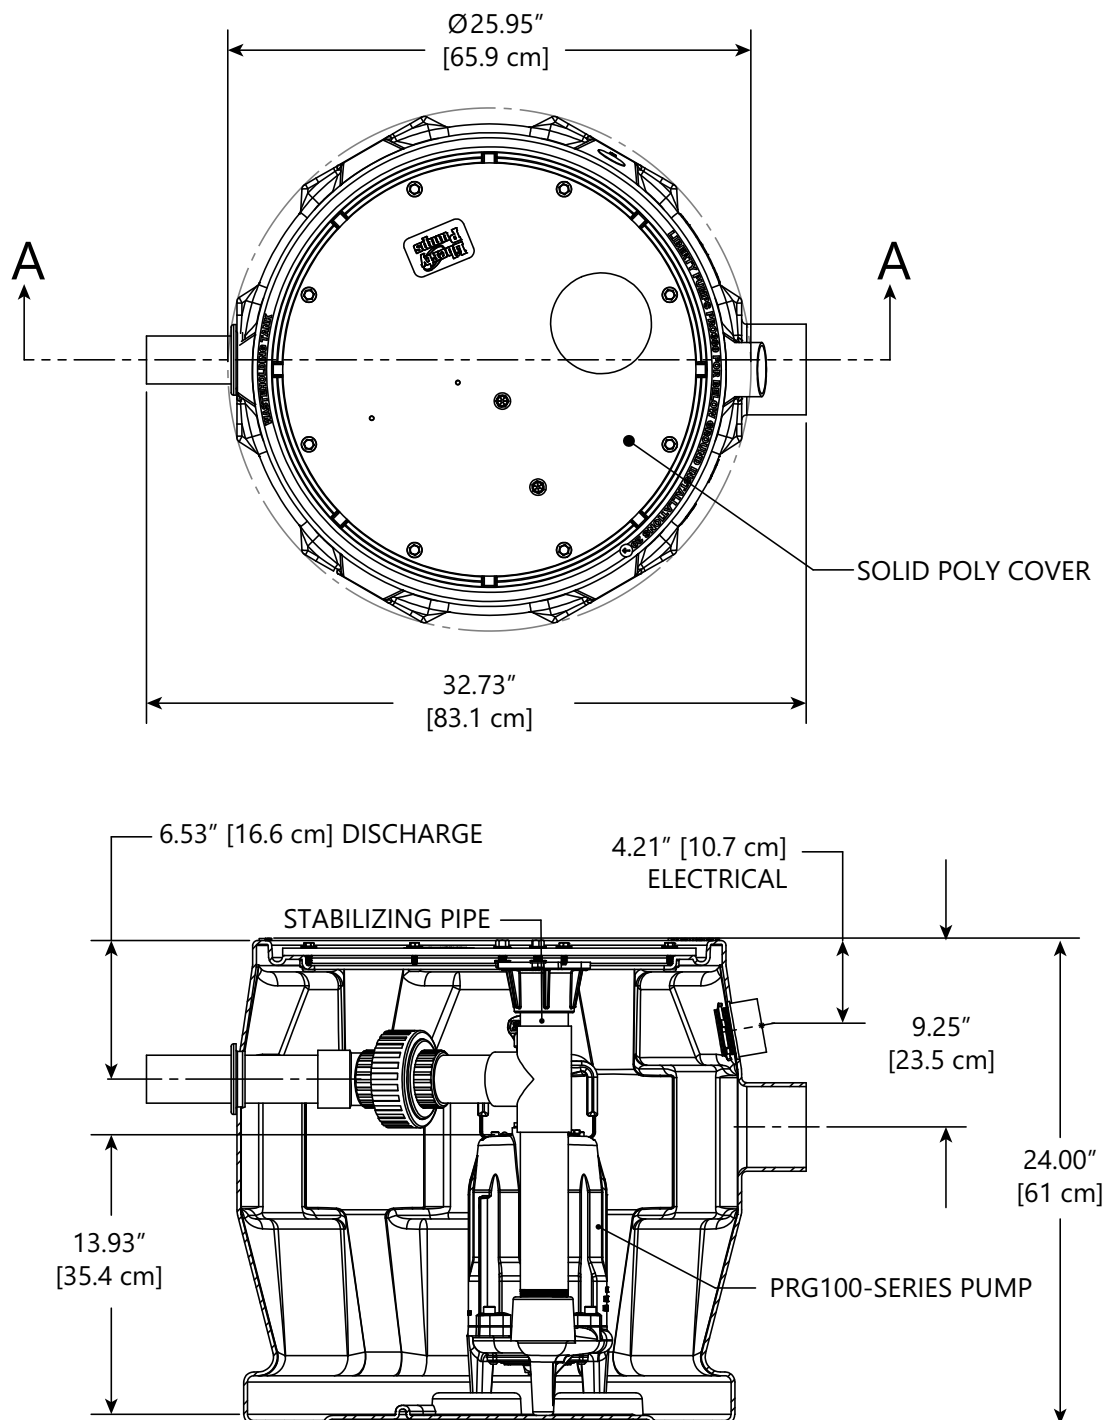

ProVore 380/ProVore 680-Series Dimensional Data

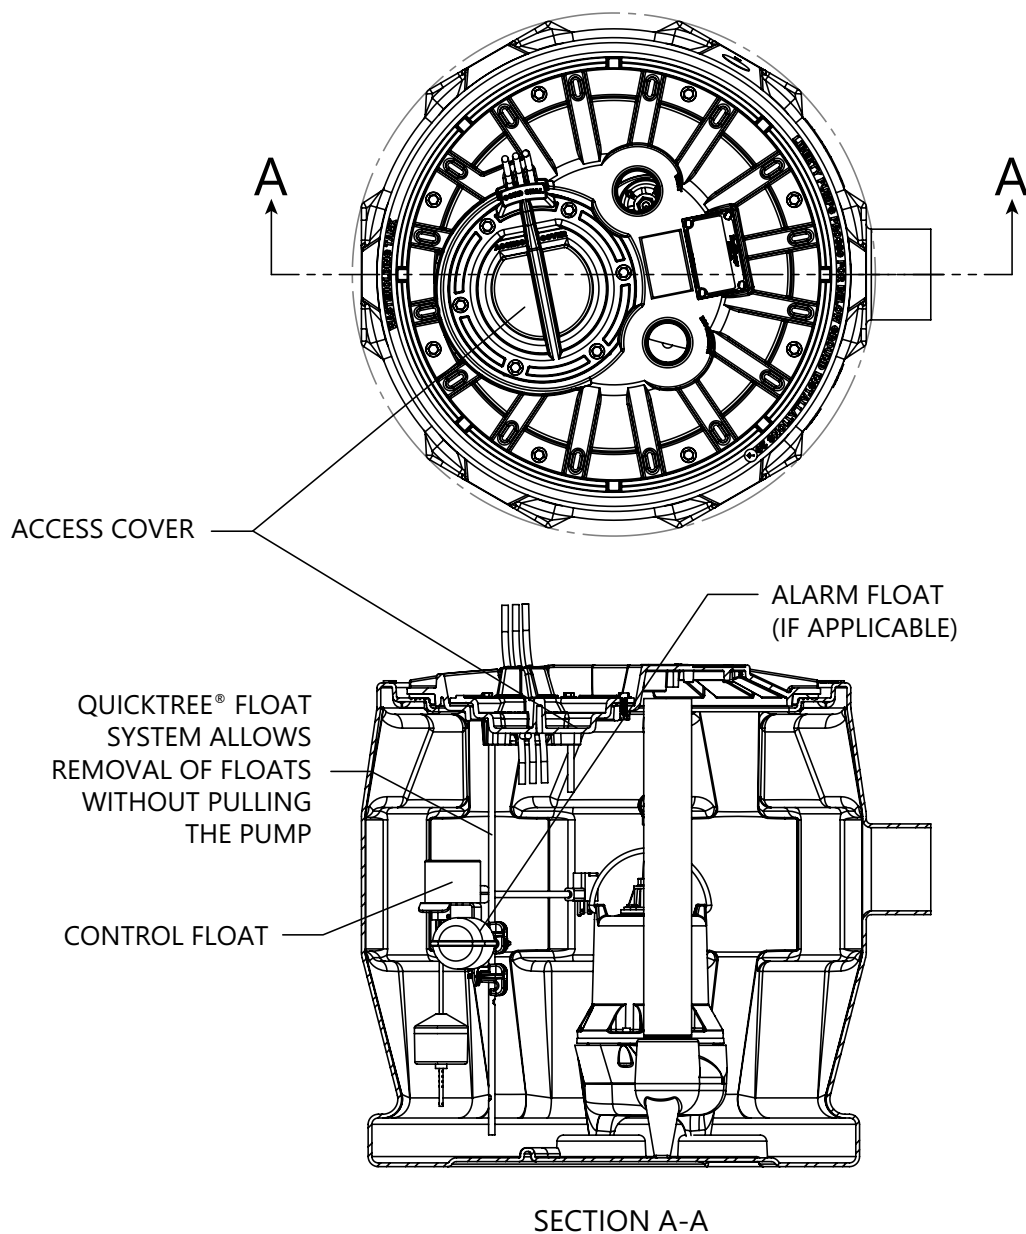


ProVore 380/ProVore 680-Series Dimensional Data

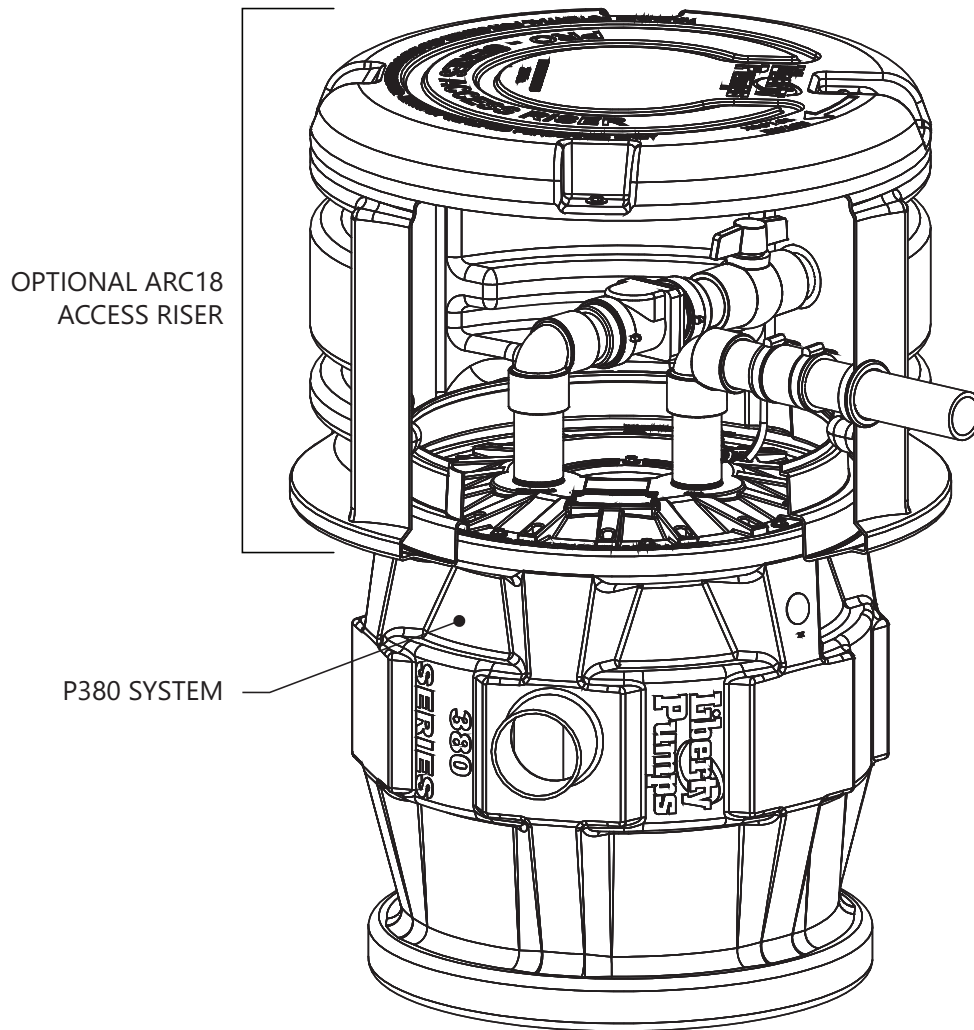



ProVore 380/ProVore 680-Series Dimensional Data

P380

P680

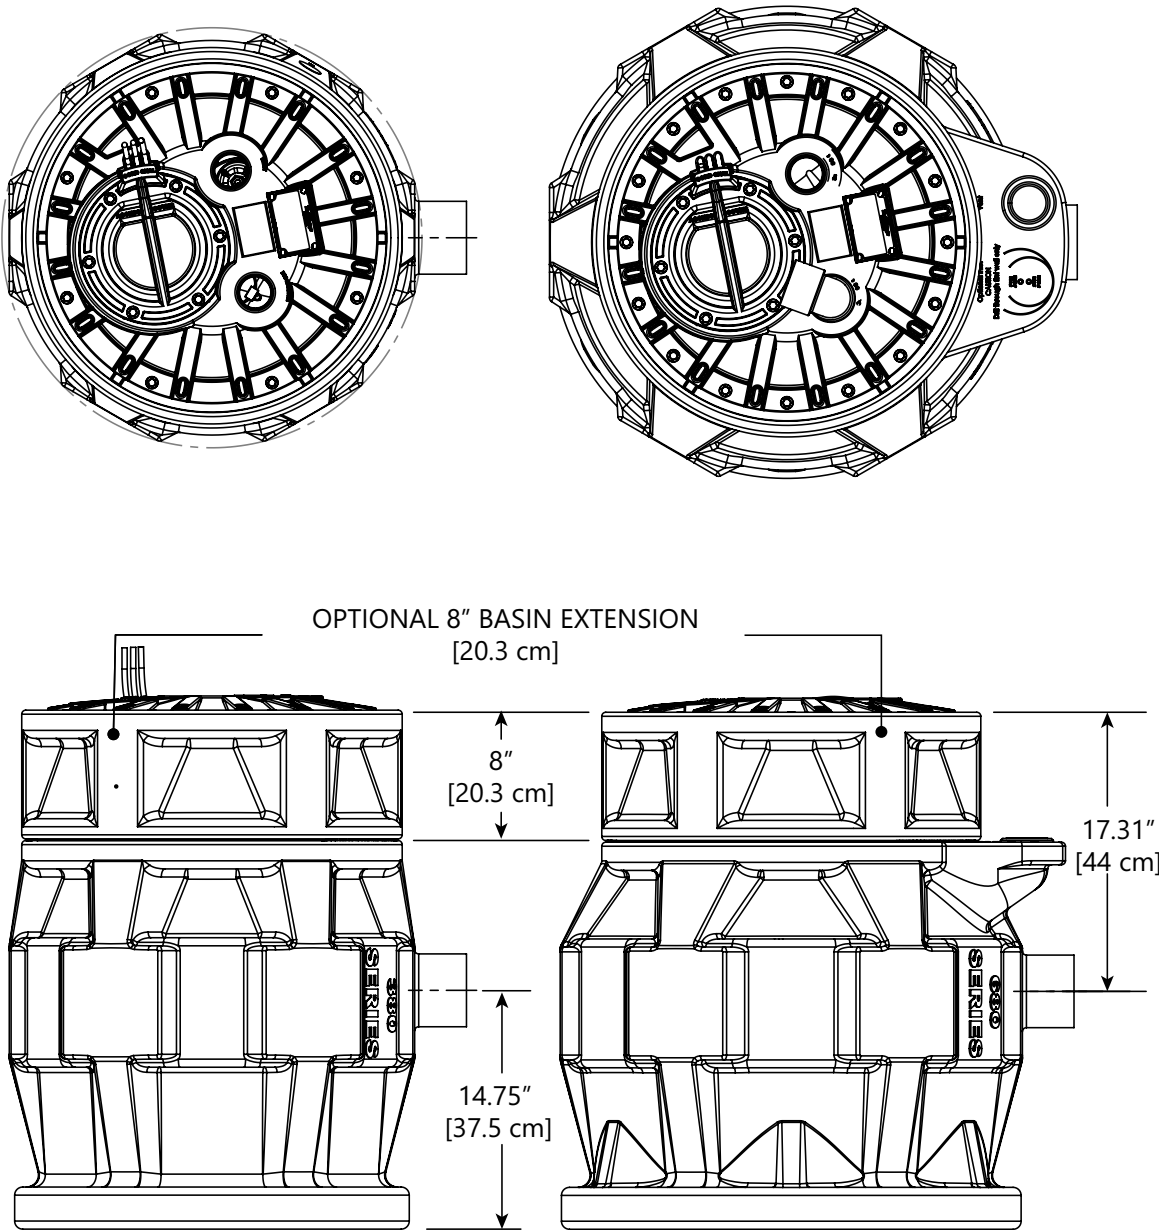

P680 OUTDOOR APPLICATION

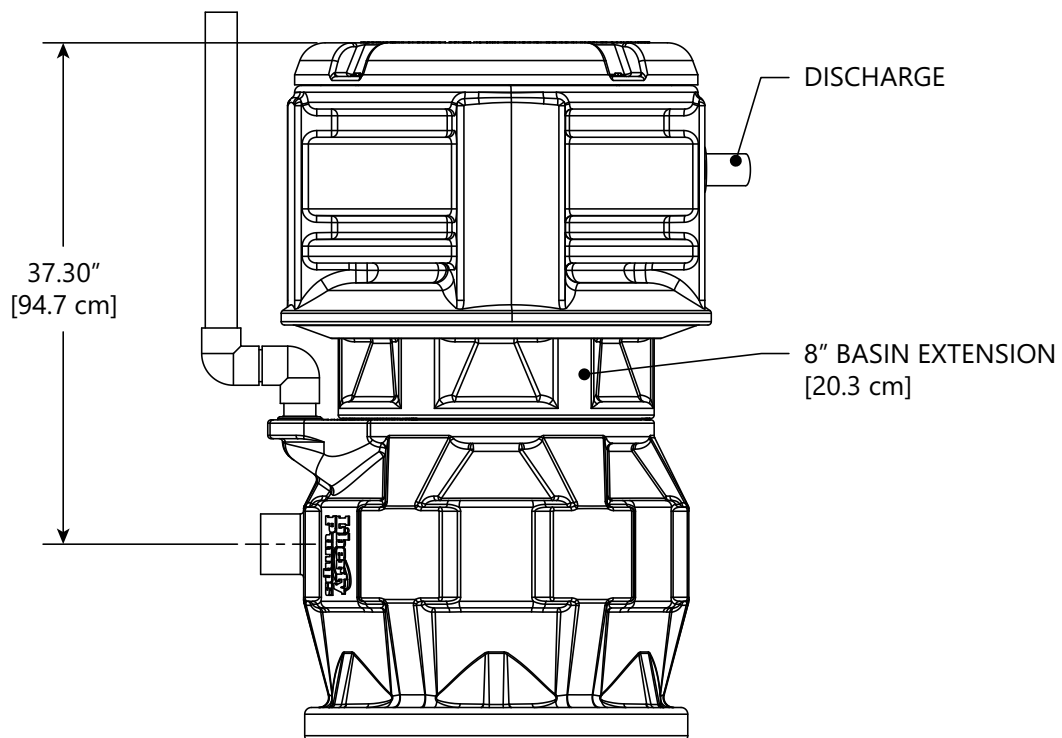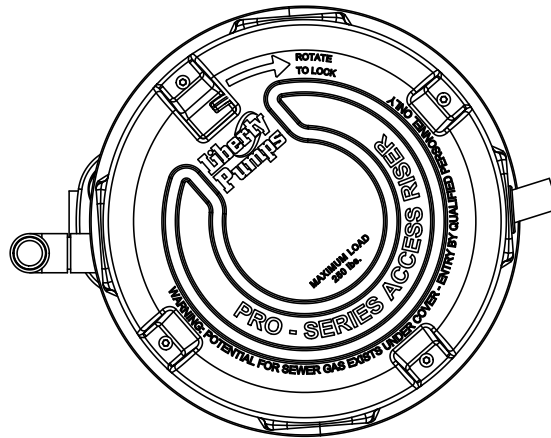

ProVore 380/ProVore 680-Series Electrical Data

MODEL	HP	VOLTAGE	PHASE	SF	FULL LOAD AMPS	LOCKED ROTOR AMPS	THERMAL OVERLOAD TEMP	STATOR WINDING CLASS	DISCHARGE	AUTOMATIC	CONTROL PANEL
P382XPRG101	1	115	1	1.00	12	47	105°C 221°F	B	2"	YES	NA
P382XPRG101V	1	115	1	1.00	12	47	105°C 221°F	B	2"	YES*	NA
P382PRG101SD-2	1	115	1	1.00	12	47	105°C 221°F	B	2" (SIDE)	YES	NA
P382XPRG102	1	230	1	1.00	6	23.7	105°C 221°F	B	2"	YES	NA
P682XPRG101	1	115	1	1.00	12	47	105°C 221°F	B	2"	YES	PDC-115
P682XPRG101W	1	115	1	1.00	12	47	105°C 221°F	B	2"	YES**	PDCW-115
P682XPRG102	1	230	1	1.00	6	23.7	105°C 221°F	B	2"	YES	PDC-230
P682XPRG102W	1	230	1	1.00	6	23.7	105°C 221°F	B	2"	YES**	PDCW-230

Note: * = vertical float and ** = outdoor panel

ProVore 380/ProVore 680-Series Technical Data

SYSTEM	TANK	UPC LISTED POLYETHYLENE BASIN MEETS IAPMO PS52 10' STACK TEST
	COVER	POLYPROPYLENE (SIDE DISCHARGE MODEL – HDPE)
	GUIDE RAIL	NONE – PUMPS PULL OUT WITH COVER
	INLET HUB	INCORPORATED INTO TANK
	DISCHARGE PIPE	SCHEDULE 80 PVC
	CONTROLS	P380 SYSTEMS – PIGGYBACK FLOATS
		P680 SYSTEMS – PDC CONTROL
PUMP	IMPELLER	CAST IRON
	SOLIDS HANDLING SIZE	GRINDER PUMP – 0.2"
	PAINT	POWDER COAT
	MAX LIQUID TEMP	60°C [140°F] INTERMITTENT
	THERMAL OVERLOAD	105°C [221°F]
	POWER CORD TYPE	SJTW
	MOTOR HOUSING	CAST IRON
	VOLUTE	CAST IRON
	SHAFT	303 STAINLESS STEEL
	HARDWARE	STAINLESS STEEL
	O-RINGS	BUNA-N
	MECHANICAL SEAL	UNITIZED GRAPHITE IMPREGNATED SILICON CARBIDE

ProVore 380/ProVore 680-Series Specifications

See individual pump specification for more details on the pump(s).

1.01 WARRANTY

Standard limited warranty shall be 3 years.