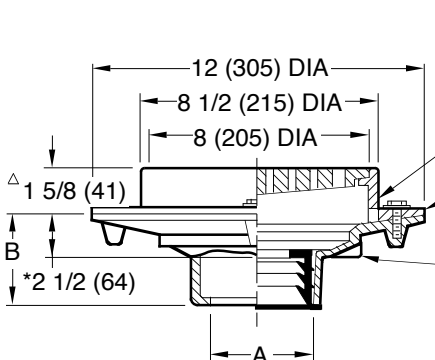
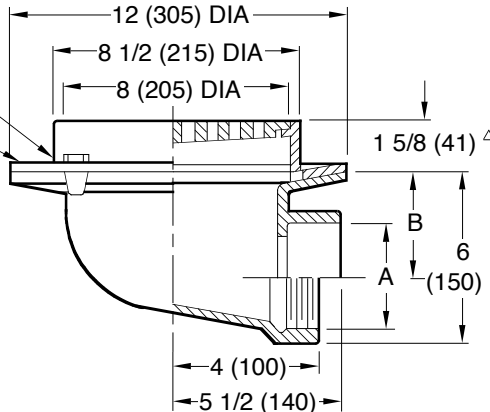


K	DRAWING NUMBER S2110	SIZE A	SCALE: NONE	DATE: 5-17-85	APPROVED BY: TD	CHECKED BY: TD	DRAWN BY: PJ	2110, 2115	DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE	SMITH® JAY R. SMITH MFG. CO.® MEMBER OF MORRIS GROUP INTERNATIONAL POST OFFICE BOX 3237 MONTGOMERY, ALABAMA 36109-0237 (USA) TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com  CUSTOMER DRIVEN SINCE 1926	LOCATION								
										FLOOR DRAINS WITH 8 1/2" (215) ROUND TOPS									
										MEDIUM DUTY DRAINS									
										FUNCTION: Used in moderate traffic areas where waste water contains no sediment or debris and floor construction requires shallow drain body. Body flange and flashing collar serve as anchor in on-grade locations and as flashing clamp when installed in waterproof floors.									
										 Free Area 14.25 SQ IN (92) SQ CM Seepage Openings Collar Can Be Used As Flashing Clamp (When Specified) Trap Primer Connection (When Specified)  ☐ Fig. 2110C . . . CAULK OUTLET ☐ Fig. 2110Y . . . NO-HUB OUTLET <table><tr><td>A SIZE</td><td>02 (50)</td><td>03 (75)</td><td>04 (100)</td><td>06 (150)</td></tr><tr><td>B</td><td colspan="2">3 3/4 (95) for Caulk, NO-HUB, and Speedi-Set, 2 (51) for Threaded</td><td colspan="2">3 3/4 (95) NO-HUB Only</td></tr></table> ☐ Fig. 2115C . . . CAULK OUTLET ☐ Fig. 2115T . . . THREADED OUTLET <table><tr><td>A SIZE</td><td>02 (50)</td><td>03 (75)</td><td>04 (100)</td></tr><tr><td>B</td><td>4 1/4 (110)</td><td>3 3/4 (95)</td><td>3 1/4 (83)</td></tr></table>		A SIZE	02 (50)	03 (75)	04 (100)	06 (150)	B	3 3/4 (95) for Caulk, NO-HUB, and Speedi-Set, 2 (51) for Threaded	
A SIZE	02 (50)	03 (75)	04 (100)	06 (150)															
B	3 3/4 (95) for Caulk, NO-HUB, and Speedi-Set, 2 (51) for Threaded		3 3/4 (95) NO-HUB Only																
A SIZE	02 (50)	03 (75)	04 (100)																
B	4 1/4 (110)	3 3/4 (95)	3 1/4 (83)																