



Highbridge®

60" x 32" alcove bath, left drain
K-877-S

Features

- Comfort Depth® design makes it easier to get in and out of the bath
- Enameled and recessed apron offers easier access and custom storage under bath
- Integral flange helps prevent water from seeping behind wall and simplifies alcove installation
- Safeguard® slip-resistant surface provides excellent traction underfoot

Material

- KOHLER® enameled cast iron

Installation

- Left drain
- Alcove

Required Products/Accessories

K-7214 27" Cable Bath Drain

or

K-7259 Brass toe tap bath drain

Recommended Products/Accessories

K-1601 Bath/whirlpool footstop, removable

K-14426 Wall-mount bath spout

K-14427 Wall-mount bath spout

K-23726 Drain treatment

K-23725 Cast iron cleaner

K-31796 Above-the-floor bath drain kit

K-31798 Bath drain kit



ADA

Codes/Standards

ASME A112.19.1/CSA B45.2

ASTM F462

ADA

ICC/ANSI A117.1

IAPMO Certification

KOHLER® Enameled Cast Iron Bath and Shower Base Lifetime Limited Warranty

See website for detailed warranty information.

1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.kohler.com USA or www.kohler.ca Canada


8-27-2024 22:15 - US/CA

THE BOLD LOOK
OF **KOHLER®**



Technical drawing of a 30-gallon stainless steel sink. The drawing includes the following dimensions and details:

- Overall Dimensions:**
 - Width: 16" (406 mm)
 - Depth: 16-3/4" (425 mm)
 - Height: 17-1/2" (445 mm)
 - Top Flange Width: 17" (432 mm)
 - Top Flange Thickness: 6-5/16" (160 mm)
- Front Flange Detail (Callout):**
 - Top Flange Thickness: 6-1/4" (159 mm)
 - Top Flange Width: 1" (25 mm)
 - Top Flange Depth: 1/2" (13 mm)
- Rim Flange Detail (Callout):**
 - Rim Flange Thickness: 1/2" (13 mm)
 - Rim Flange Width: 1/4" (6 mm)
 - Rim Flange Depth: 5/8" (16 mm)

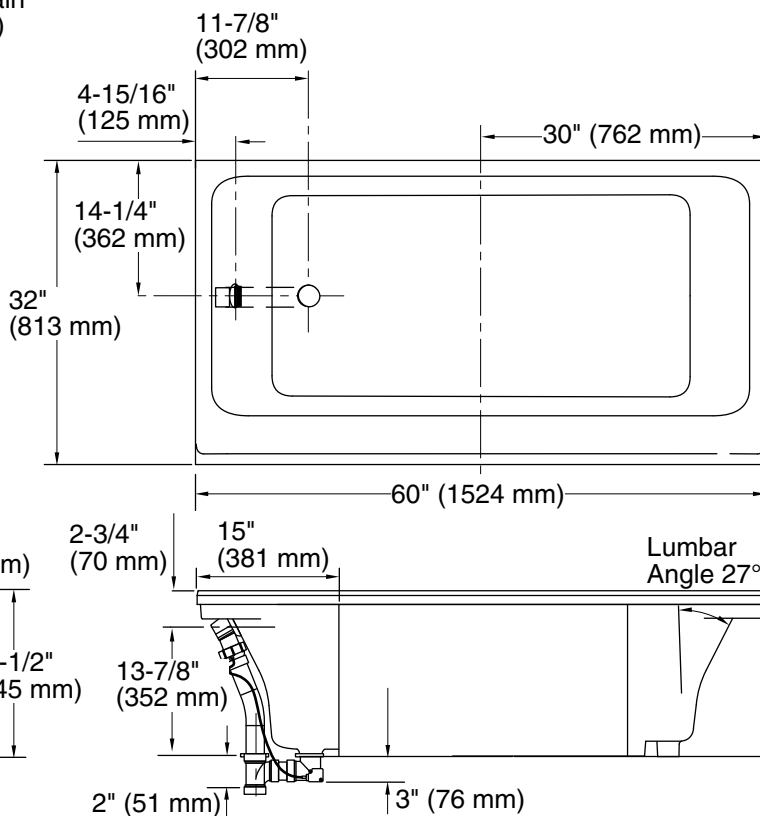

All product dimensions are nominal.

Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

ADA compliant when installed to the specific requirements of these regulations.