



OLYMPIA FAUCETS, INC.

Interchange City Distribution Center #20
1277 Heil Quaker Boulevard
La Vergne, TN 37086
(888) 772-7701
www.olympiafaucets.com

Model Number: L-7220, L-7221, L-7222, L-7290, L-7291
L-7292, L-7280, L-7282, L-7250, L-7251, L-7251G

Warnings and Notes:

Check with local plumbing code requirements before installation.
This product should be installed by a local listed plumber.
Do not use plumbers putty on threads.

Tools:



Adjustable Wrench



Plumbers Putty



Teflon Tape




Rags

INSTALLATION




Installation Steps:


Two Handle Lavatory Faucet




(1) Shut off water supplies. Remove old faucet. Clean mounting surface in preparation for new faucet.




(2) Place the faucet in position on the sink. Apply plumbers putty under the base gasket. Install washer on shanks and tighten with locknut.



(3a) when using ball-nose flexible supplies to connect faucet to water supply valves, slip coupling nut onto flexible supply. Ball-nose coupling will go partially into shank. Tighten coupling nut (DO NOT OVERTIGHTEN). Install opposite end according to manufacturer's instruction for both tubes.




(3b) when using stainless steel braided faucet supply hose; this faucet requires one end of the supply hose to have a 1/2" female IPS connection. The other end of this supply hose must match the thread on the water supply valve under your sink. Once you've identified the required size, carefully follow the manufacturer's installation instructions for each hose.




(4) Important: After installation is complete, remove aerator. Turn water supplies on and allow both hot and cold water to run at least one minute each. While water is running, check for leaks. Turn off water and replace aerator.


Pop-up Drain Installation:




(1) Remove pop-up flange from body




(2) Place a ring of putty on the bottom of flange.




(3) Insert pop-up flange through drain hole and attach flange to body. Ensure the pop-up outlet faces towards the back of the sink. Tighten the locknut securely with a wrench. Do not overtighten.




(4) Remove the excess putty. Connect the trap (check manufacturer's instructions for installation)



(5) Remove pivot rod nut from pop-up body, ensure the washers is in place, insert pivot rod, tighten pivot rod nut back to pop-up body.



(6) Push pivot rod down, insert drain plug carefully. Test to ensure drain plug works properly.




(7) Connect lift rod strap to pivot rod by using clip. Tighten the thumbscrew to connect lift rod strap to pop-up lift rod.

Exploded Drawing:

	ITEM #	DESCRIPTION
1	OP-490012C,H	Acrylic Handle Button Cold, Hot
2	OP-490014	Screw
3	OP-490013C,H	Mini Blade Handle Button Cold, Hot
4	OP-490042	Handle Hub Screw
5	OP-490015	Handle Screw
6	OP-490016C,H	Wrist Blade Handle Button Cold, Hot

	ITEM #	DESCRIPTION
A1	OP-190003C,H	Acrylic Handle Cold,Hot
A2	OP-190004C,H	Mini Blade Handle Cold, Hot
A3	OP-190006C,H	Handle Hub
A4	OP-490017	Chrome Insert
A5	OP-490018	Acrylic White Insert
A6	OP-190005C,H	Wrist Blade Handle Cold, Hot
B	OP-490040	Bonnet Nut
C	OP-390004 OP-390005	Stem Unit-Brass Post Stem Unit-Plastic Post
D	OP-490041	Spring and Seats
E	OP-490035	1.5 GPM Aerator
F	OP-590003	Mounting Locknuts & Washers
G	OP-590001	Supply Nuts
H	OP-630004 OP-630002	50/50 Pop-Up Drain Assembly Brass Pop-Up Drain Assembly

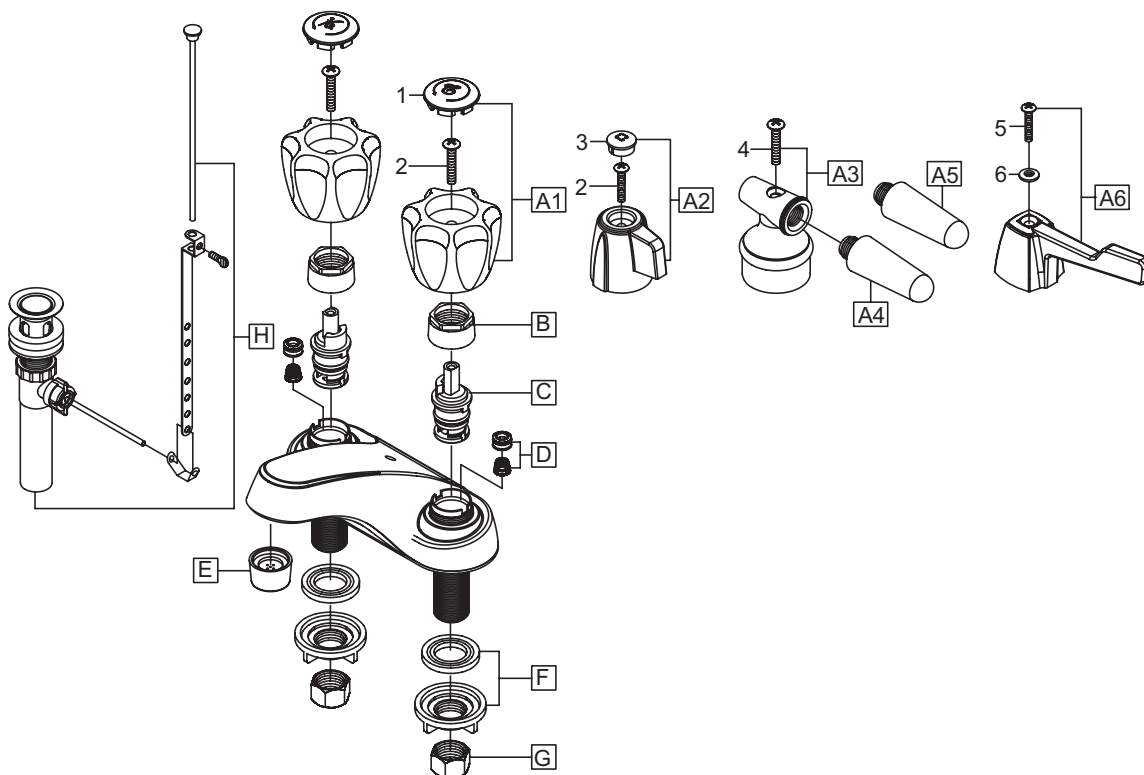

OLYMPIA

For more care information or trouble shooting inquiries about your Olympia product, Please call:

OLYMPIA FAUCETS, INC. (888) 772-7701

8AM - 8PM EST (5AM to 5PM PST)

www.olympiafaucets.com