



Z5665-BWL-AM

HET Elongated Floor Mounted, ADA Height
EcoVantage Flush Valve Toilet with Antimicrobial Glaze

TAG _____



Z5665 Series Elongated

Recommended Trim:

- ☐ **Z5955SS-EL** Elongated, standard white, open front toilet seat less cover with stainless steel check hinge.
- ☐ **Z5972-COMB** Closet bolt/wax ring kit

*Note: To ensure system performance:
Minimum Running Water Pressure = 25 psi*



This product should be used with a WaterSense labeled counterpart with a compatible flush volume to ensure that the entire system meets the requirements for water efficiency and performance.

*These dimensions and specifications are subject to change without notice.
Fixture dimensions meet ANSI/ASME standard A112.19.2 and CAN/CSA B45 requirements.
Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed per code.*



Z5665 HET Series

- Zurn High Efficiency Toilets and paired performance flush valve systems are designed to exceed industry standards while using as little as 1.1 gallons of water per flush.
- Universal high efficiency toilet can be specified with 1.28 gpf [4.8 lpf], 1.6 gpf [6.0 lpf] or dual flush valves.
- Vitreous china
- Antimicrobial ceramic glaze utilizing SmartSilver™ nano-technology to create a permanent surface that inhibits the growth of stain and odor causing mold, mildew & bacteria, thus minimizing the need for cleaning chemicals and water to cleanse the bowl.
- ADA height
- Elongated front rim
- 2 1/8" fully glazed trapway
- High efficiency siphon jet flush action
- Shipping Weight: 57 lbs.

Engineering Specification

☐ Z5665-BWL-AM

EcoVantage High Efficiency Toilet System

Vitreous China, 1.1 gpf [4.16 lpf] or greater high efficiency, ADA, floor mounted, bottom outlet toilet with siphon jet flushing action, antimicrobial ceramic glaze, and elongated front rim with 1-1/2" top spud. This bowl is designed to perform to industry standards with as little as 1.1 gallons per flush.

☐ Z5666-BWL-AM

EcoVantage High Efficiency Toilet System

Vitreous China, 1.1 gpf [4.16 lpf] or greater high efficiency, ADA, floor mounted, bottom outlet toilet with siphon jet flushing action, antimicrobial ceramic glaze, and elongated front rim with integral bedpan lugs, and 1-1/2" top spud. This bowl is designed to perform to industry standards with as little as 1.1 gallons per flush.

See Zurn One Systems for suggested packages.

Architectural/Engineering Approval

ZURN INDUSTRIES, LLC. ♦ COMMERCIAL BRASS OPERATION ♦ 5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330

Phone: 1-800-997-3876 ♦ Fax: 919-775-3541 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 7900 Goreway Drive Unit 10 ♦ Brampton, Ontario L6T5W6 ♦ Phone: 905-405-8272 Fax: 905-405-1292




Z5665-BWL-AM

HET Elongated Floor Mounted, ADA Height
EcoVantage Flush Valve Toilet with Antimicrobial Glaze

TAG _____

Rough-in dimensions for Z5665 Series

- Z5665-BWL-AM with top spud, shown with Z6000AV-HET valve

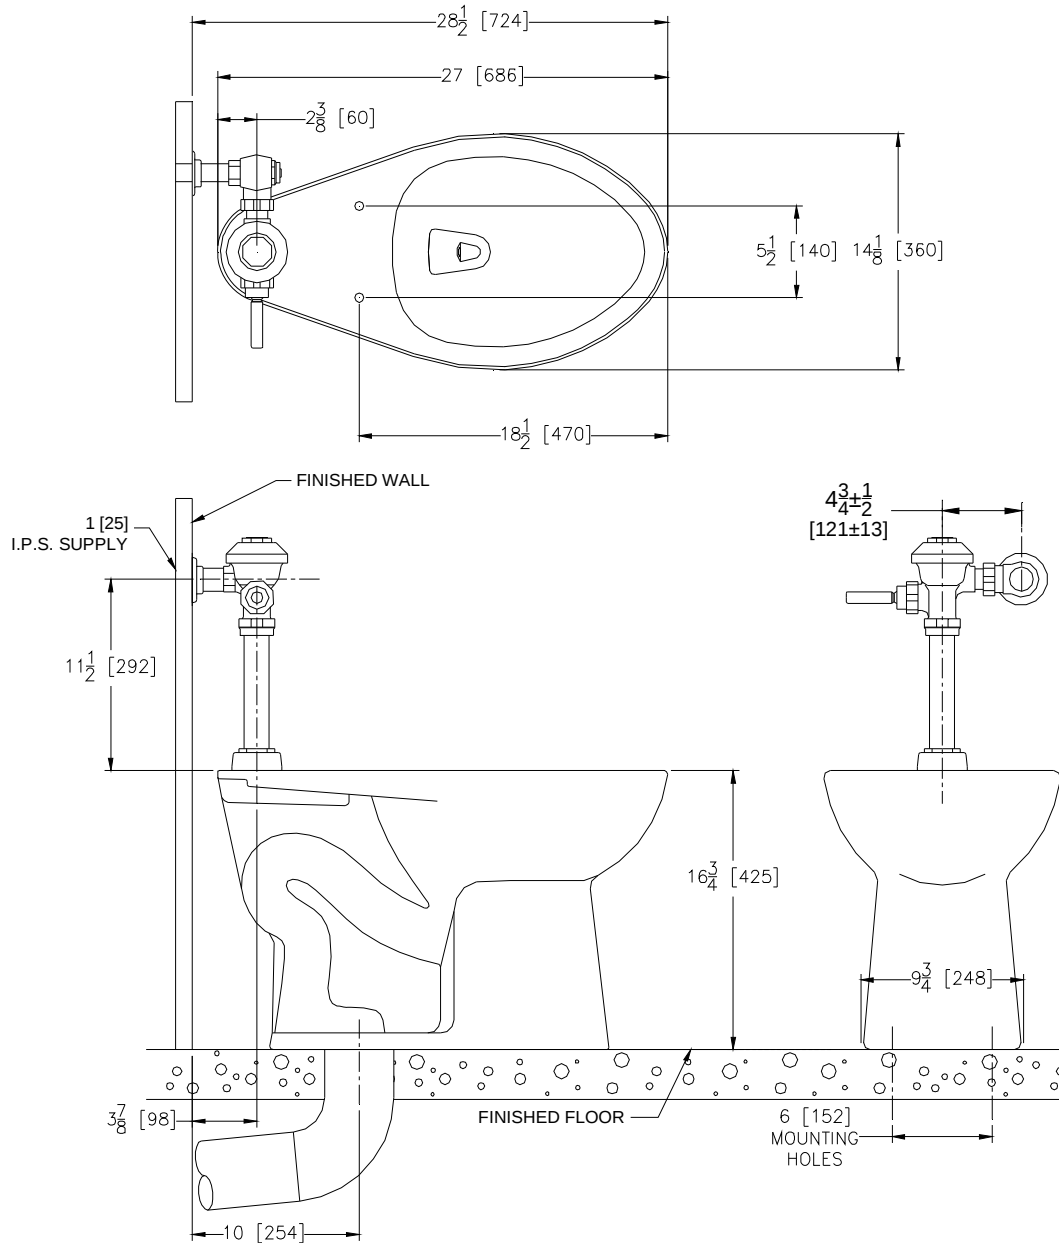

These dimensions and specifications are subject to change without notice.

Fixture dimensions meet ANSI/ASME standard A112.19.2 and CAN/CSA B45 requirements.

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed per code.



ZURN INDUSTRIES, LLC. ♦ COMMERCIAL BRASS OPERATION ♦ 5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330

Phone: 1-800-997-3876 ♦ Fax: 919-775-3541 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 7900 Goreway Drive Unit 10 ♦ Brampton, Ontario L6T5W6 ♦ Phone: 905-405-8272 Fax: 905-405-1292