

FEATURES


- Solid brass construction for durability and reliability
- Available with cross or lever handles
- Two-handle, deck-mount bridge kitchen faucet with 8" (203 mm) centers
- High-arch spout design with 360 degree rotation offers superior clearance for a variety of sink activities
- Ceramic disc valves
- 8-3/4" (222 mm) clearance below spout for large pots and pans
- Fluid design lines for ease of cleaning
- PVD finish provides a durable finish to accommodate the high-traffic kitchen environment
- 1.8 gal/min (6.8 l/min) flow rate
- Meets CalGreen requirements for kitchen faucets
- Complements the One kitchen faucet collection

CODES/STANDARDS APPLICABLE P25202

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF 61
- ADA
- ICC/ANSI A117.1
- Energy Policy Act of 1992
- California Energy Commission (CEC)
- All applicable US Federal and State material regulations

ADA

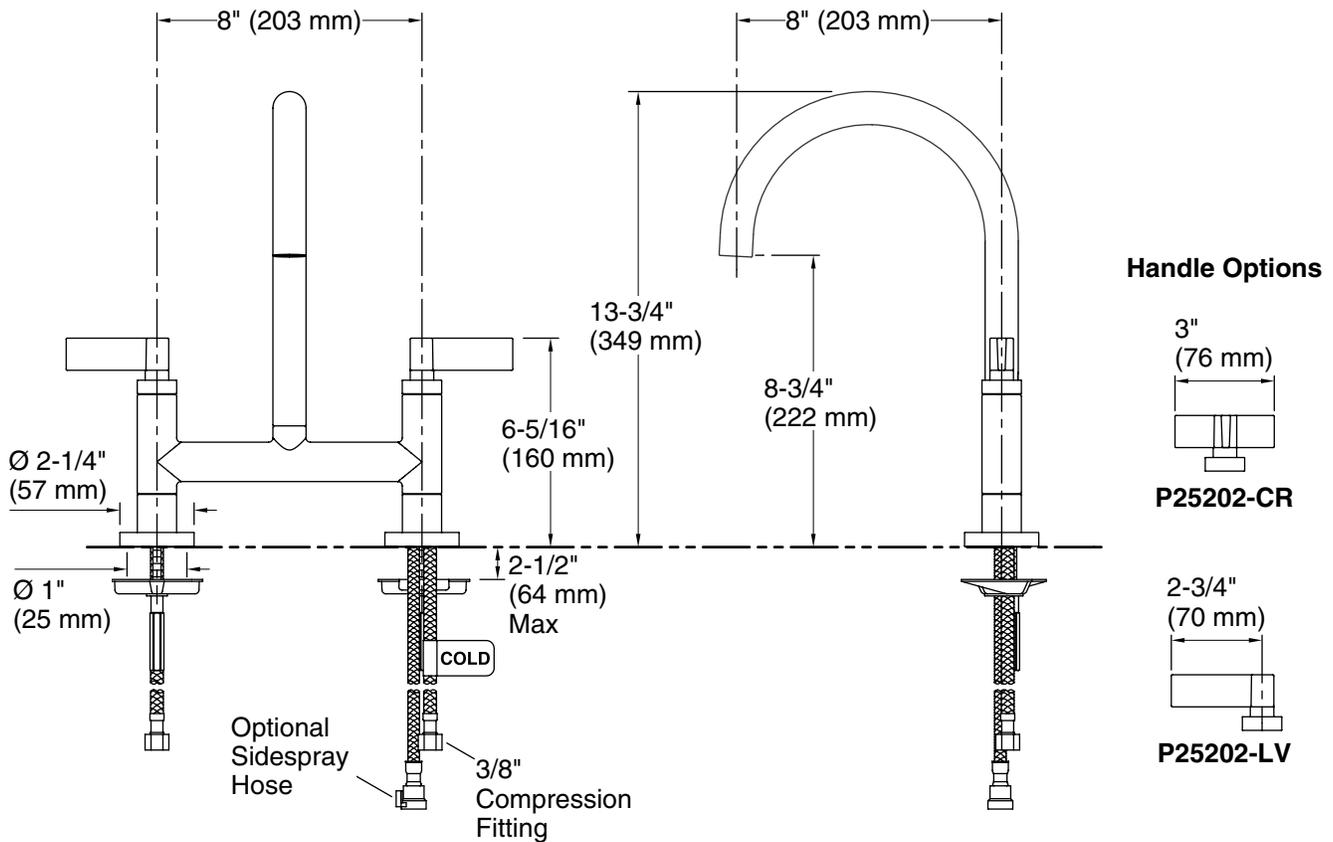

SPECIFIED MODEL			
Model	Description	Finishes	
P25202-CR	One Deck-Mount Bridge Kitchen Faucet, Cross Handle	<input type="checkbox"/> CP Polished Chrome	<input type="checkbox"/> AD Nickel Silver
		<input type="checkbox"/> GN Gunmetal	<input type="checkbox"/> ULB Unlacquered Brass
P25202-LV	One Deck-Mount Bridge Kitchen Faucet, Lever Handle	<input type="checkbox"/> CP Polished Chrome	<input type="checkbox"/> AD Nickel Silver
		<input type="checkbox"/> GN Gunmetal	<input type="checkbox"/> ULB Unlacquered Brass
Recommended Accessories			
P25210-00	One Sidespray	<input type="checkbox"/> CP Polished Chrome	<input type="checkbox"/> AD Nickel Silver
		<input type="checkbox"/> GN Gunmetal	<input type="checkbox"/> ULB Unlacquered Brass
P25215-00	One Soap/Lotion Dispenser	<input type="checkbox"/> CP Polished Chrome	<input type="checkbox"/> AD Nickel Silver
		<input type="checkbox"/> GN Gunmetal	<input type="checkbox"/> ULB Unlacquered Brass

We reserve the right to make revisions without notice in the design of products or in packaging unless this right has specifically been waived at the time the order is accepted.