



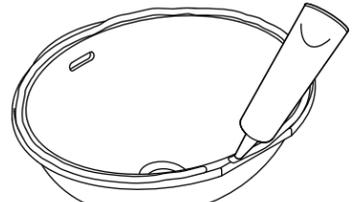
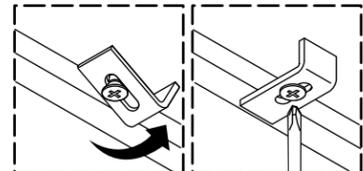
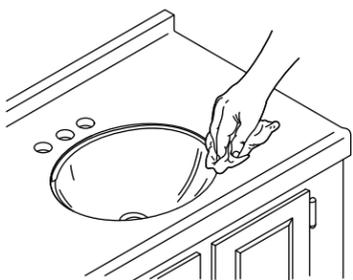





<p>Record your model number below for future reference:</p>	<p>Observe all local plumbing and building codes.</p>	<p>⚠ CAUTION: Risk of personal injury. Product can break, chip, and cause injury if handled carelessly. Get help lifting the lavatory.</p>	<p>IMPORTANT! Provide your countertop manufacturer with your lavatory model number. Countertop manufacturer should preinstall the anchors into the underside of the countertop.</p>	<p>IMPORTANT! Risk of product damage. Overtightening the nuts may cause irreparable damage to the lavatory.</p>
<p>Use the anchors and fasteners provided by the countertop manufacturer and the clamps provided with your sink. DO NOT use adhesives or adhesive sealants to install this sink.</p>	<p>1 Verify cabinet clearance.</p> 	<p>2 Clean the underside of the countertop and the rim of the sink.</p> 	<p>3 Loosely install the clips.</p> 	<p>4 Generously apply 100% silicone sealant around the rim.</p> 
<p>5 Position the lavatory squarely under the cutout. Draw the lavatory rim up against the countertop until it is snug. Hold the sink in place and rotate each clip over the rim. Evenly tighten the clips to secure.</p> 	<p>6 Immediately wipe away any excess sealant. Allow the sealant to set for 30 minutes before proceeding.</p> 	<p>7 Complete the faucet and drain installations.</p> 	<p>8 Run water into the sink and check all connections for leaks.</p> 	

Questions? Problems? For additional assistance, please contact
KALLISTA's Customer Service Department at 1-888-4-KALLISTA
(1-888-452-5547) or kallista.com.