
Lead Free Brass Ball Valve

2 Piece, Full Port, Press x MIP Connection, 250 WOG

JP-150G PRESS x MIP



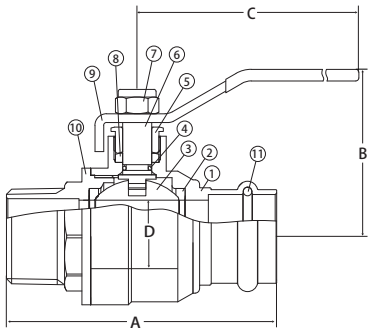

FEATURES

Dezincification Resistant Brass Alloy
Gland Follower and Single O-Ring Stem Design
Blow-Out Proof Stem
IAPMO Certified - NSF 61 & NSF 372
29 in-Hg Vacuum Rating
Wetted Surfaces Contain Less than .25% Lead Content

CERTIFICATIONS/APPROVALS

Conforms to IAPMO PS 117
Conforms to ANSI B1.20.1
IAPMO Certified
- *NSF 61-8*
- *NSF 372*
- *Uniform Plumbing Code (cUPC)*
  - *IAPMO/ANSI Z1157-2014*
  - *NSF/ANSI 14-2014*

PRESSURE/TEMPERATURE RATING

250 CWP
Max. 250°F

MATERIALS

No.	Part	Material
1	Body	Lead Free Brass - C46500
2	Seat	PTFE
3	Ball	304 Stainless Steel
4	O-Ring	NBR
5	Packing Nut	Brass - C37700
6	Stem	Brass - C37700
7	Handle Nut	Steel - Chrome Plated
8	Packing	PTFE
9	Handle	Steel - Chrome Plated
10	End Connection	Lead Free Brass - C46500
11	O-Ring	EPDM

DIMENSIONS

Part No	Size	A	B	C	D	Cv
150-573G	1/2"	2.95	1.81	3.46	0.59	18.55
150-574G	3/4"	3.52	2.09	4.29	0.75	29.76
150-575G	1"	4.07	2.25	4.29	0.98	51.53

WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, birth defects or other reproductive harm.
For more information go to www.P65Warnings.ca.gov.

© 2026 JOMAR VALVE
I P: 586.268.1220 I F: 586.979.8615 I JOMARVALVE.COM