



Two-piece elongated toilet, 1.28 gpf

Features

- Two-piece design
- Elongated bowl offers added room and comfort
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults
- 1.28 gpf (4.8 lpf)
- Left-hand Polished Chrome trip lever
- Combination consists of the K-4306 bowl and the K-4469
- Coordinates with other products in the Kelston collection
- AguaPiston® canister optimizes the flow out of the tank, harnessing gravity and the natural powerful reducing cascade of water to increase the power and effectiveness of the flush
- Easy-to-flush canister design requires less force to actuate than a 3" (76 mm) flapper, and has 90% less exposed seal material which resists conditions that cause wear, tear, shrinkage and swelling
- AquaPiston® canister optimizes the flow out of the tank. harnessing gravity and the natural powerful reducing cascade Codes/Standards of water to increase the power and effectiveness of the flush
- Eligible for consumer rebates in some municipalities

Installation

- Standard 12" (305 mm) rough-in
- DryLock® system saves installation time and helps prevent water leakage
- Seat and supply line sold separately

Recommended Products/Accessories

K-5588 Purefresh® Deodorizing elongated toilet seat K-4108 PureWash® E750 Elongated bidet toilet seat with remote control K-5420 Low-Profile Bolt Caps K-9385 Left-Hand Trip Lever

1265114 Connector Hose

1023457 Wax Ring/Hardware Kit

K-23726 Drain treatment





ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1 **CSA B651** OBC

IAPMO Certification

KOHLER® Toilets and Seats Limited Warranty


See website for detailed warranty information.







Two-piece elongated toilet, 1.28 gpf K-3755

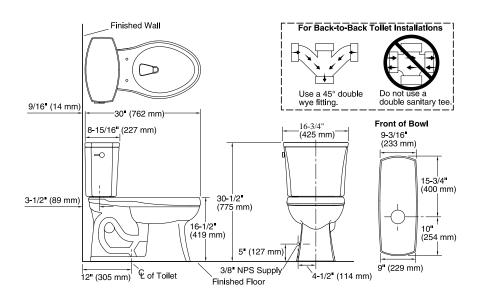

Technical Information

All product dimensions are nominal.

Toilet type: Floor-mount

Waste Outlet: Floor

Bowl shape: Elongated
Flush type: AquaPiston
Trap passageway: 2-1/8" (54 mm)

Water surface size: 11" x 8-3/4" (279 mm x 222 mm)

Rim to water 6" (152 mm)

surface:

Rough-in: 12" (305 mm) Seat-mounting 5-1/2" (140 mm)

holes:

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

The model is acceptable for left-hand Accessible compartment installations only. ADA, OBC, CSA B651 compliant when installed to the specific requirements of these

regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.

