

Technical Data Manual

Model Nos. and pricing: see Price List



Vitocell 300-V, EVIB

Single coil, indirect-fired domestic hot water storage tank
42 USG (160 L) capacity

Vitocell 300-V, EVIB

Single coil, indirect-fired domestic hot water storage tank
53 USG (200 L) capacity

Vitocell 300-V, EVIB

Single coil, indirect-fired domestic hot water storage tank
79 USG (300 L) capacity

Vitocell 300-V, EVIB

Single coil, indirect-fired domestic hot water storage tank
119 USG (450 L) capacity

VITOCCELL 300-V



Product may not be exactly as shown

Vertical indirect-fired domestic hot water (DHW) storage tank of high-grade stainless steel with one coil.

**CAUTION**
This tank version is not suitable for steam heating applications.




Benefits

Hygienic, convenient and economical Domestic hot water (DHW) heating with DHW tanks made from stainless steel – vertical version

Benefits at a glance:

- Corrosion-resistant tank of high-grade stainless steel offers a long service life.
- Fully hygienic due to high quality homogeneous stainless steel surfaces.
- The high-alloy material is immune to cracking or peeling. The tank stays hygienic and requires only minimum service.
- Does not require a consumable anode for corrosion protection.
- The entire water content is heated by a 1 3⁄8 in. (35 mm) pipe diameter (OD) stainless steel heat exchanger surface which extends to the bottom of the tank.
- The positioning of the tubular heat exchanger coil further ensures that 82% to 97% of the tank volume can be drawn at constant water temperature.
- The stainless steel heat exchanger coil is self-venting towards the top and self-draining towards the bottom, therefore not susceptible to reduced heat transfer due to air lock or deposits.
- Universally suitable – for applications requiring larger quantities of hot water, multiple vertical tanks can be combined via headers to form tank batteries.
- Standby losses minimized by highly effective HCFC free foam.
-119 USG (450 L) version comes equipped with removable soft PET insulation for easier handling.
- Easy transport into mechanical room due to low weight and compact construction.
- Certified to CSA Low Lead Content Certification Program;
including US Safe Drinking Water Act, NSF/ANSI 372 as well as other applicable US State requirements.

Cross Section

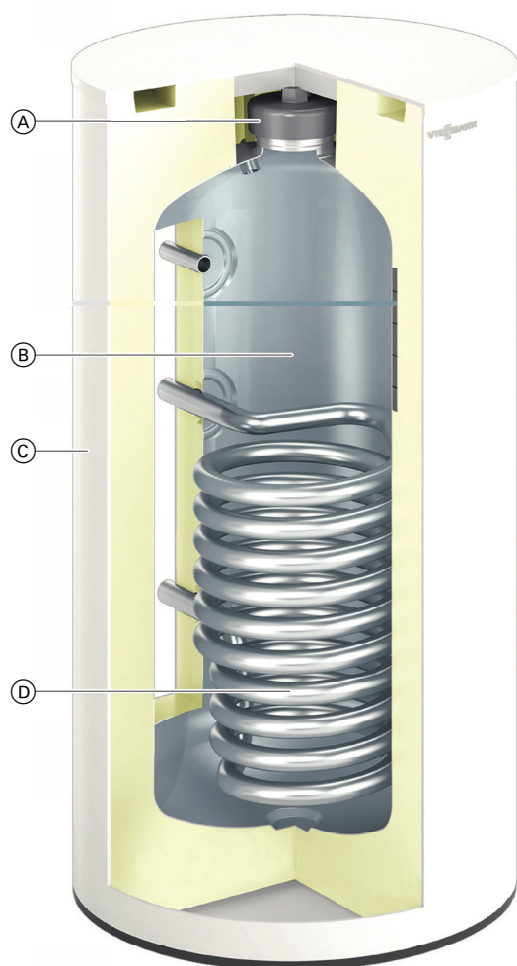

Legend

- Ⓐ Inspection and cleaning opening
- Ⓑ Stainless steel cylinder
- Ⓒ Highly effective all-round thermal insulation
- Ⓓ Indirect coil made from stainless steel

Technical Data Vitocell 300-V EVIB 42

For domestic hot water (DHW) heating applications which utilize modulating and low temperature hot water heating boilers.

Suitable for heating systems with:

- max. working pressure on heat exchanger side up to 220 psig at 392°F (200°C)
- max. working pressure on DHW water side of up to 150 psig at 210°F (99°C)

Storage capacity			USG (L)		42 (160)		
Supply flow rate							
for the recovery rates stated			GPM (m³/h)	22 (5.0)	13.2 (3.0)	8.8 (2.0)	4.4 (1.0)
Recovery rates* ¹ with a DHW temperature rise of the domestic hot water from 50 to 140°F (10 to 60°C) and heating water supply temperature of.....	194°F (90°C)	MBH (kW)	137 (40)	133 (39)	127 (37)	113 (33)	
		GPH (L/h)	182 (693)	176 (668)	170 (642)	150 (570)	
	176°F (80°C)	MBH (kW)	108 (32)	105 (31)	100 (29)	90 (26)	
		GPH (L/h)	143 (544)	139 (527)	134 (507)	120 (454)	
	158°F (70°C)	MBH (kW)	76 (22)	75 (22)	71 (21)	65 (19)	
		GPH (L/h)	101 (383)	98 (372)	95 (360)	86 (327)	
AHRI Certified Performance Rating * ²							
Heating Input			MBH (kW)	119 (35)			
Boiler Supply Water Temperature			°F (°C)	180 (82)			
Heating Supply Flow Rate			GPM (LPM)	14 (53)			
First Draw			Gal (L)	34 (128)			
First Hour Rating			GPH (LPH)	223 (844)			
Continuous Draw Rating			GPH (LPH)	189 (715)			
Standby Heat Loss			°F/hr (°C/hr)	0.8 (0.4)			
Insulation			PUR Foam				
Dimensions* ³							
Overall diameter			in. (mm)	25 (634)			
Overall length			in. (mm)	26 (661)			
Overall height* ⁴			in. (mm)	47 (1190)			
Tilt height			in. (mm)	50 (1260)			
Weight							
Tank with insulation			lbs (kg)	126 (57)			
Heating water content							
(heat exchanger pipe coil)			USG (L)	1.95 (7.4)			
Heat exchanger surface area							
			ft. ² (m ²)	11 (1.0)			
Connections							
Heating water supply/return		Ø in. (male NPT thread)	1				
Domestic cold/hot water		Ø in. (male NPT thread)	¾				
Temp. and press. relief valve		Ø in. (male NPT thread)	¾				
Recirculation		Ø in. (male NPT thread)	1				

^{*1} When planning for the recovery rate as stated or calculated, allow for the corresponding circulation pump. The stated recovery rate is only achieved when the rated output of the boiler is equal to or greater than that stated under "Recovery rates".

^{*2} AHRI Standard IWH-TS-1 based on domestic water temperature rise of 77°F (42.7°C).

^{*3} For additional dimensions, refer to "Tank Dimensions" on page 8.

^{*4} Adjustable feet can be adjusted up to 2 in. (50 mm).

For information regarding other Viessmann System Technology componentry, please reference documentation of the respective product.

Technical Data Vitocell 300-V EVIB 53

For domestic hot water (DHW) heating applications which utilize modulating and low temperature hot water heating boilers.

Suitable for heating systems with:

- max. working pressure on heat exchanger side up to 220 psig at 392°F (200°C)
- max. working pressure on DHW water side of up to 150 psig at 210°F (99°C)

Storage capacity		USG (L)	53 (200)			
Supply flow rate						
for the recovery rates stated		GPM (m³/h)	22 (5.0)	13.2 (3.0)	8.8 (2.0)	4.4 (1.0)
Recovery rates* ¹ with a DHW temperature rise of the domestic hot water from 50 to 140°F (10 to 60°C) and heating water supply temperature of.....	194°F (90°C)	MBH (kW)	137 (40)	133 (39)	127 (37)	113 (33)
		GPH (L/h)	182 (693)	176 (668)	170 (642)	150 (570)
	176°F (80°C)	MBH (kW)	108 (32)	105 (31)	100 (29)	90 (26)
		GPH (L/h)	143 (544)	139 (527)	134 (507)	120 (454)
	158°F (70°C)	MBH (kW)	76 (22)	75 (22)	71 (21)	65 (19)
		GPH (L/h)	101 (383)	98 (372)	95 (360)	86 (327)
AHRI Certified Performance Rating * ²						
Heating Input		MBH (kW)	119 (35)			
Boiler Supply Water Temperature		°F (°C)	180 (82)			
Heating Supply Flow Rate		GPM (LPM)	14 (53)			
First Draw		Gal (L)	49 (185)			
First Hour Rating		GPH (LPH)	238 (901)			
Continuous Draw Rating		GPH (LPH)	190 (719)			
Standby Heat Loss		°F/hr (°C/hr)	0.7 (0.4)			
Insulation			PUR Foam			
Dimensions* ³						
Overall diameter		in. (mm)	25 (634)			
Overall length		in. (mm)	26 (661)			
Overall height* ⁴		in. (mm)	55½ (1410)			
Tilt height		in. (mm)	57½ (1460)			
Weight						
Tank with insulation		lbs (kg)	143 (65)			
Heating water content						
(heat exchanger pipe coil)		USG (L)	1.95 (7.4)			
Heat exchanger surface area		ft. ² (m ²)	11 (1.0)			
Connections						
Heating water supply/return		Ø in. (male NPT thread)	1			
Domestic cold/hot water		Ø in. (male NPT thread)	¾			
Temp. and press. relief valve		Ø in. (male NPT thread)	¾			
Recirculation		Ø in. (male NPT thread)	1			

^{*1} When planning for the recovery rate as stated or calculated, allow for the corresponding circulation pump. The stated recovery rate is only achieved when the rated output of the boiler is equal to or greater than that stated under "Recovery rates".

^{*2} AHRI Standard IWH-TS-1 based on domestic water temperature rise of 77°F (42.7°C).

^{*3} For additional dimensions, refer to "Tank Dimensions" on page 8.

^{*4} Adjustable feet can be adjusted up to 2 in. (50 mm).

For information regarding other Viessmann System Technology componentry, please reference documentation of the respective product.

Technical Data Vitocell 300-V EVIB 79

For domestic hot water (DHW) heating applications which utilize modulating and low temperature hot water heating boilers.

Suitable for heating systems with:

- max. working pressure on heat exchanger side up to 220 psig at 392°F (200°C)
- max. working pressure on DHW water side of up to 150 psig at 210°F (99°C)

Storage capacity			USG (L)		79 (300)			
Supply flow rate								
for the recovery rates stated			GPM (m³/h)		22 (5.0)	13.2 (3.0)	8.8 (2.0)	4.4 (1.0)
Recovery rates* ¹ with a DHW temperature rise of the domestic hot water from 50 to 140°F (10 to 60°C) and heating water supply temperature of.....	194°F (90°C)	MBH (kW)	186 (54)	177 (52)	167 (49)	143 (42)		
		GPH (L/h)	247 (937)	236 (895)	223 (845)	190 (720)		
	176°F (80°C)	MBH (kW)	145 (43)	139 (41)	133 (39)	115 (34)		
		GPH (L/h)	195 (737)	186 (706)	177 (670)	153 (578)		
	158°F (70°C)	MBH (kW)	103 (30)	98 (29)	95 (28)	83 (24)		
		GPH (L/h)	137 (520)	132 (501)	126 (478)	111 (420)		
AHRI Certified Performance Rating * ²								
Heating Input			MBH (kW)	169 (50)				
Boiler Supply Water Temperature			°F (°C)	180 (82)				
Heating Supply Flow Rate			GPM (LPM)	14 (53)				
First Draw			Gal (L)	76 (288)				
First Hour Rating			GPH (LPH)	345 (1306)				
Continuous Draw Rating			GPH (LPH)	269 (1018)				
Standby Heat Loss			°F/hr (°C/hr)	0.47 (0.3)				
Insulation			PUR Foam					
Dimensions* ³								
Overall diameter			in. (mm)	26¼ (668)				
Overall length			in. (mm)	28 (706)				
Overall height* ⁴			in. (mm)	68½ (1740)				
Tilt height			in. (mm)	72 (1825)				
Weight								
Tank with insulation			lbs (kg)	231 (105)				
Heating water content								
(heat exchanger pipe coil)			USG (L)	2.91 (11)				
Heat exchanger surface area			ft. ² (m ²)	16 (1.5)				
Connections								
Heating water supply/return		Ø in. (male NPT thread)	1					
Domestic cold/hot water		Ø in. (male NPT thread)	1					
Temp. and press. relief valve		Ø in. (male NPT thread)	1					
Recirculation		Ø in. (male NPT thread)	1					

*¹ When planning for the recovery rate as stated or calculated, allow for the corresponding circulation pump. The stated recovery rate is only achieved when the rated output of the boiler is equal to or greater than that stated under "Recovery rates".

*² AHRI Standard IWH-TS-1 based on domestic water temperature rise of 77°F (42.7°C).

*³ For additional dimensions, refer to "Tank Dimensions" on page 9.

*⁴ Adjustable feet can be adjusted up to 2 in. (50 mm).

For information regarding other Viessmann System Technology componentry, please reference documentation of the respective product.

Technical Data Vitocell 300-V EVIB 119

For domestic hot water (DHW) heating applications which utilize modulating and low temperature hot water heating boilers.

Suitable for heating systems with:

- max. working pressure on heat exchanger side up to 220 psig at 392°F (200°C)
- max. working pressure on DHW water side of up to 150 psig at 210°F (99°C)

Storage capacity			USG (L)		119 (450)		
Supply flow rate for the recovery rates stated			GPM (m³/h)	22 (5.0)	13.2 (3.0)	8.8 (2.0)	4.4 (1.0)
Recovery rates*¹ with a DHW temperature rise of the domestic hot water from 50 to 140°F (10 to 60°C) and heating water supply temperature of.....	194°F (90°C)	MBH (kW)	204 (60)	196 (57)	184 (54)	154 (45)	
		GPH (L/h)	275 (1042)	262 (989)	245 (929)	206 (780)	
	176°F (80°C)	MBH (kW)	163 (48)	155 (45)	146 (43)	124 (36)	
		GPH (L/h)	216 (820)	207 (781)	195 (737)	166 (627)	
	158°F (70°C)	MBH (kW)	115 (34)	110 (32)	105 (31)	91 (27)	
		GPH (L/h)	152 (579)	147 (555)	139 (528)	121 (458)	
AHRI Certified Performance Rating *²							
Heating Input			MBH (kW)	189 (55)			
Boiler Supply Water Temperature			°F (°C)	180 (82)			
Heating Supply Flow Rate			GPM (LPM)	14 (53)			
First Draw			Gal (L)	112 (424)			
First Hour Rating			GPH (LPH)	413 (1563)			
Continuous Draw Rating			GPH (LPH)	301 (1139)			
Standby Heat Loss			°F/hr (°C/hr)	0.4 (0.2)			
Insulation			Soft PET				
Dimensions*³							
Tank diameter without insulation			in. (mm)	23.9 (609.5)			
Overall diameter with insulation			in. (mm)	32¾ (831)			
Tank length without insulation			in. (mm)	32 (811)			
Overall length with insulation			in. (mm)	35½ (904)			
Tank height without insulation			in. (mm)	74½ (1895)			
Overall height with insulation*⁴			in. (mm)	77 (1960)			
Tilt height without insulation			in. (mm)	78 (1978)			
Weight							
Tank with insulation			lbs (kg)	226 (103)			
Heating water content (heat exchanger pipe coil)							
			USG (L)	3.43 (13)			
Heat exchanger surface area			ft.² (m²)	18.3 (1.7)			
Connections							
Heating water supply/return	Ø in. (male NPT thread)	1					
Domestic cold/hot water	Ø in. (male NPT thread)	1¼					
Temp. and press. relief valve	Ø in. (male NPT thread)	1					
Recirculation	Ø in. (male NPT thread)	1					

*¹ When planning for the recovery rate as stated or calculated, allow for the corresponding circulation pump. The stated recovery rate is only achieved when the rated output of the boiler is equal to or greater than that stated under "Recovery rates".

*² AHRI Standard IWH-TS-1 based on domestic water temperature rise of 77°F (42.7°C).


*³ For additional dimensions, refer to "Tank Dimensions" on page 10.

*⁴ Adjustable feet can be adjusted up to 2 in. (50 mm).

For information regarding other Viessmann System Technology componentry, please reference documentation of the respective product.

Tank Dimensions

42 USG (160 L) and 53 USG (200 L) Tanks

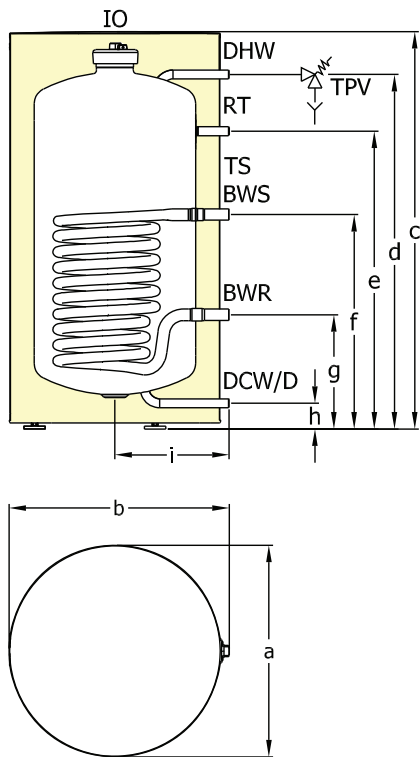


Dimensions			
Storage capacity	USG (L)	42 (160)	53 (200)
a	in. (mm)	25 (634)	25 (634)
b	in. (mm)	26 (661)	26 (661)
c	in. (mm)	47 (1190)	55½ (1410)
d	in. (mm)	42 (1062)	50½ (1282)
e	in. (mm)	33½ (850)	35 (892)
f	in. (mm)	25¼ (642)	25¼ (642)
g	in. (mm)	13½ (342)	13½ (342)
h	in. (mm)	3 (77)	3 (77)
i	in. (mm)	13½ (344)	13½ (344)

- Legend**
- IO Inspection and clean-out Opening
 - DHW Domestic Hot Water
 - TPV Temperature and Pressure relief Valve
 - RT DHW Recirculation Tapping
 - BWS Heating Water Supply
 - TS Sensor well for tank temperature sensor or temperature controller
 - BWR Heating Water Return
 - DCW/D Domestic Cold Water and Drain on the DHW side

Tank Dimensions

79 USG (300 L) Tank

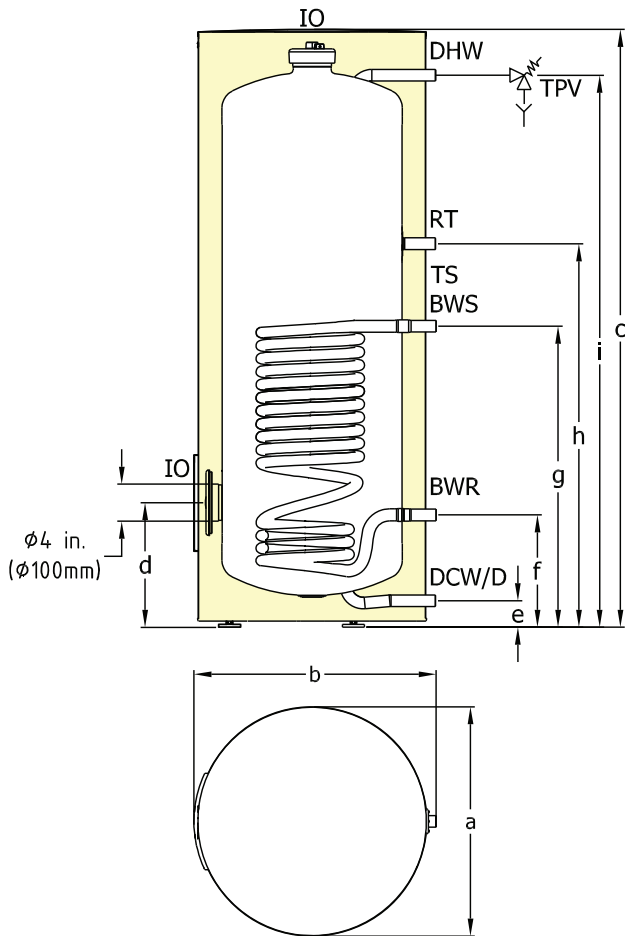

Dimensions


Storage capacity	USG (L)	79 (300)
a	in. (mm)	26¼ (668)
b	in. (mm)	28 (706)
c	in. (mm)	68½ (1740)
d	in. (mm)	14¼ (362)
e	in. (mm)	3 (77)
f	in. (mm)	13 (327)
g	in. (mm)	34½ (876)
h	in. (mm)	44 (1116)
i	in. (mm)	63¼ (1607)

Legend


- IO Inspection and clean-out Opening
- DHW Domestic Hot Water
- TPV Temperature and Pressure relief Valve
- RT DHW Recirculation Tapping
- BWS Heating Water Supply
- TS Sensor well for tank temperature sensor or temperature controller
- BWR Heating Water Return
- DCW/D Domestic Cold Water and Drain on the DHW side

Tank Dimensions

119 USG (450 L) Tank

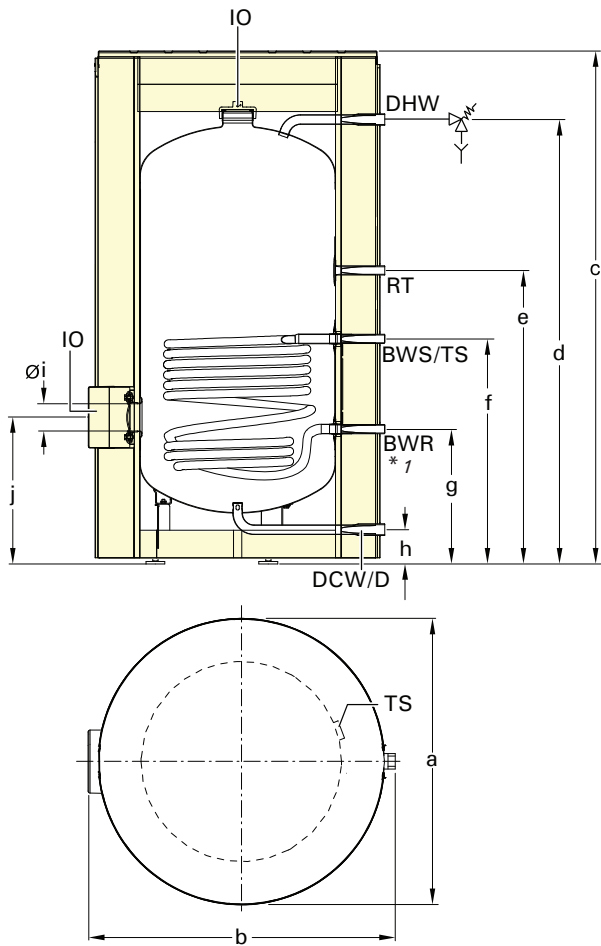

DHW tank temperature sensor in solar heating applications 119 USG (450 L).

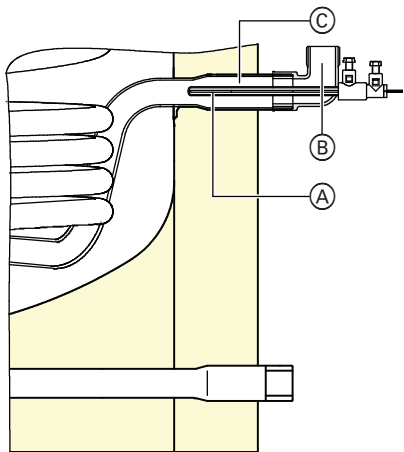

Legend

- Ⓐ DHW tank temperature sensor for solar application (included with solar control unit)
- Ⓑ Brass elbow with sensor well
- Ⓒ Solar collector return connection.

Dimensions

Storage capacity	USG (L)	119 (450)
a	in. (mm)	32¾ (831)
b	in. (mm)	35½ (904)
c	in. (mm)	77 (1960)
d	in. (mm)	71½ (1821)
e	in. (mm)	46 (1168)
f	in. (mm)	36 (916)
g	in. (mm)	17¼ (441)
h	in. (mm)	3¾ (98)
i	in. (mm)	4 (100)
j	in. (mm)	19 (484)

Legend

- IO Inspection and clean-out Opening
- DHW Domestic Hot Water
- TPV Temperature and Pressure relief Valve
- RT DHW Recirculation Tapping
- BWS Heating Water Supply
- TS Clamping system for fastening up to three temperature sensors to the tank shell.
- BWR Heating Water Return
- DCW/D Domestic Cold Water and Drain on the DHW side

*1 For solar heating systems Viessmann recommends placement of the DHW tank temperature sensor in the heating water return (BWR). This requires a brass elbow with sensor well (see price list, Vitocell 300 accessory).

Water Flow

Domestic hot water draw rate

Storage tank contents heated to 140°F (60°C), boiler not reheating.


Storage capacity	USG (L)	42 (160)	53 (200)	79 (300)	119 (450)
DHW draw rate	GPM (L/min)	2.6 (10)	2.6 (10)	4.0 (15)	4.0 (15)
DHW draw water with t = 140°F (60°C)(constant)	USG (L)	35 (133)	41 (155)	63 (240)	103 (390)
tank volume	%	83	77.5	80	87

Heat-up time

The stated heating times are achieved when the maximum recovery rate of the domestic hot water tank is made available at the respective supply temperature and with a domestic hot water rise from 50°F to 140°F (10°C to 60°C).

Storage capacity	USG (L)	42 (160)	53 (200)	79 (300)	119 (450)
Heat-up time (minutes)					
Heating water	194°F (90°C)	17	19	21	25
supply temperature	176°F (80°C)	20	24	30	33
	158°F (70°C)	30	37	40	46


Pressure drop on the heating water side

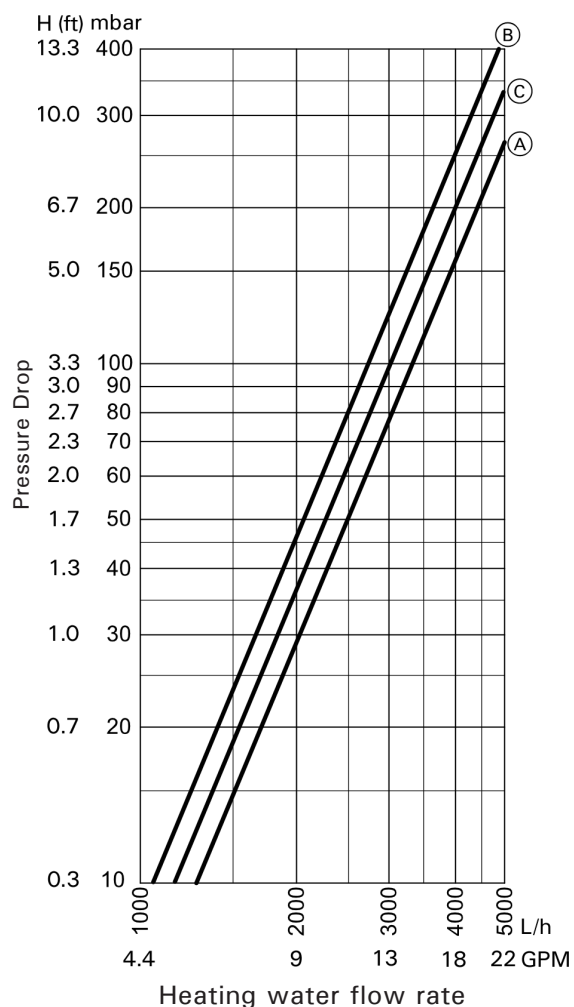

Legend

- (A) 42 and 53 USG (160 and 200 L) capacity
- (B) 79 USG (300 L) capacity
- (C) 119 USG (450 L) capacity

Pressure drop on the DHW side

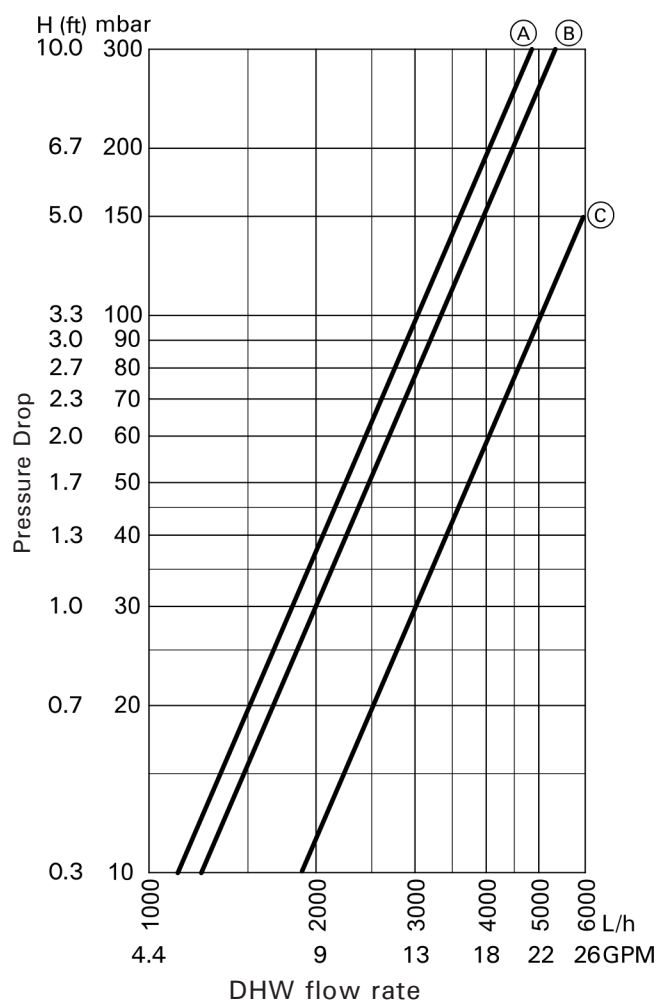

Legend

- (A) 42 and 53 USG (160 and 200 L) capacity
- (B) 79 USG (300 L) capacity
- (C) 119 USG (450 L) capacity

Standard Equipment

Vitocell 300-V, EVIB 42 USG (160 L) capacity

DHW tank made from stainless steel.

- Integral welded sensor well for tank temperature sensor/temperature controller
- Temperature and pressure relief valve
- Installation fittings
- Technical literature set
- Adjustable feet
- Fitted thermal insulation
- Color of the epoxy-coated sheet steel casing: Vitopearlwhite.

Vitocell 300-V, EVIB 53 USG (200 L) capacity

DHW tank made from stainless steel.

- Integral welded sensor well for tank temperature sensor/temperature controller
- Temperature and pressure relief valve
- Installation fittings
- Technical literature set
- Adjustable feet
- Fitted thermal insulation
- Color of the epoxy-coated sheet steel casing: Vitopearlwhite.
- Threaded elbow with solar sensor well (optional) [well internal dia. 1/4 in. (6.5 mm)]

Vitocell 300-V, EVIB 79 USG (300 L) capacity

DHW tank made from stainless steel.

- Integral welded sensor well for tank temperature sensor/temperature controller
- Temperature and pressure relief valve
- Installation fittings
- Technical literature set
- Adjustable feet
- Fitted thermal insulation
- Color of the epoxy-coated sheet steel casing: Vitopearlwhite.
- Threaded elbow with solar sensor well (optional) [well internal dia. 1/4 in. (6.5 mm)]

Vitocell 300-V, EVIB 119 USG (450 L) capacity

DHW tank made from stainless steel.

- One clamping system with three fastening channels for attaching temperature sensors to the tank shell.
- Temperature and pressure relief valve
- Installation fittings
- Technical literature set
- Adjustable feet
- Separate carton with removable thermal insulation
- Color of the plastic-coated thermal insulation: Vitographite
- Threaded elbow with solar sensor well (optional) [well internal dia. 1/4 in. (6.5 mm)]

Multiple Tank Installation

Technical data


The DHW tanks may be combined into batteries consisting of 2 tanks [79 USG (300 L)] tanks or 3 [119 USG (450 L)] tanks.

Tank batteries consisting of more than 3 tanks can be installed by creating up to 4 batteries, each consisting of 2 tanks. The heating contractor is responsible to ensure proper piping on both the primary and secondary circuits.

Storage capacity		USG (L)	79 (300)	119 (450)	
Total capacity of tank battery		USG (L)	158 (600)	238 (900)	357 (1350)
Number of storage tanks			2	2	3
Recovery rates ^{*1}					
With a DHW temperature rise of the domestic hot water from 50 to 140°F (10 to 60°C) and heating water supply temperature of.....	194°F (90°C)	MBH (kW)	354 (104)	408 (120)	612 (180)
		GPH (L/h)	472 (1788)	550 (2082)	825 (3123)
	176°F (80°C)	MBH (kW)	278 (82)	326 (96)	489 (144)
		GPH (L/h)	372 (1412)	432 (1640)	648 (2460)
	158°F (70°C)	MBH (kW)	196 (58)	232 (68)	348 (102)
		GPH (L/h)	264 (1002)	304 (1158)	456 (1737)

^{*1} When planning for the recovery rate as stated or calculated, allow for the corresponding circulation pump. The stated recovery rate is only achieved when the rated output of the boiler is equal to or greater than that stated under "Recovery rates".

^{*2} Measured values are based on a room temperature of 68°F (20°C) and a domestic hot water temperature of 149°F (65°C) and can vary by $\pm 5\%$.

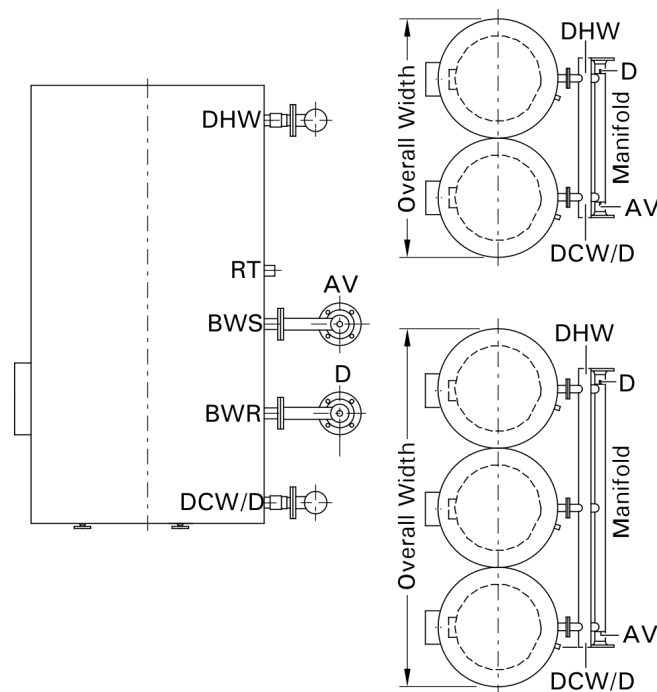

For domestic hot water heating applications which utilize modulating and low temperature hot water heating boilers.

Examples of multiple tank installations (shown). All fittings including manifolds are field supplied.

Storage tank capacity	79 USG (300 L)	119 USG (450 L)	
# of storage tanks	2	2	3
Common header size boiler supply / return	in. (51)	2 (51)	2 (51)
Common header size domestic hot / cold water	in. (32)	1 1/4 (32)	1 1/2 (38)
Dimensions with insulation	in. (1495)	74 3/4 (1900)	116 3/4 (2968)
Overall width ^{*1}			

^{*1} Overall width includes 2" clearance space between the tanks.

Legend

D	Drain on the heating water side
AV	Air Vent valve
BWR	Heating Water Return
BWS	Heating Water Supply
DCW/D	Domestic Cold Water and Drain on the DHW side
DHW	Domestic Hot Water
RT	DHW Recirculation Tapping

Multiple Tank Installation

Domestic hot water draw rate

Storage tank content heated to 140°F (60°C),
boiler not reheating

Storage tank capacity		79 USG (300 L)	119 USG (450 L)	
Number of storage tanks		2	2	3
Battery storage capacity	USG (L)	158 (600)	238 (900)	357 (1350)
DHW draw rate	GPM (L/min)	7.9 (30)	7.9 (30)	11.9 (45)
Domestic hot water draw Water with t = 140°F (60°C) (constant)	USG (L)	126.8 (480)	206 (780)	309 (1170)
% of battery volume		93	93	93

Quick recovery (over 10-minute period)

Domestic hot water rise from 50°F to 113°F (10°C to 45°C)

Heating water supply temperature	194°F (90°C)	USG/10 min (L/10 min)	186 (704)	292 (1104)	438 (1656)
	176°F (80°C)	USG/10 min (L/10 min)	172 (649)	283 (1072)	425 (1608)
	158°F (70°C)	USG/10 min (L/10 min)	164 (620)	274 (1038)	411 (1557)


Max. domestic hot water draw rate (over 10-minute period)

Domestic hot water rise from 50°F to 113°F (10°C to 45°C)

Heating water supply temperature	194°F (90°C)	GPM (L/min)	18.6 (70.4)	19.1 (110.4)	43.7 (165.6)
	176°F (80°C)	GPM (L/min)	17.0 (64.9)	28.3 (107.2)	42.4 (160.8)
	158°F (70°C)	GPM (L/min)	16.3 (62.0)	27.4 (103.8)	43.7 (165.6)

System Design Guidelines

Domestic hot water connections

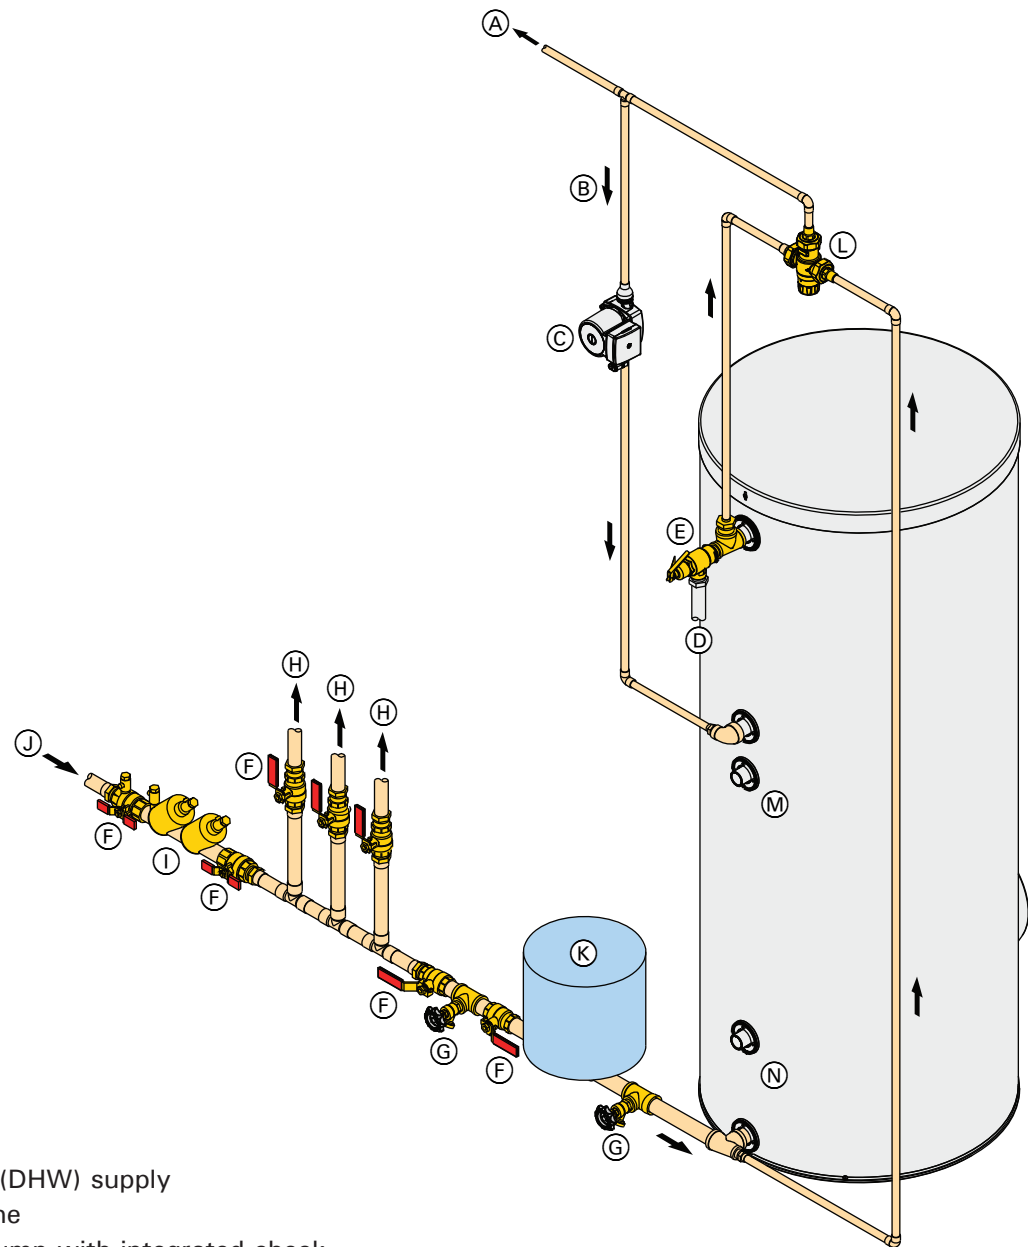

Legend

- (A) Domestic hot water (DHW) supply
- (B) DHW recirculation line
- (C) DHW recirculation pump with integrated check valve
- (D) Discharge pipe
- (E) Pressure and temperature relief valve
- (F) Shut-off valves
- (G) Drain
- (H) Domestic cold water (DCW) supply lines
- (I) Backflow preventer
- (J) DCW inlet
- (K) Precharged expansion tank (required where backflow preventer is installed; check local plumbing codes and requirements)
- (L) Thermostatic mixing valve/anti-scald valve
- (M) Boiler supply
- (N) Boiler return


IMPORTANT

This is a simplified conceptual drawing only! Piping and necessary componentry must be field verified. Proper installation and functionality in the field is the responsibility of the heating contractor.

Multiple Tank Installation

Boiler hot water connections

Refer to "Technical Data" on page 4 for additional information.

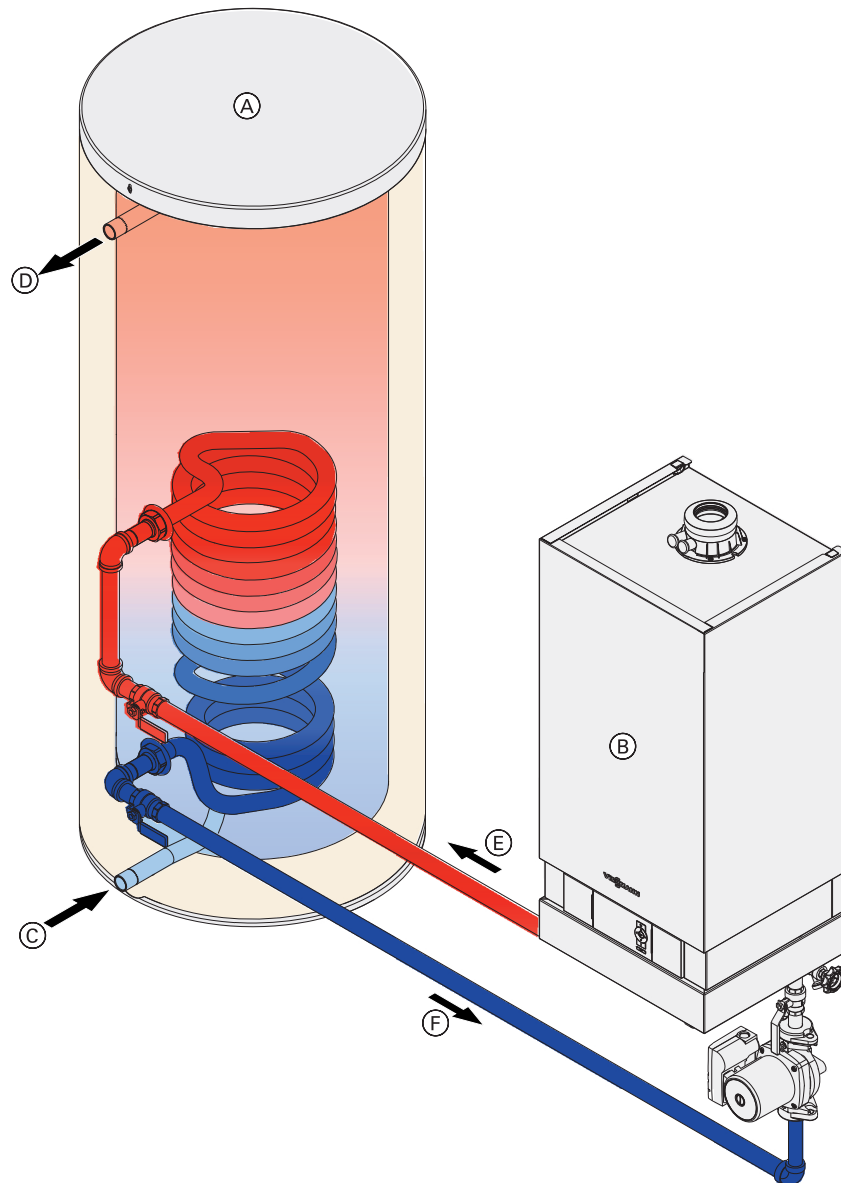

Legend

- (A) Vitocell 300
- (B) Boiler*
- (C) Domestic Cold Water (DCW)
- (D) Domestic Hot Water (DHW)
- (E) Boiler supply
- (F) Boiler return

*Refer to the boiler installation instructions for specific boiler connection details.

Additional System Information

Sensors

The sensor wells/clamps are to be used for control sensors to ensure maximum operational safety. For solar heating systems, Viessmann recommends placement of the DHW tank temperature sensor in the solar collector return. This requires a brass elbow with the sensor well, refer to "Tank Dimensions" on page 10.

WARNING

To ensure optimum, safe operation, the stainless steel well must be used. The well diameter is large enough to accommodate a wide variety of sensing bulbs. Always use spring clip to ensure proper contact of capillary bulb against the stainless steel well for proper sensing/heat transfer!

Heating water supply temperature over 230°F (110°C)

These operating conditions require the installation of an additional safety high limit into the DHW storage tank, preventing the temperature from rising above 203°F (95°C). A domestic hot water tempering valve must be used.

Temperature and pressure relief valve

A 150 psi temperature and pressure relief valve (T&P relief valve) is supplied with the tank. The heating contractor must install the valve on each tank in a method meeting code requirements. If local codes require a different relief valve, substitute the manufacturer's supplied valve. Maximum operating pressure is 150 psig.

The T&P relief valve supplied with the tank is tested under ANSI Z21.22 Code for Relief Valves and Automatic Gas Shut-off Devices for Hot Water Supply Systems.

T&P Valve	150 psig
ASME pressure steam rating	see ratings marked on T&P valve
CSA temperature steam rating	205 MBH
Relief temperature	210°F (99°C)
Inlet thread	¾ in. male
Outlet thread	¾ in. female

Tempering valve

Ensure that temperature tempering valve(s) is installed if the domestic hot water storage tank temperature exceeds 140°F (60°C) to protect from scalding. Consult plumbing codes and authorities for local requirements.

Installation of additional high limit temperature device(s)

WARNING

In a multiple-tank installation, it is recommended that an additional high limit temperature device be installed in the common domestic hot water supply header to the system. This safety device should be wired in series to the operating control of the tank battery. The setting on this additional high limit temperature device should be approximately 9°F (5°C) higher than the operating high limit.

Backflow preventers

Where backflow preventers are required, a domestic water expansion tank installation is recommended in the cold water inlet piping before the cold water enters the Vitocell. For the backflow device, observe local plumbing codes and regulations.

Recirculation tapping

The recirculation tapping is on a separate tapping. Cap this opening if the tank is not installed with recirculation

Warranty consideration

Viessmann DHW tanks require that the water to be heated must be of drinking (potable) water quality and that any water treatment equipment in use must function correctly.

Viessmann accepts no responsibility for damage howsoever caused and reserves the right to withdraw the product warranty if the product has been improperly installed or misapplied by the installer, contractor or final user. In order to qualify for product warranty, strict adherence to the installation and service manuals must be assured.


In the event that Viessmann non-approved components are utilized, Viessmann reserves the right to withdraw all expressed or implied warranties without written notice.


The water to be heated with the Vitocell must be drinking (potable) water quality. If the tank is used to heat other media, the warranty will be null and void.

Damage resulting from excessive pressure or temperature is clearly not the responsibility of Viessmann.

The amount of chloride and sulfate acceptable to the tank is limited. In areas where high concentrations of chloride and sulfate are present in drinking water, please consult Viessmann for directions.

For full warranty details, please read the product warranty sheet.



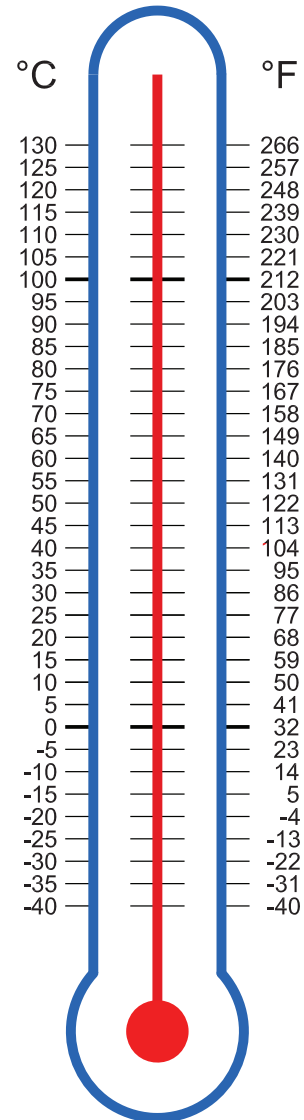

Printed on environmentally friendly
(recycled and recyclable) paper.

Technical information subject to change without notice.



Viessmann Manufacturing Company (U.S.) Inc.
45 Access Road
Warwick, Rhode Island · 02886 · USA
TechInfo Line 1-888-484-8643
1-800-288-0667 · Fax (401) 732-0590
www.viessmann-us.com · info@viessmann-us.com

Viessmann Manufacturing Company ULC
750 McMurray Road
Waterloo, Ontario · N2V 2G5 · Canada
TechInfo Line 1-888-484-8643
1-800-387-7373 · Fax (519) 885-0887
www.viessmann.ca · info@viessmann.ca