

'Apollo' Valves

SUBMITTAL SHEET

LEAD FREE

77WLF Series

APOLLOXPRESS® Press End Bronze Ball Valve



APOLLOXPRESS®



DESCRIPTION

The Lead Free* APOLLOXPRESS® 77WLF ball valve is ideal for installation in potable water systems requiring NSF 61 or Lead Free* approval. Now with Leak Before Press® feature and 250 psig maximum working pressure.

Job Name:	
Job Location:	
Engineer:	
Contractor:	
Tag:	
PO Number:	
Representative:	
Wholesale Distributor:	



FEATURES

- Lead Free* Brass & Bronze Materials
- Easily Identifiable Blue Lead Free Hang Tag
- Full-Port Flow
- Adjustable Stem Packing
- Fast, Reliable, Economical Press Installation
- Leak Before Press® Technology
- Corrosion Resistant Materials
- 100% Factory Tested
- Ridgid® XL Press Tool Compatible
- **Made in USA**, ARRA Compliant

PERFORMANCE RATING†

- Maximum Operating Pressure 250 psi
- Temperature Range: 0°F - 250°F

†APOLLOXPRESS® connectors are designed for direct mechanical connection to ASTM B88-Type K, L, and M copper tubing in the hard drawn condition. Press connectors are not suitable for steam or flammable gas service.

APPROVALS

- MSS SP-110 Ball Valves
- NSF/ANSI 61G
- NSF/ANSI 372 Lead Free*
- ANSI 3rd Party Approval to AB 1953 0.25% Lead Max.

OPTIONS

- (-04) 2 1/4" Stem Extension
- (-07) Tee-Handle
- (-10) Stainless Steel Handle and Nut
- (-11) Thermo-Seal™ Insulating Tee Handle
- (-92) Standard Lever with Balancing Stop
- (-94) 2 1/4" Stem Extension and Balancing Stop
- (77WLF-140 SERIES) S.S. Ball and Stem


** Consult factory for availability of LF Model options

STANDARD MATERIALS LIST

Part Name	Material
Body	ASTM B584 C89836
Seat	Multi-Fill PTFE
Ball	UNS C27451 Brass, Chr. Plated
Stem Packing	Multi-Fill PTFE
Nut	Zinc Plated Steel
Stem	UNS C27451 Brass
Retainer	UNS C27451 Brass
Handle	Plated Steel / Insulated Polyvinyl
Gland	Brass, ASTM B16, C36000
O-Ring	EPDM

DIMENSIONS

Model Number	Size (in.)	Dimensions (in.)					Wt. (lbs.)
		A	B	C	D	E	
77WLF-103-01	1/2"	0.50	1.54	3.08	1.50	3.74	0.61
77WLF-104-01	3/4"	0.75	1.78	3.55	2.01	4.78	1.09
77WLF-105-01	1"	1.00	2.12	4.24	2.20	4.78	1.77
77WLF-106-01	1-1/4"	1.25	2.61	5.22	3.13	7.04	4.27
77WLF-107-01	1-1/2"	1.50	2.96	5.92	3.10	7.04	4.63
77WLF-108-01	2"	2.00	3.74	7.47	3.48	7.04	8.21

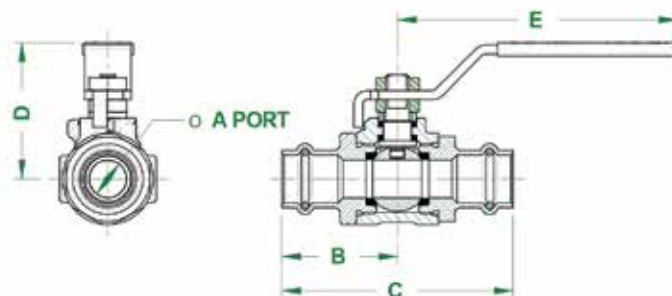

* LEAD FREE: The wetted surfaces of this product shall contain no more than 0.25% lead by weighted average. Complies with Federal Public Law 111-380. ANSI 3rd party approved and listed.

Apollo Valves, Manufactured by **Conbraco Industries, Inc.**
701 Matthews Mint-Hill Road, Matthews, NC 28105 USA
www.apollovalves.com | (704) 841-6000

This specification is provided for reference only. Conbraco Industries Inc. reserves the right to change any portion of this specification without notice and without incurring obligation to make such changes to Conbraco products previously or subsequently sold. Please visit our website @ www.apollovalves.com for the most current information.

