

ADJUSTABLE SWIVEL RING HANGERS


FUNCTION: Designed for the suspension of non-insulated stationary pipe lines. The knurled insert nut that allows a vertical adjustment after installation, is tapped to NFPA reduced rod size standards. Captured knurled insert nut present on pipe sizes 1/2" (15mm) to 2" (50mm). The capture is permanent in the bottom portion of the band, allowing the hanger to be opened during installation if desired, but preventing the knurled insert nut from falling completely out. Felt lining option has a layer of felt which separates the pipe from the hanger to reduce vibration and sound.

APPROVALS: Underwriters' Laboratories Listed in the U.S. (UL), Canada (CUL), for use with standard steel pipe sizes 3/4" to 8" and CPVC pipe sizes 3/4" - 4". Factory Mutual Approved for sizes 3/4" to 8". Complies with Federal Specifications A-A-1192A (Type 10), and Manufacturers' Standardization Society ANSI/SP-69 and SP-58 (Type 10).

Pipe Size	Rod Size A	B	Adj. C	D	E	Max. Rec. Load/lbs.	Wt. Each (in lbs.)
1/2	3/8	1 7/8	1 7/16	2 3/4	3 1/16	300	.10
3/4	3/8	1 11/16	1 1/8	2 1/2	3 1/16	300	.10
1	3/8	1 5/8	1	2 1/2	3 3/16	300	.10
1 1/4	3/8	1 15/16	1 1/16	2 13/16	3 9/16	300	.11
1 1/2	3/8	2 1/8	1 1/16	3 1/8	3 7/8	300	.11
2	3/8	2 7/16	1 1/8	3 5/16	4 3/8	300	.14
2 1/2	3/8	3 1/16	1 5/8	3 15/16	5 3/8	525	.19
3	3/8	3 11/16	1 7/8	4 9/16	6 5/16	525	.23
3 1/2	3/8	3 3/4	1 7/8	4 5/8	6 5/8	525	.25
4	3/8	4 3/16	1 7/8	5 1/16	7 5/16	650	.30
5	1/2	4 5/8	1 5/8	5 5/8	8 3/8	1000	.50
6	1/2	5 5/8	2 1/4	6 1/2	9 13/16	1000	.58
8	1/2	6 13/16	2 7/16	7 15/16	12 1/4	1000	.90

NFPA SWIVEL RING HANGER

- PRE-GALVANIZED
- PRE-GALVANIZED WITH FELT LINING

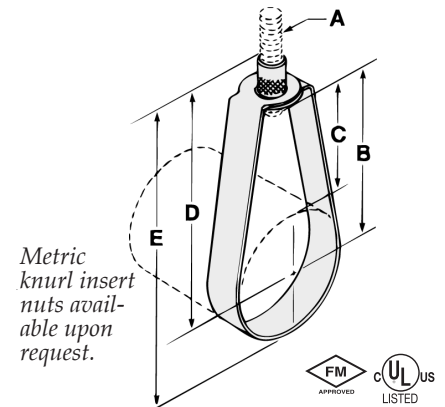

MATERIAL: Low carbon steel

ORDERING: Specify pipe size and figure number.

Note: If ordering felt lined hangers for pipe sizes of 3 1/2" or under, order the next largest size to allow for the thickness of the felt lining.


FUNCTION: Designed for the suspension of non-insulated stationary pipe lines. The PVC coating protects the pipe from contact with the metal surface of the hanger. Frequently used with Aluminum, Glass, Plastic, Brass or Copper pipe lines. This product is NOT compatible with CPVC pipe.

APPROVALS: Underwriters' Laboratories Listed in the U.S. (UL), Canada (CUL), and Factory Mutual Approved for sizes 3/4" to 8". Complies with Federal Specifications A-A-1192A (Type 10) and Manufacturers' Standardization Society ANSI/SP-69 and SP-58 (Type 10).

MATERIAL: Low carbon steel

Pipe Size	Rod Size A	B	Adj. C	D	E	Max. Rec. Load/lbs.	Wt. Each (in lbs.)
1/2	3/8	1 7/8	1 7/16	2 3/4	3 1/16	300	.11
3/4	3/8	1 11/16	1 1/8	2 1/2	3 1/16	300	.13
1	3/8	1 5/8	1	2 1/2	3 3/16	300	.13
1 1/4	3/8	1 15/16	1 1/16	2 13/16	3 9/16	300	.15
1 1/2	3/8	2 1/8	1 1/16	3 1/8	3 7/8	300	.17
2	3/8	2 7/16	1 1/8	3 5/16	4 3/8	300	.18
2 1/2	3/8	3 1/16	1 5/8	3 15/16	5 3/8	525	.19
3	3/8	3 11/16	1 7/8	4 9/16	6 5/16	525	.23
3 1/2	3/8	3 3/4	1 7/8	4 5/8	6 5/8	525	.25
4	3/8	4 3/16	1 7/8	5 1/16	7 5/16	600	.30
5	1/2	4 5/8	1 5/8	5 5/8	8 3/8	1000	.50
6	1/2	5 5/8	2 1/4	6 1/2	9 3/16	1000	.58
8	1/2	6 13/16	2 7/16	7 15/16	12 1/4	1000	.90

PVC COATED SWIVEL RING

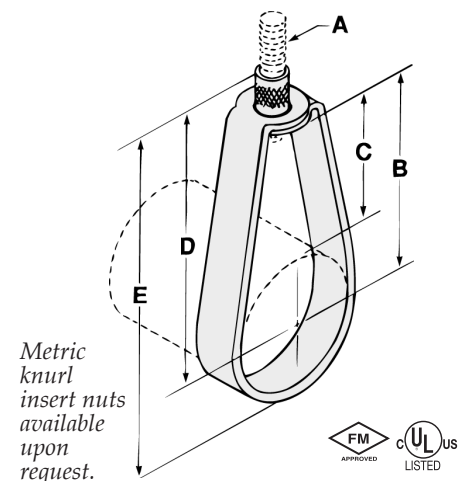


FINISH: Pre-galvanized with PVC Coating

ORDERING: Specify pipe size and figure number.

ADJUSTABLE SWIVEL RING HANGERS

SWIVEL RING HANGER

- PRE-GALVANIZED
- PRE-GALVANIZED WITH FELT LINING

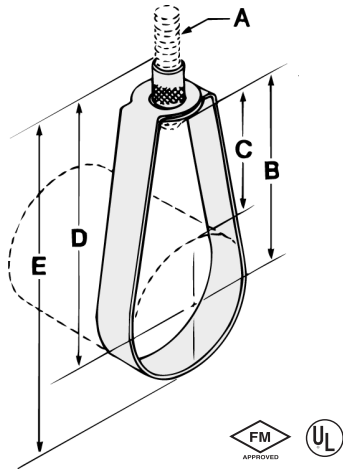

FUNCTION: Designed for the suspension of non-insulated stationary pipe lines. The knurled insert nut, allows for vertical adjustment after installation. The felt lining option reduce vibration and sound.

APPROVALS: Underwriters' Laboratories Listed in the U.S. (UL) and Factory Mutual Approved for all sizes. Complies with Federal Specification A-A-1192A (Type 10), and Manufacturers' Standardization Society ANSI/SP-69 and SP-58 (Type 10).

MATERIAL: Low carbon steel


ORDERING: Specify pipe size and figure number.

Pipe Size	Rod Size A	B	Adj. C	D	E	Max. Rec. Load/lbs.	Wt. Each (in lbs.)
2 ¹ / ₂	1 ¹ / ₂	2 ³ / ₄	1 ¹ / ₄	3 ¹¹ / ₁₆	5 ¹ / ₈	600	.33
3	1 ¹ / ₂	3 ¹ / ₈	1 ¹ / ₈	4	5 ⁷ / ₈	600	.35
3 ¹ / ₂	1 ¹ / ₂	3 ⁵ / ₈	1 ¹ / ₂	4 ⁵ / ₁₆	6 ⁵ / ₈	600	.37
4	5 ⁵ / ₈	3 ⁷ / ₈	1 ¹ / ₄	4 ¹⁵ / ₁₆	7 ¹ / ₈	1000	.48
5	5 ⁵ / ₈	4 ³ / ₈	1 ³ / ₈	5 ⁵ / ₈	8 ¹ / ₂	1000	.57
6	3 ³ / ₄	5 ⁵ / ₁₆	2	6 ¹¹ / ₁₆	10 ¹ / ₈	1250	1.06
8	3 ³ / ₄	6 ¹⁵ / ₁₆	2 ⁵ / ₈	8 ⁵ / ₁₆	12 ⁷ / ₈	1250	1.32

Note: If ordering felt lined hangers for pipe sizes of 3¹/₂" or under, order the next largest size to allow for the thickness of the felt lining.

COPPER TUBING SWIVEL RING

- COPPER COLOR EPOXY FINISH
- COPPER COLOR EPOXY FINISH WITH PVC COATING

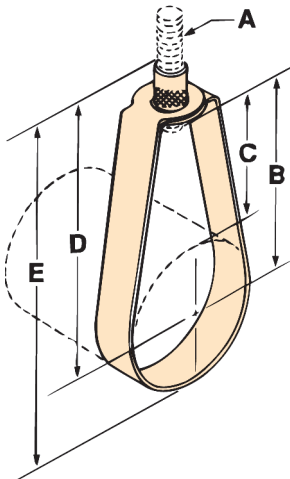

FUNCTION: Designed for the suspension of non-insulated stationary copper tubing. The knurled insert allows for vertical adjustment after installation. The PVC coating protects the tubing from contact with the metal surface of the hanger.

APPROVALS: Complies with Federal Specification A-A-1192A (Type 10) and Manufacturers' Standardization Society ANSI/SP-69 and SP-58 (Type 10).

MATERIAL: Low carbon steel

ORDERING: Specify tube size and figure number.

Tube Size	Rod Size A	B	Adj. C	D	E	Max. Rec. Load/lbs.	Wt. Each (in lbs.)
1 ¹ / ₂	3 ³ / ₈	1 ¹³ / ₁₆	1 ¹ / ₂	2 ¹¹ / ₁₆	3	300	.08
3 ³ / ₄	3 ³ / ₈	1 ⁵ / ₈	1 ³ / ₁₆	2 ¹ / ₂	2 ¹⁵ / ₁₆	300	.08
1	3 ³ / ₈	1 ⁹ / ₁₆	1	2 ⁹ / ₁₆	3	300	.08
1 ¹ / ₄	3 ³ / ₈	1 ⁵ / ₈	1 ⁵ / ₁₆	2 ¹ / ₂	3 ³ / ₁₆	300	.09
1 ¹ / ₂	3 ³ / ₈	1 ¹¹ / ₁₆	7 ⁷ / ₈	2 ⁹ / ₁₆	3 ³ / ₈	300	.09
2	3 ³ / ₈	2 ⁷ / ₁₆	1 ³ / ₈	3 ⁵ / ₁₆	4 ³ / ₈	300	.11
2 ¹ / ₂	3 ³ / ₈	2 ¹³ / ₁₆	1 ¹ / ₂	3 ⁷ / ₈	5 ⁹ / ₁₆	525	.26
3	3 ³ / ₈	3 ¹ / ₈	1 ⁹ / ₁₆	4 ³ / ₁₆	5 ³ / ₄	525	.28
3 ¹ / ₂	1 ¹ / ₂	3 ¹ / ₂	1 ¹¹ / ₁₆	4 ⁹ / ₁₆	6 ³ / ₈	525	.33
4	3 ³ / ₈	3 ³ / ₄	1 ¹¹ / ₁₆	4 ¹³ / ₁₆	6 ¹⁵ / ₁₆	650	.33
5	1 ¹ / ₂	4 ¹ / ₈	1 ⁹ / ₁₆	5 ³ / ₁₆	7 ¹³ / ₁₆	1000	.56
6	1 ¹ / ₂	4 ⁵ / ₈	1 ⁹ / ₁₆	5 ¹¹ / ₁₆	8 ¹⁵ / ₁₆	1000	.65