






28-BFV SERIES NO LEAD BRASS FLOAT VALVE (FAUCET OUTLET)

Specification:

- Threads conform to ANSI/ASME B1.20.1
- Heavy duty body with Buna-N disc
- Max Temperature Rating: 180°F (82°C)
- Max Operating Pressure Rating: 125 PSI



MATERIAL LIST	
Name	Material
Seat	NBR Rubber
Barrel	No Lead Brass
O-Ring	NBR Rubber
Float Rod End Adapter	No Lead Brass
Crank	No Lead Brass
Screw	Brass
Cotter Pin	Brass
Washer	No Lead Brass
Washer	Brass
Screw	Brass
Hex End Part	No Lead Brass

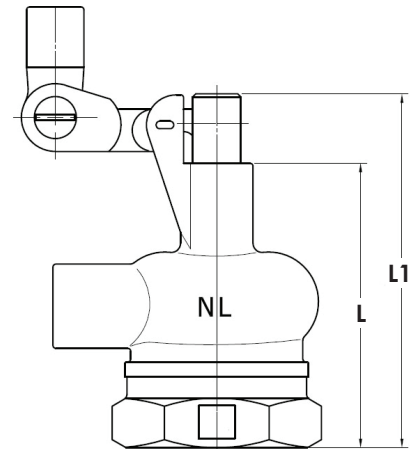

DIMENSIONS								
Part No.	Inlet	Outlet	Rod Connection	L		L1		Weight
	FPT		Tapped	inches	mm	inches	mm	
28-BFV-12NL	1-1/4"	Faucet	3/8" - 16 SAE	3.63	92.20	4.58	116.33	1300
28-BFV-15NL	1-1/2"	Faucet	3/8" - 16 SAE	3.72	94.50	4.53	115.00	1250
28-BFV-20NL	2"	Faucet	3/8" - 16 SAE	4.12	104.50	5.02	127.50	1500



25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0
Tel: 519-595-4444 Fax: 519-595-4380 Toll Free: 800-561-3164

www.boshart.com