

CLEVIS HANGERS


FUNCTION: Designed for the suspension of non-insulated stationary pipe lines. The felt lining option has a layer of felt which separates the pipe from the hanger to reduce vibration and sound. The PVC coating on protects the pipe from the metal surface of the hanger.

APPROVALS: Underwriters' Laboratories Listed in the U.S. (UL) and Factory Mutual Approved for 2 1/2" to 8" only. Complies with Federal Specifications A-A-1192A (Type 1) and Manufacturers' Standardization Society ANSI/SP-69 and SP-58 (Type 1).

MATERIAL: Low carbon steel

ORDERING: Specify pipe size and figure number.

Note: When an over-sized clevis is used, a pipe spacer should be placed over the clevis bolt to prevent the lower U-strap from moving inward.

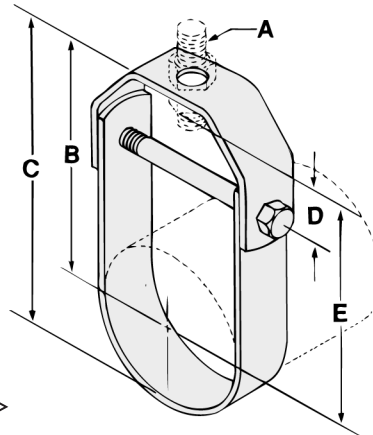

STANDARD CLEVIS HANGER

- PLAIN
- PLAIN WITH FELT LINING
- ELECTRO-GALVANIZED
- ELECTRO-GALVANIZED WITH FELT LINING
- PLAIN WITH PVC COATING
- HOT DIPPED GALVANIZED W/ ELECTRO-GALVANIZED HARDWARE

"D" Adjustment
(Top of cross bolt to bottom of hanger rod nut.)

Pipe Size	Rod Size A	B	C	Adjustment D	E	Cross Bolt	Max. Rec. Load/lbs.	Wt. Each (in lbs.)
1/2	3/8	2 7/16	2 7/8	1 1/8	2	1/4	730	.24
3/4	3/8	2 5/8	3 1/8	1 1/4	2 3/16	1/4	730	.24
1	3/8	3 1/16	3 3/4	1 5/8	2 5/8	1/4	730	.28
1 1/4	3/8	3 3/8	4 3/16	1 5/8	2 15/16	1/4	730	.32
1 1/2	3/8	3 1/2	4 7/16	1 1/2	3 1/16	1/4	730	.40
2	3/8	3 3/4	5	1 5/8	3 5/16	1/4	730	.52
2 1/2	1/2	4 5/8	6 1/16	2	4 1/16	3/8	1350	.72
3	1/2	4 7/8	6 5/8	1 13/16	4 1/4	3/8	1350	.78
3 1/2	1/2	4 1/2	6 1/2	1 1/4	3 7/8	3/8	1350	1.16
4	5/8	5 1/2	7 11/16	1 3/4	4 11/16	3/8	1430	1.35
5	5/8	6 1/8	9 1/8	1 7/8	5 5/16	1/2	1430	1.88
6	3/4	6 7/8	10 1/8	1 5/8	6	1/2	1940	2.76
8	3/4	8 3/4	12 7/8	2 1/8	7 7/8	5/8	2000	4.35
10	7/8	10 3/8	15 3/4	2 3/8	9 1/8	3/4	3600	8.22
12	7/8	11 5/8	18	2 1/2	10 1/2	3/4	3800	10.05
14	1	12 3/4	19 3/4	2 5/8	11 1/4	7/8	4200	12.97
16	1	14 1/8	22 1/8	2 5/8	13 5/8	1	4600	20.85
18	1 1/8	16 1/2	25 1/2	3 1/2	15	1 1/8	4800	24.75
20	1 1/4	18	28	4 1/8	16 1/8	1 1/4	4800	42.45
24	1 1/4	20 1/4	32 1/4	4 3/4	18 3/8	1 1/4	4800	48.65
30	1 1/4	24 1/2	38 7/8	5 1/2	21 1/2	1 1/4	6000	69.83
36	1 1/2	32	50	8 3/4	30	1 1/2	9500	175.00

Note: Use of an upper locknut ensures proper performance. Pipe spacers provided on 30" and larger clevises. If ordering felt lined hangers for pipe sizes of 3 1/2" or under, order the next largest size to allow for the thickness of the felt lining.