


# cushion strut clamp

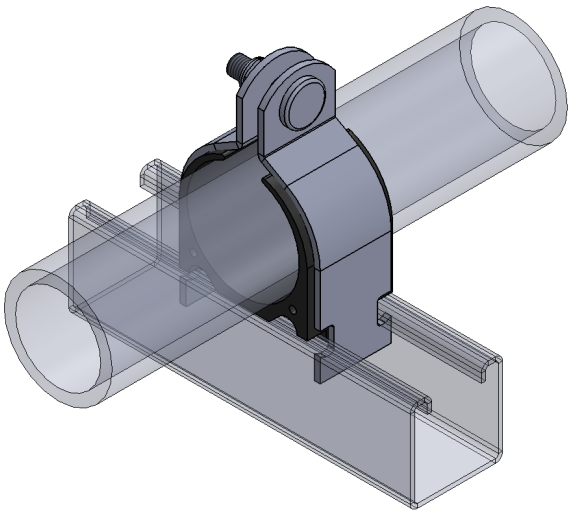

|                    |                                                                                                     |                 |
|--------------------|-----------------------------------------------------------------------------------------------------|-----------------|
| Materials/Finishes | Zinc Plated Carbon Steel                                                                            | T-304 Stainless |
|                    | T-316 Stainless                                                                                     |                 |
| Variants:          | N/A                                                                                                 |                 |
| Service:           | Designed to steady a horizontal run of pipe against a perpendicular section of strut.               |                 |
| Approvals:         | N/A                                                                                                 |                 |
| Ordering:          | Specify type, finish and pipe size.                                                                 |                 |
| Notes:             | Item numbers specify OD Size. See chart for IPS and CTS equivalent. Thermoplastic insulating liner. |                 |

| OD PIPE SIZE | IRON PIPE SIZE | COPPER TUBE SIZE | WGT EACH (LBS) |
|--------------|----------------|------------------|----------------|
| 1/4          | -              | 1/8              | 0.110          |
| 3/8          | 1/8            | 1/4              | 0.110          |
| 1/2          | 1/4            | 3/8              | 0.110          |
| 5/8          | 3/8            | 1/2              | 0.120          |
| 3/4          | -              | 5/8              | 0.130          |
| 7/8          | 1/2            | 3/4              | 0.200          |
| 1            | 3/4            | -                | 0.210          |
| 1-1/8        | -              | 1                | 0.275          |
| 1-1/4        | -              | -                | 0.292          |
| 1-3/8        | 1              | 1-1/4            | 0.310          |
| 1-1/2        | -              | -                | 0.354          |
| 1-5/8        | 1-1/4          | 1-1/2            | 0.400          |
| 1-3/4        | -              | -                | 0.413          |
| 1-7/8        | 1-1/2          | -                | 0.425          |
| 2            | -              | -                | 0.454          |
| 2-1/8        | -              | 2                | 0.483          |
| 2-3/8        | 2              | -                | 0.600          |
| 2-5/8        | -              | 2-1/2            | 0.610          |
| 2-7/8        | 2-1/2          | -                | 0.650          |
| 3-1/8        | -              | 3                | 0.630          |
| 3-1/2        | 3              | -                | 0.770          |
| 4            | 3-1/2          | -                | 1.022          |
| 4-1/8        | -              | 4                | 0.900          |
| 4-1/2        | 4              | -                | 1.100          |
| 5-5/8        | 5              | -                | 1.300          |
| 6-1/8        | -              | 6                | 1.300          |
| 6-5/8        | 6              | -                | 1.400          |