



## Camerton™

25" wall-mount blow-out service sink  
**K-12867**

### Features

- Deep squared basin
- 21-1/2" x 25" (546 - 635 mm)
- Blow-out action flushing rim
- 1-1/2" (38 mm) top spud
- Sink requires 5 - 7 gpf (19 - 27 lpf) valve, and minimum running pressure of 25 psi (172 kPa)
- No faucet holes; requires wall-mount faucet
- Sink drain with strainer sold separately

### Material

- Vitreous china

### Installation

- Wall-mount

### Recommended Products/Accessories

K-8935 Stainless Steel Rim Guard  
K-13864 Sink Strainer  
K-23726 Drain treatment  
K-23725 Cast iron cleaner

### Optional Products/Accessories

K-11352 Disposal Flange with Stopper



### Codes/Standards

ASME A112.19.2/CSA B45.1

### KOHLER® One-Year Limited Warranty


See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|

|                                                                                     |   |       |
|-------------------------------------------------------------------------------------|---|-------|
|  | 0 | White |
|-------------------------------------------------------------------------------------|---|-------|

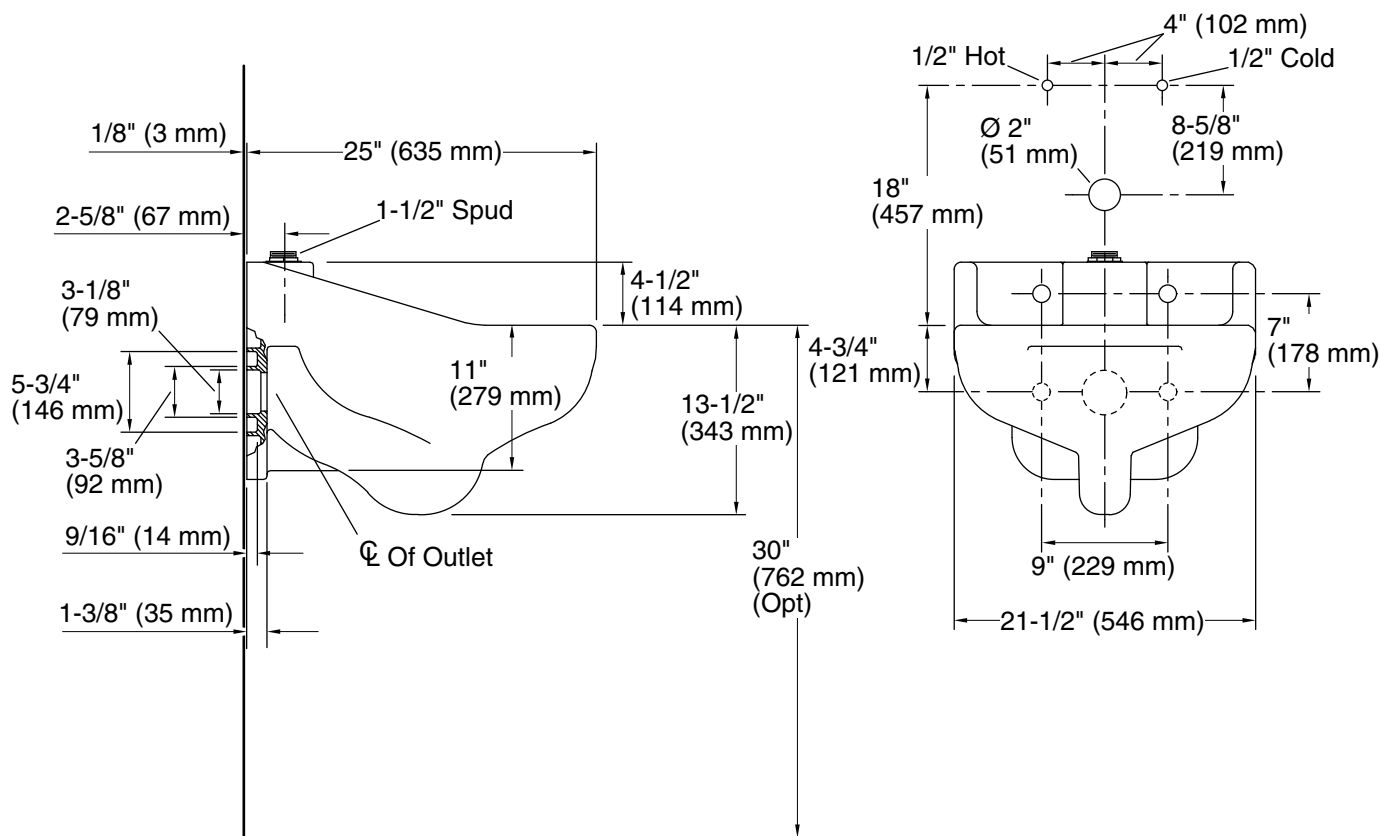

### Technical Information

All product dimensions are nominal.

Basin configuration: Single Bowl

Bowl area (Only): Length: 18" (457 mm)

Width: 18" (457 mm)

Water depth: 6-1/4" (159 mm)

With overflow: No

### Notes

Install this product according to the installation instructions.

Minimum flowing pressure required: 25 psi (172.4 kPa)

Minimum flow rate required: 25 gpm (94.6 lpm)

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.