

THREADED ACCESSORIES



7610 & 7611 Female Swivel

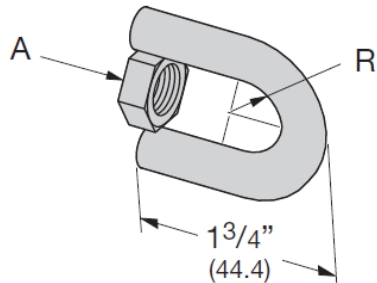


Fig. Number	A	R	Max. Rec. Load		Wt. Each	
			lbs.	kN	lbs.	kg
7610	3/8-16	9/32 (7.14)	610	(2.71)	.13	(.06)
7611	1/2-13	3/8 (9.53)	1130	(5.03)	.15	(.07)

MATERIAL: Low carbon steel

FINISH: Electro-galvanized

ORDERING: Specify figure number.

7615 & 7616 Male Swivel

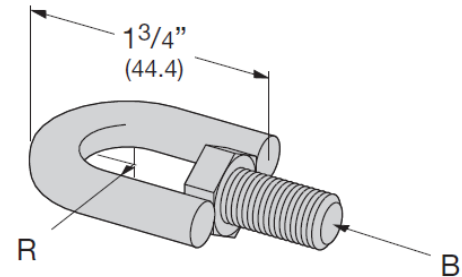


Fig. Number	A	R	Max. Rec. Load		Wt. Each	
			lbs.	kN	lbs.	kg
7615	3/8-16	9/32 (7.14)	610	(2.71)	.16	(.07)
7616	1/2-13	3/8 (9.53)	1130	(5.03)	.20	(.09)

MATERIAL: Low carbon steel

FINISH: Electro-galvanized

ORDERING: Specify figure number.

7620 & 7621 Female/Female Swivel

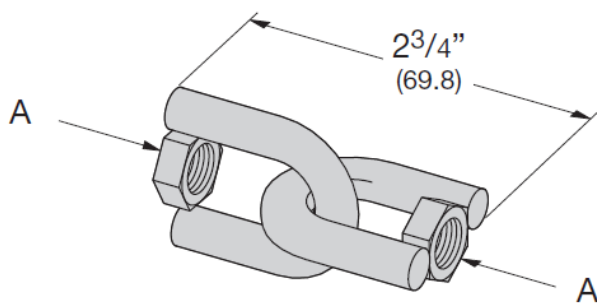


Fig. Number	A	Max. Rec. Load		Wt. Each	
		lbs.	kN	lbs.	kg
7620	3/8-16	610	(2.71)	.26	(.12)
7621	1/2-13	1130	(5.03)	.28	(.13)

MATERIAL: Low carbon steel

FINISH: Electro-galvanized

ORDERING: Specify figure number.

7625 & 7626 Female/Male Swivel

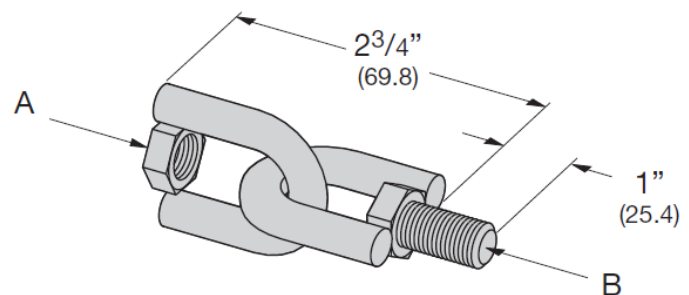


Fig. Number	A	B	Max. Rec. Load		Wt. Each	
			lbs.	kN	lbs.	kg
7625	3/8-16	3/8-16	610	(2.71)	.26	(.12)
7626	1/2-13	1/2-13	1130	(5.03)	.28	(.13)

MATERIAL: Low carbon steel

FINISH: Electro-galvanized

ORDERING: Specify figure number.

Unless otherwise specified, all dimensions on drawings and in charts are in inches and dimensions shown in parentheses are in millimeters.