
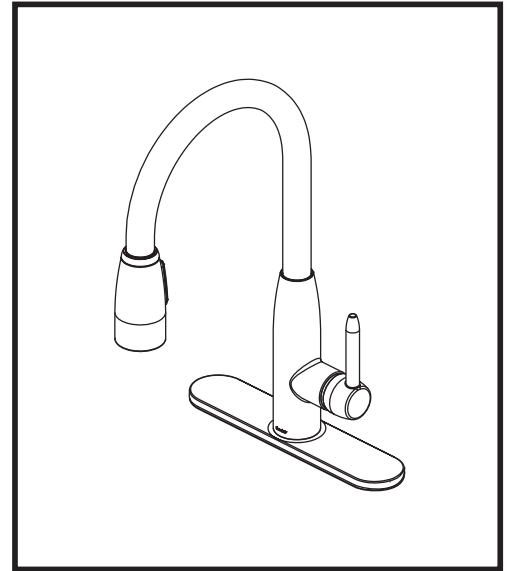


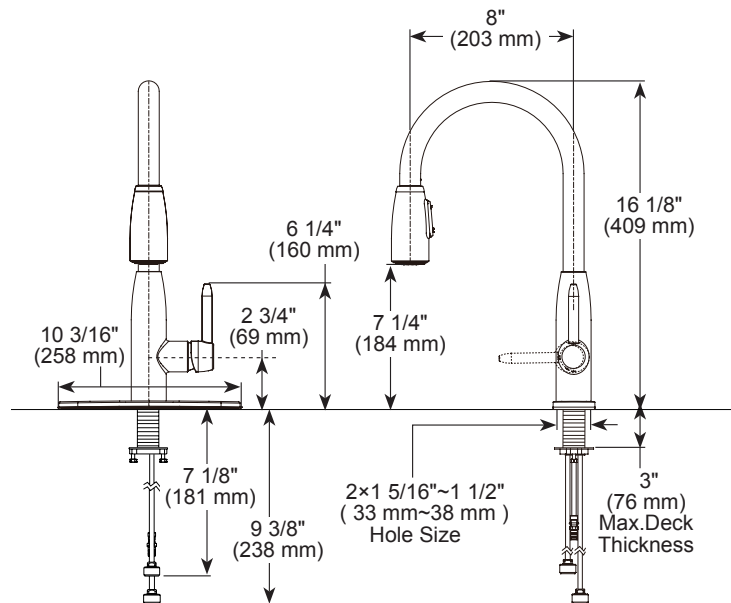

KITCHEN FAUCET:

- Single Handle Pull-out
- 1 or 3 Hole Sink Applications

STANDARD SPECIFICATIONS:

- Max. flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa
- Single handle, 2-function pull-down kitchen faucet for exposed mounting on 1 or 3 hole sinks
- Spout rotates 360°
- Pull-down wand operates in an aerated or spray mode via a toggle diverter.
- Integral check valves in hose assembly.
- Hose travels inside mounting shank so it will not interfere with deck edges.
- 1/2"-14 NPSM threaded male inlet adapters.
- Lever handle with ceramic cartridge.

WARRANTY

- Parts and Finish – Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date that the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.peerlessfaucet.com for the complete details of our limited warranty.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ICC/ANSI A117.1 - Valve control only