

PIPE STRAPS

FUNCTION: Designed to hold pipe or conduit flush with mounting surface for light duty applications.


MATERIAL: Low carbon steel

FINISH: Electro-galvanized

ORDERING: Specify pipe size and figure number.

Pipe Size	B	C	D	Wt Each (in lbs.)
1/4	1 ⁵ / ₈	1 ¹ / ₈	5/8	.01
3/8	2 ³ / ₈	1 ⁵ / ₈	1 ¹ / ₁₆	.03
1/2	2 ⁵ / ₈	1 ⁷ / ₈	7/8	.04
3/4	2 ³ / ₄	2 ¹ / ₈	1 ¹ / ₈	.05
1	3 ³ / ₈	2 ⁵ / ₈	1 ⁷ / ₁₆	.06
1 ¹ / ₄	4 ¹ / ₄	3 ³ / ₁₆	1 ¹³ / ₁₆	.08
1 ¹ / ₂	4 ¹ / ₂	3 ¹ / ₂	1 ¹⁵ / ₁₆	.10
2	5 ³ / ₈	4 ¹ / ₈	2 ⁹ / ₁₆	.13
2 ¹ / ₂	6	4 ¹ / ₂	3 ¹ / ₁₆	.20
3	7 ¹ / ₄	5 ³ / ₄	3 ³ / ₄	.50
4	6 ³ / ₄	5 ³ / ₄	4 ¹¹ / ₁₆	.51

TWO HOLE PIPE STRAP

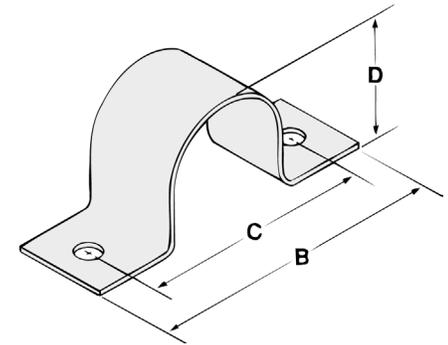

Note: Also available in copper tubing sizes with copper finish. To order, specify two hole pipe strap and tube size.

FUNCTION: Designed to hold pipe flush with mounting surface.

APPROVALS: Complies with Federal Specifications A-A-1192A (Type 26) and Manufacturers' Standardization Society ANSI/SP-69 and SP-58 (Type 26).

MATERIAL: Low carbon steel

FINISH: Plain or Electro-galvanized

ORDERING: Specify pipe size and figure number.

Pipe Size	B	C	D	E	Hole Size	Max. Rec. Load/lbs.	Wt. Each (in lbs.)
1/2	3 ⁷ / ₈	5/16	2 ⁷ / ₈	1 ⁵ / ₁₆	7/16	300	.25
3/4	4 ¹ / ₆	7/16	3 ¹ / ₁₆	1 ¹ / ₈	7/16	300	.27
1	4 ⁵ / ₁₆	9/16	3 ⁵ / ₁₆	1 ³ / ₈	7/16	300	.29
1 ¹ / ₄	4 ¹¹ / ₁₆	1 ¹ / ₁₆	3 ¹¹ / ₁₆	1 ⁵ / ₈	7/16	300	.33
1 ¹ / ₂	4 ¹⁵ / ₁₆	1 ³ / ₁₆	3 ¹⁵ / ₁₆	2	7/16	300	.35
2	5 ¹ / ₂	1 ⁵ / ₁₆	4 ¹ / ₂	2 ¹ / ₄	7/16	300	.41
2 ¹ / ₂	6	1 ³ / ₁₆	5	2 ⁷ / ₈	7/16	500	.89
3	6 ⁵ / ₈	1 ¹ / ₂	5 ⁵ / ₈	3 ¹ / ₂	7/16	500	1.06
3 ¹ / ₂	7 ¹ / ₈	1 ³ / ₄	6 ¹ / ₈	4	7/16	500	1.23
4	8 ³ / ₈	2	7 ¹ / ₈	4 ¹ / ₂	9/16	500	1.58

SHORT PIPE STRAP

Available in stainless steel. To order, specify 304 or 316 and add suffix SS to figure number. Price on request.

