

SPLIT RING HANGERS

FUNCTION: Designed for non-insulated stationary pipe lines in either a horizontal or vertical position.

APPROVALS: Complies with Federal Specification A-A-1192A (Type 12) and Manufacturers' Standardization Society ANSI/SP-69 and SP-58 (Type 12).

MATERIAL: Malleable iron


FINISH: Plain or Electro-galvanized

ORDERING: Specify pipe size, finish and figure number.

Pipe Size	Bolt Thread A	B	Max. Rec. Load/lbs.	Wt. Each (in lbs.)
3/8	3/8	13/16	180	.13
1/2	3/8	7/8	180	.14
3/4	3/8	1	180	.16
1	3/8	1 1/8	180	.18
1 1/4	3/8	1 5/16	180	.22
1 1/2	3/8	1 7/16	180	.38
2	3/8	1 11/16	180	.44
2 1/2	1/2	2 1/8	300	.45
3	1/2	2 7/16	300	.55
4	1/2	3 11/32	300	.70

EXTENSION SPLIT CLAMP

- BOLT THREAD

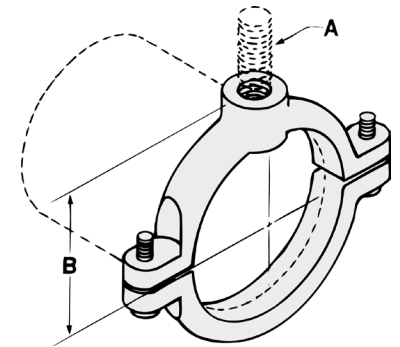

Available in stainless steel.
To order, specify 304 or 316 and add suffix SS to figure number.
Price on request

FUNCTION: Designed for non-insulated stationary tubing lines in either a horizontal or vertical position. The hinged design of Fig. 512H allows for a quicker installation.

APPROVALS: Complies with Federal Specification A-A-1192A (Type 12) and Manufacturers' Standardization Society ANSI/SP-69 and SP-58 (Type 12).

MATERIAL: Malleable iron

FINISH: Copper color epoxy finish

ORDERING: Specify tube size and figure number.

Tube Size	Rod Size A	B	Max. Rec. Load/lbs.	Wt. Each (in lbs.)	
				Fig. 512	Fig. 512H
3/8	3/8	9/16	180	.07	.08
1/2	3/8	1 1/16	180	.09	.09
3/4	3/8	7/8	180	.09	.12
1	3/8	1	180	.10	.11
1 1/4	3/8	1 1/8	180	.12	.15
1 1/2	3/8	1 5/16	180	.13	.20
2	3/8	1 1/2	180	.18	.25
2 1/2	1/2	1 7/8	300	.65	.45
3	1/2	2 1/8	300	1.00	.55
4	1/2	2 3/4	300	1.40	.90

COPPER TUBING EXTENSION SPLIT CLAMP

- TWO PIECE DESIGN
- HINGED DESIGN

