

Features

- Reduces chloramine, PFOA/PFOS, pharmaceuticals, VOC, asbestos and more
- Filter head automatically turns off water supply when cartridge is removed
- Replacing RO carbon block VOC filter every six months keeps filtration system performing effectively

Material

- High-impact plastic construction

Installation

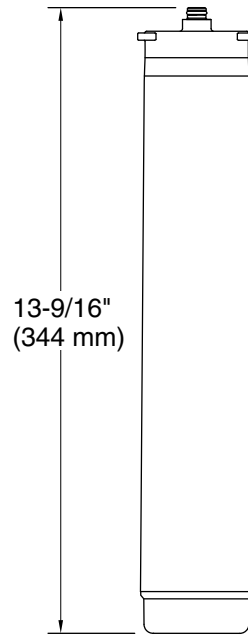
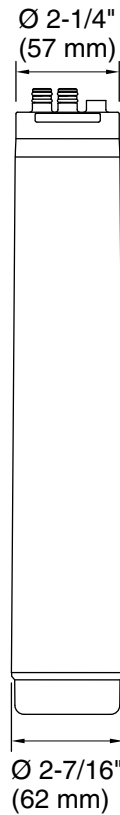
- For cold water use only
- Under-sink
- Quarter-turn twist cartridge for easy installation and replacement

**Codes/Standards**

CSA B483.1
NSF/ANSI 42
NSF/ANSI 53
NSF/ANSI 401

KOHLER® Water Filter Systems Five-Year Limited Warranty

See website for detailed warranty information.

**Technical Information**

All product dimensions are nominal.

Spout:**Notes**

For cold water use only.

To ensure the filter continues to reduce contaminants effectively, it is recommended that the filter gets replaced every 6 months.

Application guideline/water supply parameters:

Water Pressure: 40-100 psi (276-689 kPa)

Water Temperature: 40-100°F (4.4-37.8°C)