


SMA TO ST HYBRID ADAPTER

Applications

- LANs
- Laboratory

Features

- Double D-Hole Mount
- All Metal Construction
- Compact Size

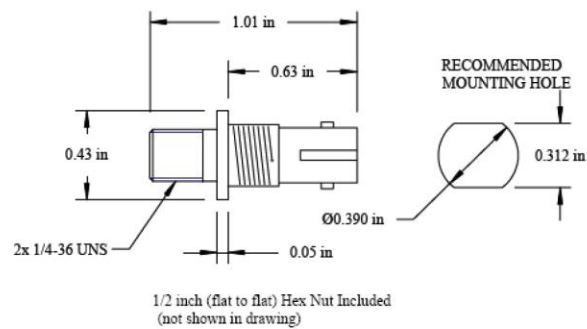

SPECIFICATIONS

Operating Temperature	-20° C to +70° C
Insertion Loss	1.0 dB or less Multimode

Materials

SMA Side	360 Brass
ST Side	Nickel Plated Zinc
Nut & Lock Washer	Stainless Steel Nickel Plated



Fiber Optics For Sale Co.

COMPLETE SUPPLY SOLUTIONS

COMPLETE SUPPLY SOLUTIONS

COMPLETE SUPPLY SOLUTIONS