
## **Ribbon Furcation Tubing**

\*

В

**FURCATION TUBE** 

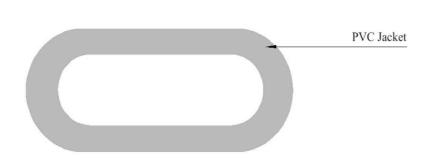

The Light Connections Hytrel Furcation Tube is composed of a hytrel tube.. All component materials meet the EU RoHS and REACH Directive standards.

Part Number Guide for 900um Furcation Tubing

900 N

Non-Lead

Furcation Tube is available in 12 TIA standard colors or special order colors.

H Unrated

Color

W

2mm &3mm Furcation Tubing FR

Style

FR

Style

F00

Tube

F00

Tube

O.D

N RB Ribbon Non-Lead

R Unrated

Color

R

BR

BL

**Product Specifications** 

Storage Temp. (C°) -40 / +70

Operating Temp. (C°) -20 / +70

## **Jacket Characteristics**

TLC Part Number	Jacket Material	Inner tube Dimension	Outer Jacket Dimension	Weight lbs./Km	Pull Load (N) Install / Operate	Bend Radius (cm) Install / Operate
F00FR2NR*	PVC	1.4mm	1.95 mm	10	444/356	2.9/1.9
F00FR3NR*	PVC	1.8mm	2.95 mm	12	666/533	4.4/2.9
F00FRRBNR*	PVC	-	2.35 mm	5		3.5/ 2.3