

ic485Ip Series

MULTI-DROP INTERFACE CONVERTER

The **ic485Ip Series** are compact, self-contained interface converters for conversion between the V.24/RS-232 and RS-422/485 communication standards. The **ic485Ip Series** consumes very little current and is therefore able to be powered from the V.24/RS-232 interface. If the application does not support interface power, the converters may also be powered via an external AC power adapter.

The **ic485Ip Series** sports three models:
ic485Ip-1F; RS232 is DB25F, RS485 is 4-screw terminal
ic485Ip-1M; RS232 is DB25M, RS485 is 4-screw terminal
ic485Ip-2F; RS232 is DB25F, RS485 is RJ-45

The **ic485Ip Series** feature three slide switches that provide the following functions:

DCE/DTE; This two position slide switch enables the user to switch the interface between data communication (DCE) and data terminal (DTE) modes.

MON/SIM; The normal setting for this two position switch is in the "simulate" (SIM) mode. The "monitor" (MON) mode is a special mode whereby the interface converter can be attached non-obtrusively between an existing network and a protocol analyzer.

Three position slide switch;


T-RTS,R-ON: In this position, the transmitter is enabled when RTS is active. The receiver is always enabled.

T-ON,R-ON: In this position, both the transmitter and receiver are enabled.


T-RTS,R-/RTS: In this position, the transmitter is enabled when RTS is active. The receiver is enabled when RTS is in-active.

APPLICATION EXAMPLES

- loop back test

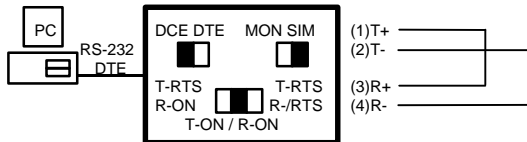

- loop back test

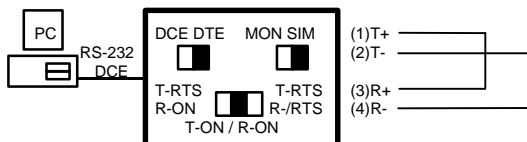

- MONITOR/SIMULATION selectable
- DTE/DCE device setting selectable
- FULL/HALF duplex mode selectable
- Implements low priced LAN
- Supports up to 32 users
- Programmable control by RTS/CTS
- TD/RD LED indicators
- Power LED indicator

ic485Ip Interface pinouts

RS-232 pin configuration

- Pin 2 TD
- Pin 3 RD
- Pin 4 RTS
- Pin 5 CTS
- Pin 6 DSR
- Pin 20 DTR
- Pin 7 GND

RS-485 pin configuration

Pin No.	RJ-45 Pin	Simulation	Monitor
1	5	T+	R1+
2	4	T-	R1-
3	6	R+	R2+
4	3	R-	R2-

Meaning of slide switches:

DCE DTE : The converter is in DTE mode.



DCE DTE : The converter is in DCE mode.



MON SIM : The converter is in simulation mode.



MON SIM : The converter is in monitor mode.



T-RTS R-ON **T-RTS R-/RTS** : The transmitter is enabled when RTS is active. The receiver is always enabled

T-ON/R-ON

T-RTS R-ON **T-RTS R-/RTS** : Both the transmitter and receiver are always enabled

T-ON/R-ON

T-RTS R-ON **T-RTS R-/RTS** : When shown, indicates a "don't care" setting for this switch.

T-ON/R-ON