
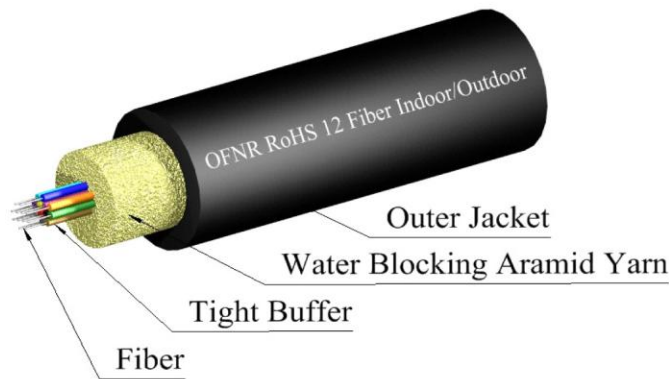


2–24 Fiber Indoor-Outdoor Cable, Riser

Fiber Optic For Sale Cable is composed of 2 to 24 colored tight buffers, water blocking aramid yarn, and a UV resistant black PVC outer jacket. All component materials meet the EU RoHS and REACH Directive standards.

Fo4sale Cable is also available in 12 TIA standard colors or special order colors. UL Listed OFNR cables are available, and unlisted, unrated cables can be supplied to accommodate special needs. Standard surface print denotes construction, NEC rating, and fiber type, and includes footage markers. Custom print can also be accommodated.

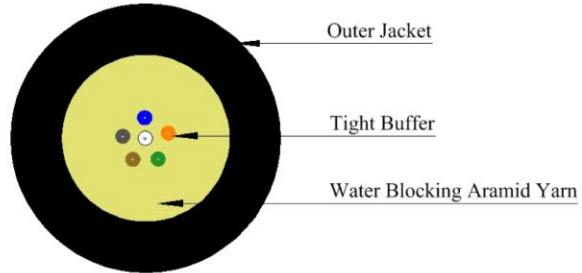

Application

- Riser
- Duct

Flame Rating

- UL1666

Specifications

Temperature Range	
Storage Temperature	-40 C to +70 C
Operating Temperature	-40 C to +70 C

Cable Characteristics	
Fiber Count	2, 4, 6, 8, 12, 24
Outer Jacket Material	Flame Retardant PVC
Outer Jacket Color	Available in 12 TIA/ EIA color standard
Strength Member	Aramid Yarn
Tight Buffer Material	Flame Retardant PVC
Tight Buffer Color	Available in 12 TIA/ EIA color standard

Physical Characteristics	Value
Nominal Outer Diameter (mm) of 2, 4, 6, 8, 12, 24 (fiber count)	4.40/ 4.80/ 5.30/ 5.80/ 6.30/ 8.10
Weight (lbs/ km) of 2, 4, 6, 8, 12, 24 (fiber count)	34/ 45/ 55/ 70/ 94/ 120
Minimum Bend Radius, Installation (cm) of 2, 4, 6, 8, 12, 24 (fiber count)	6.6/ 7.2/ 7.95/ 8.7/ 9.45/ 12.15
Minimum Bend Radius, Operation (cm) of 2, 4, 6, 8, 12, 24 (fiber count)	4.40/ 4.80/ 5.30/ 5.80/ 6.30/ 8.10

Optical Characteristics					
Items	Single Mode	OM1	OM2	OM3	OM4
Core Size	9 um	62.5 um	50 um	50 um	50 um
Wavelength	(1310/ 1550) nm	(850/ 1300) nm	(850/ 1300) nm	(850/ 1300) nm	(850/ 1300) nm
Max. Attenuation	(0.5/ 0.4) dB/ Km	(3.5/ 1.5) dB/ Km	(3.5/ 1.5) dB/ Km	(3.5/ 1.5) dB/ Km	(3.5/ 1.5) dB/ Km
Bandwidth (EMB) (High Performance)	-	220 MHz @850nm	850 MHz @850nm	2000 MHz @850nm	4700 MHz @850nm
Link Length (10Gb/ s)	-	-	150 mtr	300 mtr	550 mtr

Part Numbers					
Fiber Count	Single Mode	OM1	OM2	OM3	OM4
2	S09IO02**NRBL	M62IO02**NRBL	M50IO02**NRBL	M50IO02**NRBL	M50IO02**NRBL
4	S09IO04**NRBL	M62IO04**NRBL	M50IO04**NRBL	M50IO04**NRBL	M50IO04**NRBL
6	S09IO06**NRBL	M62IO06**NRBL	M50IO06**NRBL	M50IO06**NRBL	M50IO06**NRBL
8	S09IO08**NRBL	M62IO08**NRBL	M50IO08**NRBL	M50IO08**NRBL	M50IO08**NRBL
12	S09IO12**NRBL	M62IO12**NRBL	M50IO12**NRBL	M50IO12**NRBL	M50IO12**NRBL
24	S09IO24**NRBL	M62IO24**NRBL	M50IO24**NRBL	M50IO24**NRBL	M50IO24**NRBL

Fiber Type (9/125)	**	Fiber Type (50/125)	**	Fiber Type (62.5/125)	**
SMF28e+	- C	ClearCurve OM2	- C2	InfiniCor 300	- C3
CleaCurve XB	- CB	ClearCurve OM3	- CG	InfiniCor 1000	- C1
ClearCurve LBL	- C7	ClearCurve OM4	- C4		
ClearCurve ZBL	- CC				