

Closet Connector Housing Panels (CCH-CP)

A LANscape® Solutions Product

Corning
Cable Systems

Applications

- The panels are used with field-installable connectors or in applications where the preconnectorized cables are routed directly from the equipment to the piece of interconnect hardware
- Provides an efficient way to securely mate two or more connectors

Description

Closet connector housing panels are offered in a wide variety of fiber counts for use with the LANscape® Solutions hardware products. The panels are used with field-installable connectors or in applications where the preconnectorized cables are routed directly from the equipment to the interconnect hardware.

The panels are available with a variety of industry-standard adapter types. In most applications, the closet connector housing panels are designed for applications where specified labeling and connector identification are required. This is accomplished by the use of colored icons, which come standard on panels as space allows.

Features / Benefits


- Designed to accommodate all industry-standard adapter types
- Universal approach is used; one panel size fits in all standard LANscape Solutions hardware (for example, CCH, PCH, CCS, WCH, ICH,EDC, FZB)
- Available in 6-, 8- and 12-fiber count options in most adapter styles; 16- and 24-fiber count options available in MT-RJ and LC duplex styles
- Unique color-coded connector labeling system (space permitting)




24-Fiber LC Duplex Connector |
Photo LAN661



72-Fiber MTP® Connector Panel |
Photo LAN659

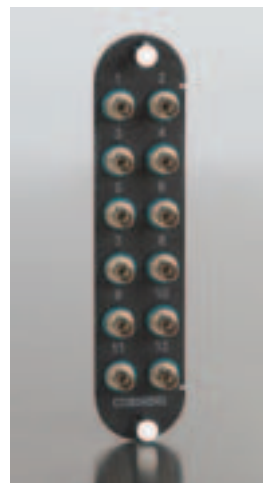

12-Fiber ST® Compatible
Connector Panel | Photo LAN662

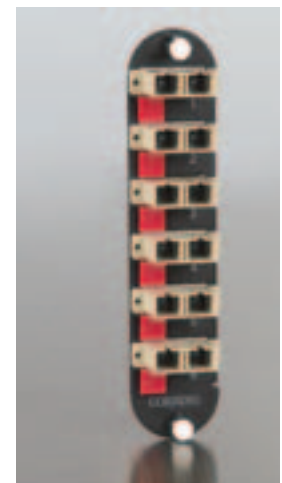

12-Fiber SC Duplex Connector
Panel | Photo LAN658

Closet Connector Housing Panels (CCH-CP)

A LANscape® Solutions Product

Corning
Cable Systems

Ordering Information

| Adapter Code | Fiber Type | Alignment | Housing | UPC/ APC | Fibers/ Adapter | Available Fibers/Panel Counts | | | | | | |
|---------------------------------|-------------------|----------------------|-----------|----------|-----------------|-------------------------------|---|----|----|----|----|----|
| | | | | | | 6 | 8 | 12 | 16 | 24 | 36 | 72 |
| LC Duplex | | | | | | | | | | | | |
| A8 | 62.5 µm Multimode | Ceramic | Composite | UPC | 2 | | X | X | X | X | | |
| D3 | 50 µm Multimode | Ceramic | Composite | UPC | 2 | | X | X | X | X | | |
| E4 | LOMMF* | Ceramic | Composite | UPC | 2 | | X | X | X | X | | |
| A9 | Single-mode | Ceramic | Composite | UPC | 2 | | X | X | X | X | | |
| SC Duplex | | | | | | | | | | | | |
| 91 | 62.5 µm Multimode | Composite | Composite | UPC | 2 | | X | X | | | | |
| G7 | 50 µm Multimode | Ceramic | Composite | UPC | 2 | | X | X | | | | |
| E7 | LOMMF | Ceramic | Composite | UPC | 2 | | X | X | | | | |
| 59 | Single-mode | Ceramic | Composite | UPC | 2 | | X | X | | | | |
| MT-RJ | | | | | | | | | | | | |
| 97 | 62.5 µm Multimode | N/A | Composite | UPC | 2 | | X | X | X | X | | |
| G1 | 50 µm Multimode | N/A | Composite | UPC | 2 | | X | X | X | X | | |
| E1 | LOMMF | N/A | Composite | UPC | 2 | | X | X | X | X | | |
| 98 | Single-mode | N/A | Composite | UPC | 2 | | X | X | X | X | | |
| SC | | | | | | | | | | | | |
| 56 | 62.5 µm Multimode | Composite | Composite | UPC | 1 | X | X | X | | | | |
| G6 | 50 µm Multimode | Ceramic | Composite | UPC | 1 | X | X | X | | | | |
| E6 | LOMMF | Ceramic | Composite | UPC | 1 | X | X | X | | | | |
| 3C | Single-mode | Ceramic | Composite | UPC | 1 | X | X | X | | | | |
| 6C | Single-mode | Ceramic | Composite | APC | 1 | X | X | X | | | | |
| ST® Compatible Connector | | | | | | | | | | | | |
| 25T | 62.5 µm Multimode | Composite | Composite | UPC | 1 | X | X | X | | | | |
| 15T | 62.5 µm Multimode | Ceramic | Composite | UPC | 1 | X | X | X | | | | |
| G5 | 50 µm Multimode | Ceramic | Composite | UPC | 1 | X | X | X | | | | |
| E5 | LOMMF | Ceramic | Composite | UPC | 1 | X | X | X | | | | |
| 19T | Single-mode | Ceramic | Composite | UPC | 1 | X | X | X | | | | |
| FC | | | | | | | | | | | | |
| 11 | Single-mode | Metal | Metal | UPC | 1 | X | X | X | | | | |
| 21 | Single-mode | Metal | Metal | APC | 1 | X | X | X | | | | |
| MTP® Connector | | | | | | | | | | | | |
| 69 | 62.5 µm Multimode | N/A | Composite | UPC | 12 | | | | | X | X | X |
| G3 | 50 µm | N/A | Composite | UPC | 12 | | | | | X | X | X |
| E3 | LOMMF | N/A | Composite | UPC | 12 | | | | | X | X | X |
| 89 | Single-mode | N/A | Composite | UPC | 12 | | | | | X | X | X |
| 90 | Single-mode | N/A | Composite | APC | 12 | | | | | X | X | X |
| Fiber Type | | Housing Color | | | | | | | | | | |
| 62.5 µm Multimode | | Beige | | | | | | | | | | |
| 50 µm Multimode | | Black | | | | | | | | | | |
| 50 µm LOMMF | | Aqua | | | | | | | | | | |
| Single-mode | | Blue | | | | | | | | | | |
| Single-mode APC | | Green | | | | | | | | | | |

*LOMMF = Laser-Optimized Multimode Fiber

Ordering Information (continued)

Closet Connector Panels

CCH - CP -

1

2

Use the following options to construct the part number:

1 Select fiber count.

06 = 6 fibers
08 = 8 fibers
12 = 12 fibers
16 = 16 fibers
24 = 24 fibers
36 = 36 fibers
72 = 72 fibers
E4 = 144 fibers

Confirm fiber count for desired adapter is available in preceding chart.

2 Select adapter code from chart on previous page.

Pigtailed Closet Connector Panels (pigtail is 3 m long)

CCH - CP - - P03

1

2

3

Use the following options to construct the part number:

1 Select fiber count.

06 = 6 fibers
08 = 8 fibers
12 = 12 fibers
16 = 16 fibers
24 = 24 fibers
36 = 36 fibers
72 = 72 fibers
E4 = 144 fibers

Confirm fiber count for desired adapter is available in preceding chart

2 Select adapter code.

From chart on previous page.

3 Select fiber type.

MIC® Subunit (Standard Fiber Cable Option)

CH = Standard multimode (50/125 μm)
SH = Laser-optimized multimode (50/125 μm) Sx +
KH = Multimode (62.5/125 μm)
RH = Single-mode

Ribbon Fiber

CJ = Standard multimode (50/125 μm)
SJ = Laser-optimized multimode (50/125 μm) Sx +
KJ = Multimode (62.5/125 μm)
RJ = Single-mode

OptiStrip™ Buffered Fiber

KN = Multimode (62.5/125 μm)
RN = Single-mode

Closet Connector Housing Panels (CCH-CP)

A LANscape® Solutions Product

Corning
Cable Systems

Ordering Information *(continued)*

Colored Icons

Pack of 50 Colored Icons

ICN -
1

Use the following options to construct the part number:

1 Select icons.

Blank Icons



YLB = Blank (Yellow)
RDB = Blank (Red)
GRB = Blank (Green)
BLB = Blank (Blue)
WTB = Blank (White)

Etched Icons



BLP = Phone (Blue)



RDC = Computer (Red)



GRT = Cable TV (Green)

Corning Cable Systems LLC • PO Box 489 • Hickory, NC 28603-0489 USA

1-800-743-2675 • FAX: +1-828-901-5973 • International: +1-828-901-5000 • <http://www.corning.com/cablesystems>

Corning Cable Systems reserves the right to improve, enhance and modify the features and specifications of Corning Cable Systems products without prior notification. LANscape and MIC are registered trademarks of Corning Cable Systems Brands, Inc. OptiStrip is a trademark of Corning Cable Systems Brands, Inc. Discovering Beyond Imagination is a trademark of Corning Incorporated. MTP is a registered trademark of USConec, Ltd. ST is a registered trademark of Lucent Technologies. All other trademarks are the properties of their respective owners. Corning Cable Systems is ISO 9001 certified. © 2001, 2005 Corning Cable Systems. All rights reserved. Published in the USA. LAN-133-EN / June 2005 / pdf