


Closet Connector Housing Panels (CCH-CP)

A LANscape® Solutions Product

features and benefits |

Universal design approach	One-size-fits-all LANscape® Solutions housings
Broadest range of fiber count and adapter types	Solutions for all needs
Colored icon labeling	Easy connector identification


Corning Cable Systems Closet Connector Housing Panels (CCH-CP) are offered in a variety of fiber counts for use with LANscape® Solutions hardware products for a “one-size-fits-all” approach. Used with factory-installed or field-installable connectors, these panels provide interconnect or cross-connect capability in a housing at main cross-connects, intermediate cross-connects, telecommunication rooms or work areas. Available with a variety of industry-standard adapter types, the CCH-CP provides an efficient way to securely mate two connectors and offers multimode and single-mode applications in 6-, 8-, 12-, 16- and 24-fiber count options, plus 36-, 72-, 96- and 144-fiber count options with MTP® Connector adapters.

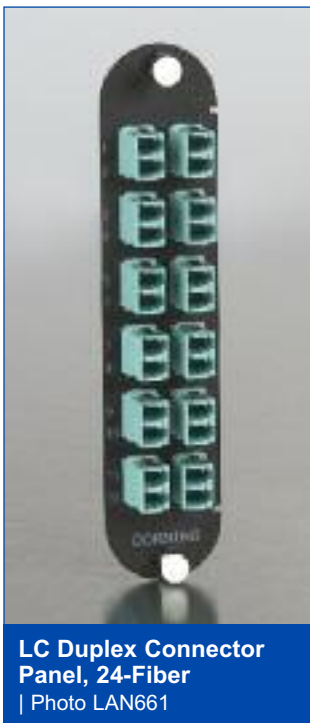

LC Duplex Connector Panel, 24-Fiber
| Photo LAN661



MTP Connector Panel, 72-Fiber
| Photo LAN659

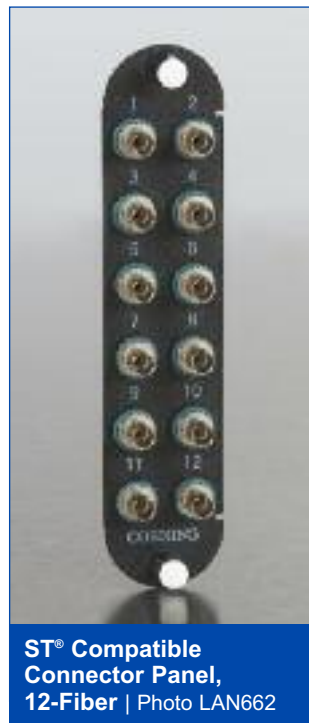

ST® Compatible Connector Panel, 12-Fiber
| Photo LAN662



SC Duplex Connector Panel, 12-Fiber
| Photo LAN658

Closet Connector Housing Panels (CCH-CP)

A LANscape®
Solutions Product

ordering information |

CCH - CP -
|1 |2

|1

Select fiber count.

06 = 6 fibers
08 = 8 fibers
12 = 12 fibers
16 = 16 fibers
24 = 24 fibers
36 = 36 fibers
72 = 72 fibers
96 = 96 fibers
E4 = 144 fibers

See Note 1.

|2

Select adapter code
(see Adapter/Connector
Code Options table on
following page).

Note:

1) Fiber count for desired adapter
is available in table on following
page.

Part Number Example

Part Number	Description
CCH-CP12-A9	Closet Connector Housing Pigtail Panel with 6 LC duplex single-mode adapters

Closet Connector Housing Panels (CCH-CP)

A LANscape®
Solutions Product

adapter/connector code options |

Adapter Code	Fiber Type	Alignment	Housing	Fiber/Adapter	Available Fiber/Panel Counts								
					6	8	12	16	24	36	72	96	144
LC Duplex													
A7	62.5 µm multimode	Metal	Composite	2		X	X	X	X				
D3	50 µm multimode	Ceramic	Composite	2		X	X	X	X				
E4	50 µm LOMMF*	Ceramic	Composite	2		X	X	X	X				
A9	Single-mode, UPC	Ceramic	Composite	2		X	X	X	X				
SC Duplex													
91	62.5 µm multimode	Metal	Composite	2		X	X						
G7	50 µm multimode	Ceramic	Composite	2		X	X						
E7	50 µm LOMMF*	Ceramic	Composite	2		X	X						
59	Single-mode, UPC	Ceramic	Composite	2		X	X						
SC													
56	62.5 µm multimode	Metal	Composite	1		X	X	X					
G6	50 µm multimode	Ceramic	Composite	1		X	X	X					
E6	50 µm LOMMF*	Ceramic	Composite	1		X	X	X					
3C	Single-mode, UPC	Ceramic	Composite	1		X	X	X					
6C	Single-mode, APC	Ceramic	Composite	1		X	X	X					
ST® Compatible Connector													
25T	62.5 µm multimode	Metal	Metal	1		X	X	X					
15T	62.5 µm multimode	Ceramic	Metal	1		X	X	X					
G5	50 µm multimode	Ceramic	Metal	1		X	X	X					
H3	50 µm LOMMF*	Ceramic	Metal	1		X	X	X					
19T	Single-mode, UPC	Ceramic	Metal	1		X	X	X					
FC													
11	Single-mode, UPC	Metal	Metal	1		X	X	X					
21	Single-mode, APC	Metal	Metal	1		X	X	X					
MTP® Connector													
69	62.5 µm multimode	N/A	Composite	12						X	X	X	X
G3	50 µm multimode	N/A	Composite	12						X	X	X	X
E3	50 µm LOMMF*	N/A	Composite	12						X	X	X	X
89	Single-mode, UPC	N/A	Composite	12						X	X	X	X
90	Single-mode, APC	N/A	Composite	12						X	X	X	X
MT-RJ													
97	62.5 µm multimode	N/A	Composite	2		X	X	X	X				
G1	50 µm multimode	N/A	Composite	2		X	X	X	X				
E1	50 µm LOMMF*	N/A	Composite	2		X	X	X	X				
98	Single-mode, UPC	N/A	Composite	2		X	X	X	X				
Fiber Type		Housing Color											
62.5 µm multimode		Beige											
50 µm multimode		Black											
50 µm LOMMF*		Aqua											
Single-mode, UPC		Blue											
Single-mode, APC		Green											

*LOMMF = Laser-optimized multimode fiber.

Closet Connector Housing Panels (CCH-CP)

A LANscape®
Solutions Product

ordering information | (continued)

Colored Icons (pack of 50)

ICN -
|1

|1

Select icon.

Blank Icons



YLB = Blank (Yellow)
RDB = Blank (Red)
GRB = Blank (Green)
BLB = Blank (Blue)
WTB = Blank (White)

Etched Icons



BLP = Phone (Blue)



RDC = Computer (Red)



GRT = Cable TV (Green)

Corning Cable Systems LLC • PO Box 489 • Hickory, NC 28603-0489 USA
800-743-2675 • FAX: 828-901-5973 • International: +1-828-901-5000 • www.corning.com/cablesystems

Corning Cable Systems reserves the right to improve, enhance and modify the features and specifications of Corning Cable Systems products without prior notification. LANscape and MIC are registered trademarks of Corning Cable Systems Brands, Inc. MTP is a registered trademark of USConec, Ltd. ST is a registered trademark of Lucent Technologies. All other trademarks are the properties of their respective owners. Corning Cable Systems is ISO 9001 certified. ©2007, 2009 Corning Cable Systems. All rights reserved. Published in the USA. LAN-133-EN / April 2009