THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

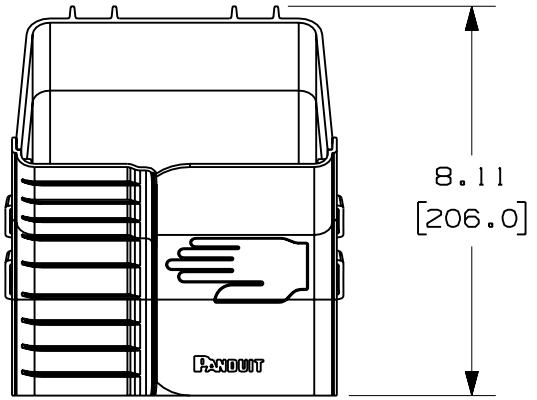

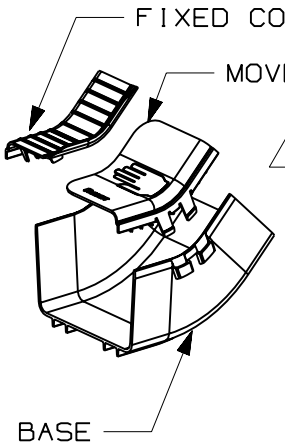

PANDUIT PART NUMBER	WEIGHT
FRIV456X4	0.84 LB/EACH (380g/EACH)

H

G NOTES:

1. SEE CURRENT CATALOG FOR ADDITIONAL PART SUFFIXES TO INDICATE COLOR AND/OR PACKAGE QUANTITY.
2. THE FIBERRUNNER 6x4 INSIDE VERTICAL 45° ANGLE FITTING IS DESIGNED WITH A MINIMUM 2" (50.8) BEND RADIUS TO PROTECT FIBER OPTIC CABLES.
3. THE FIBERRUNNER 6x4 INSIDE VERTICAL 45° ANGLE FITTING INCLUDES:
   ONE (1) INSIDE VERTICAL 45° ANGLE BASE,
   ONE (1) FIXED COVER SECTION,
   ONE (1) MOVEABLE COVER SECTION
4. DIMENSIONS IN PARENTHESES ARE IN METRIC.

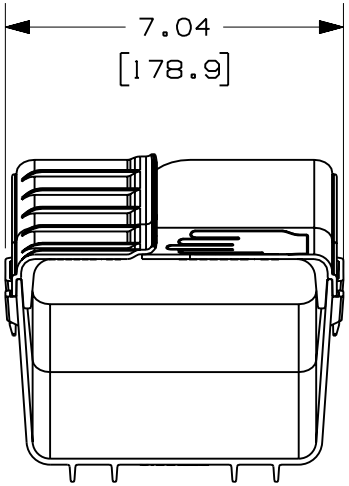

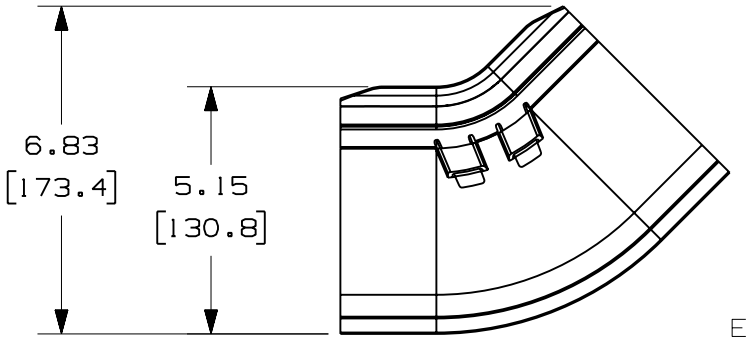

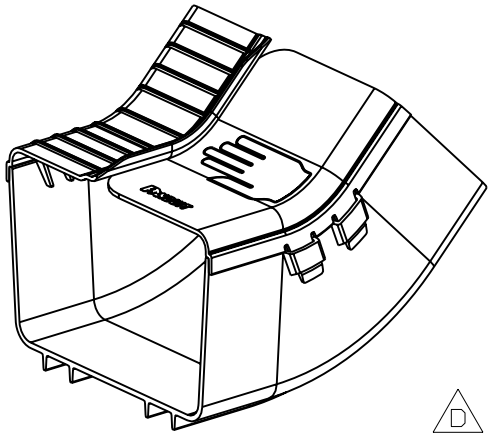

D

ENG. REF.: D37185EQ_DC_FRIV456X4_01.prt

CAD FILENAME/LAYERS

F FRIV456X4.pdf

PANDUIT CORP TINLEY PARK, ILLINOIS

FIBERRUNNER 6x4 INSIDE VERTICAL 45° ANGLE FITTING (FRIV456X4)

E CUSTOMER DRAWING

REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP	GMBH
-	--------	---	--	H. REVISED PART WEIGHT	--------	--	--	
-	--------	---	--	G. REVISED GENERAL NOTES F. REVISED CAD FILENAME	--------	--	--	
2	6-30-06	DTP	RN	E. REVISED DRAWING TITLE D. REVISED AND REDRAWN	37185-63	RN	RN	

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
(.X) ±
(.XX) ±.03 (.8)
(.XXX) ±
ANGLES ±

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY: REWE
DATE: 5-1-00
CHK'D: HIW
MAT'L: ABS
SCALE: NONE
DRAWING NO.: 37185-63
DWG: A
SIZE