

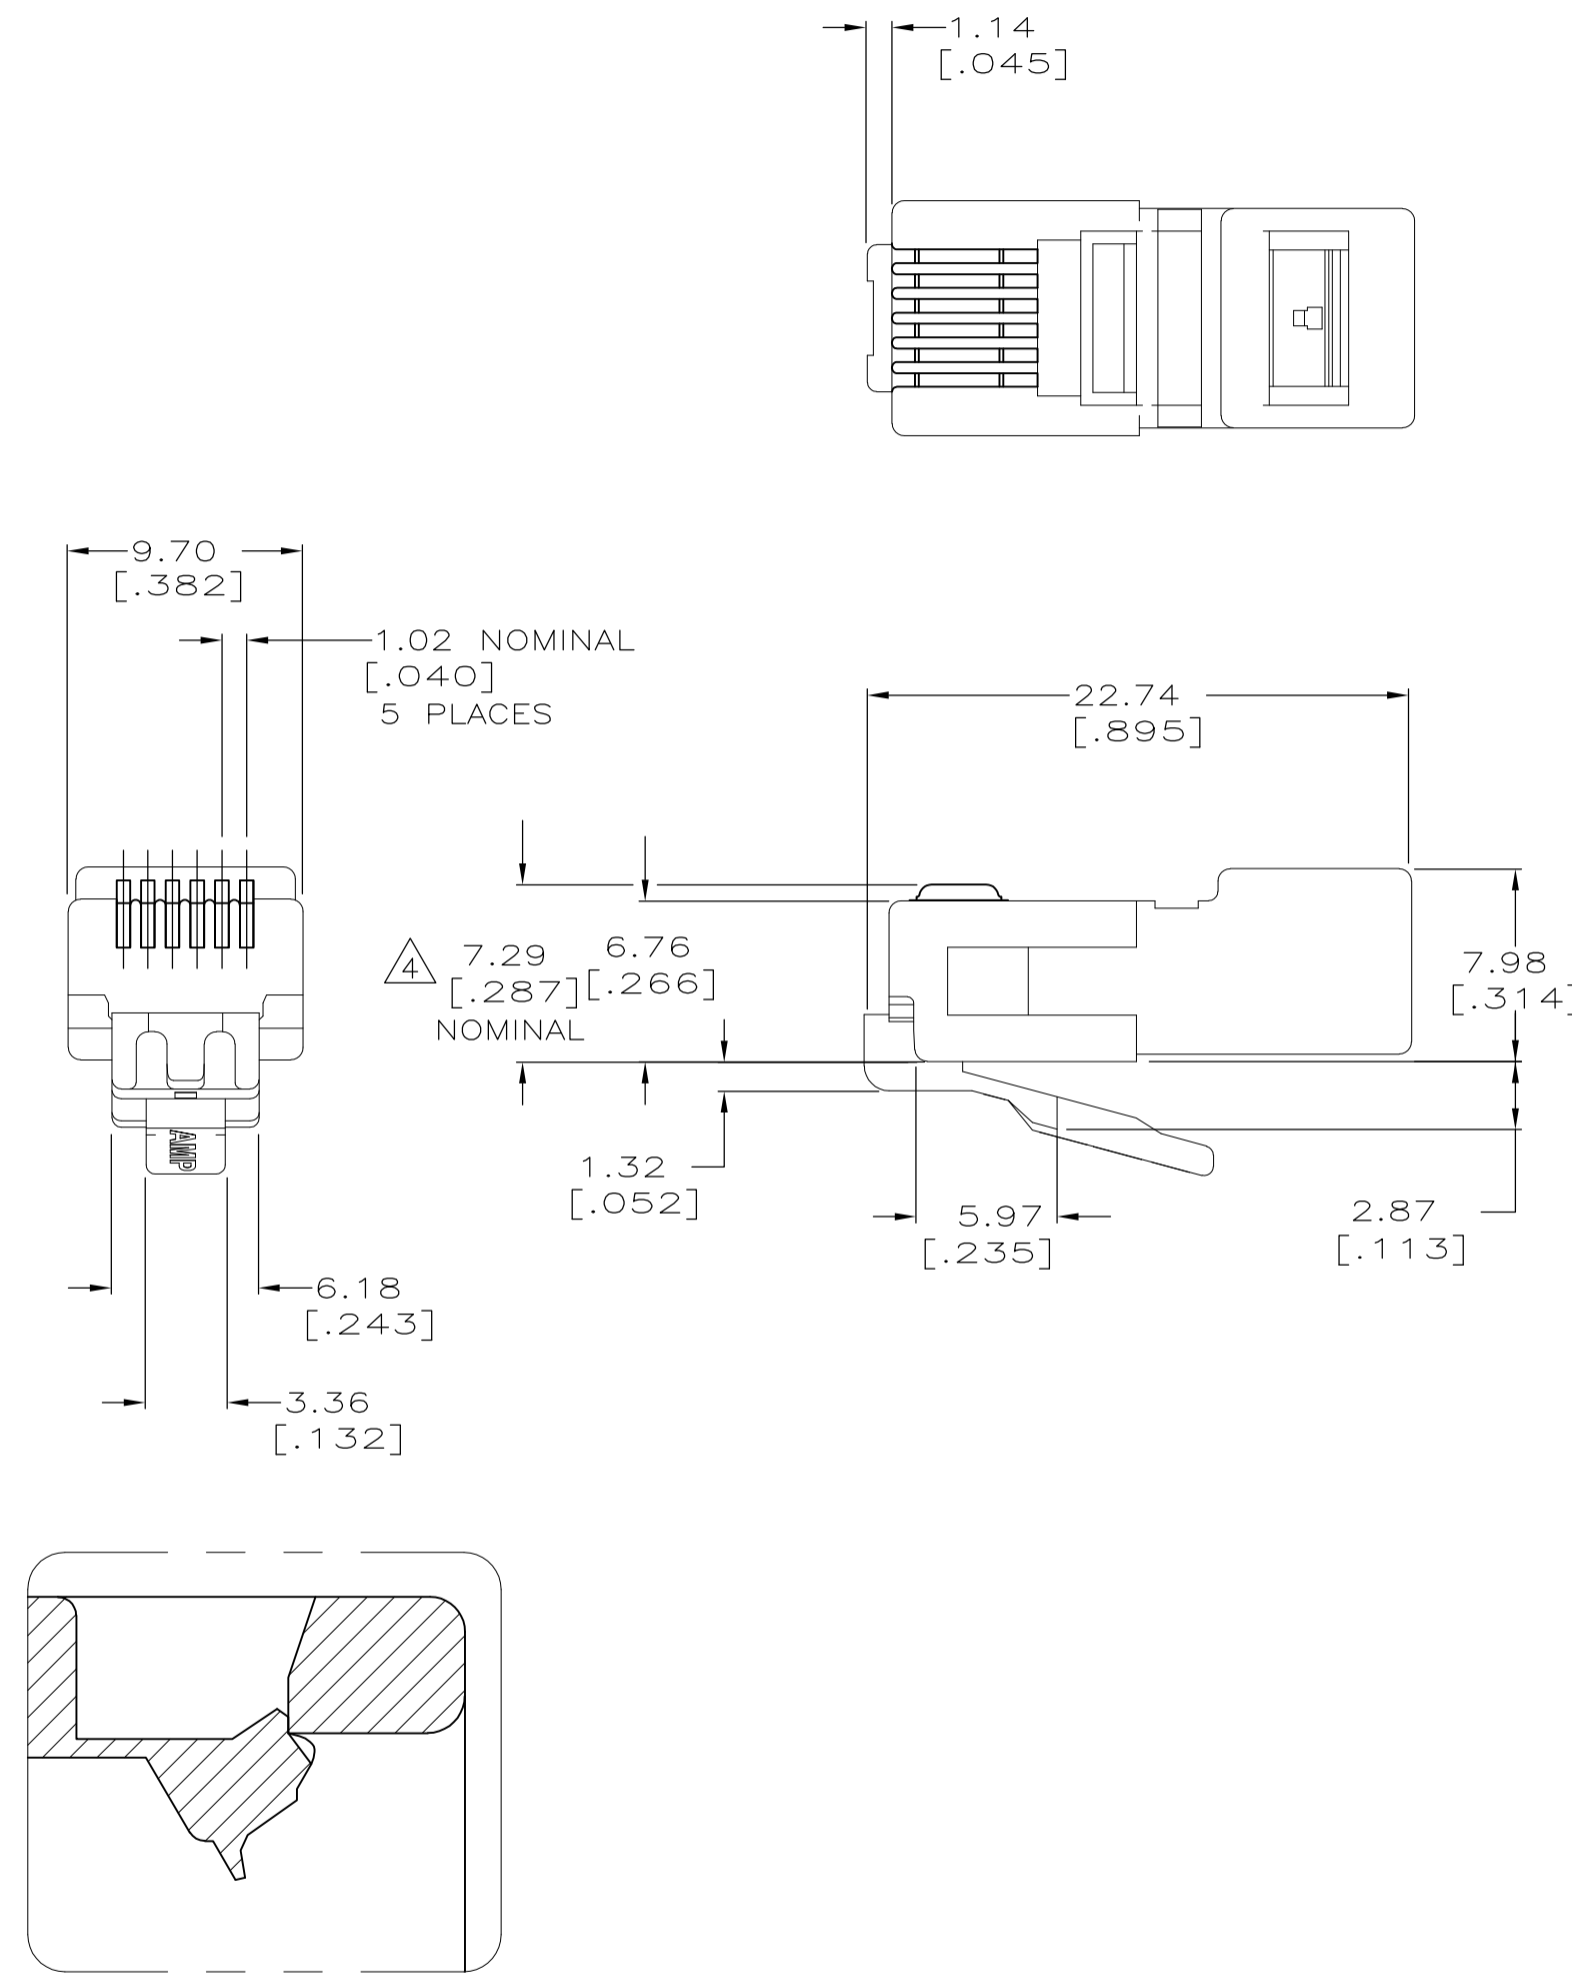


LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
J		REV PER ECO-12-012918	05JUL2012	JM	JG		

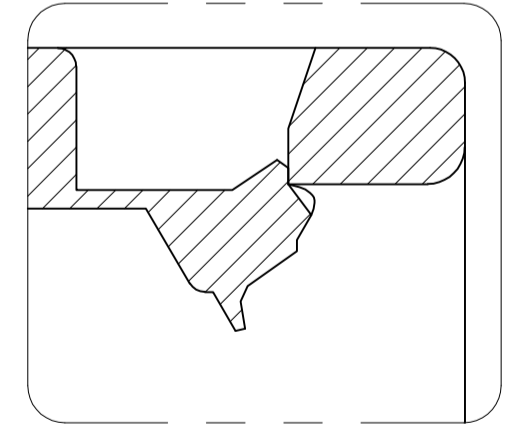

- 1 MATERIAL: HOUSING—POLYCARBONATE, CLEAR
 TERMINAL— .014 THICK PHOSPHOR BRONZE, PLATED WITH 1.27 μ m [.000050] MINIMUM THICK GOLD IN LOCALIZED GOLD PLATE AREA, OVER 2.54 μ m [.000100] MINIMUM THICK NICKEL UNDERPLATE.
- 2. ALL DIMENSIONS SHOWN ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- 3. PLUG WILL ACCEPT 0.737[.029] – 0.99[.039] DIAMETER STRANDED WIRE, 26 OR 28 AWG WITH A 4.57 [.180] DIAMETER JACKET.
- 4 TERMINATED DIMENSION 6.15 [.242] MAXIMUM.
- 5 LATCH SHALL BE IN POSITION SHOWN IN DETAIL A AFTER CRIMPING.
- 7 500 ASSEMBLIES PER PACKAGE.
- 8 100 ASSEMBLIES PER PACKAGE.

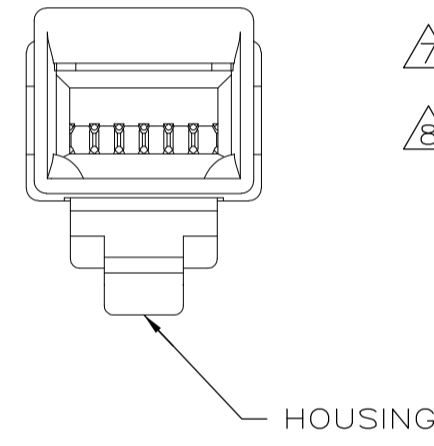

8	5-555177-3
7	5-555177-2
PACKAGED	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. HALL 28MAR2008	TE Connectivity	
DIMENSIONS: mm[INCHES]		CHK B. MCNEILL 31MAR2008	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD B. MCNEILL 31MAR2008	PRODUCT SPEC	
0 PLC ± -		APPLICATION SPEC		
1 PLC ± -		WEIGHT		
2 PLC ± -		SIZE CAGE CODE DRAWING NO		
3 PLC ± -		A2 00779 C-555177		
4 PLC ± -		RESTRICTED TO		
ANGLES ± -		CUSTOMER DRAWING		
FINISH		SCALE 4:1 SHEET 1 OF 1 REV J		