

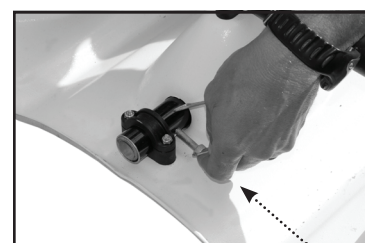
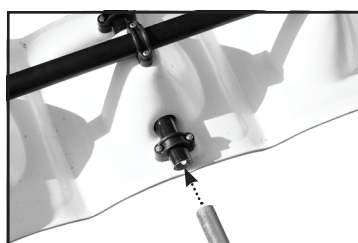
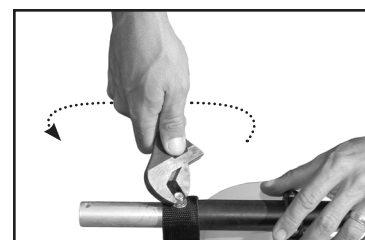


1. Depending on which wheel style is used with the dolly, slide the telescoping inner axle to the appropriate location on the outer axle.
2. Secure the inner axle and webbing strap to the outer axle using the 1/4" bolt and nut.
3. Slide the wheels on the inner axles and secure with keeper pin.
4. Slide the carry handle into the tube on the dolly frame and secure with keeper pin. Insert handle on the same side as the keeper pin. Should insert approx 4 inches. This orients the cradle and handle properly when used on the trailex trailer (dolly hanger feature).
5. Slide dolly under hull from the rear to a nearly balanced position which is directly under the diamond Hobie logo. Secure dolly to hull using webbing strap and hook. Tighten with buckles.
6. The carry handle can remain on the dolly during use under the kayak. The handle faces aft for use on the Trailex dolly hanger feature. The webbing straps can be secured to avoid dragging while transporting the dolly.

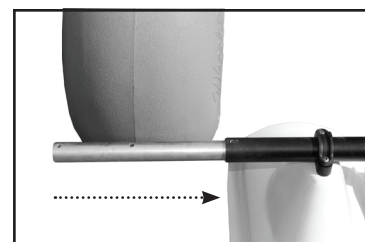

PA 14 Shown

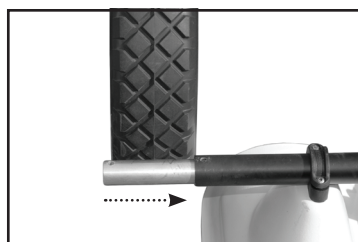