

(19) State Intellectual Property Office of the People's Republic of China

(51) Int. Cl.⁷
A24D 1/18
A24F 47/00

(12) Patent Specification for Utility Model

(21) ZL Patent No. 200420031182.0

(45) Date of Announcement of Patent right Grant: Aug. 24, 2005 (11) No. of Announcement of Patent Right Grant: CN2719043Y

<p>(22) Filing Date: April 14, 2004 (21) Application No. 200420031182.0 (73) Patentee: Hon Lik Address: Suite 12, 1010, 10th Floor, West part of Xinde Centre, No. 168- 200, Gannuo Ave. Middle, Zhonghuan, HongKong (72) Designer: Hon Lik</p>	<p>(74) Patent Agency: Shenyang Patent & Trademark Agency Academia Sinica Agent: Xu Zongfu</p> <p>The number of pages of claims: 2 The number of pages of description: 5 The number of pages of drawings: 5</p>
--	---

(54) Title of the Utility Model: Electronic Atomization Cigarette

(57) Abstract

The present utility model relates to an electronic atomization cigarette which only contains nicotine without tar. The electronic atomization cigarette includes a shell and a mouthpiece. The external wall of the shell has an air inlet. An electronic circuit board, a normal pressure cavity, a sensor, a vapor-liquid separator, an atomizer, and a liquid-supplying bottle are sequentially provided within the shell, wherein the electronic circuit board comprises an electronic switching circuit and a high frequency generator. A stream passage of the sensor is provided on one side of the sensor, and a negative pressure cavity is provided in the sensor. The atomizer and the liquid-supplying bottle are in contact with each other. An atomization cavity is arranged in the atomizer. A retaining ring for locking the liquid-supplying bottle is provided between one side of the liquid-supplying bottle and the shell, and an aerosol passage is provided on the other side of the liquid-supplying bottle. The air inlet, normal pressure cavity, vapor-liquid separator, atomizer, aerosol passage, gas vent and mouthpiece are sequentially interconnected. The product of the present utility model does not have tar, thus significantly reducing the cancerogenic risk. Users still feel as if they are smoking and experiencing the same excitement, and the cigarette is no need to be lit and is no fire risk.

Claims

1. An electronic atomization cigarette comprising a shell and a mouthpiece, characterized in that an air inlet (4) is provided on the external wall of the shell (14); an electronic circuit board (3), a normal pressure cavity (5), a sensor (6), a vapor-liquid separator (7), an atomizer (9) and a liquid-supplying bottle (11) are arranged sequentially within the shell (14), wherein the electronic circuit board (3) comprises an electronic switching circuit and a high frequency generator; a stream passage (18) of the sensor is provided on one side of the sensor (6); a negative pressure cavity (8) is provided in the sensor (6); an atomizer (9) is in contact with the liquid-supplying bottle (11); an atomization cavity (10) is arranged in the atomizer (9); a retaining ring (13) for locking the liquid-supplying bottle (11) is provided between one side of the liquid-supplying bottle (11) and the shell (14), and an aerosol passage (12) is provided on the other side of the liquid-supplying bottle (11); the air inlet (4), the normal pressure cavity (5), the vapor-liquid separator (7), the atomizer (9), the aerosol passage (12), the gas vent (17), and the mouthpiece (15) are sequentially connected; a LED (1) and a cell (2) are further provided at a front end within the shell (14), collectively constituting an integrity like a cigarette holder, cigar or a pipe.

2. The electronic atomization cigarette according to claim 1, characterized in that the atomizer (9) is postposed within the shell (14), the liquid-supplying bottle (11) is arranged between the vapor-liquid separator (7) and the atomizer (9), and a spring piece (33) for pressing the liquid-supplying bottle (11) on the atomizer (9) is arranged at one end of the liquid-supplying bottle (11).

3. The electronic atomization cigarette according to claim 1 or claim 2, characterized in that a display screen (32) is arranged on the inner wall of the shell (14).

4. The electronic atomization cigarette according to claim 1 or claim 2, characterized in that a microswitch (16) is connected to the sensor (6) in parallel within the shell (14) for manually cleaning.

5. The electronic atomization cigarette according to claim 1 or claim 2, characterized in that a ripple film (22) is provided between the sensor (6) and the negative pressure cavity (8) within the sensor; a first magnetic steel (20), a second magnetic steel (21) and a Reed switch (19) connected between said first magnetic steel and said second magnetic steel are further provided within the sensor (6); and the second magnetic steel (21) is fixedly attached

to the ripple film (22).

6. The electronic atomization cigarette according to claim 1 or claim 2, characterized in that a silicon gel check valve (31) is provided within the sensor (6); a third magnetic steel (34) is provided in the silicon gel check valve; and a Reed switch (19) is provided outside the silicon gel check valve, on a side close to the magnetic steel.

7. The electronic atomization cigarette according to claim 1 or claim 2, characterized in that a through hole is arranged on the vapor-liquid separator (7).

8. The electronic atomization cigarette according to claim 7, characterized in that a silicon gel check valve (31) covering the outside of the through hole on the vapor-liquid separator (7).

9. The electronic atomization cigarette according to claim 1 or claim 2, characterized in that an overflow hole (29) is arranged on an atomization cavity wall (25) of the atomization cavity (10); a heating element (26) is provided within the atomization cavity (10); a long stream ejection hole (24) is provided on one side of the heating element (26); and a porous body (27) is arranged outside around the atomization cavity wall (25); a first piezoelectric element (23) is provided on one side of the atomizer (9); and a bulge (36) is provided on another side of the atomizer.

10. The electronic atomization cigarette according to claim 1 or claim 2, characterized in that a second piezoelectric element (35) is additionally provided in the atomizer (9).

11. The electronic atomization cigarette according to claim 9, characterized in that the porous body (27) in the atomizer (9) is made of foam nickel, stainless fiber felt, high molecule polymer foam and foam ceramic; the heating element (26) is made of platinum wire, nickel chromium alloy or iron chromium aluminum alloy wire with rare earth element, the heating element is also made into a sheet; the atomization cavity wall (25) is made of aluminum oxide or ceramics.

12. The electronic atomization cigarette according to claim 7, characterized in that the vapor-liquid separator (7) is made of plastics or silicon rubber.

13. The electronic atomization cigarette according to claim 1 or claim 2, characterized in that a solution storage porous body (28) is provided in the liquid-supplying bottle (11), the solution storage porous body is filled with polypropylene fiber, terylene fiber

or nylon fiber, or filled with plastics that are shaped by foaming; the solution storage porous body is also molded into a column with laminated layers by polyvinyl chloride, polypropylene, polycarbonate.

14. The electronic atomization cigarette according to claim 5, characterized in that the Reed switch (19), the first magnetic steel (20), the second magnetic steel (21) and the ripple film (22) are replaced by a semiconductor strain gauge with sealed film arranged at the position of the ripple film of the sensor.

ELECTRONIC ATOMIZATION CIGARETTE

TECHNICAL FIELD

The present utility model relates to an electronic cigarette, in particular to an electronic atomization cigarette that only contains nicotine without tar.

BACKGROUND ART

Despite it is commonly known that “smoking is harmful to your health”, the number of smokers worldwide is up to 1 billion, and the number is increasing every year. On Mar. 1, 2003, the World Health Organization (WHO) concluded a global Framework Convention on Tobacco Control. According to the statistical data from WHO, about 4.9 million people die of is diseases caused by smoking each year. Although smoking may cause serious respiratory diseases and cancer, it remains extremely difficult for smokers to quit smoking completely.

The active ingredient in a cigarette is nicotine. During smoking, nicotine, along with a lot of tar aerosol droplets produced in the cigarette burning, enters smoker's alveolus and is rapidly absorbed. After being absorbed into the blood of a smoker, nicotine then produces its effect on the receptors of the smoker's central nervous system, which makes him/her relax and enjoy an inebriety similar to that produced by an exhilarant.

Nicotine is a kind of alkaloid with low molecular weight and its half-life in blood is quite short. The major harmful substance in tobacco is tar, tar in tobacco is composed of thousands of ingredients, tens of which are carcinogenic substances. At present it has been proven that passive smoking can be more harmful to non-smokers.

Some cigarette substitutes flat contain only nicotine without tar have been proposed, many of them, such as “nicotine patch”, “nicotine mouthwash”, “spray agent packaged in high pressure gas tank with propellant”, “nicotine chewing gum”, “nicotine drink” etc., are made of pure nicotine. Although these cigarette substitutes are free from tar, their major disadvantage is that an effective peak concentration cannot be reached in the blood of a smoker due to slow absorption of nicotine and thus it cannot make a smoker

get real fin, in addition, these cigarette substitutes cannot satisfy habitual smoking actions of a smoker, for example, inhaling action or sucking action, and thus are not likely to be widely accepted as effective substitutes for quitting smoking or cigarette substitutes.

THE SUMMARY OF THE UTILITY MODEL

To overcome the above-referenced drawbacks, an object of the present utility model is to provide an electronic atomization cigarette that may function as a substitute for smoking cessation products or as a cigarette substitute.

The object of the present utility model is achieved by the following technical solution.

The present utility model comprises a shell and a mouthpiece; an air inlet is provided on the external wall of the shell; an electronic circuit board, a normal pressure cavity, a sensor, a vapor-liquid separator, an atomizer and a liquid-supplying bottle are arranged sequentially within the shell, wherein the electronic circuit board comprises an electronic switching circuit and a high frequency generator; a stream passage of the sensor is provided on one side of the sensor; a negative pressure cavity is provided in the sensor; an atomizer is in contact with the liquid-supplying bottle; an atomization cavity is arranged in the atomizer; a retaining ring for locking the liquid-supplying bottle is provided between one side of the liquid-supplying bottle and the shell, and an aerosol passage is provided on the other side of the liquid-supplying bottle; the air inlet, the normal pressure cavity, the vapor-liquid separator, the atomizer, the aerosol passage, the gas vent, and the mouthpiece are sequentially connected; a LED and a cell are further provided at a front end within the shell, collectively constituting an integrity like a cigarette holder, cigar or a pipe.

Wherein: a display screen is arranged on the inner wall of the shell; a microswitch is connected to the sensor in parallel within the shell for manually cleaning; a ripple film is provided between the sensor and the negative pressure cavity within the sensor; a first magnetic steel, a second magnetic steel and a Reed switch connected between said first magnetic steel and said second magnetic steel are further provided within the sensor; and the second magnetic steel is fixedly attached to the ripple film. A silicon gel check valve is provided within the sensor; a third magnetic steel is provided in the silicon gel check valve; and a Reed switch is provided outside the silicon gel check valve, on a side close to the

magnetic steel; a through hole is arranged on the vapor-liquid separator; a silicon gel check valve covering the outside of the through hole on the vapor-liquid separator; an overflow hole is arranged on an atomization cavity wall of the atomization cavity; a heating element is provided within the atomization cavity; a long stream ejection hole is provided on one side of the heating element; a porous body is arranged outside around the atomization cavity wall; a first piezoelectric element is provided on one side of the atomizer; and a bulge is provided on another side of the atomizer; a second piezoelectric element is additionally provided in the atomizer; the porous body in the atomizer is made of foam nickel, stainless fiber felt, high molecule polymer foam and foam ceramic; the heating element is made of platinum wire, nickel chromium alloy or iron chromium aluminum alloy wire with rare earth element, the heating element can also be made into a sheet; the atomization cavity wall is made of aluminum oxide or ceramics; the vapor-liquid separator is made of plastics or silicon rubber; a solution storage porous body is provided in the liquid-supplying bottle, the solution storage porous body is filled with polypropylene fiber, terylene fiber or nylon fiber, or filled with plastics that are shaped by foaming; the solution storage porous body can also be molded into a column with laminated layers by polyvinyl chloride, polypropylene, polycarbonate; the Reed switch, the first magnetic steel, the second magnetic steel and the ripple film are replaced by a semiconductor strain gauge with sealed film arranged at the position of the ripple film of the sensor.

The present utility model also discloses an electronic atomization cigarette with another structure: the atomizer is postposed within the shell, the liquid-supplying bottle is arranged between the vapor-liquid separator and the atomizer, and a spring piece for pressing the liquid-supplying bottle on the atomizer is arranged at one end of the liquid-supplying bottle.

The advantages of the present utility model include smoking without tar, significantly reducing the cancerogenic risk. Furthermore users still feel as if they are smoking and experiencing the same excitement, and the cigarette is no need to be lit and is no fire risk.

With slight modification of the solution storage container, the device and connecting structures of the present utility model can be filled with conventional drug for

pulmonary administration apparatus.

DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic diagram of an overall structure according to the present utility model;

FIG. 2 is a schematic diagram of another overall structure according to the present utility model;

FIG. 3 is a schematic diagram of an overall structure with a display screen according to the present utility model;

FIG. 4 is a structural diagram of a sensor according to the present utility model;

FIG. 5 is a structural diagram of a sensor with a silicon gel check valve according to the present utility model;

FIG. 6 is a structural diagram of an atomizer according to the present utility model;

FIG. 7 is a structural diagram of the ceramic member in an atomizer according to the present utility model;

FIG. 8 is a structural diagram of another atomizer according to the present utility model;

FIG. 9 is a structural diagram of a vapor-liquid separator according to the present utility model;

FIG. 10 is a structural diagram of another vapor-liquid separator according to the present utility model;

FIG. 11 is a structural diagram of the connection of a liquid-supplying bottle and a mouthpiece according to the present utility model;

FIG. 12 is a functional diagram of a circuit according to the present utility model.

DETAILED DESCRIPTION OF THE INVENTION

The present utility model is further described below with reference to the accompanying drawings.

Embodiment 1

As shown in FIG. 1, the present utility model can form an integrity like a cigarette holder, a cigar or a pipe. An air inlet 4 is provided on the external wall of the shell 14. A LED 1, a cell 2, an electronic circuit board 3, a normal pressure cavity 5, a sensor 6, a vapor-liquid separator 7, an atomizer 9, a liquid-supplying bottle 11 and a mouthpiece 15 are sequentially provided within the shell 14. The electronic circuit board 3 comprises an electronic switching circuit and a high frequency generator. As shown in FIG. 4, a negative pressure cavity 8 is provided in the sensor 6 and is separated from the sensor 6 by a ripple film 22. A first magnetic steel 20, a second magnetic steel 21, and a Reed switch 19 arranged between them are also provided within the sensor 6, and the second magnetic steel 21 is attached to the ripple film 22. The atomizer 9 is in contact with the liquid-supplying bottle 11 via the bulge 36, and an atomization cavity 10 is provided in the atomizer 9. As shown in FIGS. 6 and 7, an overflow hole 29 is provided on the atomization cavity wall 25 of the atomization cavity 10. A heating element 26, which can be made of platinum wire, nickel chromium alloy or iron chromium aluminum alloy wire with rare earth element, is provided within the cavity, and the heating element 26 can also be made into a sheet form. An ejection hole is provided on the side opposite to the heating element 26 and the ejection hole can be determined to select either a long stream ejection hole 24 or a short stream ejection hole 30, depending on the material used for the atomization cavity wall 25. The long stream ejection hole 24 can employ a slot structure of 0.1 mm-1.3 mm or a circular hole structure of $\Phi 0.2$ mm-1.3 mm with a single and multiple holes. The short stream ejection hole 30 has a diameter of about 0.3 mm-1.3 mm. The atomization cavity wall 25 is surrounded with a porous body 27, which can be made of foam nickel, stainless steel fiber felt, high molecule polymer foam and foam ceramic. A first piezoelectric element 23 is also provided on the atomizer 9. The atomization cavity wall 25 can be made of aluminum oxide or ceramic. As shown in FIG. 9, a through hole is provided on the vapor-liquid separator 7, and can be made of plastic or silicon rubber. As shown in FIG. 11, a retaining ring 13 for locking the liquid-supplying bottle 11 is provided between one side of the liquid-supplying bottle 11 and the shell 14, an aerosol passage 12 is provided on the other side of the liquid-supplying bottle. A solution storage porous body 28 is provided

in the liquid-supplying bottle, and can be filled with polypropylene fiber, terylene fiber or nylon fiber, or be filled with plastic that are shaped by foaming, such as polyamine resin foam column or polypropylene foam column; alternatively, it may be made of a column formed by molding polyvinyl chloride, polypropylene, polycarbonate into a stack of laminated layers. The air inlet 4, normal pressure cavity 5, vapor-liquid separator 7, atomizer 9, aerosol passage 12, gas vent 17, mouthpiece 15 are sequentially interconnected.

As shown in the functional diagram of the circuit in FIG. 12, K1 refers to the Reed switch 19, RL refers to the heating element 26, LED1 refers to the Light Emitting Diode 1, U2 refers to a low voltage detecting element used for the over-discharging protection of the lithium cell, M1 refers to a first piezoelectric element 23, and C1, C2, R3, L1, C3, BG and M1 collectively constitute a Colpitts oscillator. The operating principle of the circuit is as follows: when K1 is closed, U1, i.e., the field effect power transistor, is turned on, RL starts, and the Colpitts oscillator starts oscillating; M1 will provide the high frequency mechanical oscillatory wave to the atomizer 9 to achieve the result of atomization.

When a smoker smokes, the mouthpiece 15 is under negative pressure, the air pressure difference or high speed stream between the normal pressure cavity 5 and the negative pressure cavity 8 will cause the sensor 6 to output an actuating signal; the electronic circuit board 3 connected therewith goes into operation. Now the ripple film 22 in the sensor 6 is deformed to take the second magnetic steel 21 away from the Reed switch 19, and the Reed switch 19 is then closed (i.e., K1 is closed) under the effect of the excessive magnetic line of force from the first magnetic steel 20, starting the field effect power transistor switch (i.e. U1 starts). The high frequency oscillator uses the Colpitts oscillator with the frequency between 550KHz and 8KHz; the automatic fine-adjusting element in the circuit resonates with the first piezoelectric element 23 in the form of a ring to supply power to liquid molecules, and the LED 1 can be lit under the supply of the rechargeable battery 2. The air enters the normal pressure cavity 5 through the air inlet 4, passes through the air passage 18 of the sensor and then the through hole in the vapor-liquid separator 7, and flows into the atomization cavity 10 in the atomizer 9. The high speed stream passing through the ejection hole drives the nicotine solution in the porous body 27 to eject into the atomization cavity 10 in the form of droplet, where the nicotine

solution is subjected to the ultrasonic atomization by the first piezoelectric element 23 and is further atomized by the heating element 26. After the atomization, the large diameter droplets stick to the wall under the action of eddy flow and are reabsorbed by the porous body 27 via the overflow hole 29, whereas the small diameter droplets float in stream and forms aerosols, which are sucked out via the aerosol passage 12, gas vent 17 and mouthpiece 15. The solution storage porous body 28 in the liquid-supplying bottle 11 will be in contact with the bulge 36 on the atomizer 9, thereby achieving the capillary infiltration liquid-supplying.

The mouthpiece 15 is threaded. When the nicotine solution in the liquid-supplying bottle 11 is used up, users can screw the mouthpiece 15 out to take the liquid-supplying bottle 11 out, refill the liquid-supplying bottle 11 with the nicotine solution, put the liquid-supplying bottle 11 into the shell 14 again, and then screw the mouthpiece 15.

The Reed switch 19, the first magnetic steel 20, the second magnetic steel 21, the ripple film 22 can be replaced by a semiconductor strain gauge with sealed film, which is mounted in the place of the ripple film of the sensor.

To simplify the design, the first piezoelectric element 23 on the atomizer 9 can be omitted, and the atomization of the nicotine solution will be made only by the heating element 26. The size of such an atomizer can be made smaller, and the structure of the connection of the whole electronic atomization cigarette is the same as the embodiment 1. In addition, as shown FIG. 8, the first piezoelectric element 23 and the heating element 26 in the atomizer 9 can be omitted, an additional second piezoelectric element 35 in the form of platen with a single layer or multiple laminated layers can be arranged in the atomization cavity, and the stream passing through the ejection hole vibrates the focus at the center of the second piezoelectric element 35 to achieve the effect of strong ultrasonic atomization.

As shown in FIG. 10, a silicon gel check valve 31 may cover the outside of the through hole on the vapor-liquid separator 7. During smoking, a stream reaches the through hole, as the air pressure in the through hole increases, the silicon gel check valve 31 is opened and the stream passes; otherwise, the silicon gel check valve 31 is closed.

As shown in FIG. 5, the sensor 6 may also be designed into a structure with the

silicon gel check valve 31. During smoking, the stream comes into the silicon gel check valve 31, the air pressure increases and the air expands, the third magnetic steel 34 in the valve approaches the Reed switch 19 gradually until the Reed switch is closed and the circuit is turned on, and the air outlet of the silicon gel check valve 31 is opened with the increment of the air pressure difference. The Reed switch 19 can also be made of Hall device or magneto diode or magneto triode instead.

Embodiment 2

As shown in FIG. 2, to improve the liquid-supplying state, the atomizer 9 is postposed within the shell 14, and the liquid-supplying bottle 11 is arranged between the vapor-liquid separator 7 and the atomizer 9. A spring piece 33 for pressing the liquid-supplying bottle 11 on the atomizer 9 is provided on one end of the liquid-supplying bottle 11. Other components and their functions are the same as those in the embodiment 1.

On the inner wall of the shell 14 of the electronic atomization cigarette described in the embodiment 1 and 2, a digital display screen 32 for showing the smoking times per day and the cell capacity can be also provided. The sensor 6 uses a linear signal output, which is proportional to the suction force (i.e., the stronger one sucks, the longer the time of operation is), the atomizer 9 operates in the linear mode, thereby simulating a humanized cigarette that looks like a normal cigarette.

Within the shell 14, the microswitch 16 is connected to the sensor 6 in parallel and used for manually cleaning. When users do not smoke, they press the microswitch 16 to start the sensor 6 connected therewith in parallel, or clean the residue or other impurity substances within the shell 14.

The nicotine solution for atomization contains 0.4-3.5% nicotine, 0.05-2% cigarette essence, 0.1-3.1% organic acid, 0.1-0.5% anti-oxidation agent, and the rest is 1,2-propylene glycol.

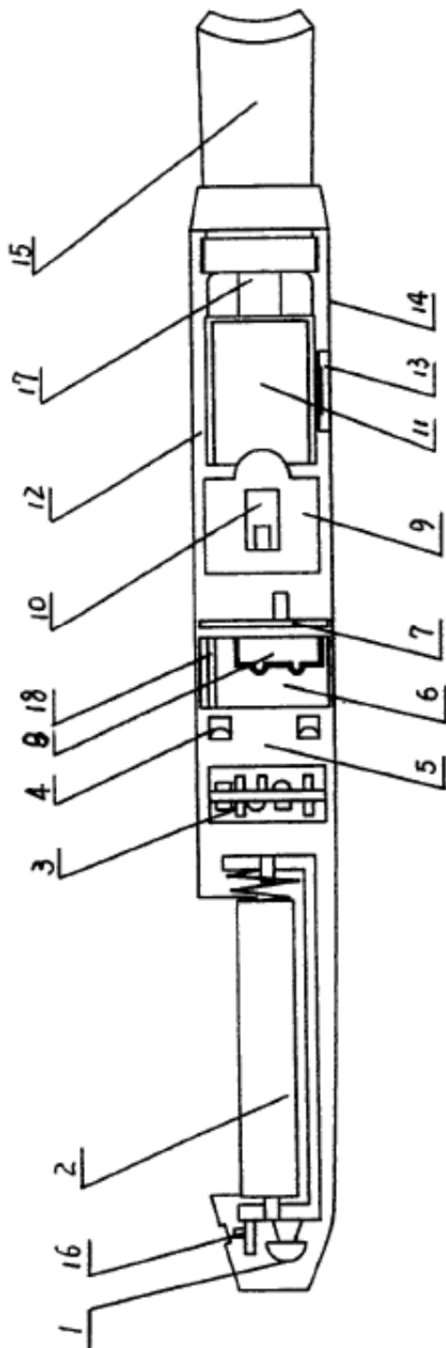


FIG. 1

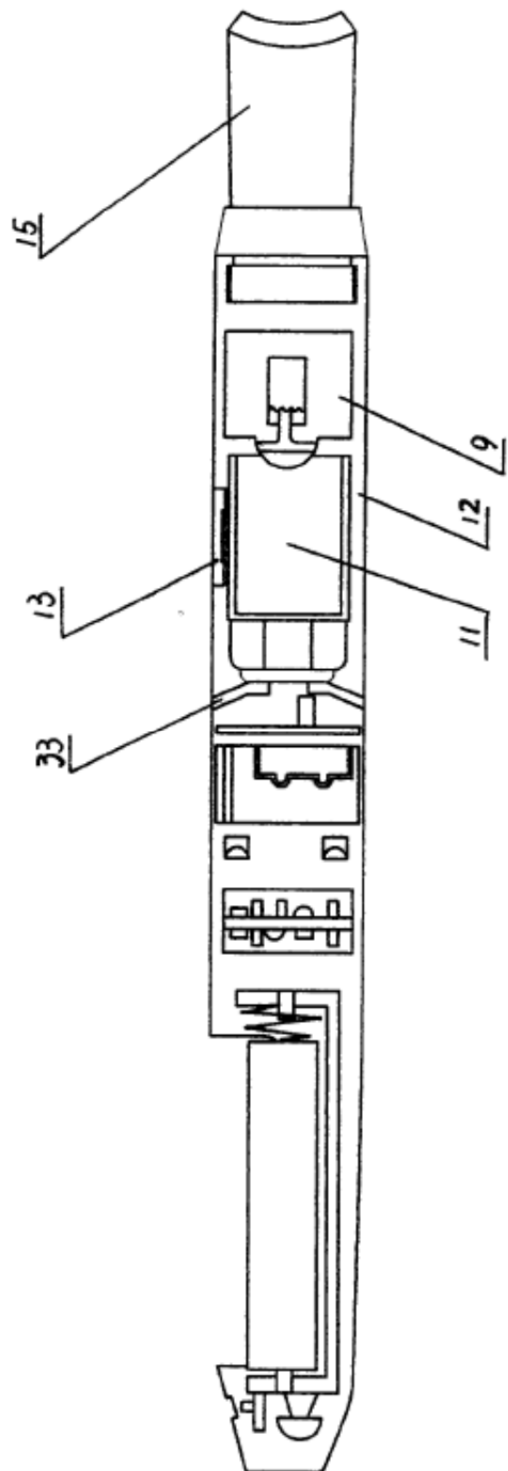


FIG. 2

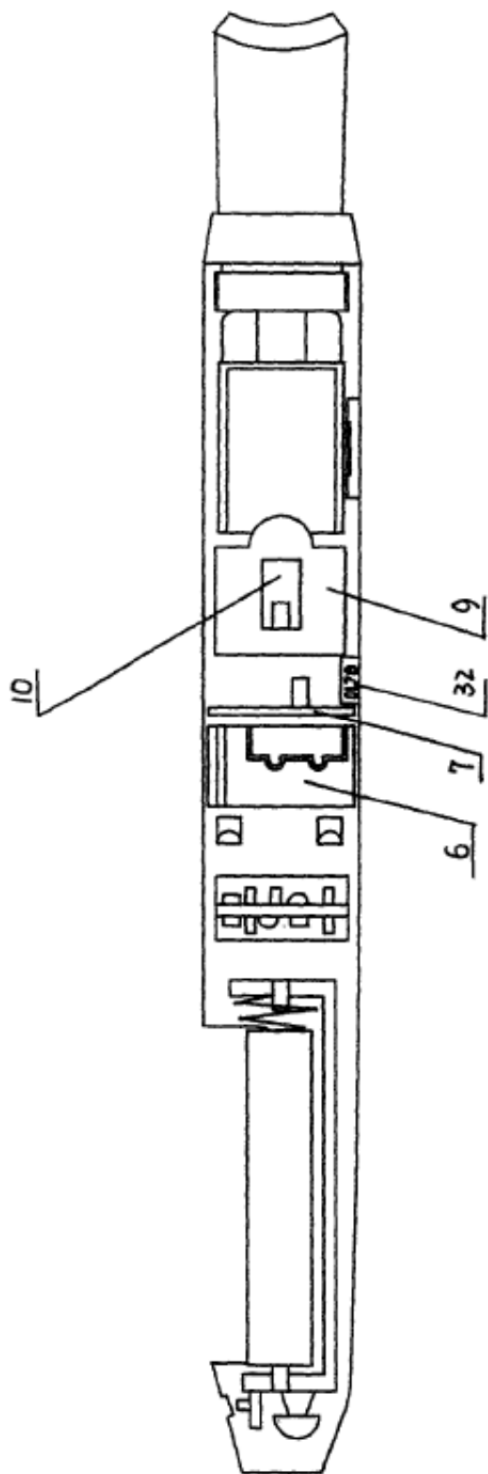


FIG. 3

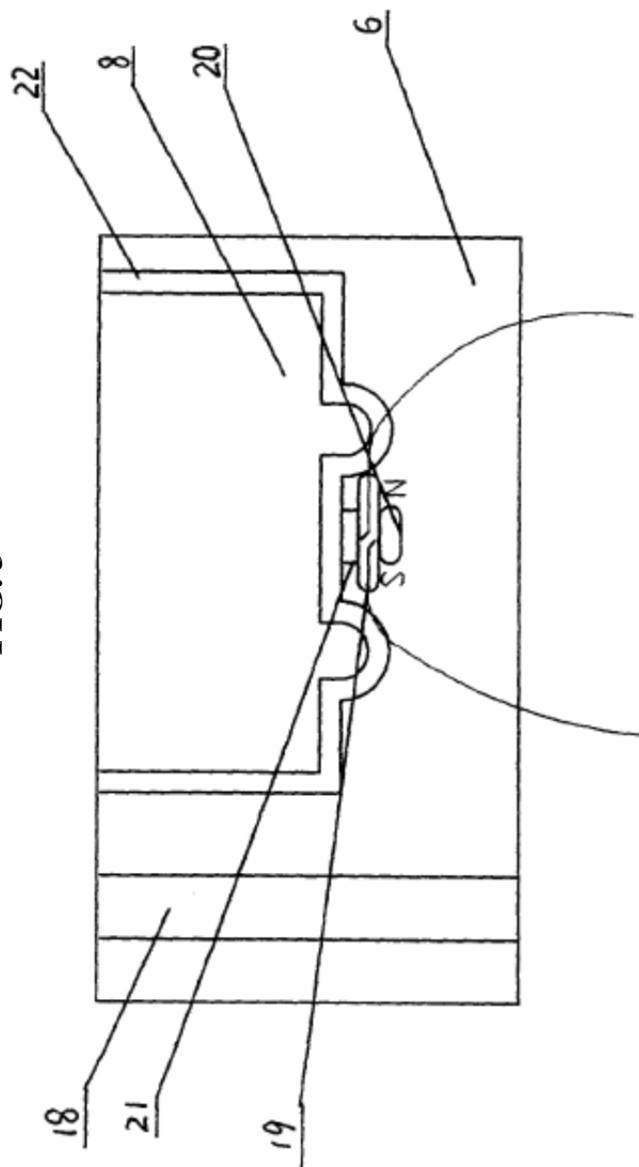


FIG. 4

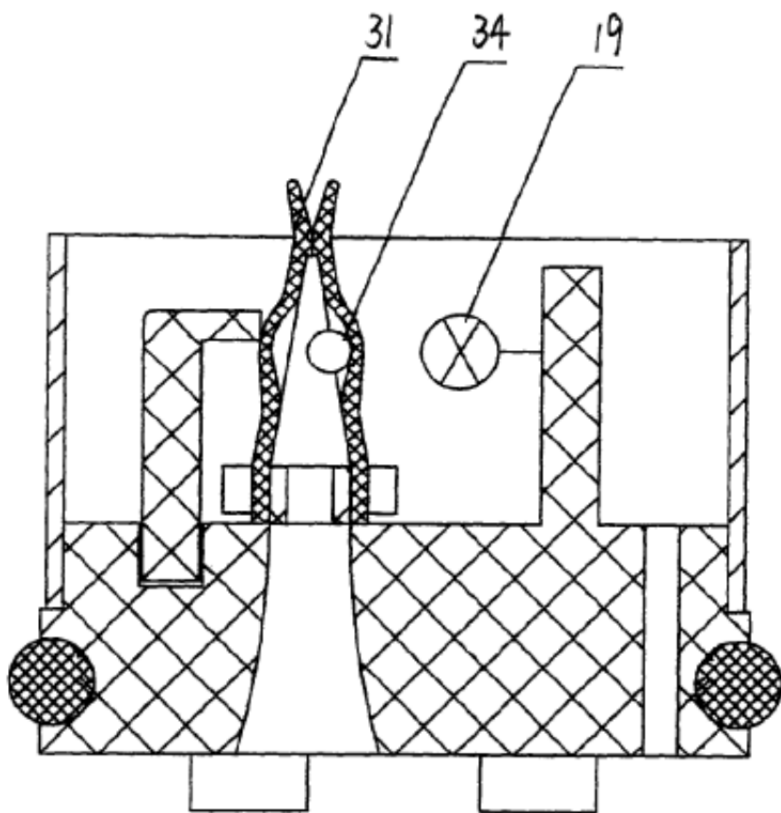


FIG. 5

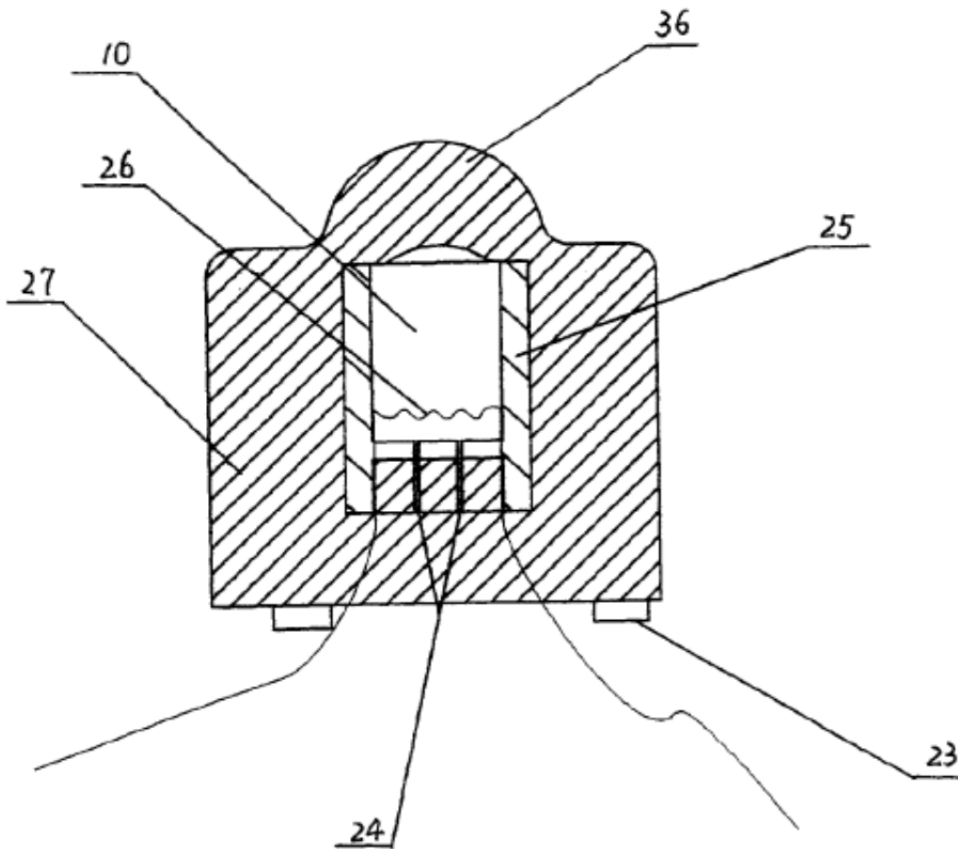


FIG. 6

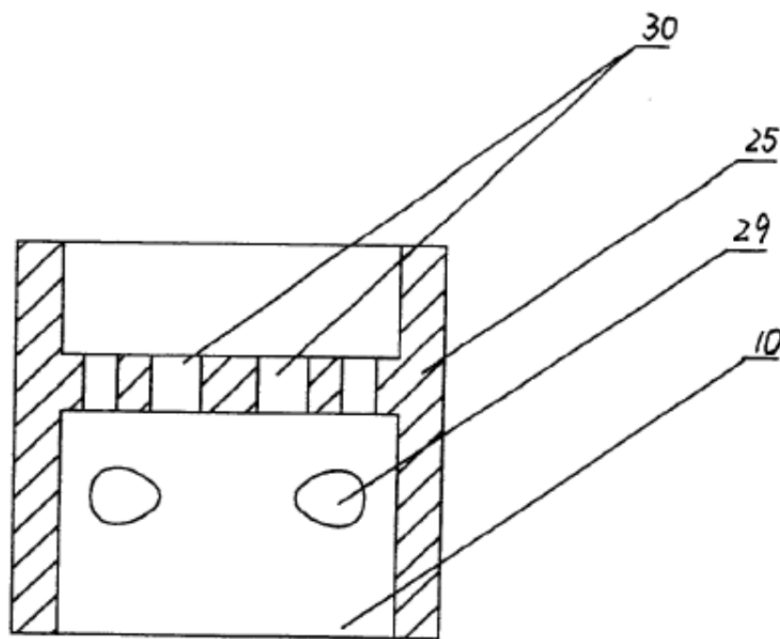
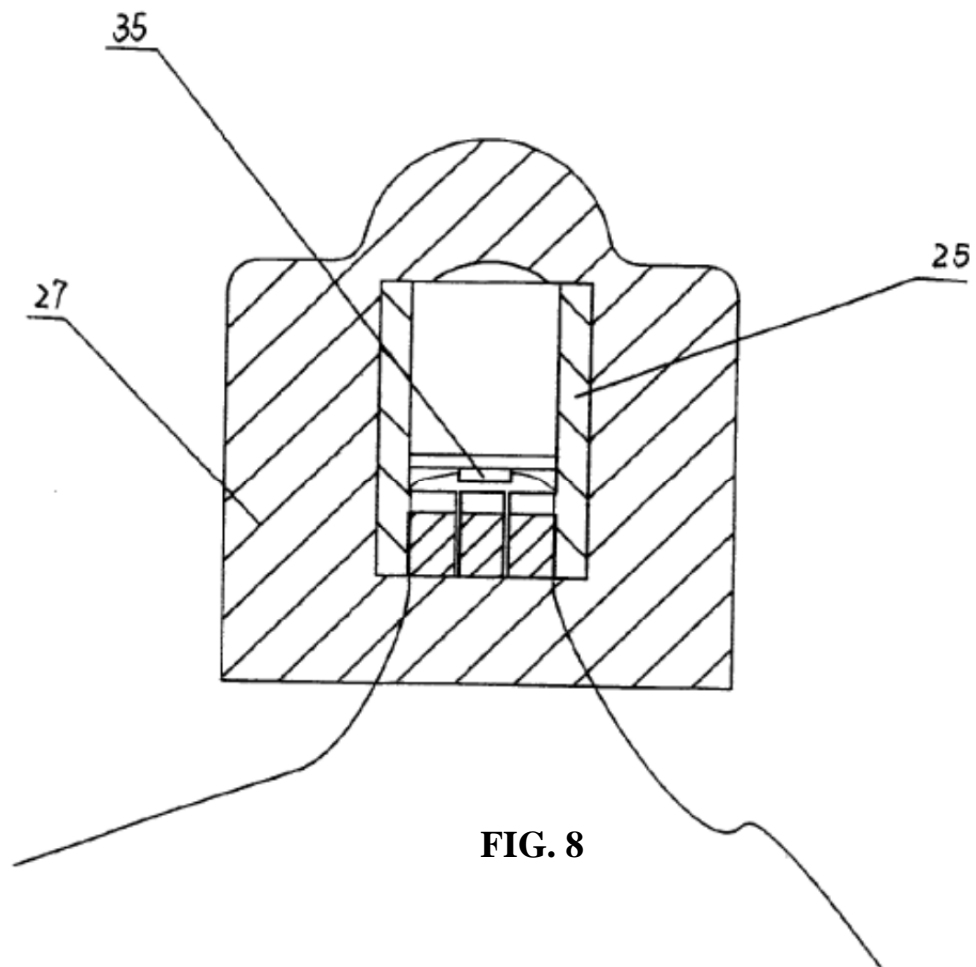


FIG. 7



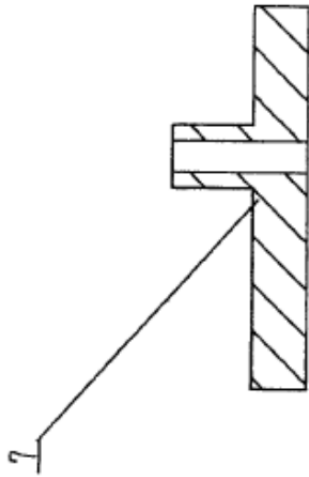


FIG. 9

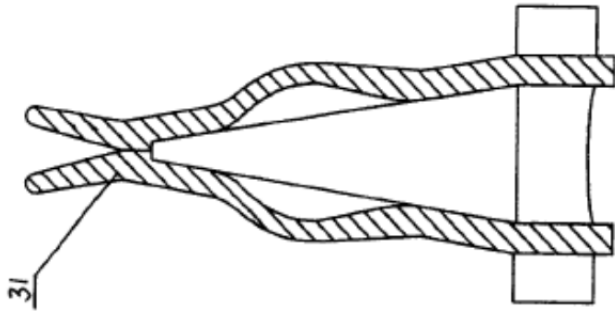


FIG. 10

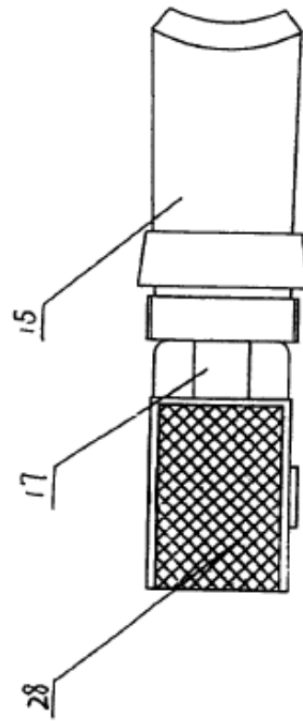


FIG. 11

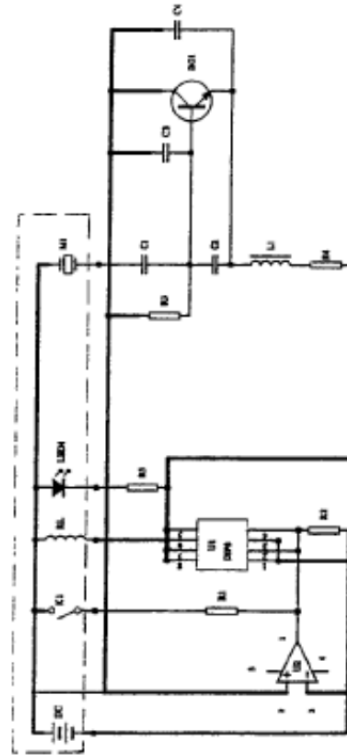


FIG. 12



Morningside
Translations

TRANSLATOR CERTIFICATION

450 7th Avenue
10th Floor
New York, NY 10123
Tel 212.643.8800
Fax 212.643.0005
www.morningtrans.com

County of New York
State of New York

Date: October 8, 2014

To whom it may concern:

I, Jane Wei, a translator fluent in the Chinese and English languages, on behalf of Morningside Translations, do solemnly and sincerely declare that the following is, to the best of my knowledge and belief, a true and correct translation of the document(s) listed below in a form that best reflects the intention and meaning of the original text.

The documents are designated as:

- Hon CN2719043Y (2)

Signature

Jane Wei

Print

Accurate Translation Services 24/7