



US008068858B2

(12) **United States Patent**
Werner et al.

(10) **Patent No.:** **US 8,068,858 B2**
(45) **Date of Patent:** **Nov. 29, 2011**

(54) **METHODS AND COMPUTER PROGRAM PRODUCTS FOR PROVIDING INFORMATION ABOUT A USER DURING A PHYSICAL ACTIVITY**

(75) Inventors: **Jon H. Werner**, Austin, TX (US); **Scot Doyle**, Austin, TX (US)

(73) Assignee: **adidas AG**, Herzogenaurach (DE)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **12/963,307**

(22) Filed: **Dec. 8, 2010**

(65) **Prior Publication Data**

US 2011/0082641 A1 Apr. 7, 2011

Related U.S. Application Data

(63) Continuation of application No. 11/932,154, filed on Oct. 31, 2007, which is a continuation of application No. 11/857,862, filed on Sep. 19, 2007, now Pat. No. 7,805,149, which is a continuation of application No. 10/759,289, filed on Jan. 16, 2004, now Pat. No. 7,292,867.

(51) **Int. Cl.**
H04Q 7/20 (2006.01)

(52) **U.S. Cl.** **455/456.3**; 455/440; 701/216;
342/357.15

(58) **Field of Classification Search** 455/414.1,
455/422.1, 436, 440, 456.1–456.3, 457;
701/207, 213–216; 342/357.01–357.09,
342/357.1–357.47

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,043,736	A	8/1991	Darnell et al.
5,334,974	A	8/1994	Simm et al.
5,400,254	A	3/1995	Fujita
5,470,233	A	11/1995	Fruchterman et al.
5,598,849	A	2/1997	Browne
5,627,548	A	5/1997	Woo et al.
5,702,323	A	12/1997	Poulton
5,742,509	A	4/1998	Goldberg et al.
5,751,245	A	5/1998	Janky et al.
5,758,313	A	5/1998	Shah et al.
5,767,795	A	6/1998	Schaphorst
5,802,492	A	9/1998	DeLorme et al.
5,825,327	A	10/1998	Krasner
5,857,066	A	1/1999	Wyche et al.
5,908,464	A	6/1999	Kishigami et al.
5,910,799	A	6/1999	Carpenter et al.
5,919,239	A	7/1999	Fraker et al.

(Continued)

OTHER PUBLICATIONS

Garmin International, Inc., NAVTALK; Cellular Phone/GPS Receiver; Owner's Manual and Reference Guide; 1999-2000; Garmin Corporation.

(Continued)


Primary Examiner — Nhan Le

(74) *Attorney, Agent, or Firm* — Sterne, Kessler, Goldstein & Fox P.L.L.C.

(57) **ABSTRACT**

In at least one embodiment, a method for execution on a portable fitness device of providing information about a first user engaged in a physical activity with the portable fitness device includes determining user performance data while the first user is engaged in the physical activity and determining whether or not to transmit the user performance data to a remotely located server computer system via a wide-area wireless network while the first user is engaged in the physical activity, wherein the determination of whether or not to transmit the user performance data is based on an indication of whether or not a remotely located second user is currently monitoring the first user.

20 Claims, 13 Drawing Sheets

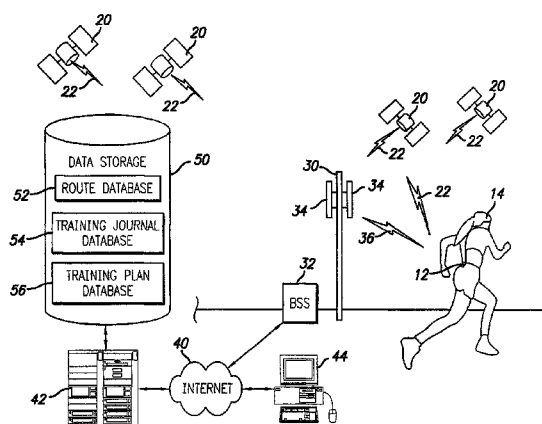

UA-1001.001

U.S. PATENT DOCUMENTS

5,938,721 A 8/1999 Dussell et al.
 5,948,040 A 9/1999 DeLorme et al.
 5,976,083 A 11/1999 Richardson et al.
 6,002,982 A 12/1999 Fry
 6,009,138 A 12/1999 Slusky
 6,011,494 A * 1/2000 Watanabe et al. 340/995.14
 6,013,007 A 1/2000 Root et al.
 6,032,108 A 2/2000 Seiple et al.
 6,198,431 B1 3/2001 Gibson
 6,212,469 B1 4/2001 Knepper
 6,246,362 B1 6/2001 Tsubata et al.
 6,251,048 B1 6/2001 Kaufman
 6,463,385 B1 10/2002 Fry
 6,513,532 B2 2/2003 Mault et al.
 6,585,622 B1 7/2003 Shum et al.
 6,601,016 B1 7/2003 Brown et al.
 6,605,038 B1 8/2003 Teller et al.
 6,716,139 B1 4/2004 Hosseinzadeh-Dolkhani et al.
 6,736,759 B1 5/2004 Stubbs et al.
 6,741,927 B2 * 5/2004 Jones 701/201
 6,746,370 B1 6/2004 Fleming et al.
 6,790,178 B1 9/2004 Mault et al.
 6,798,378 B1 9/2004 Walters
 6,823,036 B1 11/2004 Chen
 6,837,827 B1 1/2005 Lee et al.
 6,845,321 B1 1/2005 Kerns
 6,853,955 B1 2/2005 Burrell et al.
 6,872,077 B2 3/2005 Yeager
 6,879,285 B2 * 4/2005 Nobukiyo 342/357.31
 6,918,858 B2 7/2005 Watterson et al.
 6,921,351 B1 7/2005 Hickman et al.
 7,062,225 B2 6/2006 White
 7,070,539 B2 7/2006 Brown et al.
 7,216,034 B2 5/2007 Vitikainen et al.
 7,217,224 B2 5/2007 Thomas
 7,254,516 B2 8/2007 Case, Jr. et al.
 7,292,867 B2 11/2007 Werner et al.
 7,466,992 B1 * 12/2008 Fujisaki 455/556.1
 7,480,512 B2 1/2009 Graham et al.
 7,518,054 B2 4/2009 McKinney et al.
 7,670,263 B2 3/2010 Ellis et al.
 7,921,163 B1 * 4/2011 Odell et al. 709/206
 2001/0027375 A1 10/2001 Machida et al.
 2002/0049535 A1 4/2002 Rigo

2002/0094776 A1 7/2002 Pulver
 2002/0102988 A1 8/2002 Myllymaki
 2002/0107433 A1 8/2002 Mault
 2003/0100315 A1 5/2003 Rankin
 2003/0171189 A1 9/2003 Kaufman
 2003/0191578 A1 10/2003 Paulauskas et al.
 2003/0208409 A1 11/2003 Mault
 2003/0224337 A1 12/2003 Shum et al.
 2003/0229446 A1 12/2003 Boscamp et al.
 2004/0046692 A1 3/2004 Robson et al.
 2004/0102931 A1 5/2004 Ellis et al.
 2004/0199056 A1 10/2004 Husemann et al.
 2004/0203789 A1 10/2004 Hammond et al.
 2004/0203873 A1 10/2004 Gray
 2004/0249846 A1 12/2004 Randall et al.
 2005/0096933 A1 5/2005 Collins et al.
 2005/0121504 A1 6/2005 Sanders et al.
 2005/0172311 A1 8/2005 Hjelt et al.
 2005/0195094 A1 9/2005 White
 2005/0197063 A1 9/2005 White
 2005/0266961 A1 12/2005 Shum et al.
 2005/0287499 A1 12/2005 Yeager
 2006/0082472 A1 4/2006 Adachi et al.
 2006/0156356 A1 7/2006 Sato et al.
 2006/0189360 A1 8/2006 White
 2006/0240865 A1 10/2006 White
 2007/0287596 A1 12/2007 Case, Jr. et al.

OTHER PUBLICATIONS

Garmin LTD; NAVTALK; Product information; 2002; 6 pages.
 GPSII, Garmin Owner's Manual 7 Reference, 108 pages, Aug. 1996, Garmin Corp., Kansas, USA.
 GPSII, Garmin Owner's Manual 7 Reference, 100 pages, Aug. 1997, Garmin Corp., Kansas, USA.
 Magellan GPS, NAVDLX-10 User Guide, 91 pages, Magellan Systems Corp. 1995.
 Magellan GPS Satellite Navigator Reference Guide Trailblazer XL, 78 pages, Magellan Systems Corp., 1995.
 Mehaffey et al.; Garmin's NAVTALK Cell Phone and Road Map GPS Product Review; Revision 2, Nov. 2, 1999; 5 pages.
 Sawhney et al.; "Speaking and Listening on the Run: Design for Wearable Audio Computing"; Speech Interface Group; MIT Media Laboratory; Oct. 19-20, 1988; Pittsburgh, PA.

* cited by examiner

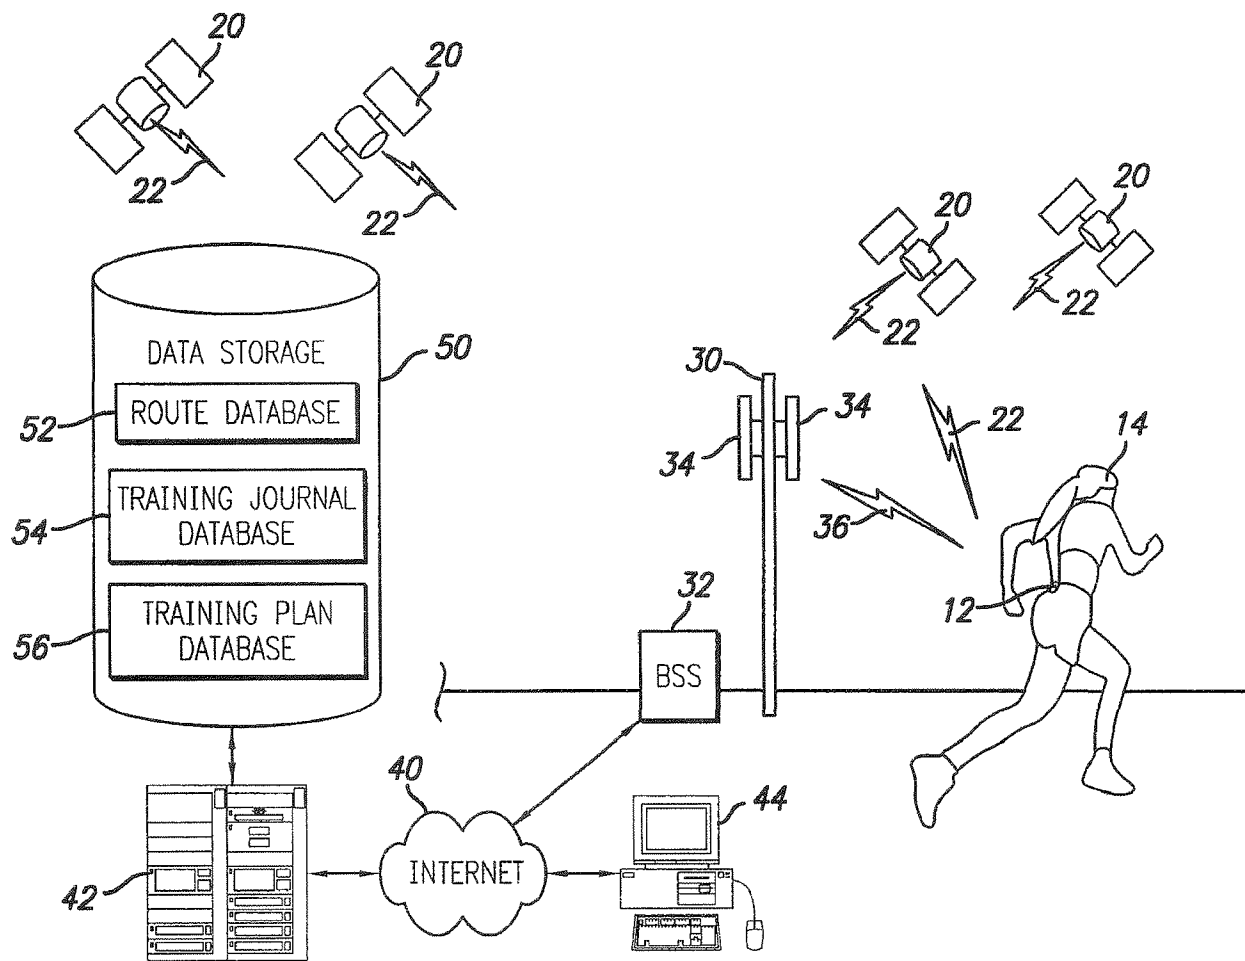


FIG. 1

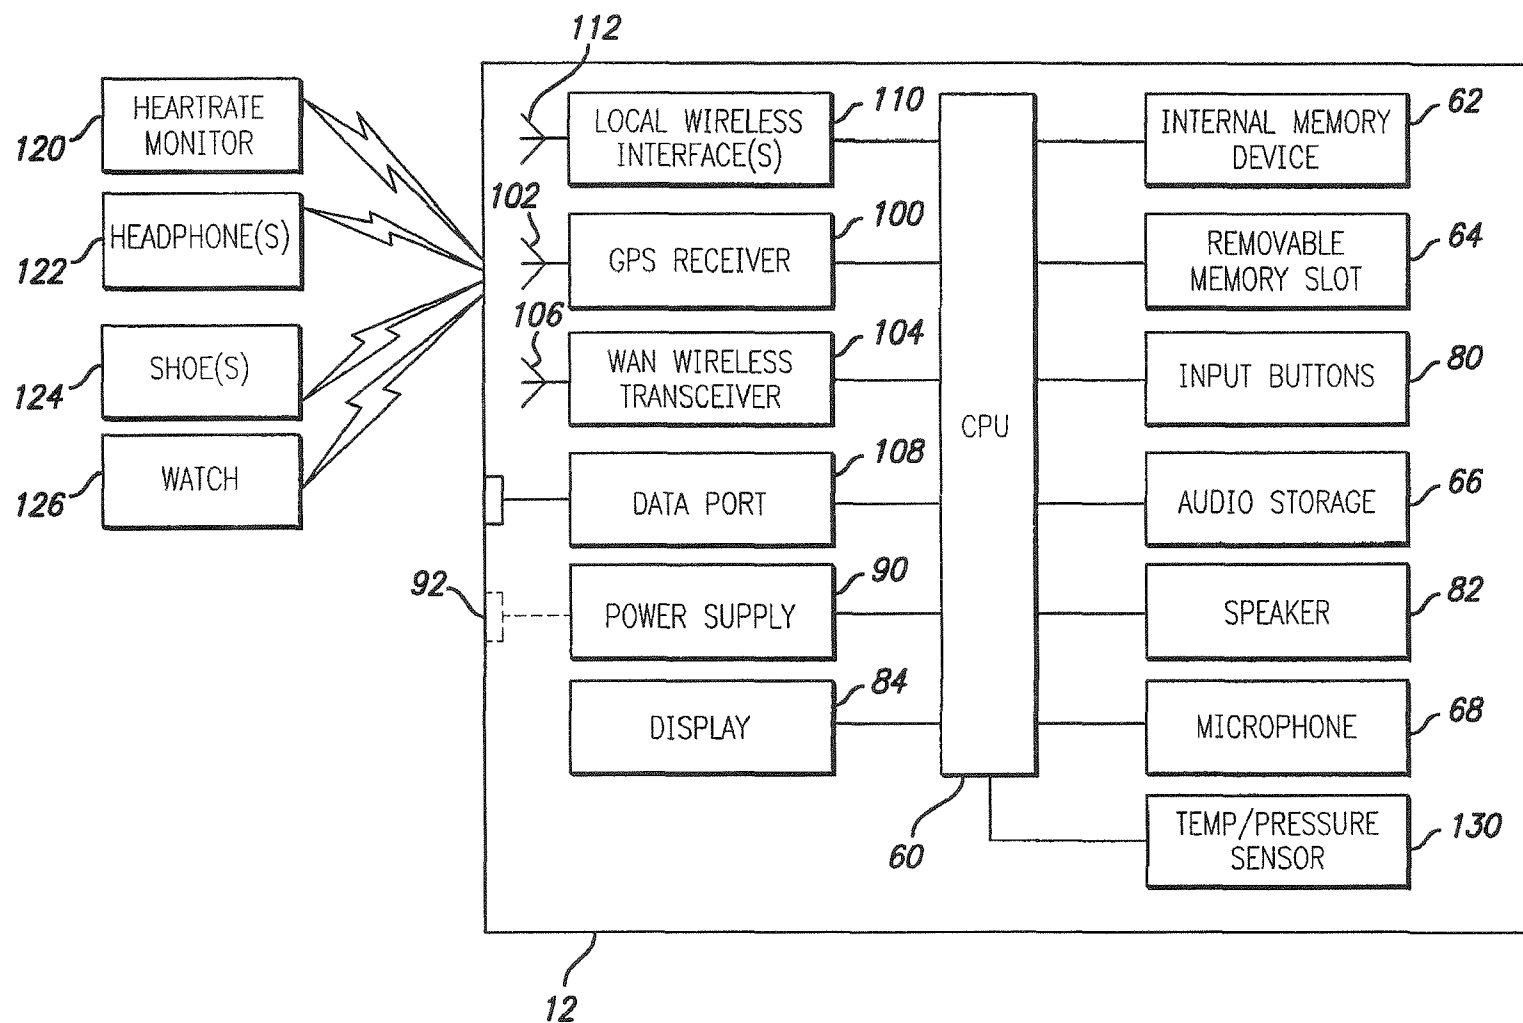


FIG. 2A

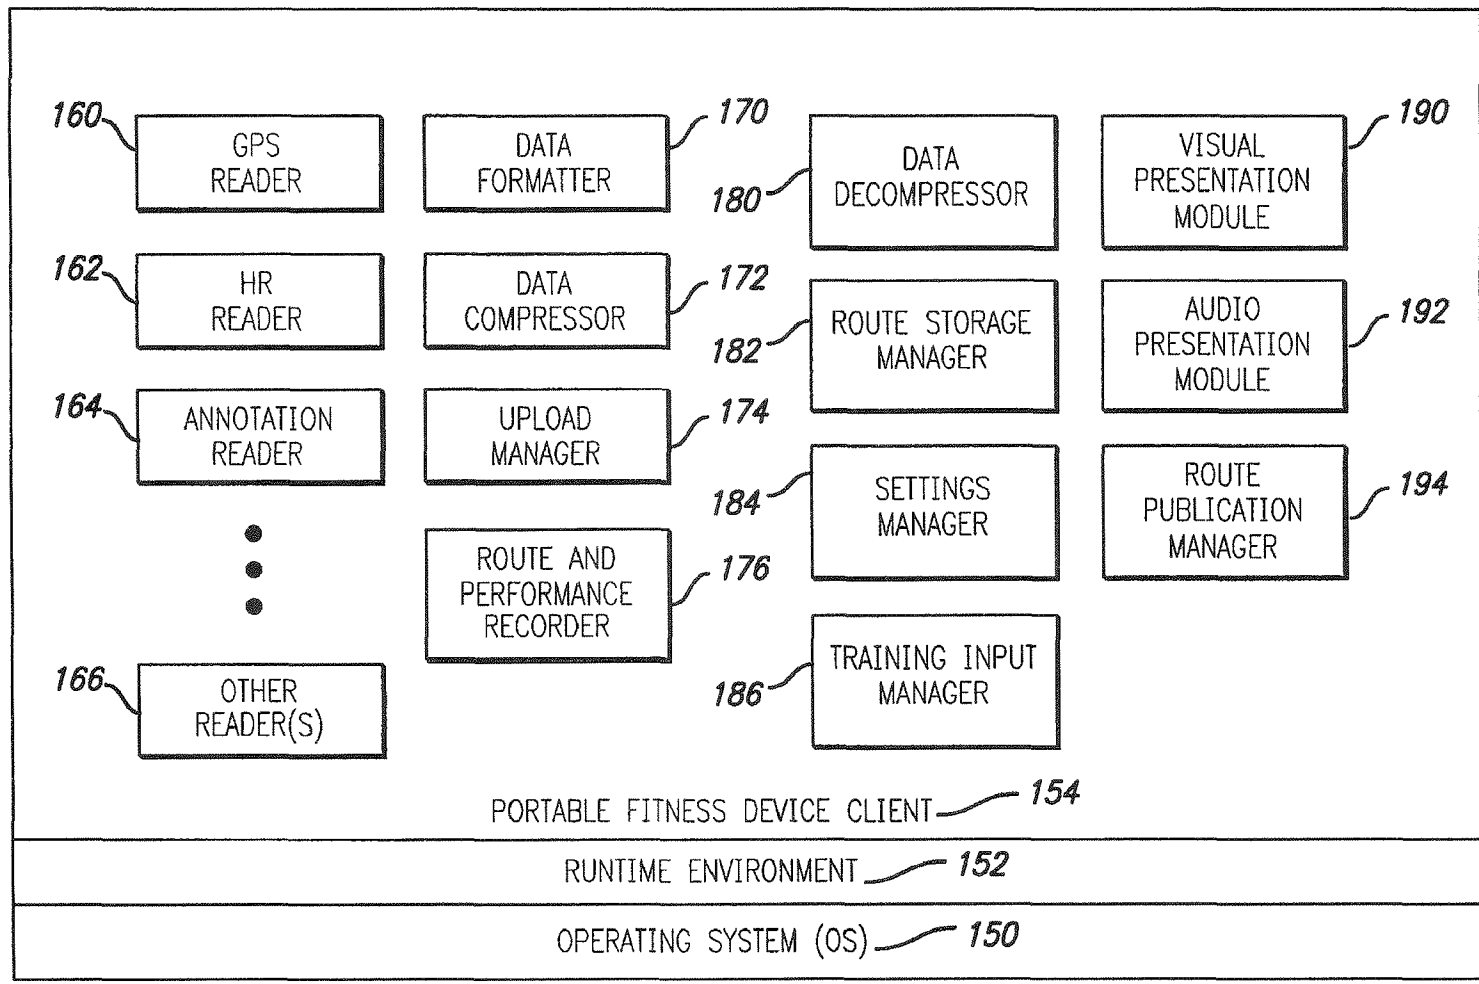


FIG. 2B

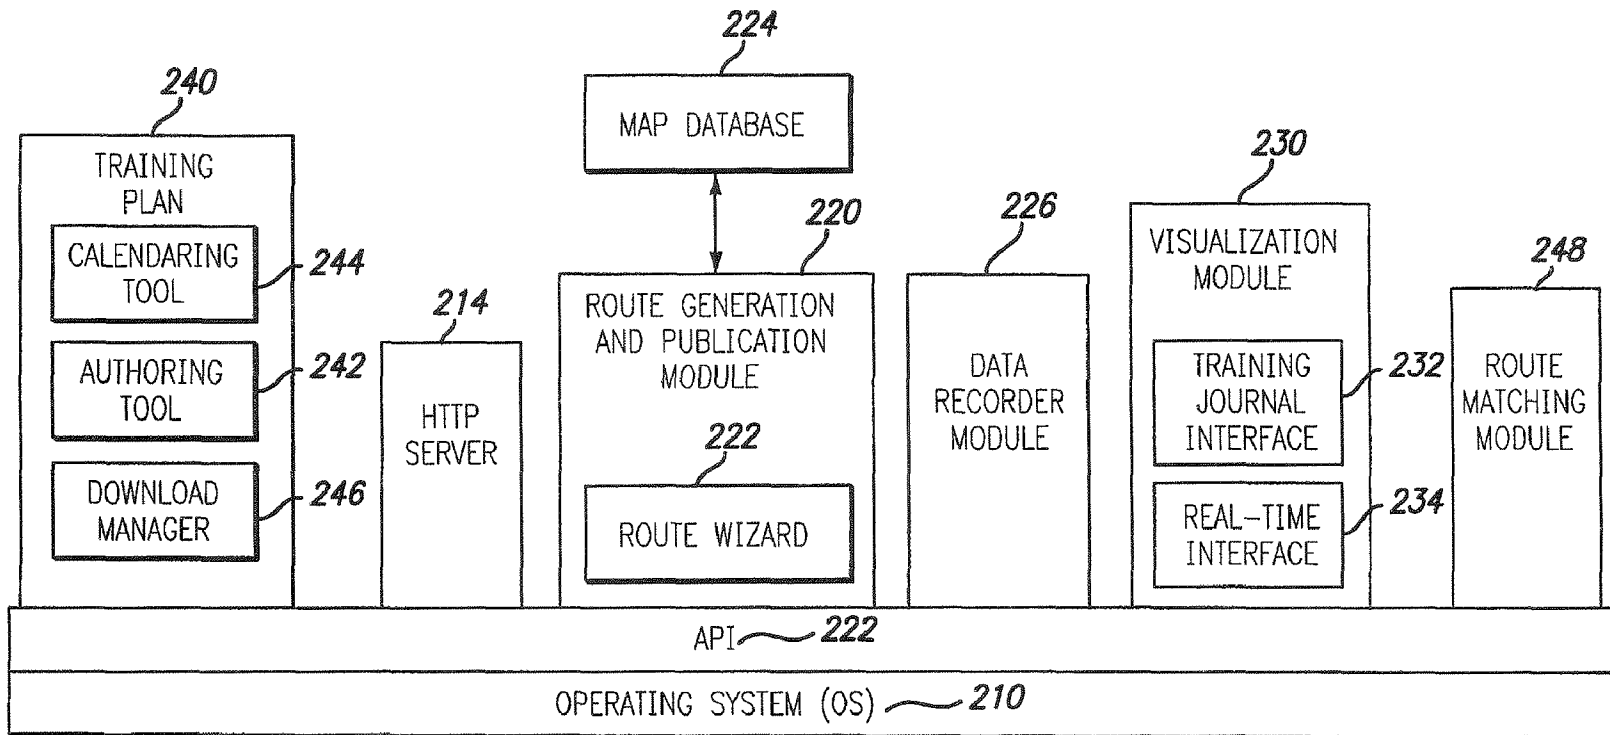


FIG. 3

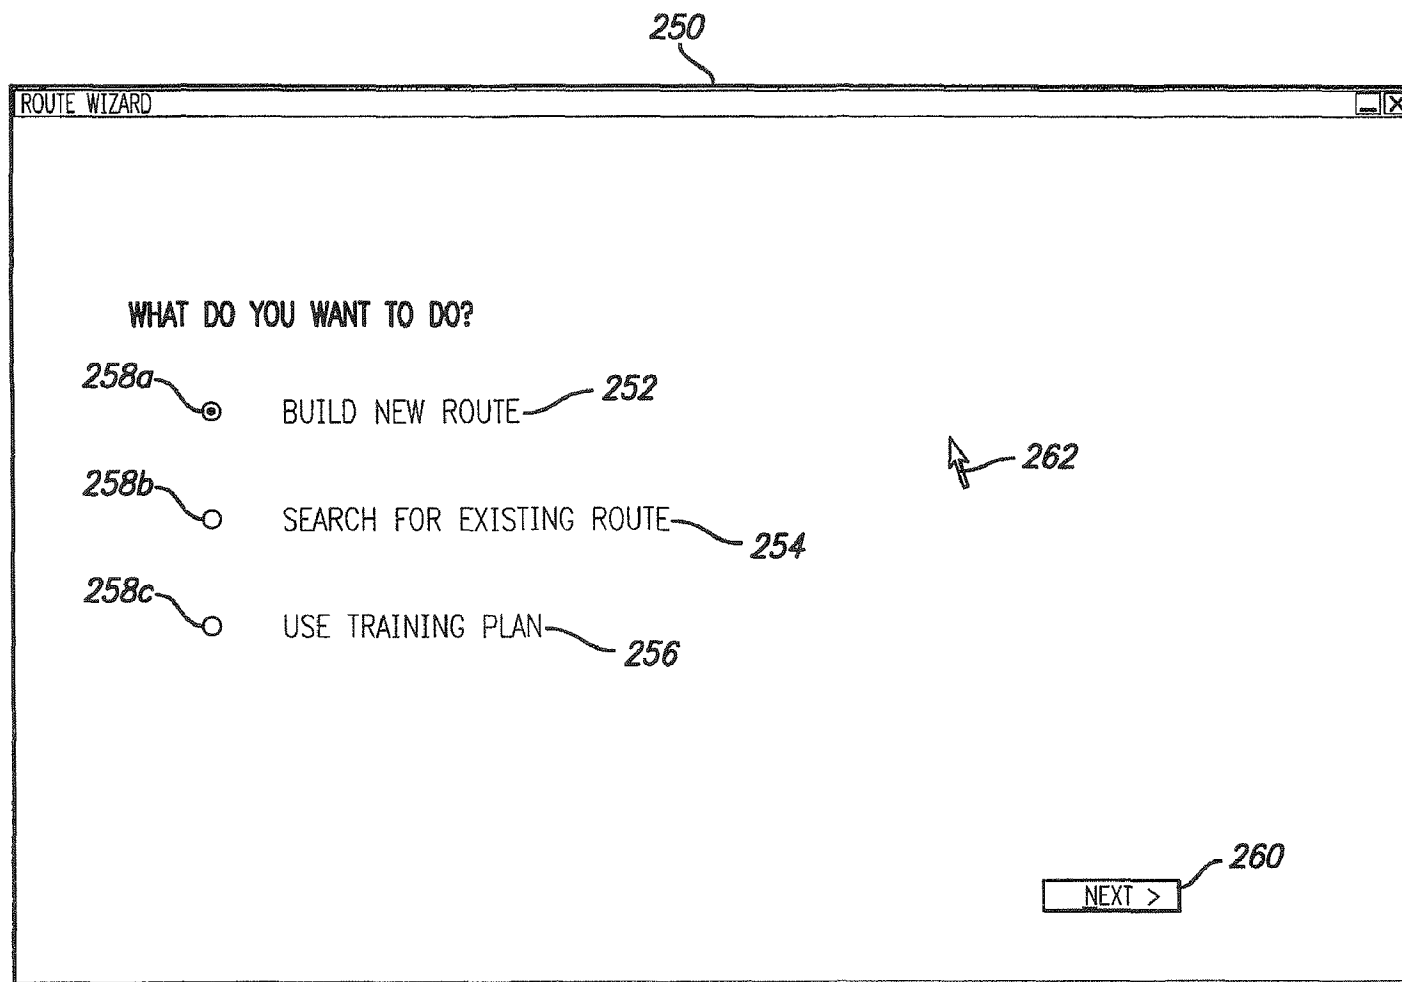


FIG. 4A

270

ROUTE WIZARD-BUILD NEW ROUTE

1. ENTER STARTING POINT

☒ NUMBER AND STREET
ZIP CODE

☐ USE STARTING POINT AS PREVIOUS ROUTE

2. ENTER ROUTE LENGTH

☒ ROUTE DISTANCE ☒ MILES ☐ KILOMETERS

☐ TIME AVG. PACE ☒ USE HISTORICAL AVG.

3. ROUTE ATTRIBUTES (OPTIONAL)

MAX. DISTANCE FROM START ☒ MILES ☐ KILOMETERS

ELEVATION OR ☒ DON'T CARE

PATTERN ☐ STRAIGHT ☐ SERPENTINE ☒ PERIMETER ☐ DON'T CARE

SAFETY ☒ AVOID HIGH RISK AREAS ☐ DON'T CARE

FLOW ☒ AVOID TRAFFIC LIGHTS ☐ DON'T CARE

INCLUDE EXISTING ROUTES? ☒ YES ☐ NO ☐ DON'T CARE

272

274

276

262

280

NEXT >

FIG. 4B

300

ROUTE WIZARD-SEARCH FOR EXISTING ROUTE
[] [X]

ROUTE LOCATION:

☒ ZIP CODE

☐ CITY

302

JUMP TO MAP

262

ROUTE ATTRIBUTES:

{

DISTANCE ☒ 1-3 MILES ☐ 3-7 MILES ☐ 7-10 MILES ☐ 10+ MILES ☐ ALL

ELEVATION

FLAT

HILLY

OR ☒ DON'T CARE

PATTERN ☐ STRAIGHT ☐ SERPENTINE ☒ PERIMETER ☐ DON'T CARE

SAFETY ☒ AVOID HIGH RISK AREAS ☐ DON'T CARE

FLOW ☒ AVOID TRAFFIC LIGHTS ☐ DON'T CARE

AMENITIES ☒ PUBLIC RESTROOMS ☒ WATER ☐ FOOD

}

304

308

NEXT >

FIG. 4C

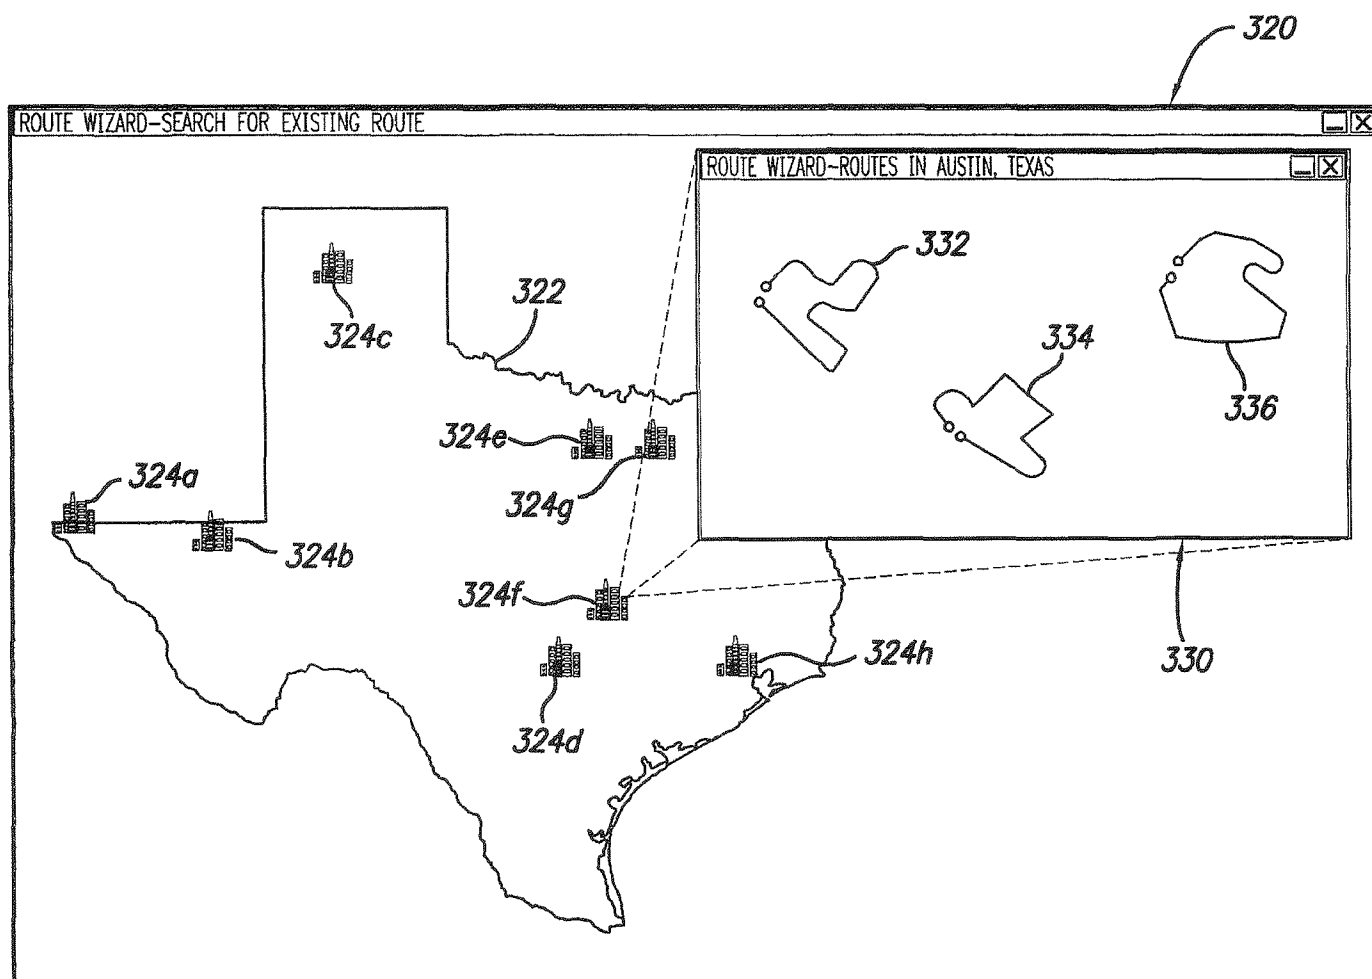


FIG. 4D

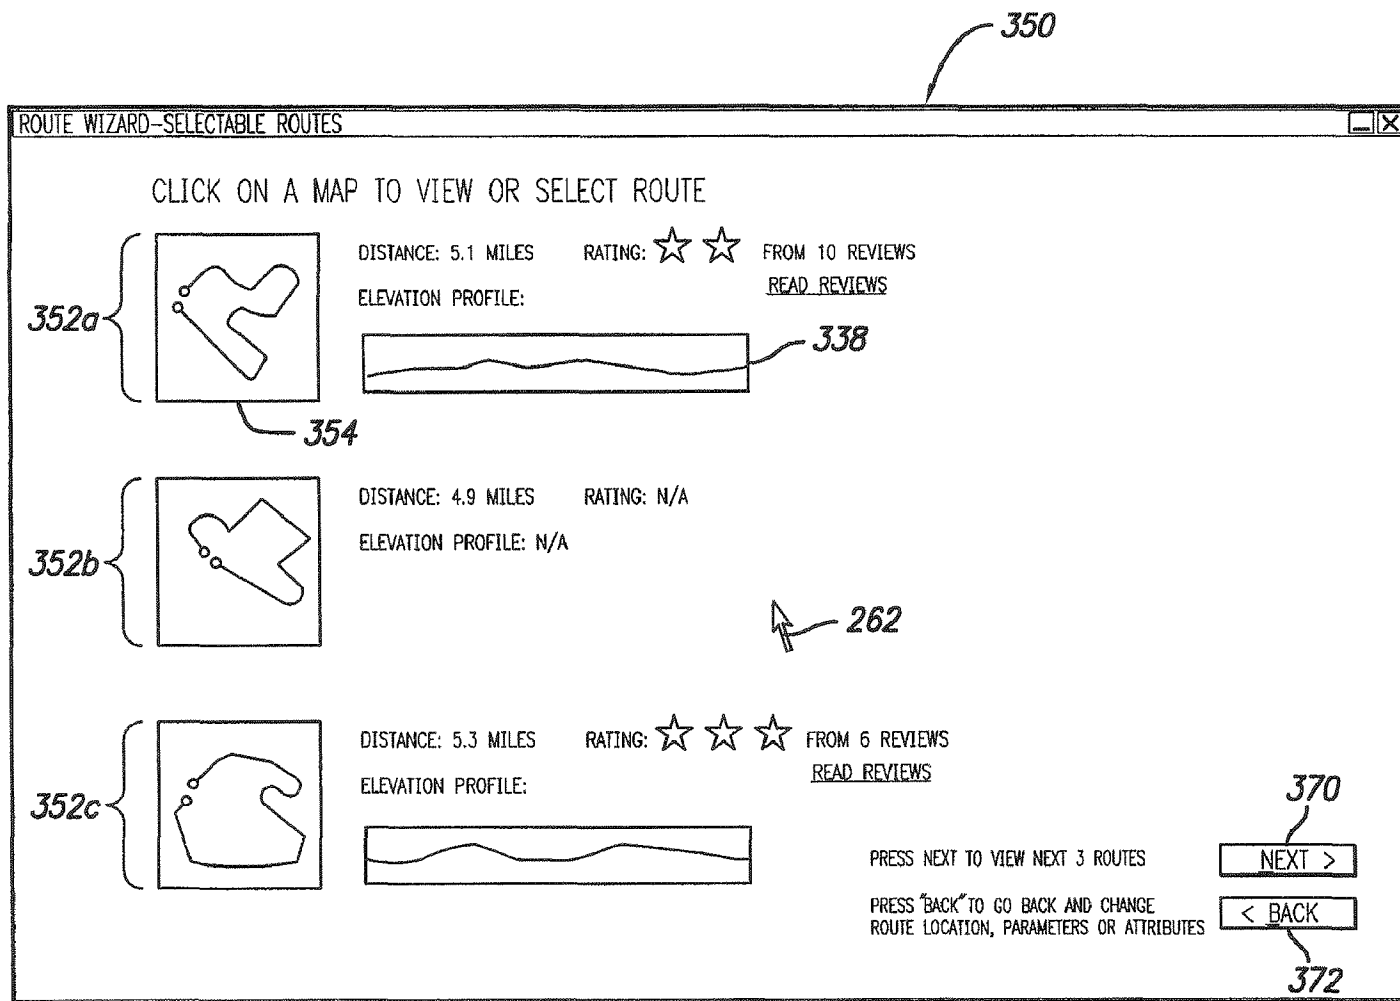


FIG. 4E

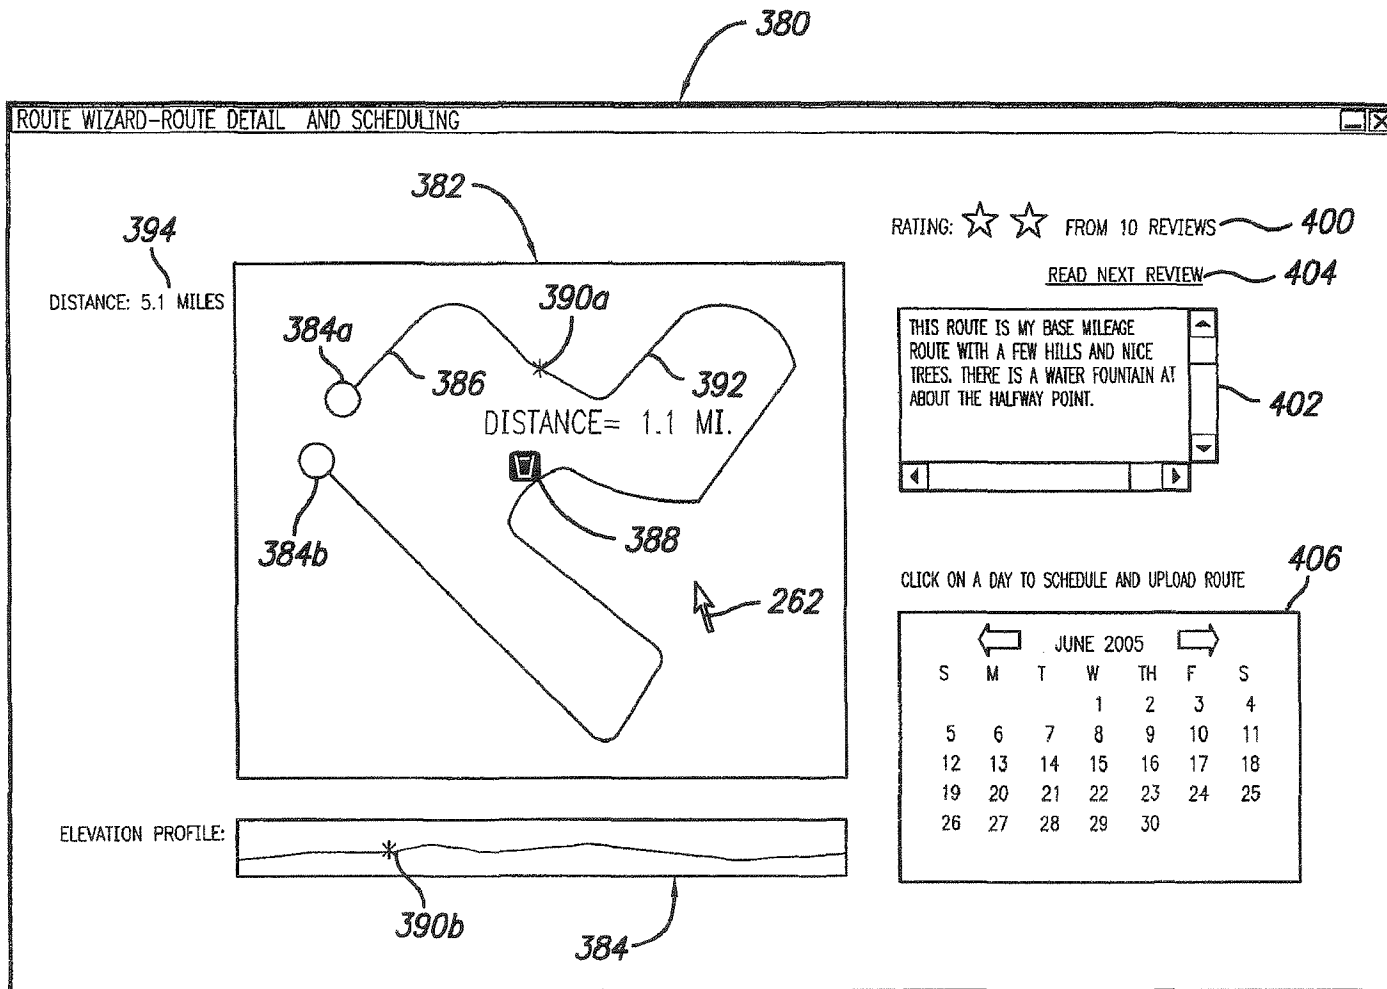


FIG. 4F

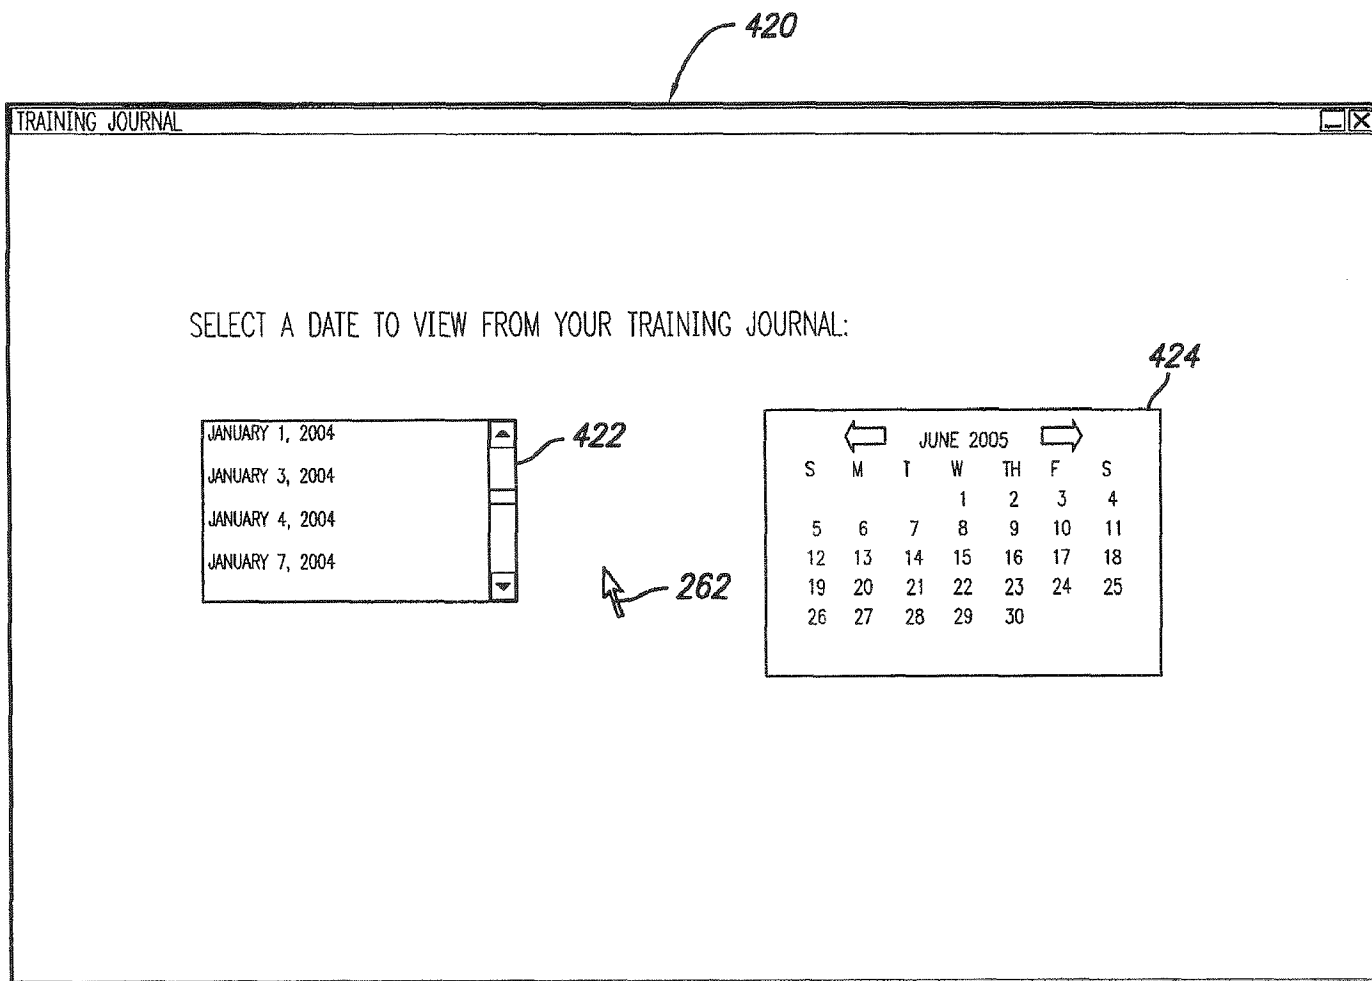


FIG. 5A

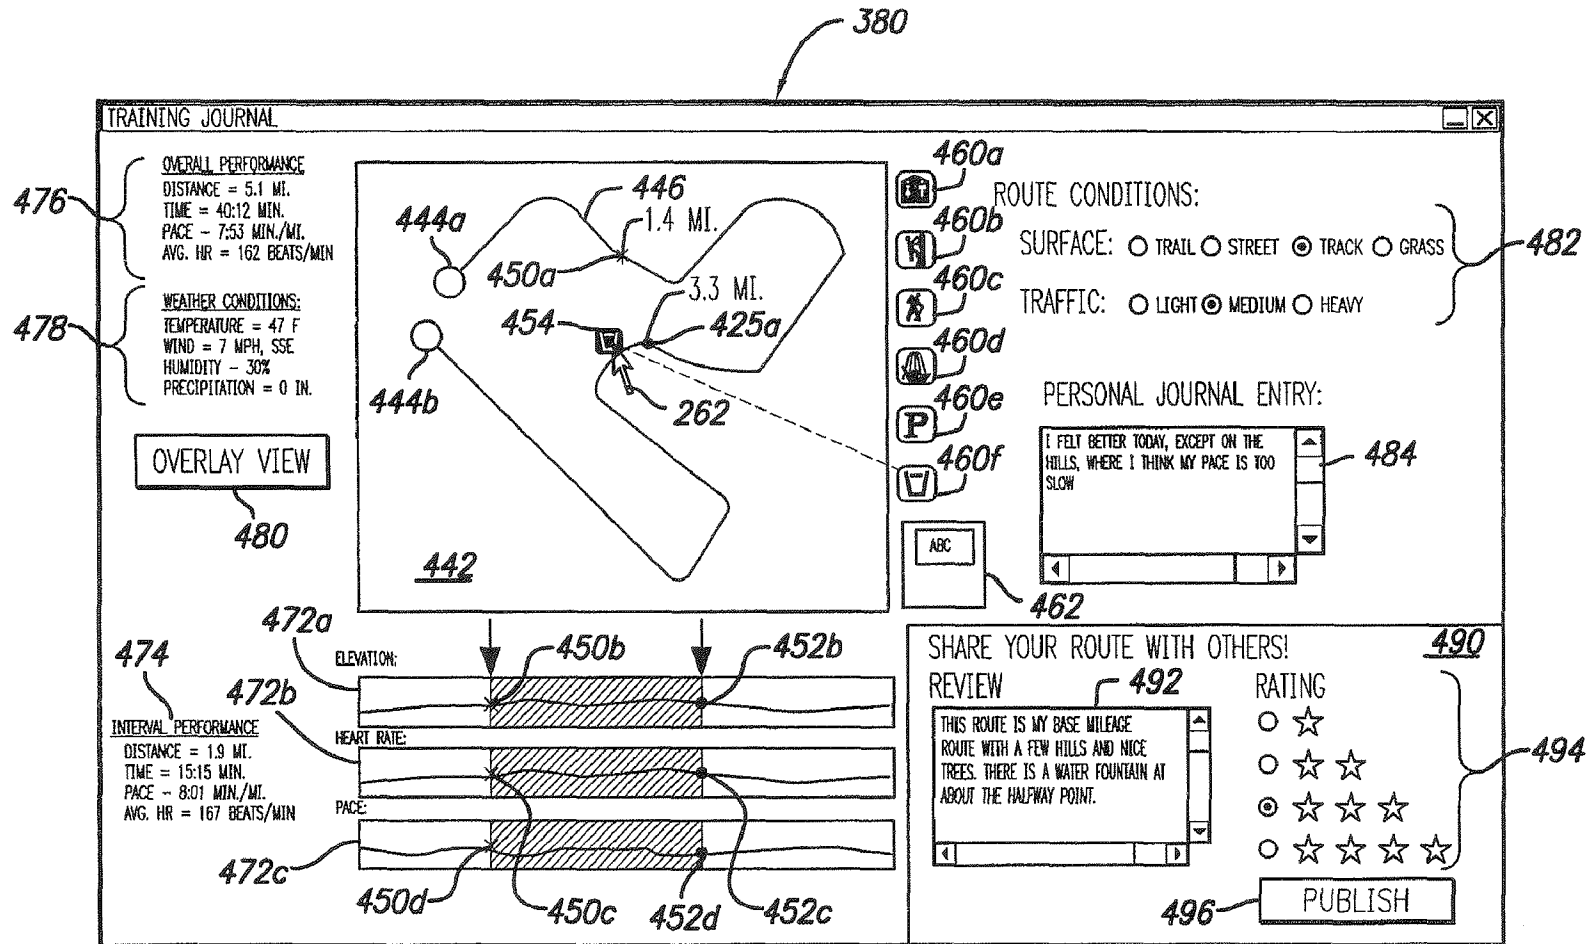


FIG. 5B

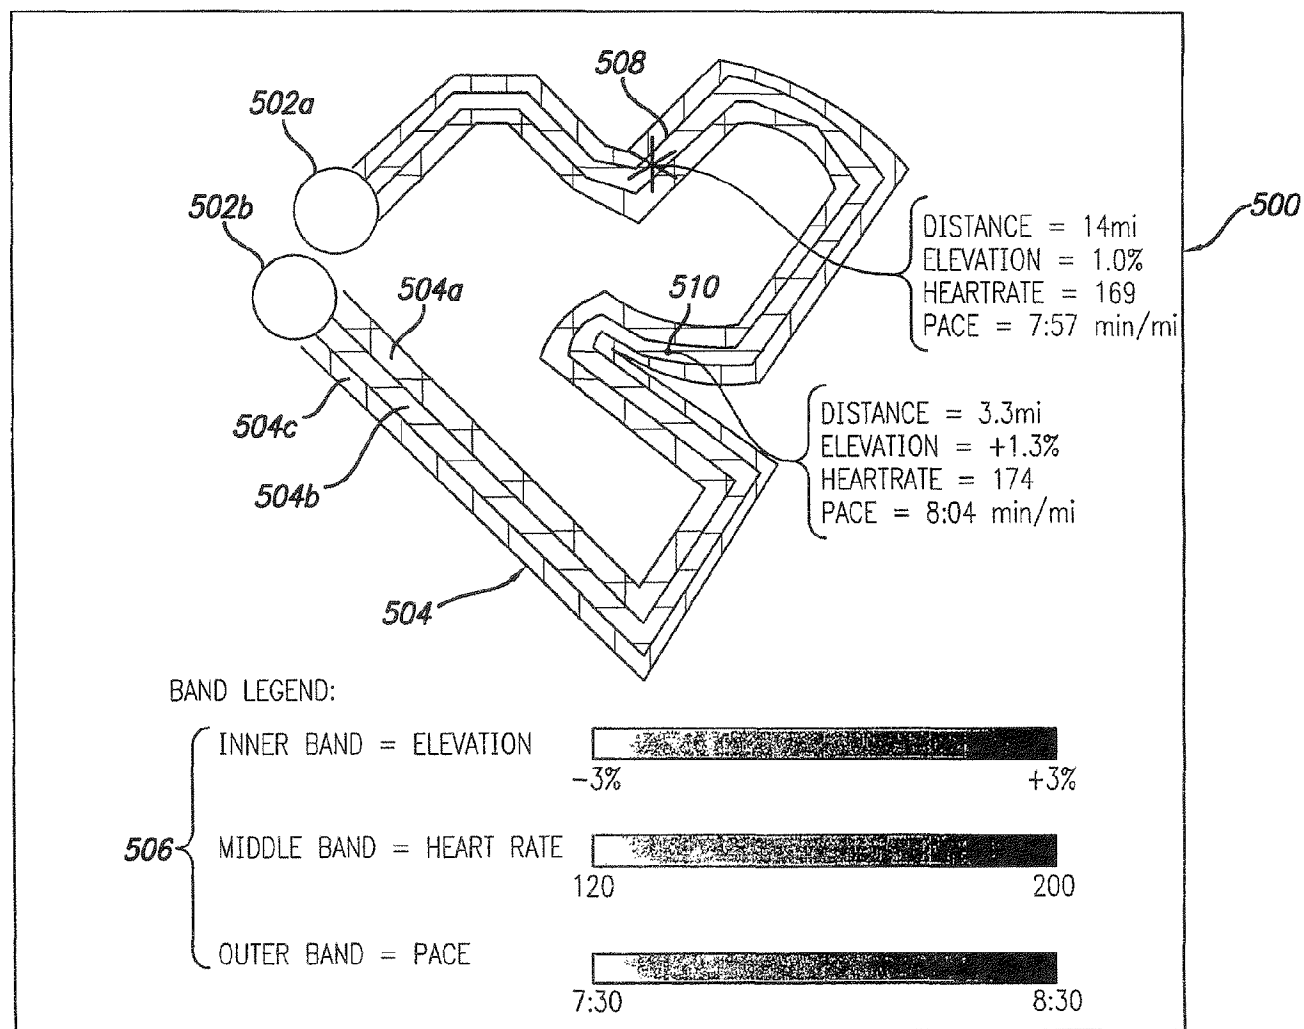


FIG. 5C

1

METHODS AND COMPUTER PROGRAM PRODUCTS FOR PROVIDING INFORMATION ABOUT A USER DURING A PHYSICAL ACTIVITY

PRIORITY CLAIM AND RELATED APPLICATIONS

The present application is a continuation of U.S. patent application Ser. No. 11/932,154, filed Oct. 31, 2007, which is a continuation of U.S. patent application Ser. No. 11/857,862, filed Sep. 19, 2007, now U.S. Pat. No. 7,805,149, which is a continuation of U.S. patent application Ser. No. 10/759,289, filed on Jan. 16, 2004, now U.S. Pat. No. 7,292,867, each of which is incorporated herein by reference in its entirety.

BACKGROUND OF THE INVENTION

1. Technical Field

The present invention relates in general to location-aware electronic devices, and in particular, to apparatus, methods, and program products facilitating the routing, scheduling, and real-time monitoring of outdoor activities, such as human fitness activities.

2. Description of the Related Art

As Global Positioning System (GPS) technology has matured, location-aware electronics have been integrated into a number of different mobile platforms, such as automobiles, mobile telephones, two-way radios, and hand-held GPS receivers, in order to provide location-based information. U.S. Pat. No. 6,013,007 to Root et al., which is incorporated herein by reference, discloses that a GPS receiver may additionally be implemented within an athlete's portable performance monitor to enable the performance monitor to record and to present the athlete with accurate performance information, such as distance traveled and pace.

SUMMARY OF THE INVENTION

In at least one embodiment, a method for execution on a portable fitness device of providing information about a first user engaged in a physical activity with the portable fitness device includes determining user performance data while the first user is engaged in the physical activity and determining whether or not to transmit the user performance data to a remotely located server computer system via a wide-area wireless network while the first user is engaged in the physical activity, wherein the determination of whether or not to transmit the user performance data is based on an indication of whether or not a remotely located second user is currently monitoring the first user.

In another embodiment, a computer program product including a computer-useable medium having computer program logic recorded thereon that, when executed by one or more processors of a portable fitness device, provides information about a first user engaged in a physical activity with the portable fitness device, includes first computer readable program code that enables a processor to determine user performance data while the first user is engaged in the physical activity, second computer readable program code that enables a processor to determine whether or not to transmit the user performance data to a remotely located server computer system via a wide-area wireless network while the first user is engaged in the physical activity, wherein the determination of whether or not to transmit the user performance data is based on an indication of whether or not a remotely located second user is currently monitoring the first user, and third

2

computer readable program code that enables a processor to transmit the user performance data to the server computer system.

In a further embodiment, a method for execution by a server computer system of providing information about a first user engaged in a physical activity with a portable fitness device includes receiving first user location data from the portable fitness device via a wide-area wireless network while the first user is engaged in the physical activity, receiving first user performance data from the portable fitness device via a wide-area wireless network while the first user is engaged in the physical activity, determining the first user's location with respect to a route path based on the received first user location data, and initiating a visual display on a remotely located second user's client computer system while the first user is engaged in the physical activity, wherein the visual display includes performance related content that is based on the first user performance data, and wherein the visual display further includes an indication of the first user's location with respect to the route path.

In another embodiment, a computer program product including computer-useable medium having computer program logic recorded thereon that, when executed by one or more processors of a server computer system, provides information about a first user engaged in a physical activity with the portable fitness device, includes first computer readable program code that enables a processor to receive first user location data from the portable fitness device via a wide-area wireless network while the first user is engaged in the physical activity, second computer readable program code that enables a processor to receive first user performance data from the portable fitness device via a wide-area wireless network while the first user is engaged in the physical activity, third computer readable program code that enables a processor to determine the first user's location with respect to a route path based on the received first user location data, and fourth computer readable program code that enables a processor to initiate a visual display on a remotely located second user's client computer system while the first user is engaged in the physical activity, wherein the visual display includes performance related content that is based on the first user performance data, and wherein the visual display further includes an indication of the first user's location with respect to the route path.

BRIEF DESCRIPTION OF THE DRAWINGS

The novel features believed characteristic of the invention are set forth in the appended claims. However, the invention, as well as a preferred mode of use, will best be understood by reference to the following detailed description of an illustrative embodiment when read in conjunction with the accompanying drawings, wherein:

FIG. 1 is a schematic diagram of an exemplary environment in which the present invention may be practiced;

FIG. 2A is a schematic block diagram of an illustrative portable fitness device in accordance with the present invention;

FIG. 2B is a layer diagram of an exemplary software configuration of a portable fitness device in accordance with the present invention;

FIG. 3 is a layer diagram of an illustrative software configuration of a server computer system providing an automated web-based route generation, route journaling and route visualization service in accordance with the present invention;

3

FIG. 4A depicts an exemplary graphical user interface of a route wizard through which a remote user may build a route, search for a route within a route database, and select routes within a predetermined training plan;

FIG. 4B illustrates an exemplary route wizard graphical user interface through which a user may enter parameters and attributes of a new route;

FIG. 4C depicts an exemplary route wizard graphical user interface through which a user may search a route database for an existing route;

FIG. 4D illustrates an exemplary route wizard graphical user interface that presents a navigable geographical map populated with graphical indications of locations for which preexisting maps are stored within the route database;

FIG. 4E depicts an exemplary route wizard graphical user interface within which a user may identify a selected route for detailed viewing;

FIG. 4F depicts an exemplary route wizard graphical user interface that presents a detailed description of a route and permits the user to upload the route to a portable fitness device;

FIG. 5A illustrates an exemplary graphical user interface of a training journal through which a user may view routes traversed with a portable fitness device in accordance with the present invention;

FIG. 5B depicts an exemplary graphical user interface of a training journal entry detailing a particular route traversed with a portable fitness device in accordance with the present invention; and

FIG. 5C illustrates an exemplary graphical user interface of a training journal entry showing a route view in which multiple route and/or performance parameters are concurrently graphically presented in a banded format along a route path.

DETAILED DESCRIPTION OF ILLUSTRATIVE EMBODIMENT

With reference now to the figures, and in particular with reference to FIG. 1, there is depicted an exemplary embodiment of an environment in which the methods, systems, and program products of the present invention may advantageously be practiced. In particular, FIG. 1 illustrates an environment 10 in which a location-aware portable fitness device 12 is utilized by an athlete 14 while engaged in a fitness activity, such as running, cycling, hiking, skiing, etc.

As shown, environment 10 includes a constellation of earth-orbiting global positioning system (GPS) satellites 20. As is known in the art, GPS satellites 20 continuously emit GPS signals 22, which enable GPS-equipped devices, such as portable fitness device 12, to continuously determine their position, velocity, and bearing as long as a sufficient number of GPS satellites 20 can be acquired.

Environment 10 further includes a wireless wide-area network (WAN) communication system including a plurality of geographically distributed cellular telephone towers 30 and base station systems (BSS) 32 (only one of each is illustrated for simplicity). Cellular telephone tower 30 includes one or more antennae 34 supporting long range two-way radio frequency communication with mobile telephones and other wireless devices, such as portable fitness device 12. The radio frequency communication between antennae 34 and portable fitness device 12 may utilize radio frequency signals 36 conforming to any known or future developed wireless protocol, for example, CDMA, GSM, EDGE, 3G, etc. The information transmitted over-the-air by BSS 32 and cellular communication tower 30 to portable fitness device 12 may be further transmitted to or received from one or more additional circuit-

4

switched or packet-switched communication networks, including, for example, the Internet 40.

As is well known to those skilled in the art, Internet 40 is a worldwide collection of servers, routers, switches and transmission lines that employ the Internet Protocol (IP) to communicate data. For example, Internet 40 may be employed to communicate data between any of server computer system 42, client computer system 44, and portable fitness device 12. For example, as described further below, Internet 40 may be utilized to communicate to portable fitness device 12 route information from a route database 52 stored within data storage 50 associated with server computer system 42. Similarly, portable fitness device 12 may transmit route and performance information to server computer system 42 for storage in training journal database 54 via Internet 40, BSS 32, and cellular communication tower 30. In addition, a user stationed at a remote client computer system 44, for example, athlete 14 or a remote trainer, may access real-time or historical performance information regarding the training of athlete 14 via server computer system 42 and Internet 40.

Referring now to FIG. 2A, there is illustrated a high-level block diagram of an exemplary implementation of portable training device 12 in accordance with the present invention. As illustrated, portable training device 12 includes a central processing unit (CPU) 60 that controls the operation of portable fitness device 12 in accordance with client software 154 described further below with respect to FIG. 2B. As shown, CPU 60 is coupled, either directly or indirectly to a variety of different components within portable fitness device 12. For example, portable fitness device 12 includes an internal memory device 62 for storing the client software, as well as various route, performance and environmental information regarding a training activity of athlete 14. The storage provided by internal memory device 62 may be further augmented by a removable storage medium inserted within removable memory slot 64 and/or dedicated audio storage 66 for storing audio data. The audio data may include, for example, music tracks encoded in MP3 format, synthesized human speech tracks, voice annotations by athlete 14 recorded via an internal or external microphone 68, as well as other audio data.

In addition to microphone 68, portable fitness device 12 may include a number of other input/output (I/O) devices. For example, portable fitness device 12 may include one or more manually manipulable input buttons 80 that permit athlete 14 to annotate a route while athlete 14 is traversing the route and/or to enter desired settings of portable fitness device 12. Portable fitness device 12 may also include a speaker 82 and display 84 through which portable fitness device 12 may present real-time performance information (e.g., elapsed distance, elapsed time, pace, distance to go, heart rate, etc.), turn-by-turn directions, real-time remote training recommendations, and other information in either an audio or visual format.

Portable fitness device 12 is equipped with a power supply 90 that powers CPU 60 and the other components of portable fitness device 12. Power supply 90 includes a battery and may further have an associated power port 92 through which the battery may be charged from an AC power source. Alternatively, the battery within power supply 90 may be charged utilizing a wireless inductive charging device, as is known in the art.

Portable fitness device 12 further includes a GPS receiver 100 and associated GPS antenna 102 that receive GPS signals 22 from GPS satellites 20. GPS receiver 100 processes GPS signals 22 to present to CPU 60 time-stamped waypoints, which include at least a time, a latitude, and a longitude. If at

5

least four GPS satellites **20** have been acquired, the time-stamped waypoints presented to CPU **60** by GPS receiver **100** preferably further include an elevation. As discussed further below, the time and position information supplied by GPS receiver **100** is utilized by client software **154** running on CPU **60** to build a record of a route traversed by athlete **14** and to determine performance information (e.g., elapsed distance, elapsed time, pace, distance to go, heart rate, etc.) regarding the athlete's traversal of the route.

Portable training device **12** supports two-way wireless WAN communication with cellular telephone tower **30** with WAN wireless transceiver **104** and its associated antenna **106**. As known to those skilled in the art, WAN wireless transceiver **104** includes a receiver for receiving radio frequency signals **36** and a transmitter for transmitting radio frequency signals **36**. As discussed in greater detail below, radio frequency signals **36** may include route information transmitted to portable fitness device **12**, route and performance information transmitted from portable fitness device **12**, settings for portable fitness device **12**, and one or two-way voice communication (e.g., a voice conversation between athlete **14** and a remote trainer stationed at remote client computer **44**). The data sent and received by WAN wireless transceiver **104** may alternatively be communicated via an optional data port **108**, which may employ short range wired or wireless communication (e.g., RS-232 or infrared).

In order to support communication with other electronics within close range, portable fitness device **12** may be further equipped with one or more local wireless interface(s) **110** and associated antennae **112**. For example, local wireless interface(s) may include interfaces for 802.11x, Bluetooth, 900 mHz communication or the like. Utilizing such technologies, portable fitness device **12** may communicate with or sense data from a heart rate monitor **120**, headphones **122**, shoes **124**, and a watch **126** worn by athlete **14** during a fitness activity. In this manner, portable fitness device **12** may gather information regarding athlete **14**, such as his/her heart rate and body temperature, and if the athlete's shoes **124** are equipped with an RFID tag, the shoes **124** worn during the fitness activity. Portable fitness device **12** may similarly present to the user performance, directional and training information via watch **126** and headphones **122**.

Of course, in alternative embodiments, portable fitness device **12** may sense or communicate with particular devices utilizing wired or wireless interfaces. For example, microphone **68** may alternatively be incorporated within wireless headphones **122**, and heart rate monitor **120** may alternatively be coupled to CPU **60** via a wired interface. Thus, those skilled in the art will appreciate from the block diagram provided in FIG. 2A, that any number of internal or external devices and sensors, such as temperature and barometric pressure sensor **130**, may be coupled to CPU **60** via either wired or wireless interfaces. In this manner, client software running on CPU **60** may associate with the time and position information provided by GPS receiver **100** various data of interest regarding athlete **14**, his/her environment and the route being traversed. The data may be stored locally by portable fitness device **12**, for example, within internal memory device **62**, or transmitted over-the-air by WAN wireless transceiver **104**, possibly in real time.

With reference now to FIG. 2B, there is illustrated a layer diagram of an exemplary software configuration of portable fitness device **12** in accordance with one embodiment of the present invention. As illustrated, the software configuration of portable fitness device **12** includes at a lowest level an operating system (OS) **150** that provides a collection of services, such as thread scheduling, memory management, inter-

6

rupts, etc., that may be accessed by higher-level software. Running on top of operating system **150** is a runtime environment **152**, such as one of the JAVA or BREW runtime environments. Finally, the software configuration of portable fitness device **12** includes a portable fitness device client **154** running on top of runtime environment **152**. Portable fitness device client **154** may be downloaded to portable fitness device **12** over-the-air, for example, via the wireless WAN and WAN wireless transceiver **104**.

As illustrated, portable fitness device client **154** comprises a number of individual modules, each performing a function of portable fitness device **12**. Those skilled in the art will appreciate that the illustrated modules are illustrative rather than exhaustive, and that portable fitness device client **154** may include additional or alternative modules to support or extend the functionality of portable fitness device **12**.

As shown in FIG. 2B, the modules within portable fitness device client **154** preferably include a number of reader modules **160-166**. GPS reader **160** receives from GPS receiver **100** time-stamped waypoints including at least time, latitude and longitude information, and, depending upon implementation and the number of GPS satellites **20** from which GPS signals **22** were received, elevation and error information. Utilizing the time-stamped waypoints received from GPS receiver **100**, GPS reader **160** calculates performance and route information for athlete **14**. For example, GPS reader **160** may determine the start time at which a route was begun, an elapsed time, an elapsed distance, distance remaining in the route, elevation change, average elevation, current pace, average pace, bearing, etc.

The remainder of readers **160-166**, for example, heart rate reader **162** and annotation reader **164**, similarly obtain input data and associate the input data with a corresponding time-stamped waypoint obtained by GPS reader **160**. Readers **162-166** may also perform additional calculations to determine instantaneous, differential or cumulative quantitative characterizations of the route, the performance of athlete **14** or of his/her environment. Thus, for example, heart rate reader **162** may obtain an instantaneous heart rate reading from heart rate monitor **120**, associate that heart rate reading with the time-stamped waypoint obtained by GPS reader **160**, and calculate an average heart rate. Similarly, annotation reader **164** may store a route annotation entered by athlete **14** via input buttons **80** or microphone **18** with a time-stamped waypoint obtained by GPS reader **160**.

The data gathered and calculated by readers **160-166** are then parsed and formatted by formatter **170** into a predetermined data format that associates the performance and route data with a timestamp and geographical location. The particular data format employed by data formatter **170** is implementation-dependent, but is preferably compact to conserve the capacity of internal memory device **62** and the bandwidth of the communication link between portable training device **12** and the wireless WAN. Storage capacity and wireless communication bandwidth may further be conserved by applying a data compressor **172** to the formatted data produced by data formatter **170**.

After data obtained and calculated by readers **160-166** have been formatted by data formatter **170** and optionally compressed by data compressor **172**, the data are either stored within internal memory device **62** (or audio storage **66** or a removal memory loaded in removable memory slot **64**) or are transmitted over-the-air via WAN wireless transceiver **104**. Upload manager **174** and route and performance recorder **176** determine whether or not to upload and/or store data locally based upon one or more criteria, for example, whether WAN wireless transceiver **104** can acquire a connection to the wire-

less WAN, the available storage within internal memory device 62, an indication of whether or not a remote user is tracking the training of athlete 14 in real-time, and/or other criteria. If, based upon these and/or other criteria, upload manager 174 decides to upload the formatted and compressed data, upload manager 174 outputs the data via WAN wireless transceiver 104 and antenna 106 to client computer system 44 and/or server computer system 42 utilizing radio frequency signals 36. Data transmitted to client computer system 44 is typically graphically presented within a display device, and data transmitted to server computer system 42 is typically stored within training journal database 54.

As noted above, portable training device 12 may alternatively receive data over-the-air from the wireless WAN. In a preferred embodiment, the data received over-the-air from the wireless WAN may include route information transmitted by server computer system 42 from route database 52, settings of portable fitness device 12 transmitted by server computer system 42 or client computer system 44, and training recommendations transmitted from server computer system 42 or client computer system 44. Route information, which may be identified as such, for example, by an XML header, is received, processed and stored by route storage manager 182. The route information may be, for example, turn-by-turn directions keyed to particular geographical areas defined by a latitude and longitude range duple. By storing route information in this format, when GPS reader 160 obtains a time-stamped waypoint falling within a particular geographic area defined by a latitude and longitude range duple, audio presentation module 192 can present an audible instruction to athlete 14 via speaker 82 and/or headphones 122 to direct athlete 14 how to traverse a desired route.

Settings data, which may be identified as such, for example, by an XML header, is initially received, processed, and output by data decompressor 180 is then subsequently processed by settings manager 184. For example, settings manager 184 may utilize settings data to update storage locations within internal memory device 62 governing particular aspects of the operation of portable training device 12. In addition, based upon the received settings, settings manager 184 may notify upload manager 174 or route and performance recorder 176 to initiate upload or storage of route and performance information.

Training recommendations received, processed and output by data decompressor 180 are subsequently processed by training input manager 186. These training recommendations preferably take the form of either voice data communicated by a human trainer utilizing, for example, a voice-over-IP (VoIP) connection to portable training device 12, or a predetermined data command representing an audio message. In the former case, training input manager 186 exports the audio data directly to audio presentation module 192, which, in turn, directly presents the audio data to athlete 14 via headphones 122 and/or speaker 82. If, however, the training recommendation takes the form of a data command representing an audio message, training input manager 186 locates an audio track within audio storage 66 or internal memory device 62 corresponding to the data command and presents the audio track to audio presentation module 192 for subsequent presentation to athlete 14. In this manner, a remote trainer, who may be stationed at client computer system 44, may provide training recommendations directly to athlete 14 in substantially real-time. And, if portable training device 12 is equipped with a microphone 68, athlete 14 may similarly communicate audibly with the remote trainer (e.g., via VoIP) through the execution of annotation reader 164 data formatter 170, data compressor 172 and upload manager 174.

Audio presentation module 192 is also preferably equipped to present, in audio format, turn-by-turn directions correcting the course of an athlete 14 to return to a route if a turn is missed, as well as turn-by-turn directions providing the most direct return path to the starting point. Such turn-by-turn directions are preferably computed by server computer system 42 based upon real time location information received over-the-air from portable fitness device 12 and then transmitted to portable fitness device 12, again utilizing over-the-air communication via the wireless WAN. Audio presentation module 192 may also be utilized to decode and present audio entertainment tracks, such as the MP3 files stored within audio storage 66.

As further depicted in FIG. 2B, portable fitness device client 154 includes a visual presentation module 190 that manages the presentation of route, performance and environmental information to athlete 14 via optional display 84 and/or the display of watch 126. It should be noted, however, that it is presently preferred to present data of all types to athlete 14 during the course of a fitness activity in audio format so that the concentration and attention of athlete 14 is not diverted from training efforts.

Finally, route publication manager 194 of portable fitness device client 154 supports the sharing of routes between multiple portable fitness devices 12, for example, utilizing the local wireless interface 110, WAN wireless transceiver 104, or data port 108. In this manner, an athlete 14 can directly share selected routes (e.g., as identified utilizing input buttons 80) to other athletes having compatible portable fitness devices 12.

Referring now to FIG. 3, there is depicted a layer diagram of an exemplary software configuration of server computer system 42 of FIG. 1 that, in accordance with the present invention, provides an automated web-based route generation, route journaling and route visualization service. The service may be restricted to users that have been issued login IDs and passwords, and may further be offered in exchange for a subscription fee.

As shown, at the lowest layer the software configuration of server computer system 42 includes an operating system (OS) 210, which is preferably one of the commercially available operating systems, such as Windows, UNIX, LINUX, AIX, etc. OS 210 has an associated application programming interface (API) 212 through which middleware and application programs may access the services of OS 210.

Running on top of OS 210 is a hypertext transport protocol (HTTP) server 214, which, as is well known in the art, communicates data over Internet 40 utilizing HTTP. In particular, HTTP server 214 supports data communication with portable fitness device 12 and one or more remote client computers 44 utilizing HTTP. Communication with server computer system 42 may alternatively or additionally be conducted utilizing a sockets layer interface or other lower layer protocol running over IP.

In addition to HTTP server 214, the application software of server computer system 42 includes a number of different modules supporting the client-side functionality provided by portable fitness device client 154. In the depicted embodiment, these modules include a route generation and publication module 220, a data recorder module 226, and a visualization module 230. Those skilled in the art will again appreciate that alternative or additional modules may be implemented within server computer system 42 in order to provide or extend the described or additional functionality.

Route generation and publication module 220 generates routes to be traversed by athletes 14 during fitness activities, stores the routes within route database 52 (FIG. 1) for subse-

quent access, and downloads the routes to portable fitness devices **12**. In a preferred embodiment, route generation and publication module **220** includes a route wizard **222**, which, as described below with respect to FIG. 4A-4F, guides a user through a step-by-step process for generating routes having desired parameters and attributes. As shown in FIG. 3, route generation and publication module **220** preferably accesses a local or remote map database **224** that stores street and/or trail information in association with at least latitude and longitude information, and preferably elevation information. Thus, given at least one terminal point (e.g., a starting point), route generation and publication module **220** is able to construct one or more routes having a desired length, elevation profile, and other parameters and attributes. Routes generated by route generation and publication module **220** are stored for subsequent access within route database **52**.

Once a particular route is scheduled by an athlete **14** as discussed further below, route generation and publication module **220** transforms the route into a sequence of turn-by-turn instructions and publishes the route to a portable fitness device **12** via HTTP server **214** and the wireless WAN. Because route generation and publication module **220** can obtain elevation information along a desired route directly from map database **224**, route generation and publication module **220** is also able to advantageously supply, in conjunction with a route, elevation information for the route. In this manner, the elevation information supplied by route generation and publication module **220** can assist or replace the elevation information provided by GPS receiver **100**. Thus, if less than four GPS satellites **20** are acquired, or if GPS receiver **100** is not designed to process elevation information, portable fitness device **12** can still determine elevation-dependent route and performance data regarding a route traversed by athlete **14**.

Data recorder module **226** receives route and performance information from portable training device **12** via the wireless WAN and/or local wireless interface **110** and/or data port **108** and utilizes such data to build a virtual training journal for athlete **14** within training journal database **54**. As noted previously, depending upon the operation of the upload manager **174** and route and performance recorder **176** within portable fitness device client **154**, data recorder module **226** can build a journal entry describing the traversal of a particular route in substantially real time (i.e., during traversal of the route). Data recorder module **226** also preferably supports an interface through which a route recorded by data recorder module **226** can be exported to route database **52** for subsequent viewing, selection and scheduling within a user's training journal.

The exemplary software configuration of server computer system **42** finally includes visualization module **230**. Visualization module **230** supports one or more interfaces through which users of remote client computer systems **44** can view and/or annotate the data recorded within training journal database **54** by data recorder module **226**. In the depicted embodiment, visualization module **230** includes training journal interface **232**, which, as described in detail below, permits an athlete **14** to view and/or annotate a journal entry describing a route traversed during a fitness activity after completion of the route traversal. In a preferred embodiment, visualization module **230** further includes a real-time interface **234** through which a user at a remote client computer system **44** may view, in substantially real time, data logged within training journal database **54** for one or more athletes. Thus, for example, a spectator having access to Internet **40** can view the real-time standings of multiple competitors in a fitness activity, such as a marathon, cycling race, or other

competitive event. Similarly, a remotely located trainer having access to Internet **40** via a client computer **44** can view the progress of one or more athletes **14** engaged in one or more training activities in substantially real time.

Visualization module **230** also preferably includes support for the export of selected journal entries between accounts of different users of the back-end service provided by server computer system **42**. For example, visualization module **230** preferably permits a user to transmit a journal entry representing a traversal of a route via email. In addition, visualization module **230** may permit a user to create a "buddy" account that may be accessed and even annotated by guest users. In this manner, if the services provided by server computer system **42** are provided for a subscription fee, marketing of the service is enhanced by the ability of non-subscribers or subscriber having reduced-cost subscriptions to view journal entries created by exercise partners.

Referring now to FIGS. 4A-4F, there are illustrated a sequence of graphical user interface (GUI) windows presented by route wizard **222** to a user of client computer system **44** by HTTP server **214**. As noted above, route wizard **222** provides a graphical and intuitive interface through which a remote user can automatically build, search for, and/or schedule routes to be traversed during a fitness activity.

In order to access route wizard **222**, a user stationed at a remote client computer system **44** first logs into server computer system **42** via Internet **40** and HTTP server **214**. As is well known to those skilled in the art, the login process typically includes the entry by the remote user of a login ID and password or other authentication information to server computer system **42**, which then authenticates the identity of the user by reference to the user database or the like.

Following the preliminary authentication process, an exemplary embodiment of route wizard **222** first presents a graphical user interface (GUI) window **250** to the user. Within GUI window **250**, the user is prompted to select one of three options **252**, **254** and **256**, which are each associated with a respective one of radio buttons **258a-258c**. Thus, the user is permitted to build a new route (option **252**), search for an existing route within route database **52** (option **254**), and access one or more routes within a pre-packaged training plan (option **256**). After the user has indicated a preference among options **252-256** by selecting one of radio buttons **258a-c** utilizing cursor **262** or a keyboard, the user selects Next button **260** to proceed to the next step.

If the user selected option **256** indicating that the user desires to select a pre-packaged training plan, route wizard **222** may subsequently present the user with one or more additional windows in which a training plan meeting the user's needs and desires is designed. Route wizard **222** then automatically populates the training journal of the user with a schedule of fitness activities that conform to the distance, time and/or other parameters of the training plan. Thereafter, the user may be permitted to build or search for routes within route database **52** as described below with respect to FIGS. 4B-4F in order to fulfill the requirements of the scheduled fitness activities.

Assuming that the user selects option **252** of GUI window **250** in order to build a new route, route wizard **222** next presents to the user the GUI window **270** shown in FIG. 4B. As shown in FIG. 4B, window **270** includes a number of GUI components prompting the user to enter parameters for the new route to be built and, optionally, desired attributes of the route.

Specifically, the user is first prompted in section **272** to designate a starting point of the route (which in this embodiment is also the ending point) by entering a street address or

11

ZIP code or by selecting a route within route database 52 having the desired starting point. Next, the user is prompted in section 274 to enter a desired overall length of the route, specified either by distance or by time. If time is utilized to specify the length of the route, a desired or historical average pace is preferably entered so that a route distance can be computed. In addition to the route parameters collected in sections 272 and 274, GUI window 270 may also prompt the user to enter optional route attributes. In the illustrated embodiment, the optional route attributes include a maximum distance that the route may extend from the starting point, a desired elevation profile of the route, a desired pattern of the route, a desired safety characterization of the route, a desired flow of the route, and whether or not the route may be a pre-existing route stored within route database 52.

Once the user has entered all required parameter and any optional route attributes within GUI window 270, the user selects Next button 280 utilizing cursor 262. In response, route generation and publication module 220 builds one or more routes conforming as closely as possible to the route parameters and route attributes entered through GUI window 270. The presentation of such routes by route wizard 222 is described below with respect to FIG. 4E.

Referring now to FIG. 4C, there is illustrated an exemplary embodiment of a GUI window 300 presented by route wizard 222 to a user of client computer system 44 in response to selection of option 254 in GUI window 250 of FIG. 4A. That is, in response to a user input indicating that the user desires to search for a pre-existing route within route database 52, route wizard 222 prompts the user through GUI window 300 to enter parameters and attributes of routes of interest to the user.

In the depicted embodiment, GUI window 300 includes two modalities by which the user may specify parameters for the route. In particular, in section 302, the user is permitted to specify a location of the route by ZIP code or city name. Alternatively, as represented by button 304, the user may specify a geographic location of the route or routes to be located by the search through a map interface. For example, if the user selects button 304 utilizing cursor 262, route wizard 222 may present window 320 of FIG. 4D, which is described below.

Still referring to FIG. 4C, in section 306 of GUI window 300, the user is permitted to input into route wizard 222 desired attributes of the route to be located through the search of route database 52. For example, in the illustrated embodiment, the route attributes include a range of route distance, an elevation profile, a route pattern, a route safety profile, a route flow, and amenities adjacent to the route. After the user has successfully entered a route location and any desired route attributes, the user may select Next button 308 utilizing cursor 262 to invoke a search of route database 52 by route generation and publication module 220 to locate one or more routes, if any, characterized by the desired route location and any route attributes. Assuming route generation and publication module 220 locates one or more routes of interest within route database 52, route wizard 222 presents the routes to the user through an interface such as that depicted in FIG. 4E, which is described below.

Referring now to FIG. 4D, there is illustrated an exemplary GUI window 320 in which route wizard 222 presents a navigable geographical map populated with graphical indications of locations for which preexisting routes are stored within the route database 52. In the depicted embodiment, GUI window 320 includes a graphical representation 322 of a geographical area, for example, a political, cultural, or regional boundary. Within geographical representation 322, route wizard 22 pre-

12

sents a number of indicia 324a-h identifying geographic locations of one or more pre-existing routes for which route database 52 stores route data.

In response to the user flying over one of indicia 324 utilizing cursor 262, route wizard 222 displays in a separate window or frame 330 route maps 332-336 of the routes in the geographic location corresponding to the selected indicia 324. Graphical representations 332-336 may be advantageously presented overlaying a street or topographical map within window 330. If the user visually identifies one or more routes of interest at a particular geographical location through visual inspection of indicia 324 and/or the route maps 332-336 displayed within windows 330, the user may select that geographical location by clicking on the associated indicia 324. In this manner, GUI window 320 and its associated functionality provide the user with a graphical and intuitive way of viewing and selecting route locations of interest.

With reference now to FIG. 4E, there is illustrated an exemplary GUI window 350 presented by route wizard 22 in order to permit a user to select from among one or more pre-existing routes that were located within route database 52 or that were built by route generation and publication module 220 in response to the input gathered by route wizard 222 within GUI window 270. As shown, in the depicted embodiment proposed routes that may be selected by the user are presented to the user in the form of route summaries 352a-c. Although such route summaries 352 may take any of a number of formats, in one preferred embodiment, each route summary 352 includes at least a route thumbnail 354 and a route distance 356. The route summary 352 may further include an elevation profile 358, which in the depicted embodiment is illustrated in graphical form, a route rating 360, and one or more audio or textual reviews or links thereto 362.

The user has a number of different navigation options from GUI window 350. First, by clicking on any of route thumbnails 354, the user is next presented with a graphical component through which the user may select or view detailed information regarding the selected route, as described further below with respect to FIG. 4F. Alternatively, the user may utilize cursor 262 to select Next button 370 in order to view one or more additional route summaries 352 of additional routes satisfying the user's route parameters and/or route attributes. In addition, by selecting Back button 372 utilizing cursor 262, the user is presented with one or more of the previously described GUI windows in order to permit the user to modify the route location or other route parameters or attributes.

With reference now to FIG. 4F, there is illustrated an GUI window 380 presented by route wizard 222 to provide a detailed view of a proposed route and an interface through which the user can upload route data to portable training device 12 and schedule traversal of the route. In the illustrative embodiment, window 380 includes a detailed route map 382 indicating the geographical path of the route. Route map 382 includes terminal points 384a, 384b and a route path 386. Route map 382 may optionally further include one or more annotations 388 associated with a route, which may be stored in route database 52 or accessed from map database 224. For example, in FIG. 4F, route diagram 382 contains an annotation 388 indicating a geographical location of a potable water source.

By clicking on route path 386 utilizing cursor 262, the user invokes display by route wizard 222 of a marker 390a, which may then be selectively slid to any desired location along route path 386 utilizing cursor 262. Route wizard 222 preferably displays marker location information 392 in associa-

13

tion with marker **390a** to indicate the geographic location of marker **390** (e.g., the distance between marker **390a** and terminal **384a** along route path **386**). In addition, route wizard **322** preferably displays a corresponding second marker **390b** in association with elevation profile **384**. In this manner, by manipulating either of markers **390a** or **390b** utilizing cursor **262**, the user can visualize the location of particular elevation features or annotations **388**.

As further shown in FIG. 4F, window **380** further includes a rating of the route, which in this case includes between one and four “stars” and an indication of a number of reviews. In addition, window **380** may optionally include a number of written reviews, for example, displayed within text box **402**. The user may navigate to a next review of the route by selecting link **404**.

GUI window **380** of FIG. 4F finally includes an interface through which the user may invoke the upload of route information pertaining to the route currently being viewed to portable training device **12**. In the depicted embodiment, the user can invoke upload of the route information to portable training device **12** by scheduling the route utilizing calendar interface **406**. For example, in order to upload route information pertaining to the illustrated route to portable training device **12**, the user may select a desired date such as Jan. 16, 2004, by clicking on that date within calendar interface **406** utilizing cursor **262**. In response to this input, route generation and publication module **220** enters the route to the athlete’s training journal in training journal database **54** as a prospective event and uploads route information to portable training device **12** via Internet **40** and the wireless WAN. Importantly, in order to conserve data storage capacity within portable training device **12**, the upload by route generation and publication module **220** is preferably deferred until a selectable time interval of the scheduled date. In this manner, route information is provided to portable training device **12** automatically and as needed.

Referring now to FIGS. 5A-C, there are illustrated a series of GUI windows presented by training journal interface **232** of visualization module **230** of server computer system **42** to permit a user to view, annotate and share training journal entries created utilizing data received over-the-air from portable fitness device **12**. In order to access training journal interface **232**, a user stationed at a remote client computer system **44** first logs into server computer system **42** via Internet **40** and HTTP server **214**. As is well known to those skilled in the art, the login process typically includes the entry by the remote user of a login ID and password or other authentication information to server computer system **42**, which then authenticates the identity of the user by reference to the user database or the like.

Following the preliminary authentication process, training journal interface **232** of visualization module **230** presents GUI window **420** to the remote user via HTTP server **214** and Internet **40**. As illustrated, GUI window **420** includes a calendar interface **424** through which the user can select a past, current or future calendar month of interest utilizing cursor **262**. An associated list box **422** presents for selection dates within the selected calendar month having journal entries within training journal database **54** for the specified login ID. Thus, by navigating utilizing cursor **262**, the user can select for viewing journal entries detailing past or real-time routes previously traversed or currently being traversed by an athlete **14**, or prospective routes scheduled for the athlete **14**.

Assuming that the user selects a past journal entry within training journal database **54** from list box **422**, training journal interface **232** presents GUI window **440** of FIG. 5B, again utilizing HTTP serve **214**. As shown, the journal entry pre-

14

sented by training journal interface **232** within GUI window **440** provides detailed information regarding a route previously traversed by athlete **14**, the athlete’s performance, environmental conditions, as well as the athlete’s personal comments and annotations.

In particular, the training journal entry presented within GUI window **440** includes a route map **442** having terminal points **444a-b** and a route path **446** showing the geographical path traversed by the route. As discussed above, route map **442** may advantageously be presented as an overlay of a trail or street map retrieved from map database **224**.

The overall performance of athlete **14**, in traversing the route depicted in route map **442**, is preferably summarized in a performance summary sect **476**. As indicated, performance summary section **476** may indicate the route distance, total elapsed time, average pace, average heart rate of athlete **14**, as well as other route and performance information. Weather conditions at the time and geographical location at which athlete **14** traversed the route may optionally be presented in a weather condition section **478**. For example, weather condition section **478** may specify the temperature, wind speed and direction, humidity, and precipitation. The weather condition information presented within weather condition section **478** may advantageously be accessed by visualization module **230** from any of the multiple publicly accessible weather databases available via Internet **40**.

The user may interact with route map **442** in a number of ways. For example, the user may annotate route map **442** by dragging any of icons **460a-f** to a selected location along route path **446** utilizing cursor **262**. For example, in the illustrated embodiment, the user is dragging an annotation **454** representing a potable water source onto route map **442**. The user may alternatively drag callout box icon **462** onto route map **442** in order to enter a textual annotation.

In addition, in response to clicking on route path **446** utilizing cursor **262**, training journal interface **232** displays one or more markers **450a**, **452a** along route path **446**, preferably in association with one or more items of route or performance information (e.g., a distance) for the geographical location identified by the marker **450a**, **452a**. By adding markers **450a**, **452a** in this manner, the user can graphically and intuitively ascertain the geographical location of features of interest and performance and route information at selected locations along route path **446**. Training journal interface **232** may alternatively or additionally present route and performance information for a selected geographical location in response to the user causing cursor **262** to “fly over” the corresponding location on route path **446**.

In association with route map **442**, training journal interface **232** preferably presents other performance information, route information, and/or environmental information in graphical format. For example, in the depicted embodiment, training journal interface **232** presents an elevation profile **472a**, a heart rate profile **472b**, and a pace profile **472c** in association with route map **442**. When the user adds markers **450a**, **452a** to route path **446**, training journal interface **232** automatically presents corresponding markers **450b-d** and **452b-d** at corresponding locations along graphical profiles **472a-c**. As discussed above, all of markers **450** and all of markers **452** are synchronized so that movement of any of markers **450** moves all of markers **450** movement of any of markers **452** moves all of markers **452**. In this manner, the user is able to graphically and intuitively define an interval over which performance, route and/or environmental information may be viewed. For example, in the depicted embodiment, interval information is depicted in interval section **474**, which informs the user of the interval distance, time taken by

15

the athlete to traverse the route interval, average pace over the route interval and average heart rate over the route interval.

Of course, the particular types of route, performance and environmental information shown in FIG. 5B are not exhaustive and other types of route, performance, and environmental information may be captured in association with the traversal of a route. If additional route, performance or environmental information is captured in association with the route, that information is preferably presented in a profile 472, within interval section 474, and/or within overall performance section 476 in like manner. For example, GUI window 440 may present information regarding what pair of shoes 24 the athlete was wearing during the fitness activity, together with a lifetime mileage total for that specific pair of shoes 24.

In a preferred embodiment of the present invention, the user may alternatively or additionally view route, performance and environmental information regarding a previously traversed route in an overlay view in which a graphical representation of the route, performance and/or environmental information is depicted along route path 446. For example, in the illustrated embodiment, in response to user selection of overlay view button 480 utilizing cursor 262, training journal interface 232 presents route map 500 of FIG. 5C in place of route map 442 of FIG. 5B.

Like route map 442, route map 500 includes terminal points 502a and 502b defining the starting and ending points of a route path 504. In contrast to route map 442, however, route path 504 of route map 500 comprises a plurality of bands 504a-c, each of which represents a respective route, performance or environmental parameter quantified at the waypoints recorded along the route. The value of the respective route, performance or environmental parameter is preferably charted along route path 504 utilizing gray scale or color shade variation to represent the instantaneous quantity of the route, performance or environmental parameter at each point along the route. Thus, in FIG. 5C, the different hatching applied to each of bands 504a-504c represents a different color and a varying spacing between the hatches represents the display of the colors at varying levels of intensity along the route path, depending upon the value of the parameters at each point along the path. The value associated with each shade of color or each level of gray scale is generally graphically represented in an accompanying legend 506. Training journal interface 232 preferably further presents instantaneous route and performance data at any point along the route path in response to a flyover of cursor 262 or in response to the user adding markers 508, 510 to the route path, as described above. For example, in association with the display of marker 508, training journal interface 232 displays information regarding the traversed distance, relative elevation, heart rate and pace associated with a distance 1.4 miles from the beginning of the route.

Returning to FIG. 5B, in addition to supporting user annotation of route maps 442 and 500, GUI window 440 preferably permits the user to enter additional information regarding environmental and route conditions and personal thoughts. For example, GUI window 440 includes a route condition section 482 that permits the user to record the surface and traffic conditions observed along the route, as well as a text box 484 in which the user may enter personal reflections about the training activity.

Finally, GUI window 440 preferably includes a GUI component that permits the user to review and/or rate the route. For example, in the exemplary embodiment, GUI window 440 contains a second text box 492 in which the user can compose a review of the route and a ratings section 494 in which the user can award the route between one and four

16

“stars”. After the route has been reviewed and/or rated, the user can select Publish button 496, which causes training journal interface 232 to store the review and rating within route database 52 in association with the route. In this manner, the review and rating are available for access by other users through route wizard 222, as described above.

Training journal interface 232 preferably permits a user to view prospective routes that have been scheduled utilizing a similar interface to that illustrated in FIG. 5B. In particular, in response to a user selecting a journal entry for a future date within list box 422 of FIG. 5A, training journal interface 232 presents a journal entry containing a route map 442 of the prospective training activity as shown in FIG. 5B. Of course, the journal entry will not contain any performance information (e.g., time, pace, heart rate, etc.) because the athlete 14 has not yet traversed the route.

Training journal interface 232 also preferably permits a user to view routes currently being traversed in substantially real time through an interface similar to that depicted in FIG. 5B. In this case, training journal interface 232 presents a journal entry containing a route map 442 and a marker 450a showing the athlete's current location with respect to route path 446. In addition, training journal interface 232 may present a summary section 476 summarizing the athlete's performance to the current position, a weather condition section 478, an interval section 474, and one or more graphical profiles 472. In this manner, a remote trainer or spectator stationed at a client computer system 44 may track an athlete's performance information, route information and environmental information in substantially real time.

If a user stationed at a client computer system 44 desires to view a substantially real time view of the activities of multiple athletes traversing a common route, the user preferably logs into real-time interface 234 through HTTP server 214. Assuming the user has the appropriate subscription and/or permissions, real-time interface 234 builds from the training journals of multiple athletes a web page containing a single route map on which multiple markers, each representing a respective athlete, are presented. The web page may further present separate performance and route information for each athlete. In this manner, a remote trainer or spectator stationed at a client computer system 44 may track performance information, route information and environmental information in substantially real time for multiple athletes traversing the same or substantially the same route.

While the invention has been particularly shown as described with reference to a preferred embodiment, it will be understood by those skilled in the art that various changes in form and detail may be made therein without departing from the spirit and scope of the invention. For example, it will be appreciated that the concepts disclosed herein may be extended or modified to apply to other types of configuration entities having different rules than the particular exemplary embodiments disclosed herein. In addition, although aspects of the present invention have been described with respect to a computer system executing software that directs the functions of the present invention, it should be understood that present invention may alternatively be implemented as a program product for use with a data processing system. Programs defining the functions of the present invention can be delivered to a data processing system via a variety of signal-bearing media, which include, without limitation, non-rewritable storage media (e.g., CD-ROM), rewritable storage media (e.g., a floppy diskette or hard disk drive), and communication media, such as digital and analog networks. It should be understood, therefore, that such signal-bearing media, when carrying or encoding computer readable instructions that

17

direct the functions of the present invention, represent alternative embodiments of the present invention.

In addition, while the present invention has been described with respect to an exemplary software configuration in which software performing certain functions of the present invention resides on a server computer system of a service provider (e.g., of a subscription service), those skilled in the art will appreciate that, in alternative embodiments, such software may alternatively reside on a client computer system, such as client computer system 44, and/or on portable fitness device 12.

Furthermore, while the present invention has been described with reference to tracking and visualizing the performance and/or route of an athlete, those skilled in the art will appreciate that the present invention may also be applied to tracking and visualizing the location and movement of other persons, such as children or criminals under electronic supervision, or objects.

What is claimed is:

1. A method for execution by a server computer system of providing information about a first user engaged in a physical activity with a portable fitness device, the method comprising:

receiving first user location data from the portable fitness device via a wide-area wireless network while the first user is engaged in the physical activity;

receiving first user performance data from the portable fitness device via a wide-area wireless network while the first user is engaged in the physical activity;

determining the first user's location with respect to a route path based on the received first user location data; and initiating a visual display on a remotely located second user's client computer system while the first user is engaged in the physical activity,

wherein the visual display includes performance related content that is based on the first user performance data, and

wherein the visual display further includes an indication of the first user's location with respect to the route path.

2. The method of claim 1, further comprising the step of: transmitting to the portable fitness device via the wide-area wireless network an indication of whether or not the remotely located second user is monitoring the first user.

3. The method of claim 1, wherein the first user performance data comprises speed, pace, elapsed distance, elapsed time, distance to go, heart rate, or elevation data, or a combination thereof.

4. The method of claim 1, further comprising the steps of: receiving from the second user's client computer system a training recommendation; and

transmitting the training recommendation to the portable fitness device via the wide-area wireless network while the first user is engaged in the physical activity.

5. The method of claim 1, further comprising the step of: transmitting to the portable fitness device via the wide-area wireless network an instruction for the first user to change their directional heading while the first user is engaged in the physical activity.

6. The method of claim 1, wherein a third user is engaged in a physical activity with a second portable fitness device, further comprising the step of:

receiving third user location data from a second portable fitness device via a wide-area wireless network while the third user is engaged in the physical activity;

receiving third user performance data from the second portable fitness device via a wide-area wireless network while the third user is engaged in the physical activity;

18

determining the third user's location with respect to a route path based on the received third user location data; and initiating a visual display on a remotely located second user's client computer system while the third user is engaged in the physical activity,

wherein the visual display includes performance related content that is based on the third user performance data, and

wherein the visual display further includes an indication of the third user's location with respect to the route path.

7. The method of claim 6, wherein the indication of the third user's location with respect to the route path simultaneously includes indications of the third user's location at the first time and at a second time subsequent to the first time.

8. The method of claim 1, wherein the client computer system is a desktop computer.

9. The method of claim 1, wherein the indication of the first user's location with respect to the route path simultaneously includes indications of the first user's location at the first time and at a second time subsequent to the first time.

10. The method of claim 1, further comprising the step of: determining weather condition information while the user is engaged in the physical activity,

wherein the visual display further includes the weather condition information.

11. A computer program product comprising computer-useable medium having computer program logic recorded thereon that, when executed by one or more processors of a server computer system, provides information about a first user engaged in a physical activity with the portable fitness device, the computer program logic comprising:

first computer readable program code that enables a processor to receive first user location data from the portable fitness device via a wide-area wireless network while the first user is engaged in the physical activity;

second computer readable program code that enables a processor to receive first user performance data from the portable fitness device via a wide-area wireless network while the first user is engaged in the physical activity;

third computer readable program code that enables a processor to determine the first user's location with respect to a route path based on the received first user location data; and

fourth computer readable program code that enables a processor to initiate a visual display on a remotely located second user's client computer system while the first user is engaged in the physical activity,

wherein the visual display includes performance related content that is based on the first user performance data, and

wherein the visual display further includes an indication of the first user's location with respect to the route path.

12. The computer program product of claim 10, further comprising:

fifth computer readable program code that enables a processor to transmit to the portable fitness device via the wide-area wireless network an indication of whether or not the remotely located second user is monitoring the first user.

13. The computer program product of claim 10, wherein the first user performance data comprises speed, pace, elapsed distance, elapsed time, distance to go, heart rate, or elevation data, or a combination thereof.

19

14. The computer program product of claim 10, further comprising:

fifth computer readable program code that enables a processor to receive from the second user's client computer system a training recommendation; and

sixth computer readable program code that enables a processor to transmit the training recommendation to the portable fitness device via the wide-area wireless network while the first user is engaged in the physical activity.

15. The computer program product of claim 10, further comprising:

fifth computer readable program code that enables a processor to transmit to the portable fitness device via the wide-area wireless network an instruction for the first user to change their directional heading while the first user is engaged in the physical activity.

16. The computer program product of claim 10, wherein a third user is engaged in a physical activity with a second portable fitness device, further comprising:

fifth computer readable program code that enables a processor to receive third user location data from a second portable fitness device via a wide-area wireless network while the third user is engaged in the physical activity;

sixth computer readable program code that enables a processor to receive third user performance data from the second portable fitness device via a wide-area wireless network while the third user is engaged in the physical activity;

seventh computer readable program code that enables a processor to determine the third user's location with respect to a route path based on the received third user location data; and

20

eighth computer readable program code that enables a processor to initiate a visual display on a remotely located second user's client computer system while the third user is engaged in the physical activity,

wherein the visual display includes performance related content that is based on the third user performance data, and

wherein the visual display further includes an indication of the third user's location with respect to the route path.

17. The computer program product of claim 16, wherein the indication of the third user's location with respect to the route path simultaneously includes indications of the third user's location at the first time and at a second time subsequent to the first time.

18. The computer program product of claim 10, wherein the client computer system is a desktop computer.

19. The computer program product of claim 10, wherein the indication of the first user's location with respect to the route path simultaneously includes indications of the user's location at the first time and at a second time subsequent to the first time.

20. The computer program product of claim 10, further comprising:

fifth computer readable program code that enables a processor to determine weather condition information while the user is engaged in the physical activity, wherein the visual display further includes the weather condition information.

* * * * *