



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NUMBER	FILING or 371(c) DATE	GRP ART UNIT	FIL FEE REC'D	ATTY. DOCKET NO	TOT CLAIMS	IND CLAIMS
61/392,242	10/12/2010		220	H0024680-4511		

CONFIRMATION NO. 2500

91970
HONEYWELL/FOX ROTHSCHILD
Patent Services
101 Columbia Road
Morristown, NJ 07962

FILING RECEIPT



Date Mailed: 10/22/2010

Receipt is acknowledged of this provisional patent application. It will not be examined for patentability and will become abandoned not later than twelve months after its filing date. Any correspondence concerning the application must include the following identification information: the U.S. APPLICATION NUMBER, FILING DATE, NAME OF APPLICANT, and TITLE OF INVENTION. Fees transmitted by check or draft are subject to collection. Please verify the accuracy of the data presented on this receipt. **If an error is noted on this Filing Receipt, please submit a written request for a Filing Receipt Correction. Please provide a copy of this Filing Receipt with the changes noted thereon. If you received a "Notice to File Missing Parts" for this application, please submit any corrections to this Filing Receipt with your reply to the Notice. When the USPTO processes the reply to the Notice, the USPTO will generate another Filing Receipt incorporating the requested corrections**

Applicant(s)

SELMA BEKTESEVIC, Williamsville, NY;
HSUEH SUNG TUNG, Getzville, NY;
HALUK KOPKALLI, Staten Island, NY;

Power of Attorney:

John Sumner--58699

If Required, Foreign Filing License Granted: 10/20/2010

The country code and number of your priority application, to be used for filing abroad under the Paris Convention, is **US 61/392,242**

Projected Publication Date: None, application is not eligible for pre-grant publication

Non-Publication Request: No

Early Publication Request: No

Title

INTEGRATED PROCESS FOR THE MANUFACTURE OF FLUORINATED OLEFINS

PROTECTING YOUR INVENTION OUTSIDE THE UNITED STATES

Since the rights granted by a U.S. patent extend only throughout the territory of the United States and have no effect in a foreign country, an inventor who wishes patent protection in another country must apply for a patent in a specific country or in regional patent offices. Applicants may wish to consider the filing of an international application under the Patent Cooperation Treaty (PCT). An international (PCT) application generally has the same effect as a regular national patent application in each PCT-member country. The PCT process **simplifies** the filing of patent applications on the same invention in member countries, but **does not result** in a grant of "an international

page 1 of 3

Pet'rs Exhibit 1011
Arkema France v. Honeywell
IPR2015-00916
Page 0000001

patent" and does not eliminate the need of applicants to file additional documents and fees in countries where patent protection is desired.

Almost every country has its own patent law, and a person desiring a patent in a particular country must make an application for patent in that country in accordance with its particular laws. Since the laws of many countries differ in various respects from the patent law of the United States, applicants are advised to seek guidance from specific foreign countries to ensure that patent rights are not lost prematurely.

Applicants also are advised that in the case of inventions made in the United States, the Director of the USPTO must issue a license before applicants can apply for a patent in a foreign country. The filing of a U.S. patent application serves as a request for a foreign filing license. The application's filing receipt contains further information and guidance as to the status of applicant's license for foreign filing.

Applicants may wish to consult the USPTO booklet, "General Information Concerning Patents" (specifically, the section entitled "Treaties and Foreign Patents") for more information on timeframes and deadlines for filing foreign patent applications. The guide is available either by contacting the USPTO Contact Center at 800-786-9199, or it can be viewed on the USPTO website at <http://www.uspto.gov/web/offices/pac/doc/general/index.html>.

For information on preventing theft of your intellectual property (patents, trademarks and copyrights), you may wish to consult the U.S. Government website, <http://www.stopfakes.gov>. Part of a Department of Commerce initiative, this website includes self-help "toolkits" giving innovators guidance on how to protect intellectual property in specific countries such as China, Korea and Mexico. For questions regarding patent enforcement issues, applicants may call the U.S. Government hotline at 1-866-999-HALT (1-866-999-4158).

LICENSE FOR FOREIGN FILING UNDER

Title 35, United States Code, Section 184

Title 37, Code of Federal Regulations, 5.11 & 5.15

GRANTED

The applicant has been granted a license under 35 U.S.C. 184, if the phrase "IF REQUIRED, FOREIGN FILING LICENSE GRANTED" followed by a date appears on this form. Such licenses are issued in all applications where the conditions for issuance of a license have been met, regardless of whether or not a license may be required as set forth in 37 CFR 5.15. The scope and limitations of this license are set forth in 37 CFR 5.15(a) unless an earlier license has been issued under 37 CFR 5.15(b). The license is subject to revocation upon written notification. The date indicated is the effective date of the license, unless an earlier license of similar scope has been granted under 37 CFR 5.13 or 5.14.

This license is to be retained by the licensee and may be used at any time on or after the effective date thereof unless it is revoked. This license is automatically transferred to any related applications(s) filed under 37 CFR 1.53(d). This license is not retroactive.

The grant of a license does not in any way lessen the responsibility of a licensee for the security of the subject matter as imposed by any Government contract or the provisions of existing laws relating to espionage and the national security or the export of technical data. Licensees should apprise themselves of current regulations especially with respect to certain countries, of other agencies, particularly the Office of Defense Trade Controls, Department of State (with respect to Arms, Munitions and Implements of War (22 CFR 121-128)); the Bureau of Industry and

Security, Department of Commerce (15 CFR parts 730-774); the Office of Foreign Assets Control, Department of Treasury (31 CFR Parts 500+) and the Department of Energy.

NOT GRANTED

No license under 35 U.S.C. 184 has been granted at this time, if the phrase "IF REQUIRED, FOREIGN FILING LICENSE GRANTED" DOES NOT appear on this form. Applicant may still petition for a license under 37 CFR 5.12, if a license is desired before the expiration of 6 months from the filing date of the application. If 6 months has lapsed from the filing date of this application and the licensee has not received any indication of a secrecy order under 35 U.S.C. 181, the licensee may foreign file the application pursuant to 37 CFR 5.15(b).

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	H0024680-4511
		Application Number	
Title of Invention	INTEGRATED PROCESS FOR THE MANUFACTURE OF FLUORINATED OLEFINS		
<p>The application data sheet is part of the provisional or nonprovisional application for which it is being submitted. The following form contains the bibliographic data arranged in a format specified by the United States Patent and Trademark Office as outlined in 37 CFR 1.76.</p> <p>This document may be completed electronically and submitted to the Office in electronic format using the Electronic Filing System (EFS) or the document may be printed and included in a paper filed application.</p>			

Secrecy Order 37 CFR 5.2

<input type="checkbox"/>	Portions or all of the application associated with this Application Data Sheet may fall under a Secrecy Order pursuant to 37 CFR 5.2 (Paper filers only. Applications that fall under Secrecy Order may not be filed electronically.)
--------------------------	---

Applicant Information:

Applicant 1						Remove	
Applicant Authority		<input checked="" type="radio"/> Inventor		<input type="radio"/> Legal Representative under 35 U.S.C. 117		<input type="radio"/> Party of Interest under 35 U.S.C. 118	
Prefix	Given Name	Middle Name		Family Name		Suffix	
	SELMA			BEKTESEVIC			
Residence Information (Select One) <input checked="" type="radio"/> US Residency <input type="radio"/> Non US Residency <input type="radio"/> Active US Military Service							
City	Williamsville	State/Province	NY	Country of Residence i		US	
Citizenship under 37 CFR 1.41(b) i		BA					
Mailing Address of Applicant:							
Address 1		770 Maple Road, Apt. 9B					
Address 2							
City	Williamsville	State/Province		NY			
Postal Code	14221	Country i	US				
Applicant 2						Remove	
Applicant Authority		<input checked="" type="radio"/> Inventor		<input type="radio"/> Legal Representative under 35 U.S.C. 117		<input type="radio"/> Party of Interest under 35 U.S.C. 118	
Prefix	Given Name	Middle Name		Family Name		Suffix	
	HSUEH	SUNG		TUNG			
Residence Information (Select One) <input checked="" type="radio"/> US Residency <input type="radio"/> Non US Residency <input type="radio"/> Active US Military Service							
City	Getzville	State/Province	NY	Country of Residence i		US	
Citizenship under 37 CFR 1.41(b) i		US					
Mailing Address of Applicant:							
Address 1		16 Vassar Drive					
Address 2							
City	Getzville	State/Province		NY			
Postal Code	14068	Country i	US				
Applicant 3						Remove	
Applicant Authority		<input checked="" type="radio"/> Inventor		<input type="radio"/> Legal Representative under 35 U.S.C. 117		<input type="radio"/> Party of Interest under 35 U.S.C. 118	
Prefix	Given Name	Middle Name		Family Name		Suffix	
	HALUK			KOPKALLI			
Residence Information (Select One) <input checked="" type="radio"/> US Residency <input type="radio"/> Non US Residency <input type="radio"/> Active US Military Service							
City	Staten Island	State/Province	NY	Country of Residence i		US	

Application Data Sheet 37 CFR 1.76		Attorney Docket Number		H0024680-4511	
		Application Number			
Title of Invention		INTEGRATED PROCESS FOR THE MANUFACTURE OF FLUORINATED OLEFINS			
Citizenship under 37 CFR 1.41(b) i		US			
Mailing Address of Applicant:					
Address 1		364 Giffords Lane			
Address 2					
City	Staten Island		State/Province	NY	
Postal Code	10308		Country ⁱ	US	
All Inventors Must Be Listed - Additional Inventor Information blocks may be generated within this form by selecting the Add button.					
<input type="button" value="Add"/>					

Correspondence Information:

Enter either Customer Number or complete the Correspondence Information section below. For further information see 37 CFR 1.33(a).			
<input type="checkbox"/> An Address is being provided for the correspondence Information of this application.			
Customer Number	91970		
Email Address	patentservices-us@honeywell.com		<input type="button" value="Add Email"/> <input type="button" value="Remove Email"/>

Application Information:

Title of the Invention	INTEGRATED PROCESS FOR THE MANUFACTURE OF FLUORINATED OLEFINS		
Attorney Docket Number	H0024680-4511	Small Entity Status Claimed	<input type="checkbox"/>
Application Type	Provisional		
Subject Matter	Utility		
Suggested Class (if any)		Sub Class (if any)	
Suggested Technology Center (if any)			
Total Number of Drawing Sheets (if any)	3	Suggested Figure for Publication (if any)	

Publication Information:

<input type="checkbox"/> Request Early Publication (Fee required at time of Request 37 CFR 1.219)
<input type="checkbox"/> Request Not to Publish. I hereby request that the attached application not be published under 35 U.S.C. 122(b) and certify that the invention disclosed in the attached application has not and will not be the subject of an application filed in another country, or under a multilateral international agreement, that requires publication at eighteen months after filing.

Representative Information:

Representative information should be provided for all practitioners having a power of attorney in the application. Providing this information in the Application Data Sheet does not constitute a power of attorney in the application (see 37 CFR 1.32). Enter either Customer Number or complete the Representative Name section below. If both sections are completed the Customer Number will be used for the Representative Information during processing.			
Please Select One:	<input checked="" type="radio"/> Customer Number	<input type="radio"/> US Patent Practitioner	<input type="radio"/> Limited Recognition (37 CFR 11.9)

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	H0024680-4511
		Application Number	
Title of Invention	INTEGRATED PROCESS FOR THE MANUFACTURE OF FLUORINATED OLEFINS		
Customer Number	91970		

Domestic Benefit/National Stage Information:

This section allows for the applicant to either claim benefit under 35 U.S.C. 119(e), 120, 121, or 365(c) or indicate National Stage entry from a PCT application. Providing this information in the application data sheet constitutes the specific reference required by 35 U.S.C. 119(e) or 120, and 37 CFR 1.78(a)(2) or CFR 1.78(a)(4), and need not otherwise be made part of the specification.

Prior Application Status		Remove	
Application Number	Continuity Type	Prior Application Number	Filing Date (YYYY-MM-DD)

Additional Domestic Benefit/National Stage Data may be generated within this form by selecting the **Add** button. [Add](#)

Foreign Priority Information:

This section allows for the applicant to claim benefit of foreign priority and to identify any prior foreign application for which priority is not claimed. Providing this information in the application data sheet constitutes the claim for priority as required by 35 U.S.C. 119(b) and 37 CFR 1.55(a).

			Remove
Application Number	Country ⁱ	Parent Filing Date (YYYY-MM-DD)	Priority Claimed
			<input type="radio"/> Yes <input checked="" type="radio"/> No

Additional Foreign Priority Data may be generated within this form by selecting the **Add** button. [Add](#)

Assignee Information:

Providing this information in the application data sheet does not substitute for compliance with any requirement of part 3 of Title 37 of the CFR to have an assignment recorded in the Office.

Assignee 1				Remove
If the Assignee is an Organization check here. <input checked="" type="checkbox"/>				
Organization Name	HONEYWELL INTERNATIONAL INC.			
Mailing Address Information:				
Address 1	101 Columbia Road			
Address 2				
City	Morristown	State/Province	NJ	
Country ⁱ	US	Postal Code	07962	
Phone Number	973-455-2062	Fax Number	973-455-5904	
Email Address	patentservices-us@honeywell.com			

Additional Assignee Data may be generated within this form by selecting the **Add** button. [Add](#)

Signature:

A signature of the applicant or representative is required in accordance with 37 CFR 1.33 and 10.18. Please see 37 CFR 1.4(d) for the form of the signature.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number		H0024680-4511	
		Application Number			
Title of Invention		INTEGRATED PROCESS FOR THE MANUFACTURE OF FLUORINATED OLEFINS			
Signature		/J. Eric Sumner/		Date (YYYY-MM-DD)	
				2010-10-12	
First Name	John	Last Name	Sumner	Registration Number	58699

This collection of information is required by 37 CFR 1.76. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 23 minutes to complete, including gathering, preparing, and submitting the completed application data sheet form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

Privacy Act Statement

The Privacy Act of 1974 (P.L. 93-579) requires that you be given certain information in connection with your submission of the attached form related to a patent application or patent. Accordingly, pursuant to the requirements of the Act, please be advised that: (1) the general authority for the collection of this information is 35 U.S.C. 2(b)(2); (2) furnishing of the information solicited is voluntary; and (3) the principal purpose for which the information is used by the U.S. Patent and Trademark Office is to process and/or examine your submission related to a patent application or patent. If you do not furnish the requested information, the U.S. Patent and Trademark Office may not be able to process and/or examine your submission, which may result in termination of proceedings or abandonment of the application or expiration of the patent.

The information provided by you in this form will be subject to the following routine uses:

1. The information on this form will be treated confidentially to the extent allowed under the Freedom of Information Act (5 U.S.C. 552) and the Privacy Act (5 U.S.C. 552a). Records from this system of records may be disclosed to the Department of Justice to determine whether the Freedom of Information Act requires disclosure of these records.
2. A record from this system of records may be disclosed, as a routine use, in the course of presenting evidence to a court, magistrate, or administrative tribunal, including disclosures to opposing counsel in the course of settlement negotiations.
3. A record in this system of records may be disclosed, as a routine use, to a Member of Congress submitting a request involving an individual, to whom the record pertains, when the individual has requested assistance from the Member with respect to the subject matter of the record.
4. A record in this system of records may be disclosed, as a routine use, to a contractor of the Agency having need for the information in order to perform a contract. Recipients of information shall be required to comply with the requirements of the Privacy Act of 1974, as amended, pursuant to 5 U.S.C. 552a(m).
5. A record related to an International Application filed under the Patent Cooperation Treaty in this system of records may be disclosed, as a routine use, to the International Bureau of the World Intellectual Property Organization, pursuant to the Patent Cooperation Treaty.
6. A record in this system of records may be disclosed, as a routine use, to another federal agency for purposes of National Security review (35 U.S.C. 181) and for review pursuant to the Atomic Energy Act (42 U.S.C. 218(c)).
7. A record from this system of records may be disclosed, as a routine use, to the Administrator, General Services, or his/her designee, during an inspection of records conducted by GSA as part of that agency's responsibility to recommend improvements in records management practices and programs, under authority of 44 U.S.C. 2904 and 2906. Such disclosure shall be made in accordance with the GSA regulations governing inspection of records for this purpose, and any other relevant (i.e., GSA or Commerce) directive. Such disclosure shall not be used to make determinations about individuals.
8. A record from this system of records may be disclosed, as a routine use, to the public after either publication of the application pursuant to 35 U.S.C. 122(b) or issuance of a patent pursuant to 35 U.S.C. 151. Further, a record may be disclosed, subject to the limitations of 37 CFR 1.14, as a routine use, to the public if the record was filed in an application which became abandoned or in which the proceedings were terminated and which application is referenced by either a published application, an application open to public inspections or an issued patent.
9. A record from this system of records may be disclosed, as a routine use, to a Federal, State, or local law enforcement agency, if the USPTO becomes aware of a violation or potential violation of law or regulation.

INTEGRATED PROCESS FOR THE MANUFACTURE OF FLUORINATED OLEFINS

FIELD OF THE INVENTION

[0001] The present invention relates to processes for producing haloalkenes, particularly, though not exclusively, 2,3,3,3-tetrafluoropropane (HFO-1234yf) and/or 1,2,3,3,3-pentafluoropropene (HFO-1225ye).

BACKGROUND OF THE INVENTION

[0002] Chlorine-containing compounds, such as chlorofluorocarbons (CFCs), have been employed as refrigerants, foam blowing agents, cleaning agents, solvents, heat transfer media, sterilants, aerosol propellants, dielectrics, fire extinguishing agents, and power cycle working fluids. Such chlorine-containing compounds have proven to be detrimental to the Earth's ozone layer. Many of the hydrofluorocarbons (HFCs), used as the substitutes of CFCs, have been found to contribute to global warming. For these reasons, there is a worldwide effort to develop new compounds that are more environmentally benign while at the same time being as effective, or more effective, from a performance standpoint.

[0003] Applicants have come to appreciate that 1,1,1,2,3-pentafluoropropene (HFO-1225ye) and 1,1,1,2-tetrafluoropropene (HFO-1234yf) are each useful in one or more of the above mentioned applications. Accordingly, compositions containing either or both fluorinated olefins are among the materials being developed for such use.

[0004] Methods for producing HFO-1234yf and HFO-1225ye are known. In one example, it is known that hexafluoropropylene (HFP) can be hydrogenated to produce 1,1,1,2,3,3-hexafluoropropane (HFC-236ea). HFC-236ea is then used as a reactant in a

dehydrogenation reaction to produce HFO-1225ye. It is further known that HFO-1225ye can be hydrogenated to produce 1,1,1,2,3-pentafluoropropane (HFC-245eb) and that HFC-245eb can then be dehydrofluorinated to produce HFO-1234yf.

[0005] U.S. Patent Application Publication No. 2009/0234165, the contents of which are incorporated by reference herein, further provides that HFO-1225ye and HFO-1234yf can be produced in a single facility. Most notably, it was realized that the hydrogenation of HFP can yield both HFC-236ea and HFC-245eb and that these two products can be simultaneously dehydrofluorinated to produce HFO-1225ye and HFO-1234yf, respectively. Processing conditions are taught to be adjustable, so as to favor the selective conversion of one hydrofluoroolefin over the other. Catalysts that may be used for such reactions were taught to include metal catalysts, even more preferably one or more transition metal-based catalysts (including in certain preferred embodiments transition metal halide catalysts), such as FeCl_3 , chromiumoxyfluoride, Ni (including Ni mesh), NiCl_2 , CrF_3 , and mixtures thereof, supported or in bulk. Other catalysts include carbon-supported catalysts, antimony-based catalysts (such as SbCl_5), aluminum-based catalyst (such as AlF_3 , Al_2O_3 , and fluorinated Al_2O_3), palladium-based catalysts, platinum-based catalysts, rhodium-based catalysts and ruthenium-based catalysts, including combinations thereof.

[0006] Other examples of methods for the production of HFO-1225ye and HFO-1234yf are set forth in, at least, U.S. Pat. No. 7,560,602, which is assigned to the assignee of the present invention and is incorporated herein by reference. This patent discloses a similar dehydrohalogenation process for producing 2,3,3,3-tetrafluoropropene (1234yf) and 1,1,1,2,3-pentafluoropropene (HFO-1225ye) by catalytic dehydrofluorination of 1,1,1,2,3-pentafluoropropane (245eb) and 1,1,1,2,3,3-hexafluoropropane (HFC-236ea), respectively.

Preferred dehydrohalogenation catalysts include fluorinated chromium oxide catalysts, aluminum fluoride catalysts, ferric fluoride catalysts, mixtures of magnesium fluoride and aluminum fluoride catalysts, nickel-based catalysts, carbon based catalysts, and combinations thereof.

[0007] Alternative catalysts for such dehydrohalogenation reactions are also known. U.S. Patent Application Publication No. 20100029997, for example, teaches the production of hydroolefins (e.g. HFO-1234yf) by dehydrohalogenating HFC-245eb in the presence of potassium hydroxide (KOH), sodium hydroxide (NaOH), $\text{Ca}(\text{OH})_2$, CaO, and combinations thereof. While particularly preferred catalysts include KOH, alternative catalysts also include LiOH, $\text{Mg}(\text{OH})_2$ and NaOH.

[0008] Applicants have come to appreciate that during continuous processing using KOH as a catalyst, the reaction proceeds until either the organic reactants or KOH is consumed. Upon completion of the reaction, the reactor must be dismantled to remove the salt and/or salt solutions. This, in turn creates, higher operating costs and reduces productivity. Accordingly, more efficient process is desirable for removal of spent catalyst and recycle of unused or regenerated catalyst and/or unused organics during a continuous process.


[0009] Applicants assert that the instant invention addresses the foregoing needs.

SUMMARY OF THE INVENTION

[0010] The instant invention relates, at least in part, to a method of increasing the cost efficiency for dehydrohalogenation production of a fluorinated olefin by recovering and recycling spent catalyst. In one aspect, the present invention relates to dehydrohalogenating a fluorinated alkane (e.g. pentafluoropropanes and/or hexafluoropropanes) in the presence of KOH

to produce a fluorinated olefin (e.g. tetrafluoropropenes and/or pentafluoropropenes). Removal of spent KOH from the reactor allows for facile separation of organic and KOH. This in turn leads to lower cost associated with design and operation of complicated and highly specialized separation equipment. Recycling the spent KOH leads to greater catalyst efficiency. Increased productivity is similarly observed if KF salts are also isolated from the product stream, converted back to KOH using calcium salts, and recycled to the reaction.

[0011] In one aspect, the instant invention relates to a method or process for manufacturing of a fluoroolefin including: (a) hydrogenating a first haloolefin to produce a haloalkane; (b) dehydrohalogenating the haloalkane in the presence of KOH to produce a second haloolefin; (c) withdrawing a reaction stream comprising spent KOH; and (d) purifying spent KOH. The first haloolefin may include a compound of formula (I)



wherein each X is independently Cl, F, I or Br, provided that at least two Xs are F; each Y is independently H, Cl, F, I or Br; each R^1 is independently H, Cl, F, I, Br or unsubstituted or halogen substituted methyl or ethyl radical; each R^2 is independently H, Cl, F, I, Br or unsubstituted or halogen substituted methyl or ethyl radical; n is 1, 2 or 3; a and b are each 0, 1 or 2, provided that $a+b = 2$; m is 0, 1 or 2; and z is 0, 1, 2 or 3.


[0012] In further embodiments of the foregoing, the first haloolefin is comprised of a compound of formula (IA)



wherein each X is independently Cl, F, I or Br, provided that at least two Xs are F; each Y is independently H, Cl, F, I or Br; n is 1, 2 or 3; and m is 0, 1 or 2.

[0013] In even further embodiments of the foregoing, the first haloalkane is hexafluoropropylene (HFP).

[0014] The intermediate haloalkane of the reaction process may be, in certain embodiments, any compound of formula (II)



wherein each X is independently Cl, F, I or Br, provided that at least two Xs are F; each Y is independently H, Cl, F, I or Br; each R^1 is independently H, Cl, F, I, Br or unsubstituted or halogen substituted methyl or ethyl radical; each R^2 is independently H, Cl, F, I, Br or unsubstituted or halogen substituted methyl or ethyl radical; n is 1, 2 or 3; a and b are each 0, 1 or 2, provided that $a+b=2$; m is 0, 1 or 2; and z is 0, 1, 2 or 3.

[0015] In further embodiments of the foregoing, the haloalkane is a compound of formula (IIA):



wherein each X is independently Cl, F, I or Br, provided that at least two Xs are F; each Y is independently H, Cl, F, I or Br; n is 1, 2 or 3; and m is 0, 1 or 2.

[0016] In even further embodiments of the foregoing, the intermediate haloalkane is 1,1,1,2,3,3-hexafluoropropane (HFC-236ea) and/or 1,1,1,2,3-pentafluoropropane (HFC-245eb).

[0017] The second haloolefin may be, in certain embodiments, any compound of the formula (III):



wherein each X is independently Cl, F, I or Br, provided that at least two Xs are F; each Y is independently H, Cl, F, I or Br; each R^1 is independently H, Cl, F, I, Br or unsubstituted or halogen substituted methyl or ethyl radical; each R^2 is independently H, Cl, F, I, Br or

unsubstituted or halogen substituted methyl or ethyl radical; n is 1, 2 or 3; a and b are each 0, 1 or 2, provided that $a+b = 2$; m is 0 or 1; and z is 0, 1, 2 or 3.

[0018] In further embodiments of the foregoing, the second haloolefin is comprised of a compound of the formula (IIIA):



wherein each X is independently Cl, F, I or Br, provided that at least two Xs are F; each Y is independently H, Cl, F, I or Br; n is 1, 2 or 3; and m is 0 or 1.

[0019] In even further embodiments of the foregoing, the second haloolefin is 2,3,3,3-tetrafluoropropene (1234yf) and/or 1,1,1,2,3-pentafluoropropene (HFO-1225ye).

[0020] In embodiments where the second haloolefin is HFO-1225ye and/or HFO-1234yf, the foregoing reactions can be produced in a single facility having four unit operations. More specifically, hydrogenation of HFP with hydrogen is known to yield both HFC-236ea and HFC-245eb. Like HFC-236ea, HFC-245eb subsequently can be dehydrofluorinated to produce a desirable product. In particular, HFC-236ea can be dehydrofluorinated to produce HFO-1225ye and HFC-245eb can be dehydrofluorinated to produce HFO-1234yf. Thus, both HFO-1225ye and HFO-1234yf can be produced using a single set of four unit operations: hydrogenation of the starting material, separation of the desired intermediate, dehydrofluorination of the intermediate to produce the desired product, followed by another separation to isolate the desired product. For example, in a preferred system, HFP and H_2 are reacted in a hydrogenation reactor to form an intermediate product stream comprising HFC-236ea and/or HFC-245eb. The relative concentrations of HFC-236ea and HFC-245eb is dependant on reaction conditions in the hydrogenation reactor, such as pressure, temperature, and relative concentration of reactants in the reactor. If the desirable end product is HFO-1225ye, then processing conditions preferably

favor the production of HFC-236ea. That is, the hydrogenation reactor is operated to produce an intermediate product stream rich in HFC-236ea which is subsequently separated from the intermediate process stream and fed into a dehydrofluorination reactor to form a final product stream comprising HFO-1225ye. This HFO-1225ye is then separated from the final product stream and recovered as a purified product. If the desirable end product is HFO-1234yf, then processing conditions preferably favor the production of HFC-245eb. That is, the hydrogenation reactor is operated to produce an intermediate product stream rich in HFC-245eb. This can be accomplished by operating the hydrogenation reactor under conditions favorable to convert the HFP into HFC-236ea and then converting the HFC-236ea into HFC-245eb. The HFC-245eb is then separated from the intermediate product stream and fed into a dehydrofluorination reactor to form a final product stream comprising HFO-1234yf. This HFO-1234yf is then separated from the final product stream and recovered as a purified product.

[0021] In addition, when HFO-1234yf is the desired product, HFO-1225ye can be introduced into the hydrogenation reactor at some point and then converted into HFC-245eb. The source of this HFO-1225ye can be either a separate feed stream and/or a recycle stream (i.e., recycling HFO-1225ye derived from HFC-236ea as noted above). The HFC-245eb is again separated from the intermediate product stream and fed into a dehydrofluorination reactor to form a final product stream comprising HFO-1234yf. This HFO-1234yf is then separated from the final product stream and recovered as a purified product.

[0022] With any of the foregoing, the final dehydrofluorination step (e.g. 245eb → 1234yf or 236ea → 1225ye) occurs in the presence of at least a potassium hydroxide (KOH) catalyst. The amount of catalyst used, or mole ratio of catalyst to organic, will vary depending on the particular parameters present in each embodiment as discussed above, or otherwise herein.

In certain embodiments, the mol ratio of KOH to organic feeds (e.g. HFC-245eb and/or HFC-236ea) is from less than 1 to 3, preferably 1-1.5.

[0023] Dehydrohalogenation can be performed in any suitable reaction vessel or reactor.

In certain non-limiting embodiments, the reactor includes one or a series of Continuously Stirred Tank Reactors (CSTR), where organic (e.g. HFC-236ea and/or HFC-245eb) and KOH are fed continuously into the reactor. From the reaction product stream, a stream of spent KOH may be withdrawn and purified on a continuous or intermittent basis.

[0024] In certain embodiments, the stream of spent KOH further includes one or more dissolved organics, such as, but not limited to HFC-236ea and/or HFC-245eb. The spent KOH may be purified from such organics using one or more known separation methods. Such methods include, but are not limited to, distillation and/or phase separation. The resulting KOH can then be, optionally, concentrated and recycled back to the dehydrohalogenation reaction independently, or otherwise with one or more organics, as provided herein.

[0025] In further embodiments, the product stream also includes a salt by-product of the dehydrohalogenation reaction, such as potassium fluoride (KF). KF may be isolated from the product stream using known techniques and converted to KOH using known methods. For example, in one embodiment, KF is converted to KOH in the presence of CaF_2 , as described herein. The resulting KOH can be, optionally, concentrated and recycled back to the dehydrohalogenation reaction independently, or otherwise with one or more organics, as provided herein.

[0026] Additional embodiments and advantages of the instant invention will be readily apparent to one of skill in the art based on the disclosure provided herein.

BRIEF DESCRIPTION OF THE DRAWINGS

[0027] FIG. 1 is a process flow diagram showing the production of fluoroolefins according to an embodiment of the invention.

[0028] FIG. 2 is a process flow diagram showing the hydrogenation unit operation according to an embodiment of the invention.

[0029] FIG. 3 is a process flow diagram showing the hydrogenation unit operation according to another embodiment of the invention.

[0030] FIG. 4 is a process flow diagram showing the first separation unit operation according to an embodiment of the invention.

[0031] FIG. 5 is a process flow diagram showing the first separation unit operation according to another embodiment of the invention.

[0032] FIG. 6 is a process flow diagram showing the dehydrofluorination unit operation according to an embodiment of the invention.

[0033] FIG. 7 is a process flow diagram showing the dehydrofluorination unit operation according to another embodiment of the invention.

DETAILED DESCRIPTION OF THE INVENTION

[0034] The instant invention relates, at least in part, to a method increasing the cost efficiency for dehydrohalogenation production of a fluorinated olefin by recovering and recycling spent catalyst. In one aspect, the present invention relates to dehydrohalogenating a fluorinated alkane (e.g. pentafluoropropane and/or hexafluoropropane) in the presence of KOH to produce a fluorinated olefin (e.g. tetrafluoropropenes and/or pentafluoropropenes). Removal

of spent KOH from the reactor reduces design and operation costs and recycling the spent and/or regenerated KOH leads to improved catalyst efficiency.

[0035] In certain embodiments, the fluorinated olefins of the present invention include one or more C3 to C6 fluoroalkenes, preferably compounds having a formula as follows:




where X^1 is a C2, C3, C4, or C5 unsaturated, substituted or unsubstituted, alkyl radical, each R is independently Cl, F, Br, I or H, and z is 1 to 3. Highly preferred among such compounds are propenes and butenes having from 3 to 5 fluorine substituents, and among these tetrafluoropropenes (HFO-1234) and pentafluoropropenes (HFO-1225) are especially preferred.


[0036] In one embodiment, the processes for producing the fluorinated olefins of the present invention include reacting a fluorinated olefin starting material with a degree of halogen substitution of N+1 having substantially the same number of carbon atoms as the fluorinated olefin(s) to be synthesized with a degree of halogen substitution of N. The fluorinated olefin starting material preferably, though not exclusively, has a degree of fluorine substitution of N+1 and is exposed to reaction conditions effective to produce a reaction product containing one or more fluorinated alkanes having the same number of carbons atoms as the final olefin. This olefin conversion step includes a reaction that is sometimes referred to herein for convenience, but not necessarily by way of limitation, as a reduction or hydrogenation step. The resulting fluorinated alkane is then converted to a fluorinated olefin having a degree of fluorine substitution of N. This alkane conversion step comprises a reaction that is sometimes referred to herein for convenience, but not necessarily by way of limitation, as a dehydrohalogenation reaction or more particularly in certain embodiments as a dehydrofluorination or dehydrochlorination reaction.

[0037] Based on the foregoing, in one aspect of the present invention, the processes for producing a fluoroolefin includes the following steps:

(a) hydrogenating a compound of formula (I):



under conditions effective to form at least one fluorinated alkane of formula (II)



where:

each X is independently Cl, F, I or Br, provided that at least two Xs are F;

each Y is independently H, Cl, F, I or Br;

each R¹ is independently H, Cl, F, I, Br or unsubstituted or halogen substituted methyl or ethyl radical;

each R₂ is independently H, Cl, F, I, Br or unsubstituted or halogen substituted methyl or ethyl radical;

n is 1, 2 or 3;

a and b are each 0, 1 or 2, provided that a+b = 2;

m is 0, 1 or 2; and

z is 0, 1, 2 or 3; and

(b) dehydrohalogenating the compound of formula (II) under conditions effective to produce a fluoroolefin with a lower degree of fluorine substitution than the compound of formula (I), preferably to produce a compound of formula (III):



where each n is the same value as in formula (I) and m is 0 or 1.

[0038] In further non-limiting embodiments, the reactant of formula (I) may include a three carbon olefin of formula (IA) wherein z is 0, namely



to produce a three carbon alkane of formula (IIA) as follows:



where X, Y, n, and m are all as indicated above, which compound is then dehydrohalogenated to form a compound of formula (IIIA)



where n is the same value as in formula (IA) and m is 0 or 1.

[0039] In even further embodiments, the instant invention provides a saturated terminal carbon of the compounds of formulas (I) or (IA) that is fully substituted with fluorine (for example, n on the saturated terminal carbon is 3 and each X on that carbon is F). In such embodiments, the compound of Formula (I) or (IA) is preferably a fluoropropene having from three to six fluorine substituents, and potentially other halogen substituents, including for example hexafluoropropene (that is, Z is 0, n is 3, m is 0, and all X are F) or pentafluoropropene (that is, Z is 0, n is 3, m is 1, and all X are F). the resulting compound of formula (II) or (IIA) is selected from the group consisting of, one or more of the following fluorinated alkanes: pentafluoropropane (HFC-245) and hexafluoropropane (HFC-236), including all isomers of each of these, but preferably 1,1,1,2,3-pentafluoropropane (HFC-245eb) , 1,1,1,2,3,3-hexafluoropropane (HFC-236ea) and combinations of these. In certain preferred embodiments the fluorinated alkane produced by the conversion step has a degree of fluorine substitution of N+1.

[0040] In any of the foregoing reactions, the step wherein the olefin is converted to an alkane is carried out under conditions effective to provide a formula (I) conversion of at least about 40%, more preferably at least about 55%, and even more preferably at least about 70%. In certain preferred embodiments the conversion is at least about 90%, and more preferably about 99%. Further in certain preferred embodiments, the conversion of the compound of formula (I) or (IA) to produce a compound of formula (II) is conducted under conditions effective to provide a formula (II) or (IIA) selectivity of at least about 60%, more preferably at least about 80%, and more preferably at least about 90%, and even more preferably about 100%.

[0041] In any of the foregoing reactions, the step wherein the alkane is converted to a fluorinated olefin having a degree of fluorination of N is carried out under conditions effective to provide a formula (II) conversion of at least about 40%, more preferably at least about 55%, and even more preferably at least about 70%. In certain preferred embodiments the conversion is at least about 90%, and more preferably about 95%. Further in certain preferred embodiments, the conversion of the compound of formula (II) to produce a compound of formula (III) is conducted under conditions effective to provide a formula (III) selectivity of at least about 60%, more preferably at least about 80%, and more preferably at least about 90%, and even more preferably about 98%.

THE HYDROGENATION STEP

[0042] Although it is contemplated that the hydrogenation or reduction step may be conducted in batch operation, it is preferred that the hydrogenation reaction is carried out as a substantially continuous operation. While it is contemplated that the hydrogenation reaction may be conducted in a single reaction vessel, this reaction step may comprise two or more reactors or

reaction stages in parallel, in series, or both, or any combination of reactor designs. In addition, it is contemplated that the reaction step may include one or more feed preheating steps or stages, depending on the particulars of each application.

[0043] While it is possible that the reaction may involve in certain embodiments a liquid phase reaction, it is contemplated that in certain embodiments the hydrogenation reaction comprises at least one vapor phase reaction stage.

[0044] In one embodiment of the present invention, as illustrated in Figure 2, the hydrogenation step comprises a reaction step A having associated therewith at least a first flow path or feed stream 1A, at least a second flow path or feed stream 1B and at least a third flow path or feed stream 2, with each flow path being independently operable. In such embodiments, it is preferred that the first flow path or feed stream 1A comprises HFP and preferably substantially all of the HFP being fed to the reaction step A, the second path or feed stream 1B comprises HFO-1225ye, and preferably substantially all of the HFO-1225ye being fed to the reaction step A (it being recognized that the feed stream 1B in many embodiments will have a substantially zero flow and that in other embodiments this feed stream 1B may in fact be a recycle stream from subsequent operations in the process). The feed stream 2 comprises the hydrogenation agent, preferably H_2 , for the reaction step A. Flow path or stream 4 is at path for allowing introduction of a recycle stream into the reaction step. In some embodiments, the actual flow of recycle stream 4 is zero, but in preferred embodiments, the recycle stream comprises a relatively low temperature stream comprising a portion of the reaction product stream 3A after it has been cooled and/or separated, the content of recycle stream 4, when present, preferably being relatively rich in HFC-236ea, HFC-245eb, or a combination of these.

[0045] In another preferred embodiment of the present invention as illustrated in Figure 3, the hydrogenation step comprises at least a first reaction step A1 and a second reaction step A2. In one embodiment, the first reaction step A1, which may comprise one or more reaction stages in parallel or in series or a combination of parallel or series, having associated therewith at least a first flow path or feed stream 1A and at least a second flow path or feed stream 2A, with each flow path being independently operable. In such embodiments, it is preferred that the first flow path or feed stream 1A comprises HFP and preferably substantially all of the HFP being fed to the reaction step A, the second path or feed stream 2A comprises the hydrogenation agent, preferably H₂, for the reaction step A. Flow path or stream 4A is at path for allowing introduction of a recycle stream into the reaction step. In some embodiments, the actual flow of recycle stream 4A is substantially zero, but in preferred embodiments, the recycle stream comprises a relatively low temperature stream comprising a portion of the reaction product stream 3A after it has been cooled and/or separated, the content of recycle stream 4, when present, preferably being relatively rich in HFC-236ea, HFC-245eb, or a combination of these.

[0046] In connection with the reaction stage converting HFP in the hydrogenation reactor at step A1, it is preferred in certain embodiments to use a trickle bed reactor. It is contemplated that the reaction in such case proceeds as follows:



A major side reaction of this process yields HFC-245eb and HF. It is believed that 245eb is formed from 236ea by hydrodefluorination and/or by dehydrofluorination followed by reduction:



[0047] The second reaction step A2, may comprise one or more reaction stages in parallel or in series or a combination of parallel or series, having associated therewith at least a

first flow path or feed stream 1B and at least a second flow path or feed stream 2B, with each flow path being independently operable. In such embodiments, it is preferred that the first flow path or feed stream 1B, when present, comprises HFO-1225ye, and preferably substantially all of the HFO-1225ye being fed to the reaction step A. The second path or feed stream 2B comprises the hydrogenation agent, preferably H₂, for the reaction step A2. Flow path or stream 4B is at path for allowing introduction of a recycle stream into the reaction step. In some embodiments, the actual flow of recycle stream 4B is zero, but in preferred embodiments, the recycle stream comprises a relatively low temperature stream comprising a portion of the reaction product stream 3A and/or 3B after it has been cooled and separated, the content of recycle stream 4B, when present, preferably being relatively rich in HFC-236ea, HFC-245eb, or a combination of these. Flow path or stream 10 is at path for allowing introduction of a second recycle stream into the reaction step, which in preferred embodiments comprises at least a portion of the reaction product stream 6 after being processed to comprise a stream relatively rich in HFO-1225ye.

[0048] In connection with the reaction stage converting HFO-1225ye in the hydrogenation reactor at step A2, it is preferred in certain embodiments to use a trickle bed reactor. It is contemplated that the reaction in such case proceeds as follows:



A major side reaction is contemplated to be:



[0049] Preferably, the hydrogenation reaction conditions are controlled in the reaction in order to achieve the desired conversion and/or selectivity in accordance with the present invention. As used herein, the term “reaction conditions” is intended to include the singular and means control of any one or more processing parameters, including possibly using or not using a

reaction vessel or stage, which can be modified by the operator of the reaction to produce the conversion and/or selectivity of the feed material in accordance with the teachings contained herein. By way of example, but not by way of limitation, conversion of the feed material may be controlled or regulated by controlling or regulating any one or more of the following: the temperature of the reaction, the flow rate of the reactants, the presence of diluent, the amount of catalyst present in the reaction vessel, the shape and size of the reaction vessel, the pressure of the reaction, and any one combinations of these and other process parameters which will be available and known to those skilled in the art in view of the disclosure contained herein. The size and shape, and other characteristics of the reaction vessel itself may vary widely with the scope of the present invention, and it is contemplated that the vessel associated with each stage may be different than or the same as the vessel associated with the upstream and downstream reaction stages. Furthermore, it is contemplated that all reaction stages can occur inside a single vessel, provided that means and mechanisms necessary to control conversion are provided. For example, it may be desirable in certain embodiments to utilize a single tubular reactor for each reaction stage, providing conversion control by judicious selection of the amount and/or distribution of catalyst throughout the tubular reactor. In such a case, it is possible to further control the conversion in different sections of the same tubular reactor by controlling the amount of heat removed from or added to different sections of the tubular reactor.

[0050] Those skilled in the art will be readily able to select the type of catalyst(s) used for the hydrogenation step of the present invention in view of the teachings contained herein. For example, it is preferred in certain embodiments that at least one, but preferably all, reaction stages utilize palladium catalyst, preferably 1% palladium on carbon, either alone or in combination with other catalysts. In this regard one or more of the hydrogenation catalysts

disclosed in US Patent 5, 679,875, which is incorporated herein by reference, may be used for one or more of the reaction stages in accordance with the present invention. In certain preferred embodiments, the catalyst preferably comprises palladium supported on carbon, such as a carbon mesh.

[0051] Thus, certain embodiments of the present methods comprise bringing a fluorinated olefin in accordance with formula I and a hydrogenation agent, such as H_2 , into contact with a first amount of catalyst in at least a first reaction stage to produce a reaction stream comprising hydrofluorocarbon(s), unreacted fluorinated olefin and hydrogen. In certain preferred embodiments the hydrogenation step is followed by a preferred separation step as described below. While it is contemplated that a wide variety of hydrogenation reaction temperatures may be used, depending on relevant factors such as the catalyst being used and the most desired reaction product, it is generally preferred that the reaction temperature for the hydrogenation step is from about 50°C to about 150°C, preferably about from 75°C to about 115°C, and even more preferably from about 90°C to about 100°C.

[0052] In general, it is also contemplated that a wide variety of reaction pressures may be used, depending again on relevant factors such as the specific catalyst being used and the most desired reaction product. The reaction pressure can be, for example, from about 100 psig to about 300 psig, preferably about from 150 psig to about 250 psig, and even more preferably about 200 psig.

[0053] Applicants have found, without being bound by or to any particular theory, that the use of a cooled recycle stream 4, 4A, or 4B in the hydrogenation reaction allows the feed materials to serve as a means for removing heat from the hydrogenation reaction. Since the reduction or hydrogenation reaction of the present invention is generally exothermic, and usually

substantially exothermic, the use of such a recycle material has the effect in preferred embodiments of maintaining the reactor temperature below that which would exist if the recycle were not used, assuming all other process conditions were maintained the same.

[0054] It is contemplated that the amount of hydrogen used may vary widely. In preferred embodiments, the hydrogen is feed to the reaction step as a gas in a H₂:olefin feed ratio of from about 1:1 to about 2:1, and even more preferably ratio of from about 1:1 to about 1.5:1, and even more preferably about 1.3:1.

THE HYDROGENATION REACTION EFFLUENT SEPARATION

[0055] In certain preferred embodiments, the present invention also includes the step of cooling at least a portion reactor product stream (3, 3A, 3B) to remove at least a portion of the heat of reaction. In many preferred embodiments, this cooling step is included as part of the preferred aspects of the separation step B, which are described in connection with Figures 4, 5 and 6 below. Preferably the ratio of cooled recycled reaction product to fresh feed is about 12:1, with the temperature of the recycle stream preferably being at about 50 °C to about 100 °C, and even more preferably about 70 °C. In addition, in order to help remove heat of reaction, it is preferred in certain embodiments to introduce the fresh feeds and/or the recycle feeds to the reaction in the liquid phase and allowing the heat of reaction to evaporate the liquid feed and/or the reaction products and withdrawing the reaction products in the gas phase.

[0056] With reference now to Figure 4, the reaction product streams 3A and 3B are directed to a separation step B, which comprises in the embodiment of Figure 4 a cooling step B1 which produces one or more cooled reaction product streams 3AB, which in turn are fed to one or more separation stages B2. It is contemplated that those skilled in the art will be able to devise

without undue experimentation many means and mechanisms for attaining such cooling in view of the teachings contained herein and all such means and mechanisms are with the scope of the present invention. The preferred separation step B2 preferably includes at least a first separation step which produces a first stream 4 relatively rich in unreacted hydrogen, fluorinated alkane, such as HFC-236ea and/or HFC-245eb, or a combination of these, which may be recycled, with or without further processing, to the reaction step A. A second stream 5, which is relatively rich in the fluorinated alkane, such as HFC-236ea and/or HFC-245eb, is also produced from the separation step B2.

[0057] In one preferred embodiment shown in Figure 4A, the separation step comprises, in addition to the cooling step B1 and the separation step B2 which produces at least a first cooled stream 4A containing a portion of the reaction product, which is preferably recycled to the reaction step A, and a crude product stream 100 which is fed to a further separation step B3 in which a substantial portion of excess hydrogen in the stream 100 is purged from the stream and sent for disposal or further processing in stream 4B. The stream 101 from the separation step B3 is then feed to a further separation step B4 where unwanted by-products are removed in stream 4C and one or more product streams 5A and 5B are produced. In preferred embodiments, stream 5A is relatively rich in a first fluorinated alkane, preferably HFC- 236ea, and a second stream 5B rich in a second fluorinated alkane, preferably HFC-245eb.

[0058] In another embodiment described with reference now to Figure 5, the reaction product streams 3A and 3B are each directed to a separate separation steps, which comprise separate cooling steps B1 and B1', each of which produces one or more cooled reaction product streams 3A' and 3B', which in turn are fed to separate separation stages B2 and B2' to produce a first stream 5A relatively rich in a first of the fluorinated alkane products, such as HFC-236ea

when the feed stream 3A is rich in HFP, and a second reaction product stream 5B relatively rich in a second of the fluorinated alkane products, such as HFC-245eb when the feed stream 3B is rich in HFO-1225ye. A stream 4 (not shown) as described above in connection with Figure 4 may also be removed from each of the steps B2 and B2'. In addition, the particular embodiments shown and described in Figure 4A may also be adapted for use in connection with one or both the separation steps B and B' shown in Figure 5.

DEHYDROHALOGENATION

[0059] The dehydrofluorination step can be carried out in a liquid phase in the presence of a caustic solution or a gas phase in the presence of a dehydrofluorination catalyst. It is contemplated that the reaction may be carried out batchwise, continuously or a combination thereof.

[0060] In one embodiment the converting step involves a reaction in which HFC-245eb and/or HFC-236ea is contacted with a dehydrohalogenating agent such as potassium hydroxide (KOH), sodium hydroxide (NaOH), Ca(OH)₂, CaO, and combinations thereof to form the fluorinated olefin. If KOH is used, such a reaction may be described by way of illustration, but not necessarily by way of limitation, by the following reaction equations (1) and (2):



[0061] In such embodiments, KOH is provided as a caustic aqueous solution comprising from about 2% to about 100%, more preferably from about 10% to about 50%, and even more preferably from about 10% to about 30% by weight of KOH. In further embodiments, the caustic solution, and preferably the KOH solution, is brought to a temperature of from about

20°C to about 100°C, more preferably from about 20°C to about 90°C, and most preferably from about 20°C to about 70°C. The reaction pressure in such embodiments may vary, depending on particular processing parameters of each application. In certain embodiments, the reaction pressure ranges from atmospheric pressure, super-atmospheric pressure or under vacuum. The vacuum pressure, when used, in certain embodiments ranges from about 5 torr to about 760 torr.

[0062] It is contemplated that the amount of catalyst used, or mole ratio of catalyst to organic, will vary depending on the particular parameters present in each embodiment. In certain embodiments, the mol ratio of KOH to organic feeds (e.g. HFC-245eb and/or HFC-236ea) is from less than 1 to 3, preferably 1-1.5. In further embodiments, the contact time, which is expressed as the ratio of the volume of the catalyst (ml) to the total feed flow (ml/sec) is from about 0.1 seconds to about 1000 seconds, and preferably from about 2 seconds to about 120 seconds.

[0063] The foregoing reaction equations (1) and (2) can be accomplished using any suitable vessel or reactor. Such vessels or reactors should be constructed from materials which are resistant to corrosion, such as nickel and its alloys, including Hastelloy, Inconel, Incoloy, and Monel. In certain embodiments, this reaction is performed using one or a series of Continuously Stirred Tank Reactors (CSTR). In this type of reactor, organic feed (e.g. HFC-236ea and/or HFC-245eb) and KOH would be fed continuously into the reactor and the resulting product stream formed would be fed into a condenser or distillation column for separation of 1225ye and/or 1234yf from and un-reacted 236ea and/or 245eb, as well as other by-products of the reaction.


[0064] In certain preferred embodiments, spent KOH is removed from the product stream either periodically or continuously and is recycled back to the reactor for reuse. As noted

previously, Applicants have discovered that, during continuous processing, using KOH as a catalyst, the reaction proceeds until either the organic reactants (e.g. HFC-236ea and/or HFC-245eb) or KOH is consumed. This increases costs of productivity because the reactor must be dismantled upon completion of the reaction to remove the salt and/or salt solutions. By recycling the KOH, however, such costs may be reduced and the system made more efficient.

[0065] Spent KOH may be withdrawn from the reactor by a product stream either continuously or intermittently using one or more known separation techniques. To this end, spent KOH separation may occur using any known compound separation techniques, such, but not limited to, distillation, phase separation, etc. In certain embodiments, withdrawal of spent KOH is especially beneficial for component separation as it allows for facile separation of organic and KOH. This in turn leads to lower cost associated with design and operation of complicated and highly specialized separation equipment.

[0066] The product stream containing spent KOH typically carries with it some dissolved organic (e.g. HFC-236ea and/or HFC-245eb). By stopping the stirrer and then removing spent KOH during the time agitation is stopped, separation of KOH and such organic can be facilitated. Spent KOH and dissolved organic would be taken into a container where additional separation of KOH and organic can be accomplished using one or more of the foregoing separation techniques. In one embodiment, for example, KOH is separation by distillation, i.e. by heating organic just above boiling point of 236ea and/or 245eb, thus fractionating the organic from the spent KOH. Alternatively, one can use phase separator to separate between the two phases. The organic free KOH isolate can be immediately recycled to the reactor or can be concentrated and the concentrated solution can be returned to reactor.

[0067] In further embodiments, the product stream containing the spent KOH also includes potassium fluoride (KF). Again, the KF/KOH containing product stream can be separated using any of the foregoing methods, thus isolating KF from KOH. In certain embodiments, isolated KF then can be converted back to KOH and recycled back to the dehydrohalogenation reaction. For example, $\text{Ca}(\text{OH})_2$ can be used for KF conversion according to reaction below.



CaF_2 will precipitate from the foregoing reaction while KOH is isolated and recycled back to reactor. Recycling of spent KOH leads to better efficiency of the catalyst use. Moreover, the use of $\text{Ca}(\text{OH})_2$ to convert salt to KOH increases catalyst use and avoids costs associated with disposal of salt, and/or purchase of new raw material.

[0068] In one embodiment of the present invention, and referring to Figure 6, the dehydrohalogenation step comprises a reaction step C having associated therewith at least a first flow path or feed stream 5A, at least a second flow path or feed stream 5B and at least a third flow path or feed stream 8, with each flow path being independently operable. In such embodiments, it is preferred that the first flow path or feed stream 5A comprises HFO-236ea and preferably substantially all of the HFO-236ea being fed to the reaction step C, the second path or feed stream 5B comprises HFC-245eb, and preferably substantially all of the HFO-245eb being fed to the reaction step C (it being recognized that the feed stream 5B in many embodiments will have a substantially zero flow). Flow path or stream 8 is at path for allowing introduction of a recycle stream into the reaction step. In some embodiments, the actual flow of recycle stream 8 is zero, but in preferred embodiments, the recycle stream comprises a relatively low temperature stream comprising a portion of the reaction product stream 6A after it has been cooled and/or

separated. The content of recycle stream 8, when present, may include unreacted organic (e.g. HFC-236ea, HFC-245eb) and spent KOH. Each may be purified or recovered, as provided herein and recycled.

[0069] In another preferred embodiment of the present invention as illustrated in Figure 7, the dehydrohalogenation step comprises at least a first reaction step C1 and a second reaction step C2. The first reaction step C1, which may comprise one or more reaction stages in parallel or in series or a combination of parallel or series, having associated therewith at least a first flow path or feed stream 5A and at least a second flow path or feed stream 8A, with each flow path being independently operable. The second reaction step C2, which may comprise one or more reaction stages in parallel or in series or a combination of parallel or series, having associated therewith at least a first flow path or feed stream 5B and at least a second flow path or feed stream 8B, with each flow path being independently operable. In such embodiments, it is preferred that the first flow path or feed stream 5A comprises HFO-236ea and preferably substantially all of the HFO-236ea being fed to the reaction step C, the second path or feed stream 5B comprises, when present, HFO-245eb and preferably substantially all of the HFO-245eb being fed to the reaction step C. Flow path or streams 8A and 8B are flow paths for allowing introduction of a recycle stream comprising at least a portion of unreacted feed back or recycled KOH, as defined herein. In some embodiments, the actual flow of recycle streams 8A and 8B are substantially zero, but in preferred embodiments, the recycle streams comprises relatively low temperature streams comprising a portion of the reaction product streams 6A and 6B after they have been cooled and separated.

[0070] Preferably, the reaction conditions are controlled in the reaction in order to achieve the desired conversion and/or selectivity in accordance with the present invention. As

used herein, the term “reaction conditions” is intended to include the singular and means control of any one or more processing parameters, including possibly using or not using a reaction vessel or stage, which can be modified by the operator of the reaction to produce the conversion and/or selectivity of the feed material in accordance with the teachings contained herein. By way of example, but not by way of limitation, conversion of the feed material may be controlled or regulated by controlling or regulating any one or more of the following: the temperature of the reaction, the flow rate of the reactants, the presence of diluent, the amount of catalyst present in the reaction vessel, the shape and size of the reaction vessel, the pressure of the reaction, and any one combinations of these and other process parameters which will be available and known to those skilled in the art in view of the disclosure contained herein. The size and shape, and other characteristics of the reaction vessel itself may vary widely with the scope of the present invention, and it is contemplated that the vessel associated with each stage may be different than or the same as the vessel associated with the upstream and downstream reaction stages.

Furthermore, it is contemplated that all reaction stages can occur inside a single vessel, provided that means and mechanisms necessary to control conversion are provided. For example, it may be desirable in certain embodiments to utilize a single tubular reactor for each reaction stage, providing conversion control by judicious selection of the amount and/or distribution of catalyst throughout the tubular reactor. In such a case, it is possible to further control the conversion in different sections of the same tubular reactor by controlling the amount of heat removed from or added to different sections of the tubular reactor.

[0071] The resulting products may be isolated from the product stream using one or more methods known in the art and purified accordingly.

EXAMPLES

[0072] The following examples are provided for the purpose of illustrating the present invention but without limiting the scope thereof.

[0073] Example 1:

[0074] CSTR was used to convert 245eb to 1234yf. The reactor was designed and operated in such a way that the end of the dip tube was in the middle of KOH phase. After the startup, organic and fresh KOH constantly go in. Organic out (the overhead portion) is constantly taken out. In a typical cycle organic and KOH flow in and overhead is taken out for 30 min. Flowrates are 5 and 12 ml/min, respectively. The mixture is stirred during this period of time. Then stirrer is stopped for 10 min, while feeds still go in. While stirrer is off, after 10 min, applicable valves for the spent KOH to go out were open. Between 500 and 550 g (careful material balance is calculated, so that reactor was not overfilled or emptied out) was taken out every 40 min.

[0075] Experiment was carried out for 7 hours. Temperature was 48 °C. Pressure was 45 psig. GC area percent of the organic feed was ~97% of 245eb, the rest being most probably 254. The flowrates translate to mol ratio of KOH to G-245eb of 1, or slightly above 1. Theoretical residence time was 100 min.

[0076] Scrubber PCC (SPCC) was used to collect spent KOH and organic that was carried out with spent KOH. Organic was trapped in MeCl_2 which was added to SPCC. The volume of MeCl_2 inside the SPCC was 15% of the total volume of liquid in SPCC. Product and un-reacted organic was collected in PCC that were held in dry ice. Vapor samples were taken once in an hour while liquid samples were taken at much longer intervals.

[0077] Overall mass balance was 94% for organic. Average conversion was 48%.
Selectivity to 1234yf was 73%.

[0078] Example 2:

[0079] The second experiment was carried out in the same fashion as the experiment 1, except that pressure and temperature were 48 psig and 47 C. Experiment lasted 6 hours and overall conversion was 69%. Selectivity to 1234yf was 75%.

[0080] Example 3:

[0081] Reactor was loaded with 807 ml of organic. The feed was analyzed by GC to reveal Area % for 236ea as 97.70. There was no 1234yf in this feed, while the % of 1225ye was 0.03. After loading the reactor with organic, 1641 ml of 25% KOH is added. Therefore mol ratio of KOH to 236ea was 1.23.

[0082] The flowrates of 236ea and KOH were 2 and 4 ml/min. Pressure was 35-45 psig. Reactor temperature was 42-45 C.

[0083] Spent KOH was taken out of reactor periodically (it was fed continuously as was organic; overhead product was taken out continuously → semi-continuous operation). In this semi-continuous mode KOH and organics flowed into stirred reactor for 50 min. Then stirrer was stopped for 10 min while reactants were still going in. Afterwards 290-300 g of spent KOH was taken out (by watching the change in the weight on the scale). Then stirrer was started as was the clock for 50 min time period.

[0084] Spent KOH was collected in scrubber PCC (SPCC). SPCC was pre-filled with methylene chloride (the target was to have 15-20 wt% of MeCl_2 in the final spent KOH- MeCl_2 solution). Analysis of methylene chloride layer revealed that ~70 GC area % was 236ea. There was small amount of 1225ye (~2%) while the rest were some unknown heavies. In order to

confirm that all organic was extracted with MeCl_2 , part KOH was added to part MeCl_2 (i.e. 1:1).


GC analysis revealed that amount of organic was negligible.

[0085] Overall mass balance was 88.67%. Residence time was 200 min. The conversion was ~50%. Selectivity to 1225ye was 63%. The reaction was carried out for the total of 97 hours.

CLAIMS

What is claimed is:

1. A method for producing at least one fluorinated olefin comprising:
 - a. hydrogenating a starting material stream comprising at least one alkene according to Formula (I):



by contacting said starting material with a reducing agent to produce an intermediate product stream comprising at least one alkane according to Formula (II):



where:

each X is independently Cl, F, I or Br, provided that at least two Xs are F;

each Y is independently H, Cl, F, I or Br;

each R¹ is independently H, Cl, F, I, Br or unsubstituted or halogen substituted methyl or ethyl radical;

each R₂ is independently H, Cl, F, I, Br or unsubstituted or halogen substituted methyl or ethyl radical;

n is 1, 2 or 3;

a and b are each 0, 1 or 2, provided that a+b = 2;

m is 0, 1 or 2; and

z is 0, 1, 2 or 3;

- b. optionally, separating said intermediate product stream into a plurality of intermediate product streams, said plurality of intermediate product streams comprising two or more streams selected from the group consisting of a first

- stream rich in at least a first alkane according to Formula II, a second stream rich in at least a second alkane according to Formula II, and an alkane recycle stream;
- c. dehydrofluorinating, in the presence of KOH, at least a portion of said intermediate process stream from step (a) or said plurality of intermediate process streams of step (b) to produce an alkene product stream comprising 1,1,1,2,3-pentafluoropropene and at least one additional alkene having a lower degree of fluorine substitution compared to the degree of fluorination of the compound of formula (I); and
 - d. withdrawing from a dehydrofluorinated product stream a product reaction stream comprising spent KOH; and
 - e. purifying spent KOH.
2. The method of claim 1 wherein said additional alkene is a compound according to formula (III):

$$(CX_nY_{3-n})(CR^1_aR^2_b)_ZCX=CH_{m+1}X_{1-m} \text{ (III)}$$
 where each of X, Y, R^1 , R^2 , n, a, and b is the same value as in formula (I) and m is 0 or 1.
 3. The method of claim 2 wherein Z is 0.
 4. The method of claim 3 wherein m is 0 or 1.
 5. The method of claim 4 wherein said n is 3.
 6. The method of claim 5 wherein X is F.
 7. The method of claim 1 wherein said reducing agent is H_2 .
 8. The method of claim 1 wherein said starting material stream comprises hexafluoropropylene and said additional alkene is 1,1,1,2-tetrafluoropropene.
 9. A method for producing 1,1,1,2-tetrafluoropropene comprising:

- a. hydrogenating a starting material stream comprising hexafluoropropylene by contacting said starting material stream with a reducing agent in a hydrogenation reactor to produce an intermediate stream comprising 1,1,1,2,3-pentafluoropropane or 1,1,1,2,3,3-hexafluoropropane;
 - b. dehydrofluorinating, in the presence of KOH, said 1,1,1,2,3-pentafluoropropane or said 1,1,1,2,3,3-hexafluoropropane in a dehydrofluorination reactor to produce a product stream comprising 1,1,1,2-tetrafluoropropene or 1,1,1,2,3-pentafluoropropene;
 - c. withdrawing from the product stream a second product stream comprising spent KOH; and
 - d. purifying spent KOH.
10. The process of claim 9 wherein the second product stream further comprises a dissolved organics.
11. The process of claim 10 wherein the dissolved organics are selected from the group consisting of 1,1,1,2,3,3-hexafluoropropane (HFC-236ea) or 1,1,1,2,3-pentafluoropropane (HFC-245eb).
12. The process of claim 9 wherein the spent KOH is purified using at least one separation method.
13. The process of claim 12 wherein the separation method is selected from the group consisting of distillation or phase separation.
14. The process of claim 9 further comprising, optionally, concentrating the purified KOH and recycling it back to the dehydrohalogenation reaction.
15. The process of claim 9 wherein the reaction stream further comprises KF.

16. The process of claim 15 further comprising converting KF to KOH in the presence of CaF_2 .
17. The process of claim 17 further comprising, optionally, concentrating the converted KOH and recycling it back to the dehydrohalogenation reaction.
18. A process for the manufacture of a fluoroolefin comprising:
- (a) dehydrohalogenating a haloalkane in the presence of KOH to produce a haloalkene;
 - (b) withdrawing a reaction stream comprising spent KOH; and
 - (c) purifying spent KOH.
19. The process of claim 18 wherein the haloalkane is comprised of a compound of formula (IIA):



wherein each X is independently selected from the group consisting of Cl, F, I and Br; each Y is independently selected from the group consisting of H, Cl, F, I, and Br; n is 1, 2, or 3; and m is 0, 1 or 2.

20. The process of claim 19 wherein the haloalkane is 1,1,1,2,3,3-hexafluoropropane (HFC-236ea) or 1,1,1,2,3-pentafluoropropane (HFC-245eb).
21. The process of claim 18 wherein the haloalkene is comprised of a compound of formula (IIIA):



wherein each X is independently selected from the group consisting of Cl, F, I and Br; each Y is independently selected from the group consisting of H, Cl, F, I, and Br; n is 1, 2, or 3; and m is 0 or 1.

22. The process of claim 21 wherein the haloalkene is 2,3,3,3-tetrafluoropropane (HFO-1234yf) or 1,2,3,3,3-pentafluoropropene (HFO-1225ye).
23. The process of claim 18 wherein the dehydrohalogenation occurs using a continuously stirred tank reactor.
24. The process of claim 18 wherein the spent KOH is withdrawn from the reactor continuously or intermittently.
25. The process of claim 18 wherein the reaction stream further comprises a dissolved organics.
26. The process of claim 25 wherein the dissolved organics are selected from the group consisting of 1,1,1,2,3,3-hexafluoropropane (HFC-236ea) or 1,1,1,2,3-pentafluoropropane (HFC-245eb).
27. The process of claim 18 wherein the spent KOH is purified using at least one separation method.
28. The process of claim 27 wherein the separation method is selected from the group consisting of distillation or phase separation.
29. The process of claim 18 further comprising, optionally, concentrating the purified KOH and recycling it back to the dehydrohalogenation reaction.
30. The process of claim 18 wherein the reaction stream further comprises KF.
31. The process of claim 30 further comprising converting KF to KOH in the presence of CaF_2 .
32. The process of claim 31 further comprising, optionally, concentrating the converted KOH and recycling it back to the dehydrohalogenation reaction.
33. A process for the manufacture of a fluoroolefin comprising:

(a) dehydrohalogenating 1,1,1,2,3,3-hexafluoropropane (HFC-236ea) or 1,1,1,2,3-pentafluoropropane (HFC-245eb) in the presence of KOH to produce 2,3,3,3-tetrafluoropropane (HFO-1234yf) or 1,2,3,3,3-pentafluoropropene (HFO-1225ye);

(b) withdrawing a reaction stream comprising spent KOH; and

(c) purifying spent KOH.

34. The process of claim 33 wherein the dehydrohalogenation occurs using a continuously stirred tank reactor.

35. The process of claim 33 wherein the spent KOH is withdrawn from the reactor continuously or intermittently.

36. The process of claim 33 wherein the reaction stream further comprises a dissolved organics.

37. The process of claim 36 wherein the dissolved organics are selected from the group consisting of 1,1,1,2,3,3-hexafluoropropane (HFC-236ea) or 1,1,1,2,3-pentafluoropropane (HFC-245eb).

38. The process of claim 33 wherein the spent KOH is purified using at least one separation method.

39. The process of claim 38 wherein the separation method is selected from the group consisting of distillation or phase separation.

40. The process of claim 33 further comprising, optionally, concentrating the purified KOH and recycling it back to the dehydrohalogenation reaction.

41. The process of claim 33 wherein the reaction stream further comprises KF.

42. The process of claim 41 further comprising purifying KF from the reaction stream.

43. The process of claim 33 further comprising converting KF to KOH in the presence of CaF_2 , optionally, concentrating the KOH and recycling it back to the dehydrohalogenation reaction.

ABSTRACT

The instant invention relates, at least in part, to a method increasing the cost efficiency for dehydrohalogenation production of a fluorinated olefin by recovering and recycling spent catalyst. In one aspect, the present invention relates to dehydrohalogenating a fluorinated alkane (e.g. pentafluoropropane and/or hexafluoropropane) in the presence of KOH to produce a fluorinated olefin (e.g. tetrafluoropropenes and/or pentafluoropropenes). Removal of spent KOH from the reactor allows for facile separation of organic and KOH. This in turn leads to lower cost associated with design and operation of complicated and highly specialized separation equipment. Recycling the spent KOH leads to better utilization of KOH. Increased productivity is similarly observed if KF salts are also isolated from the product stream, converted back to KOH using calcium salts, and recycled to the reaction.

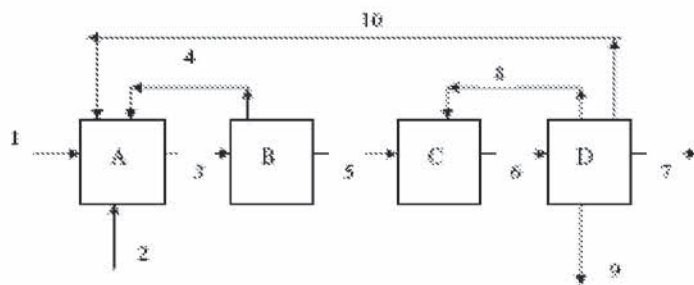


FIGURE 1




FIGURE 2

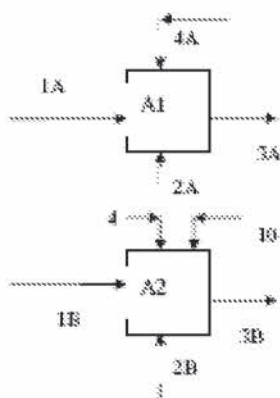


FIGURE 3

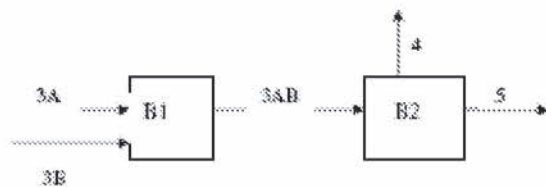


FIGURE 4

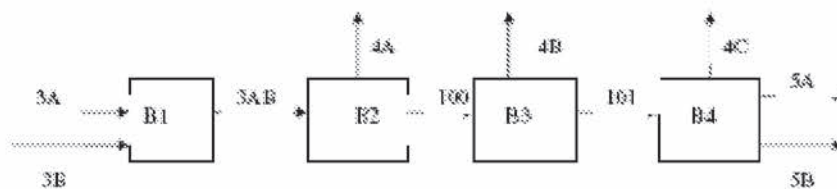


FIGURE 4A

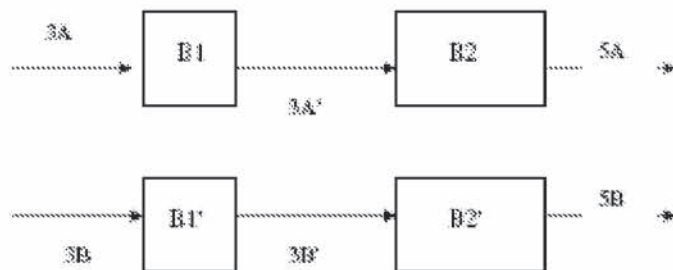


FIGURE 5




FIGURE 6




FIGURE 7

Electronic Patent Application Fee Transmittal

Application Number:

Filing Date:

Title of Invention:

INTEGRATED PROCESS FOR THE MANUFACTURE OF FLUORINATED OLEFINS

First Named Inventor/Applicant Name:

SELMA BEKTESEVIC

Filer:

John Eric Sumner/Michele Greenberg

Attorney Docket Number:

H0024680-4511

Filed as Large Entity

Provisional Filing Fees

Description

Fee Code

Quantity

Amount

**Sub-Total in
USD(\$)**

Basic Filing:

Provisional application filing

1005

1

220

220

Pages:

Claims:

Miscellaneous-Filing:

Petition:

Patent-Appeals-and-Interference:

Post-Allowance-and-Post-Issuance:

Extension-of-Time:

Description	Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Miscellaneous:				
Total in USD (\$)				220

Electronic Acknowledgement Receipt

EFS ID:	8608617
Application Number:	61392242
International Application Number:	
Confirmation Number:	2500
Title of Invention:	INTEGRATED PROCESS FOR THE MANUFACTURE OF FLUORINATED OLEFINS
First Named Inventor/Applicant Name:	SELMA BEKTESEVIC
Customer Number:	91970
Filer:	John Eric Sumner/Michele Greenberg
Filer Authorized By:	John Eric Sumner
Attorney Docket Number:	H0024680-4511
Receipt Date:	12-OCT-2010
Filing Date:	
Time Stamp:	15:58:06
Application Type:	Provisional

Payment information:

Submitted with Payment	yes
Payment Type	Credit Card
Payment was successfully received in RAM	\$ 220
RAM confirmation Number	2883
Deposit Account	
Authorized User	

File Listing:

Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
-----------------	----------------------	-----------	-------------------------------------	---------------------	---------------------

1	Application Data Sheet	int11B.PDF	1104892	no	5
			15cd18dce5c38892ff32733ef8a86d963ee5b42d		
Warnings:					
Information:					
2		int183.PDF	161044	yes	37
			d2e25cb2ae944b1a89130585a145dbfd72ea35be		
	Multipart Description/PDF files in .zip description				
	Document Description		Start	End	
	Specification		1	29	
	Claims		30	36	
	Abstract		37	37	
Warnings:					
Information:					
3	Drawings-only black and white line drawings	int184.PDF	33750	no	3
			a8f805d7aa17927191517e5d7aeaa76c7be46f6		
Warnings:					
Information:					
4	Fee Worksheet (PTO-875)	fee-info.pdf	29890	no	2
			991fe98e069c486ea18034e1033f169e272cf711		
Warnings:					
Information:					
Total Files Size (in bytes):			1329576		

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.