

# THE ENCYCLOPAEDIA FOR LOCKSMITHS

© E.C. COREITT

by  
**Mick Friend**  
**Master Locksmith**  
Technical Editor Norman R England

**ACCO Brands**

**Exhibit 1011**

ACCO Brands v. Think Products

IPR2015-01167

Ex. 1011 - Page 1 of 3

An AuthorsOnLine Book

Copyright © Authors OnLine Ltd 2004

Text Copyright © Mick Friend 2004

Cover design by E.C.Corbitt ©

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopy, recording or otherwise, without prior written permission of the copyright owner. Nor can it be circulated in any form of binding or cover other than that in which it is published and without similar condition including this condition being imposed on a subsequent purchaser.

ISBN 0 7552 0117 5

Authors OnLine Ltd  
40 Castle Street  
Hertford SG14 1HR  
England

This book is also available in e-book format, details of which are available at  
[www.authorsonline.co.uk](http://www.authorsonline.co.uk)

**Padbar**


*Application – Building*

A steel bar spanning the full width of the opening of a door with supporting brackets or staples fixed to the frame and secured by a padlock. Often purpose made to fit the door. The term is also used generically to describe larger hasps and staples  
(see also locking bar)

**Padbolt**

*Application – Building*

A barrel or tower bolt with a 'hook' end to engage over a fixed eye in the locked position and which is secured by means of a padlock.

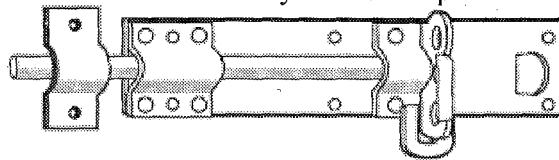

© copyright MF 2004

**Padlock**

*Application – Locksmith*

An independent removable and portable locking device, comprising of a body, key or code mechanism and a shackle, operated from one side only. The locking member is a hinged, sliding or swivelled shackle which locks into the padlock body. Usually used with a Hasp and Staple, Padbolt, Padbar or locking bar. Range from one weighing a few grams to over 2kg. Sizes from 12mm to over 75mm. May be made from a variety of material and 'Marine' padlocks are designed to survive the most hostile climate. Shackle lengths may vary from 12mm to over 150mm. The most common styles are open and closed shackle but long shackle and bar shackle are also available. Locking can be key to open and snap shut, key open and close, key retaining or code (See open, closed and long shackle)  
( See BS EN 12320)

**Paknet**

*Application – Alarm*

A type of signalling that uses radio transmission to relay a signal from an alarmed premises to a central station. Used in remote areas where telephone lines are vulnerable and also as a backup in higher security installations.

**Pan (1)**

*Application – CCTV*

Movement of the camera in the horizontal plane, ie left and right