

Cox Communications, Inc.
Exhibit 1005



US006031904A

United States Patent [19]
An et al.

[11] **Patent Number:** **6,031,904**
[45] **Date of Patent:** **Feb. 29, 2000**

[54] **SERVICE ORDER MECHANISM FOR TELEPHONE SUBSCRIBER**

[75] Inventors: **Yafan An**, Plano, Tex.; **Eric Bierman**, Ottawa; **Michael A. Kelly**, Kinburn, both of Canada

[73] Assignee: **Nortel Networks Corporation**, Montreal, Canada

[21] Appl. No.: **08/878,966**

[22] Filed: **Jun. 19, 1997**

Related U.S. Application Data

[60] Provisional application No. 60/028,760, Oct. 23, 1996.

[51] **Int. Cl.**⁷ **H04M 3/42**

[52] **U.S. Cl.** **379/201; 379/93.12; 379/93.23; 370/352; 370/466**

[58] **Field of Search** 379/201, 114, 379/115, 93.12, 93.23, 265, 142; 370/352, 401, 466, 467, 465

[56] **References Cited**

U.S. PATENT DOCUMENTS

4,984,155	1/1991	Geier et al.	379/93.12
5,473,679	12/1995	La Porta et al.	379/201
5,475,746	12/1995	Miller et al.	379/201
5,485,511	1/1996	Iglehart et al.	379/156


5,544,236	8/1996	Andruska et al.	379/201
5,629,978	5/1997	Blumhardt et al.	379/201
5,631,954	5/1997	Evans et al.	379/93.17
5,657,446	8/1997	Pinard et al.	379/201
5,668,857	9/1997	McHale	379/93.07
5,687,224	11/1997	Alley, Jr. et al.	379/201
5,696,809	12/1997	Voit	379/265
5,751,802	5/1998	Carr et al.	379/201
5,761,288	6/1998	Pinard et al.	379/201
5,778,178	7/1998	Arunachalam	395/200.33
5,790,173	8/1998	Strauss et al.	379/201
5,790,648	8/1998	Bailis et al.	379/201
5,799,285	8/1998	Klingman	379/93.12
5,838,682	11/1998	Dekelbaum et al.	370/401
5,845,267	12/1998	Ronen	705/40
5,850,433	12/1998	Rondeau	379/201
5,884,032	3/1999	Bateman et al.	379/201


Primary Examiner—Scott Wolinsky


[57] **ABSTRACT**

A system and method for allowing telephone subscribers to update over the Internet the features which are active on the telephone. A server on the Internet is connected to a profile repository which determines which features are active on each subscriber line. Subscribers with Internet access may access a special home page, and access their feature profile and make additions, deletions etc. to it. This eliminates the need for a human operator to process requests for changing feature profiles.

15 Claims, 16 Drawing Sheets

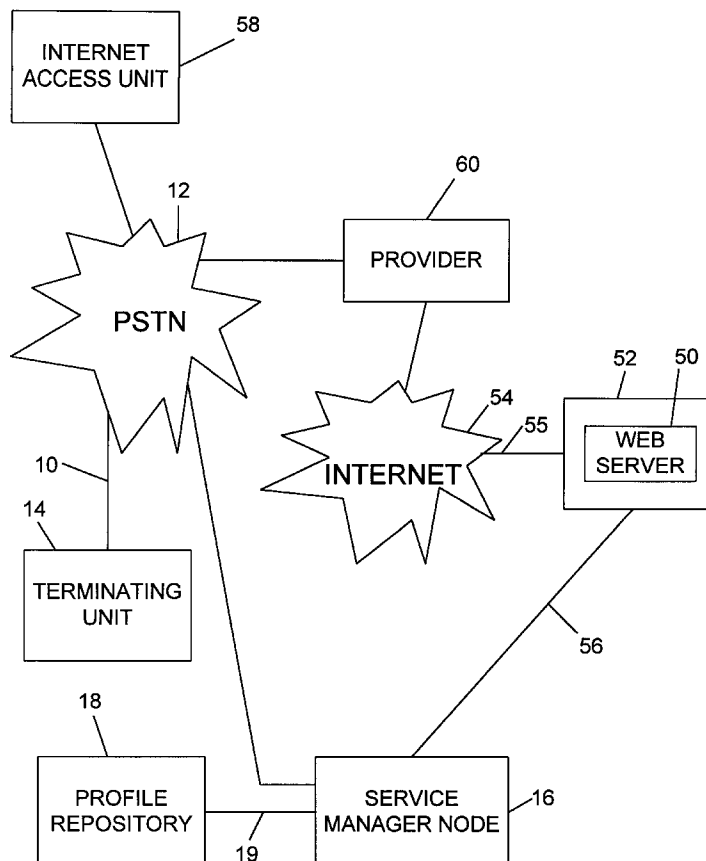

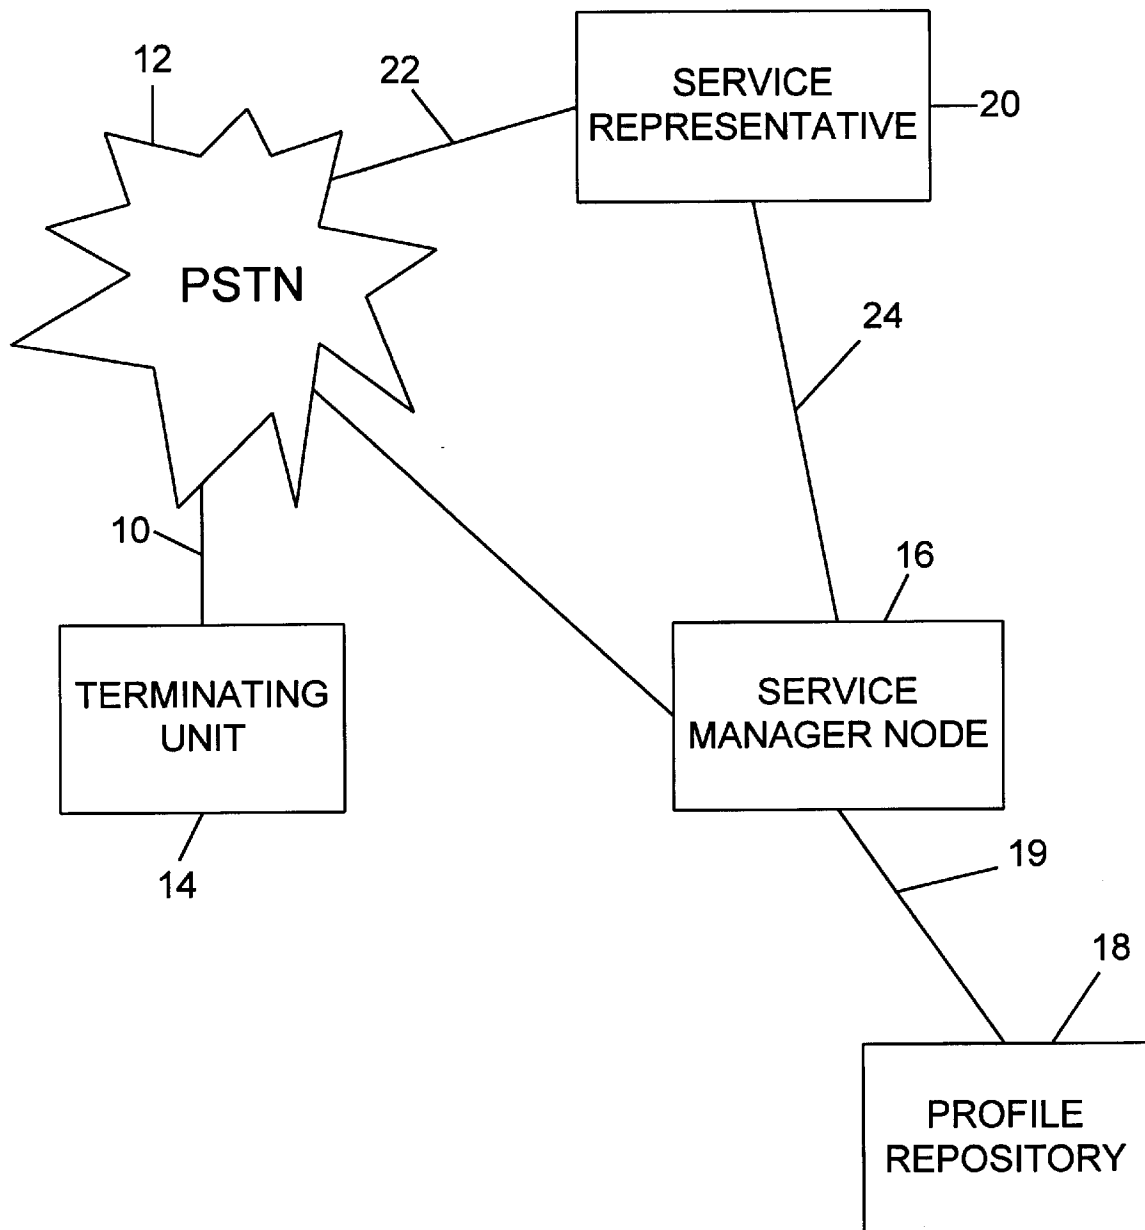**FIGURE 1**

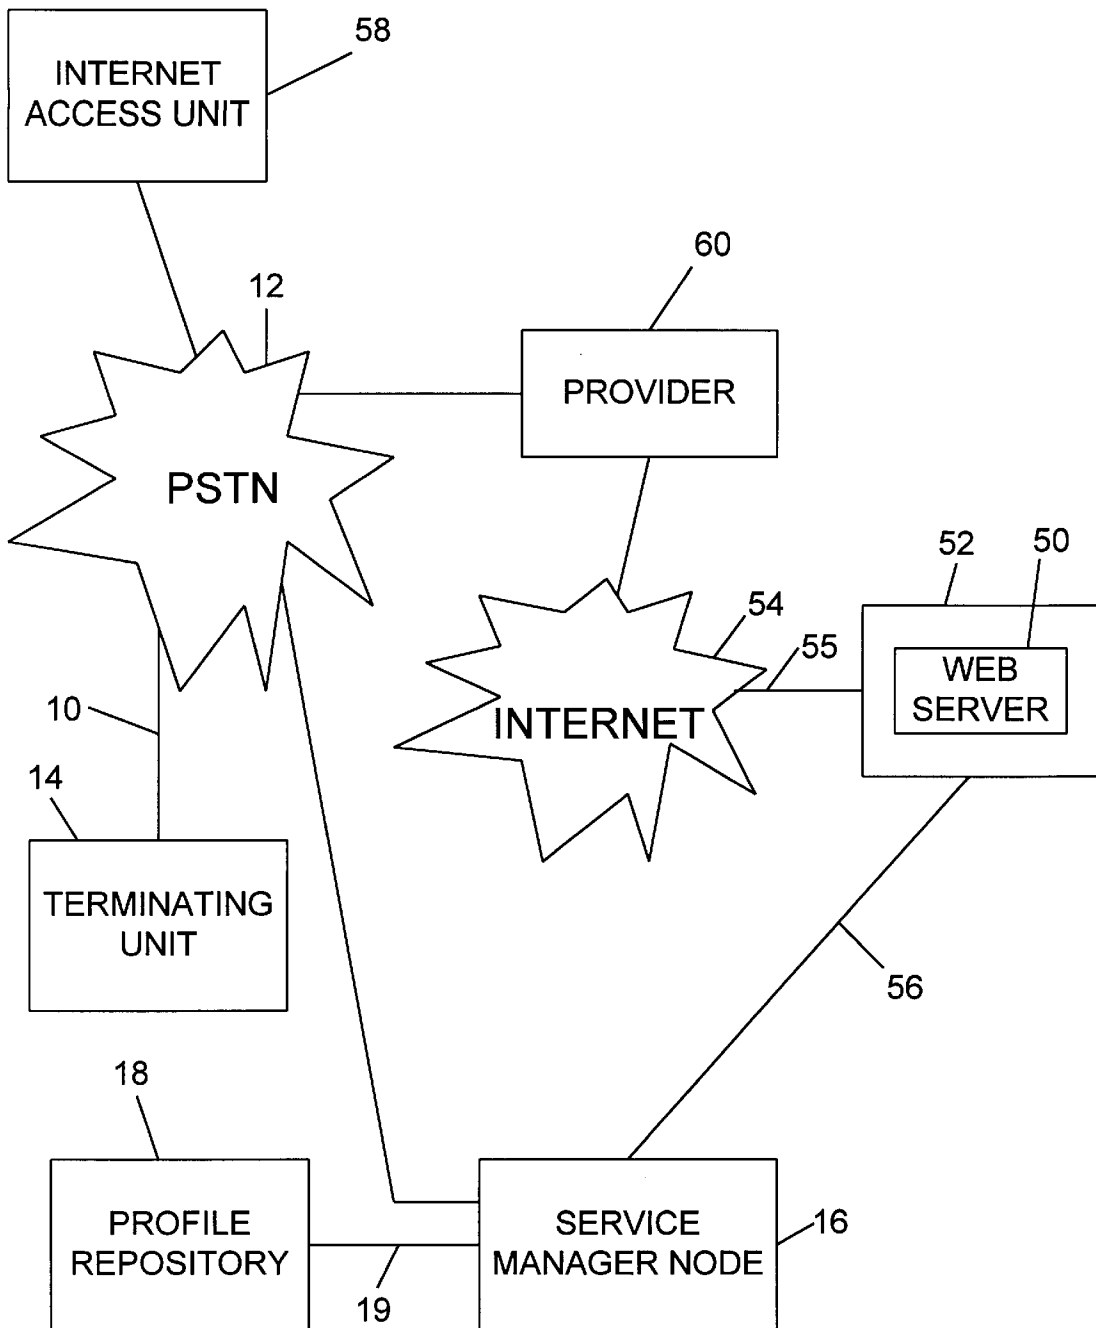**FIGURE 2**

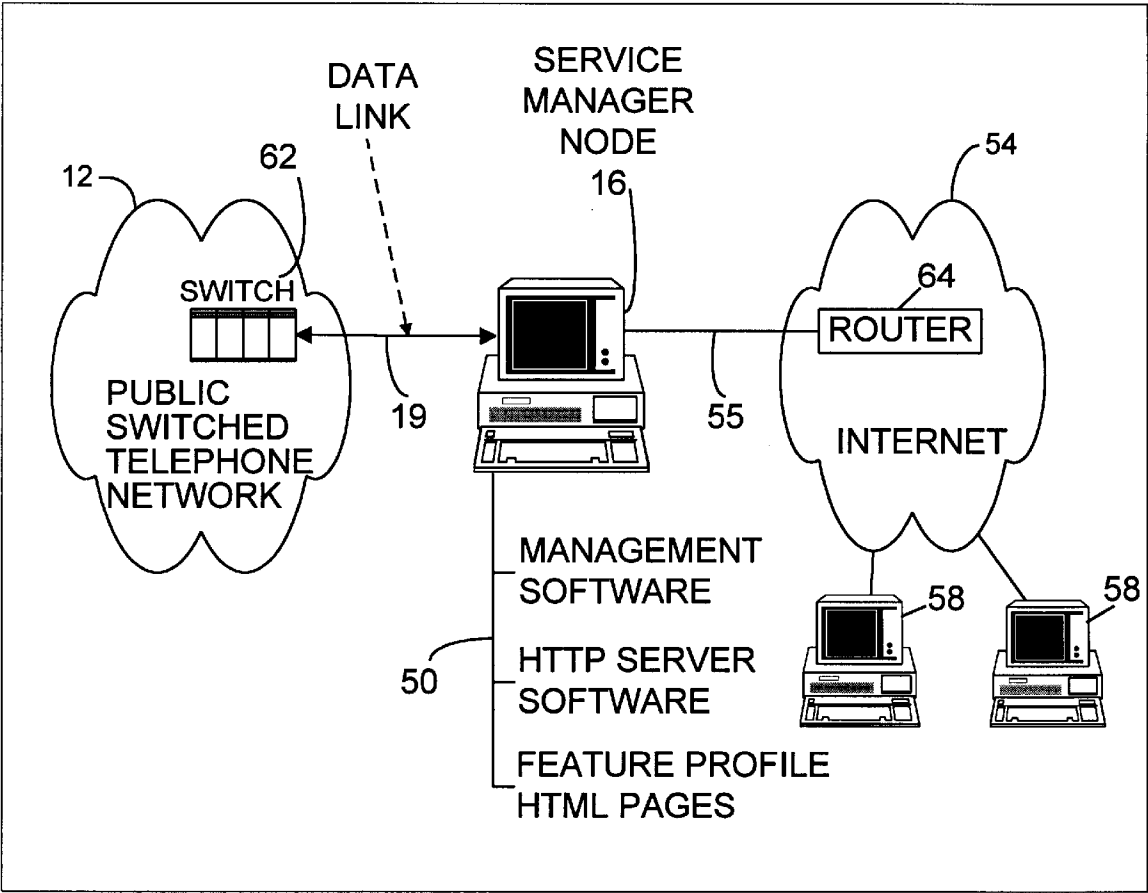


FIGURE 3


WELCOME TO THE SSPM

DN **395-2504**

PIN **XXXXX**

CANCEL **ENTER**

FIGURE 4

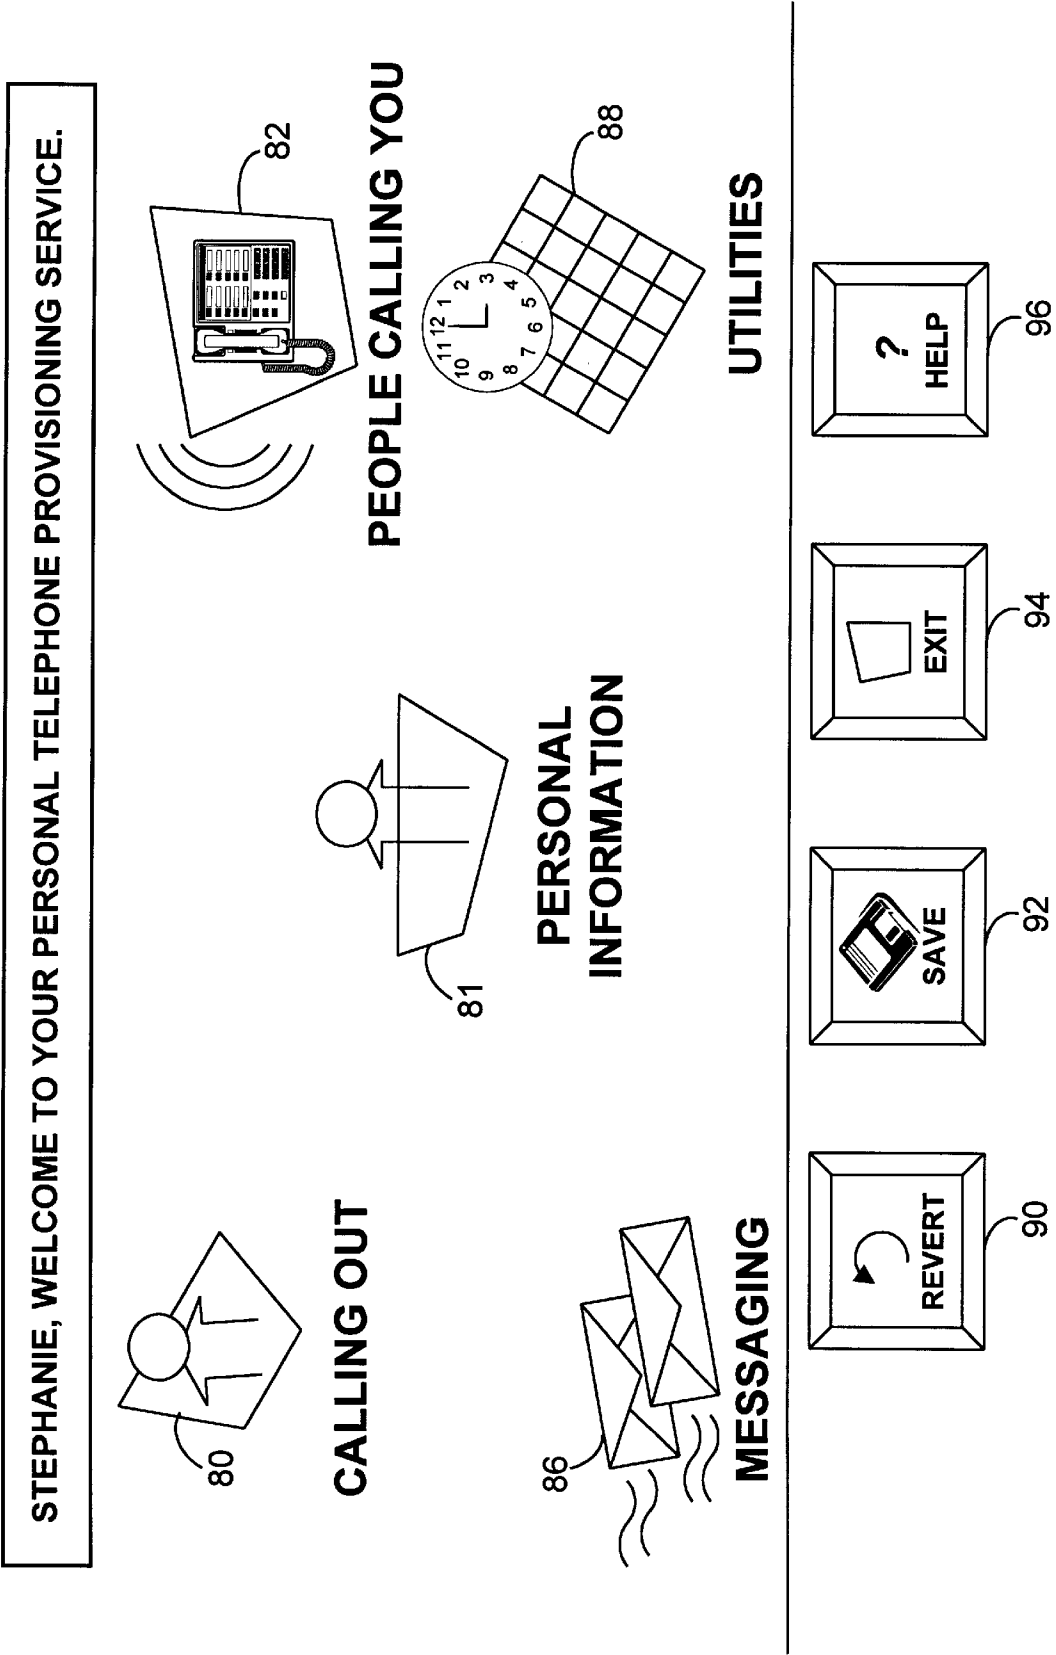

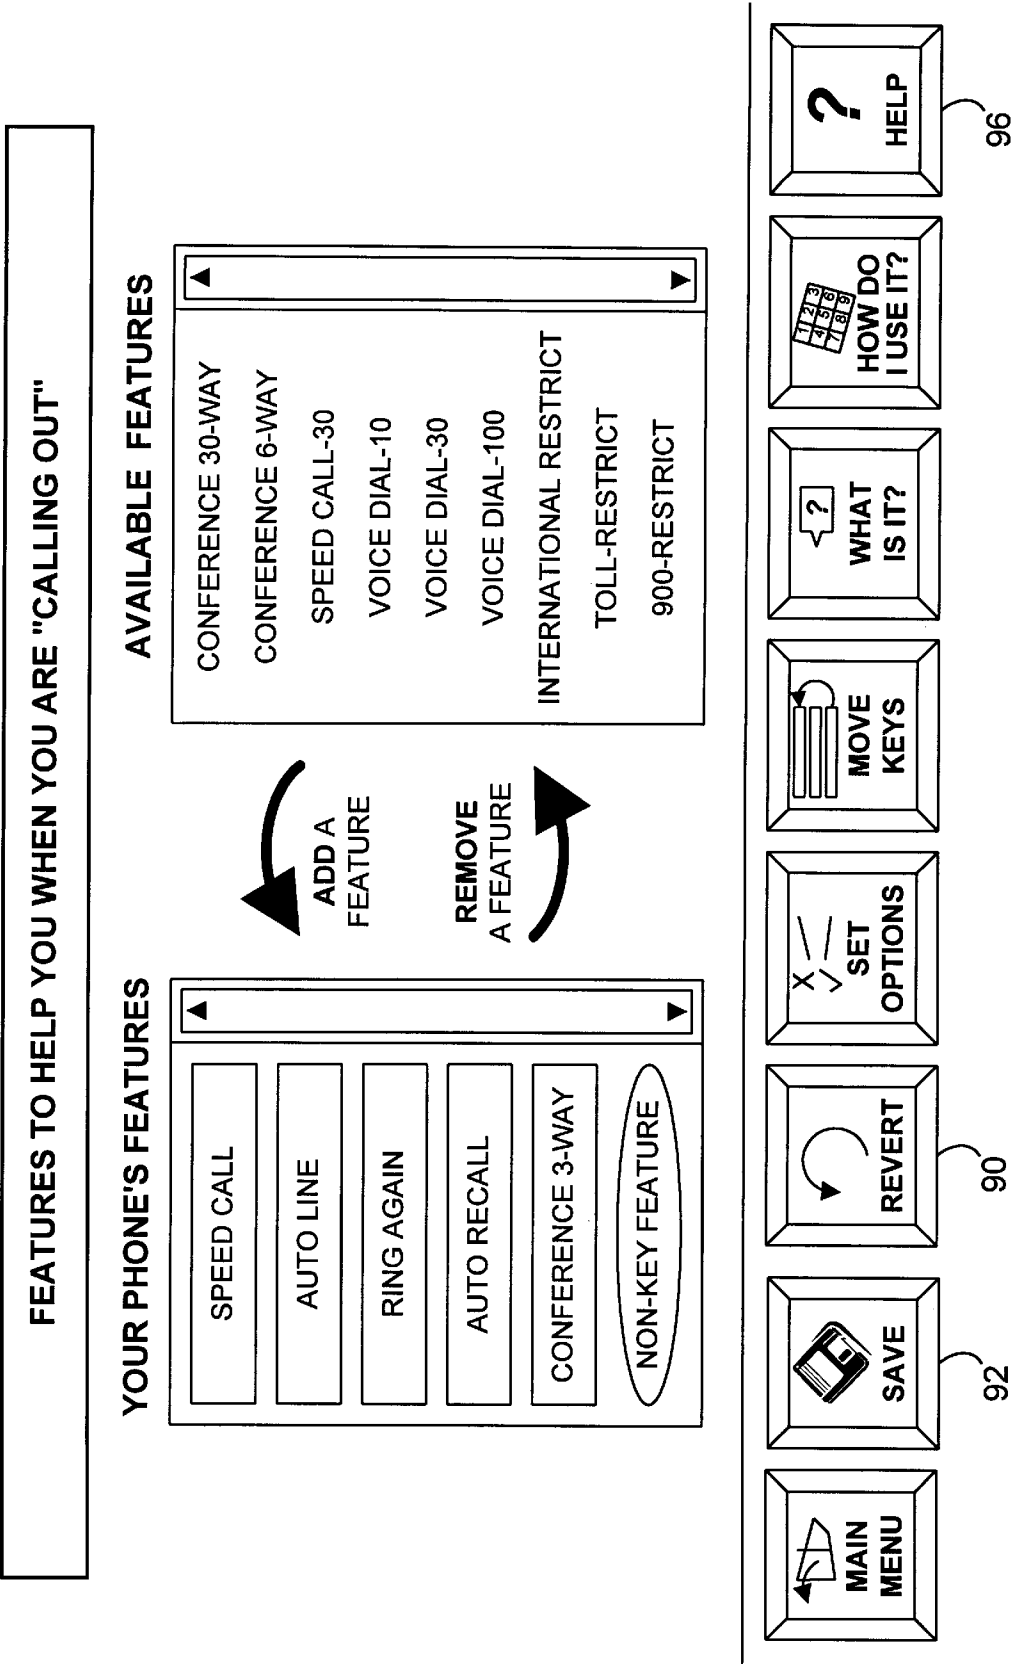


FIGURE 6

SPEED CALL OPTIONS

ALLOWS YOU TO REACH PREDEFINED NUMBERS BY DIALING SPECIFIC PROGRAMMED CODES

NAME		PHONE NUMBER
1	BIN ZOU	393-9893
2	JULIAN CRADDOCK	395-2164
3	MICHELLE BEAUDRY	395-2504
4	CHRIS CORNER	393-2244
5	ROB McLELLAN	393-2167
6	YAFAN AN	393-2536
7	MIKE KELLY	6-1-613-555-5555
8	DAVID HARVEY	393-9383
9	JONATHAN ABRAMS	393-1347
0	STEPHANIE BAKER	393-6130









FIGURE 7

96

90

92

HOW TO USE THE "SPEED CALL" FEATURE ON THE MERIDIAN BUSINESS SET

PRESS DN KEY OR LIFT RECEIVER

PRESS SPEED CALL

PRESS A NUMBER KEY
(0 through 9)

<div>1</div>	<div>2</div>	<div>3</div>
<div>4</div>	<div>5</div>	<div>6</div>
<div>7</div>	<div>8</div>	<div>9</div>
<div>*</div>	<div>0</div>	<div>#</div>

PRESET NUMBER WILL BE DIALED AUTOMATICALLY

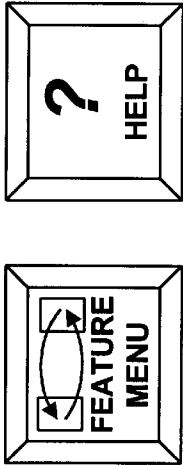



FIGURE 8

HOW TO USE THE "SPEED CALL" FEATURE ON THE LINK SETS

PRESS DN KEY OR LIFT RECEIVER

PRESS *

PRESS A NUMBER KEY
(0 through 9)



PRESET NUMBER WILL BE DIALED AUTOMATICALLY

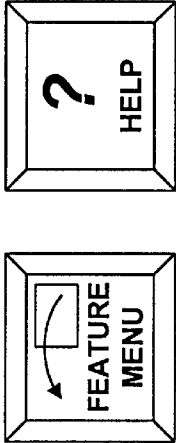


FIGURE 9

AUTO LINE OPTIONS

ALLOWS YOU TO AUTOMATICALLY CALL A NUMBER BY PRESSING AN ASSIGNED KEY

PRESSING THE "AUTO LINE"
BUTTON ON YOUR PHONE
WILL DIAL THIS NUMBER:

395-2504

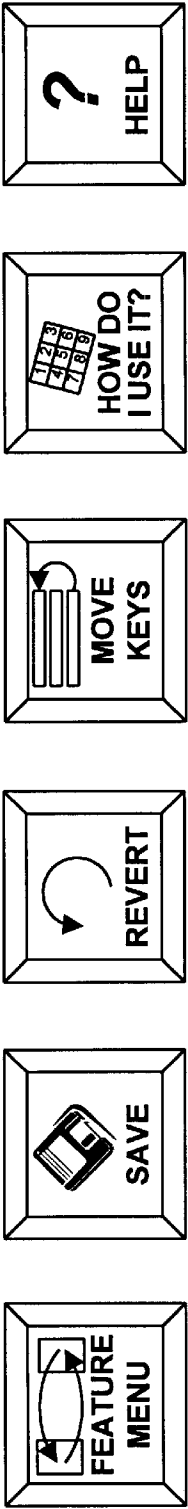



FIGURE 10

HOW TO USE THE "AUTO LINE" FEATURE

PRESS  AND YOUR PRESET NUMBER
WILL BE DIALED AUTOMATICALLY.

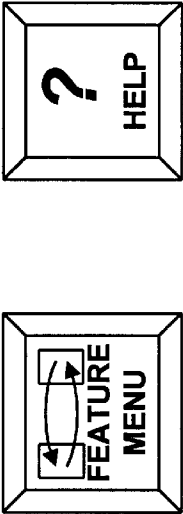


FIGURE 11


CONFIRMATION OF CHANGES TO SAVE

YOU HAVE MADE CHANGES TO THE FOLLOWING FEATURES:

SPEED CALL	<input checked="" type="checkbox"/>	CONFIRM	<input type="checkbox"/>	CANCEL
AUTO LINE	<input checked="" type="checkbox"/>	CONFIRM	<input type="checkbox"/>	CANCEL
CALL FORWARD	<input type="checkbox"/>	CONFIRM	<input checked="" type="checkbox"/>	CANCEL



FIGURE 12

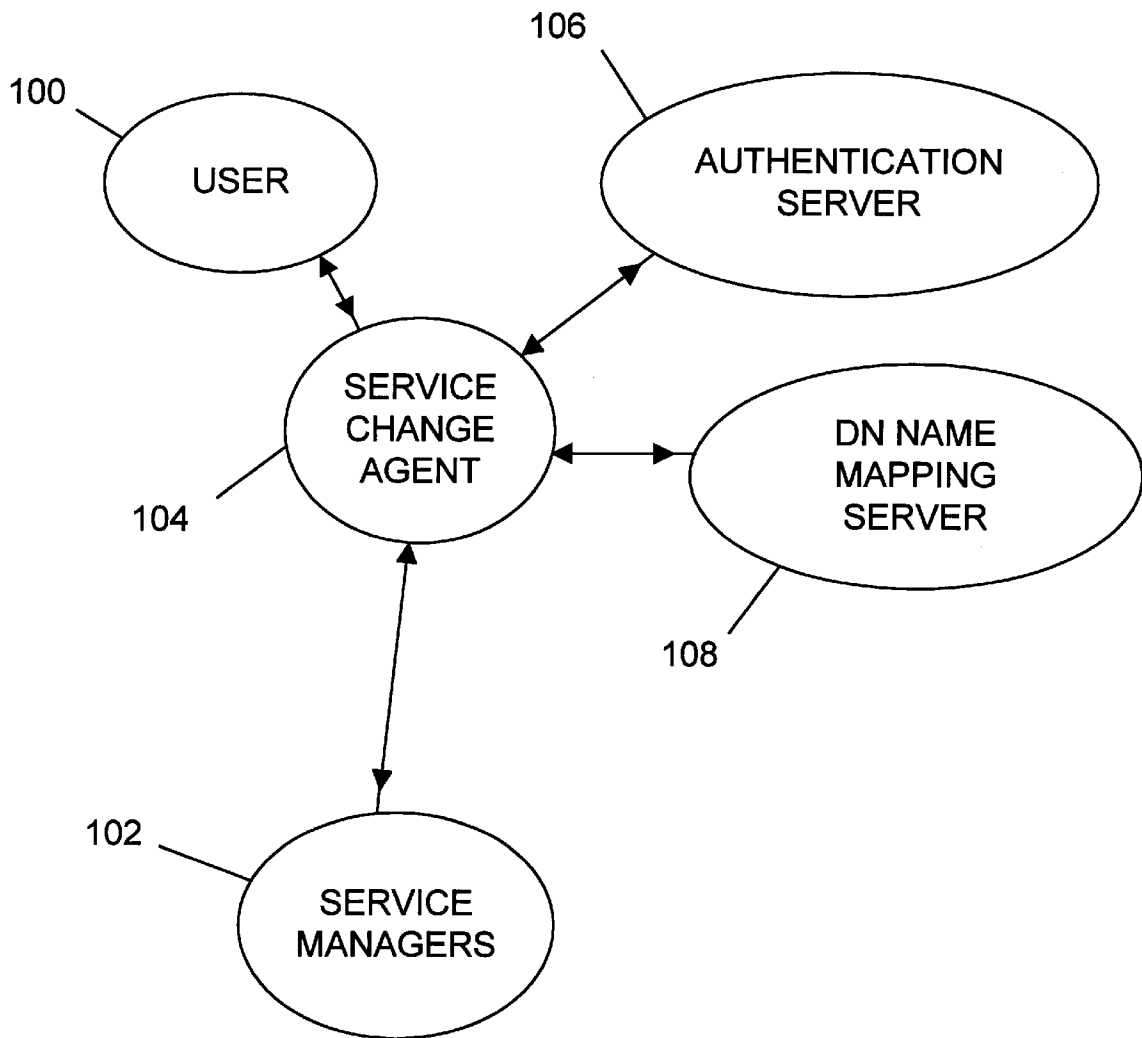**FIGURE 13**

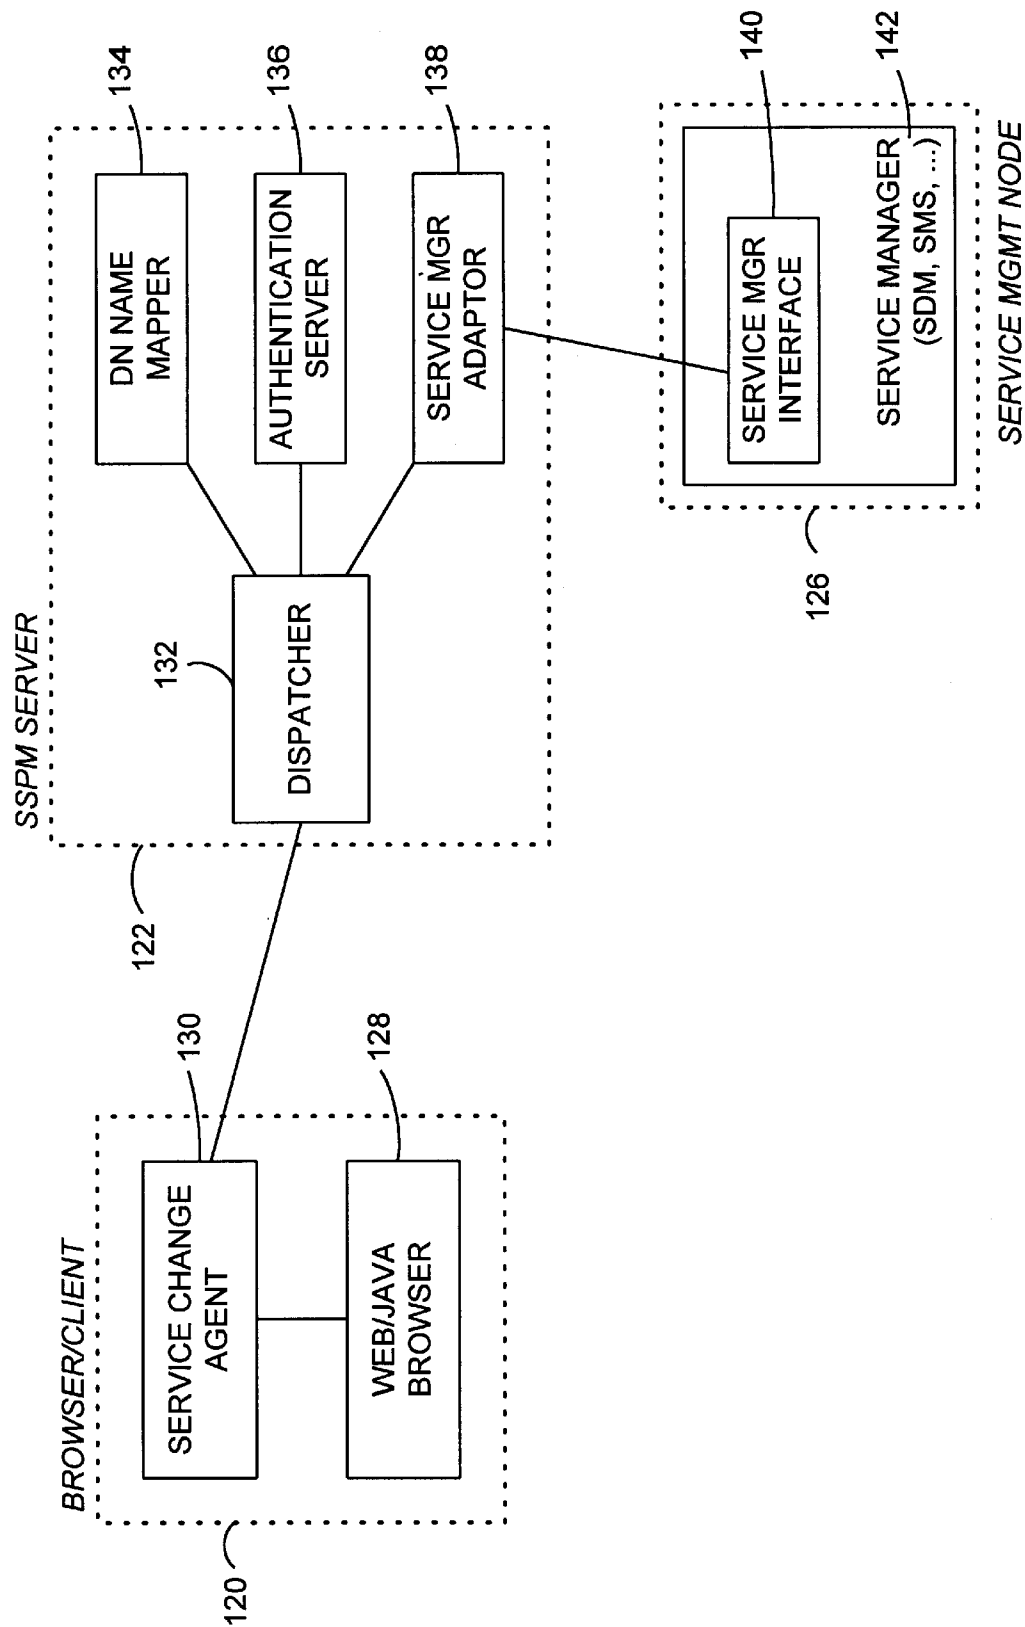


FIGURE 14

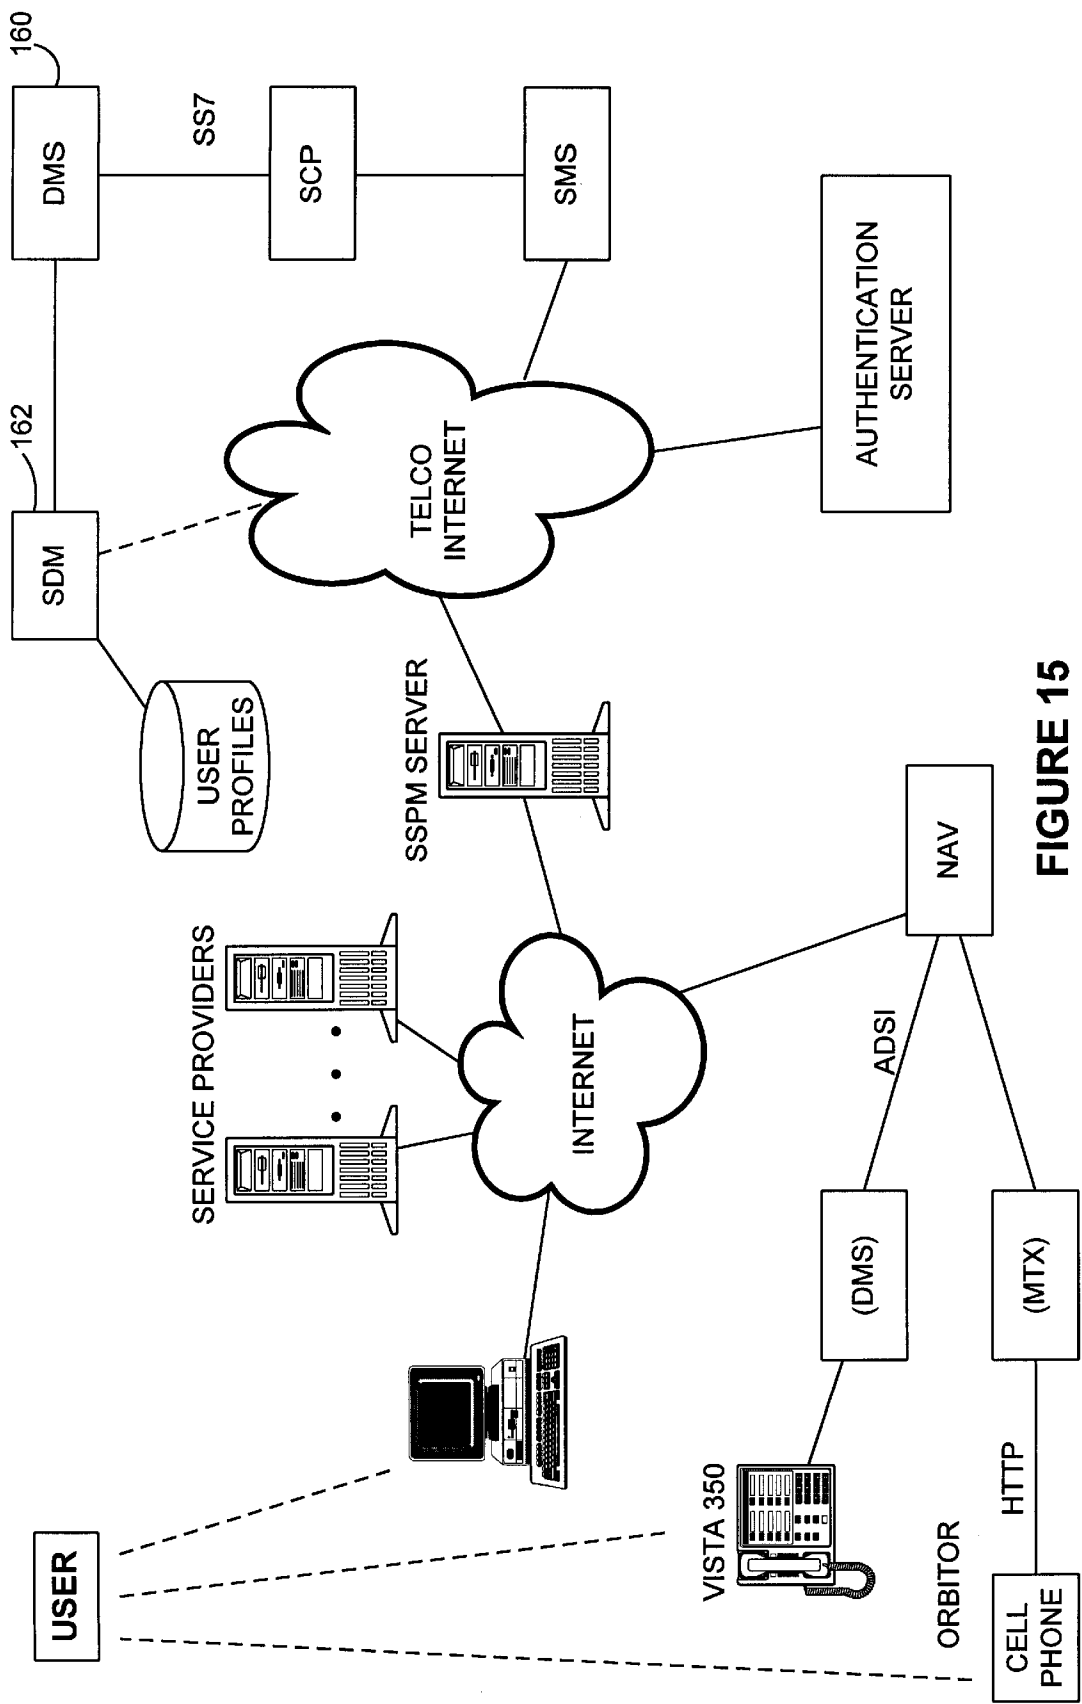


FIGURE 15

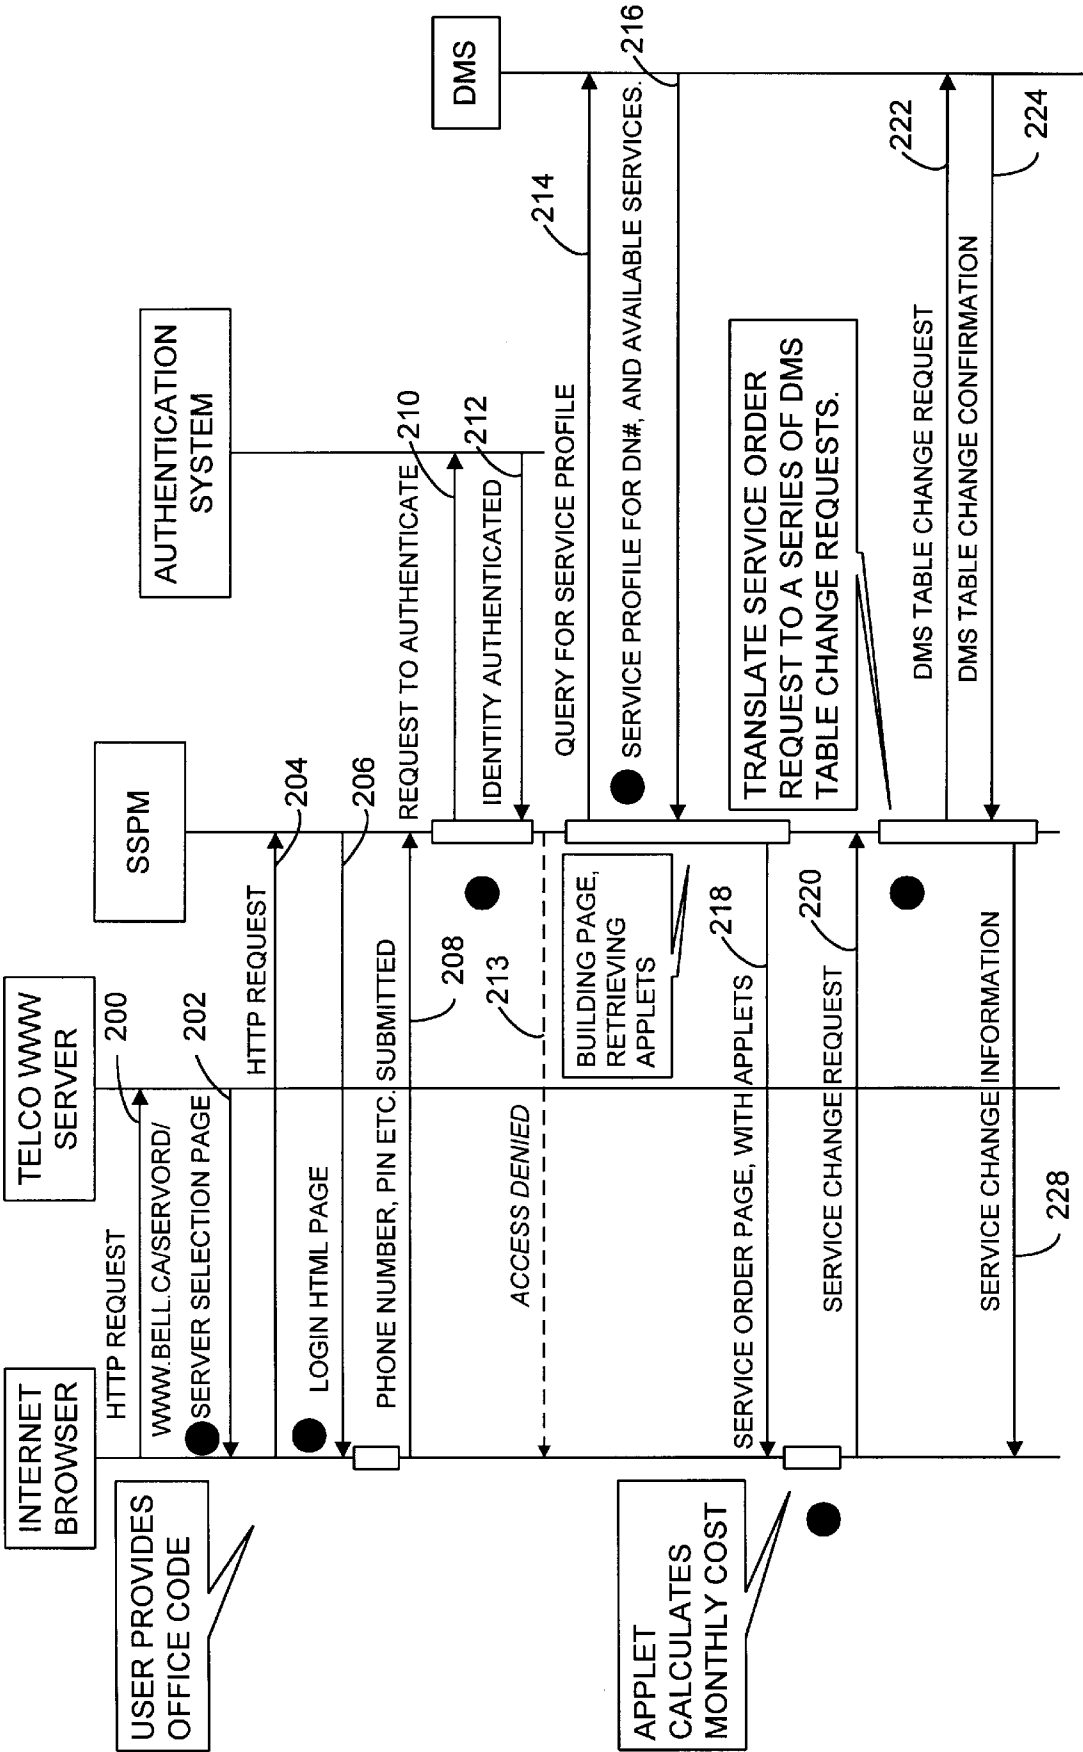


FIGURE 16

1

SERVICE ORDER MECHANISM FOR TELEPHONE SUBSCRIBER

RELATED APPLICATIONS

This application claims the benefit under Title 35, United States Code, Section 119(e) of the United States provisional application having the serial No. 60/028,760, filed on Oct. 23, 1996.

FIELD OF THE INVENTION

This invention relates to configuring different telephone feature profiles for different subscribers and, more particularly, to a system which permits a subscriber to add/change or delete features with respect to his/her particular telephone feature profile.

BACKGROUND OF THE INVENTION

Today, telephone subscribers need to interact with a telephone service provider's service representative to order new features or change existing ones. The addition, modification, activation or de-activation of features, when not performed through a service representative, often requires elaborate user interface actions which are difficult to remember (particularly when infrequently used) and difficult to verify. For example, for a customer to turn on the "call forward" feature, he/she needs to key in *73, wait for a reorder tone, and then key in the forwarded-to number.

SUMMARY OF THE INVENTION

What is proposed here is provide an alternate parallel mechanism to those subscribers who are also subscribers to an information communications network, for example an "Internet" service. The subscriber can locate his personal "telephone feature profile" on the telephone service provider's server on the Internet, access it via a password, such as his/her "calling card" PIN, and see at a glance the features and options currently active on his line/number. Additionally, the subscriber may submit requests to add/change/delete features, on-line.

As an example, we describe a scenario of how the "call forward" feature could benefit significantly from this approach. A person arriving at a new location, such as a hotel room, or someone else's home, could access his/her "telephone feature profile" via the hotel or friend's Internet access and activate his/her "call forward" feature with the number of the telephone in the hotel or friend's home. All calls would then be forwarded to the new location.

This mechanism removes the need for a human interface from some (growing) percentage of feature modification requests and thus reduces operating costs to telephone service providers.

Through the Internet, a visual and user-friendly interface can be provided to subscribers which significantly simplifies service order procedures. Subscribers would configure their feature complements and be given the resulting monthly cost, helping them understand real costs versus real benefits. In some cases, such as ISDN (integrated services digital network) service, where feature complements are more complex (to the point where the service representatives can often not answer the questions), a clearer exposition of what the features do in all of their permutations, by customer trial and error can be very beneficial. These frequent feature changes are managed by subscribers themselves.

According to a first broad aspect, the invention provides a feature ordering system for use in connection with a

2

telephone network which implements features for individual subscribers on the basis of a feature profile stored for each subscriber DN (directory number), the feature ordering system comprising: a server acting directly or indirectly on the feature profiles, the server being connected to an information communications network and accessible by subscribers through the information communications network and permitting, when accessed by a subscriber, access to that subscriber's telephone feature profile for viewing and optionally changing, adding or deleting features by the subscriber.

According to a second broad aspect, the invention provides a service order system for allowing a subscriber having access to an Internet browser to select which features are active on a subscriber line having a particular directory number, the features being provided by a service provider having a feature profile repository containing feature profile information determining which features are active on the subscriber line, the service order system comprising: a server in communication with the feature profile repository and also with a communications network such as the Internet for presenting feature profile information on a subscriber's access unit connected to the server through the communications network, and for receiving changes, additions or deletions requested by the subscriber through their access unit.

According to a third broad aspect, the invention provides a method of updating features which are active on a subscriber line having a particular DN comprising: a subscriber accessing a feature management server with an access device with a connection through a communications network; the feature management server presenting a series of pages on the access device; the subscriber entering their DN on one of the pages and submitting this to the server; the server collecting from a feature profile repository feature profile information relevant to the DN entered by the subscriber and presenting this on one or more of the pages; the subscriber selecting on one or more of the pages changes, additions or deletions for the feature profile information and submitting this to the server; and the server making corresponding changes to the feature profile repository.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram of a conventional subscriber feature ordering system;

FIG. 2 is a block diagram illustrating the network configuration of one embodiment of the present invention;

FIG. 3 is a block diagram illustrating the network configuration of another embodiment of the invention;

FIGS. 4 to 12 are illustrations of exemplary displays presented on the PC screen of a subscriber using the invention;

FIG. 13 is an illustration of the logical architecture of the invention;

FIG. 14 is a high-level design block diagram of an embodiment of the invention;

FIG. 15 is a block diagram of an embodiment of the invention; and

FIG. 16 is a high-level walk through for the embodiment of FIG. 15.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

A high level block diagram showing the context for the conventional management of telephone line features is

shown in FIG. 1. A subscriber has one or more service lines **10** (only one shown) connected to the PSTN (public switched telephone network) **12**. These service lines may be conventional telephone lines, or more advanced lines such as ISDN lines. They may also represent wireless connections for mobile telephones or pagers. A terminating unit **14** such as a telephone, modem, fax etc. is connected to each line **10**. Each service line is identifiable by a unique DN (directory number).

Typically, a plurality of features are available to a subscriber. Some features may be implemented directly with switches forming part of the PSTN **12**, and other features may be implemented on peripheral processing platforms which may be, for example, AIN (advanced intelligent network) based, or IN (intelligent network) based. Examples of some well known features typically available to subscribers include call forward, call waiting, ring again, speed call, message waiting, 3-way conferencing, softkey programming, and 800 services.

The provision of the features is managed by "service manager programs" (or simply "service managers") running on service manager nodes **16** connected to or forming part of the PSTN **12**. The service manager nodes are processing platforms for running the service managers and perhaps other functions as well. Each service manager has access to a respective profile repository **18** which identifies which features are to be provided on each line **10**. The profile repository **18** for a given service manager is a memory storage allocation which may be stored on the respective service manager node **16**, on the machine (such as a switch forming part of the PSTN) which implements the features, or on some other intermediate machine. For multiple features managed by multiple service managers, there will typically be multiple profile repositories **18**. Alternatively the profile repositories may be collected together on a common intermediate machine or machines. In the case that the profile repositories **18** are stored separately from the service manager nodes **16**, links **19** connecting them are required. In either case, the profile information for a given DN, which may be distributed across multiple profile repositories **18**, will be collectively referred to as the "feature profile" for that DN. The feature profile is used to control the access to features. For example, the Call Waiting feature is a feature typically implemented by a switch forming part of the PSTN, and the profile repository for such features is usually stored on the switch providing local service to a particular line. With call waiting, a first ongoing telephone call between a subscriber and another party is interrupted when another call comes in from a second party to the subscriber's DN, thereby allowing the subscriber to speak to the second party while the first party is on hold and then to choose between talking to the first or the second party. When a subscriber does not have the call waiting feature active, the second party simply gets a busy signal. For this feature, a record in the memory of a switch would indicate whether the call waiting feature was active for a particular DN. When a call comes in to the subscriber with that DN while the subscriber is on the telephone, the switch consults the record and either provides or does not provide the feature.

Service representatives **20** are provided to assist subscribers in ordering features for activation on their lines **10**. The term "service representative" refers to both a service representative terminal and a human operator operating the terminal. The service representatives **20** have connections **22** to the PSTN **12** through which subscribers can communicate with the service representatives **20**, and the service representatives have access through proprietary telephone

company lines **24**, for example, to the service manager nodes **16** running the service managers which control the update of the feature profile information stored in the profile repositories **18**.

With the conventional system of FIG. 1, when a subscriber wishes to modify his feature profile, he places a call which is connected through the PSTN **12** to one of the service representatives **20**. The service representative **20** receives instructions for making the changes and passes these to the appropriate service manager which then updates the actual feature profile stored in the profile repository **18**.

The invention provides a mechanism for the subscribers to configure the various services and features which are active on their lines **10** without the need for the involvement of a service representative **20**.

Referring now to FIG. 2, an exemplary system architecture for implementing an SSPM (subscriber service provisioning manager) system according to the invention is shown. Elements which are in common with FIG. 1 are similarly labelled. An SSPM server is placed on a machine connected to/forming part of a public communications network. In the illustrated embodiment this is a Web server **50** running on a machine **52** which is accessible through the public Internet **54** through connection **55**. The Web server **50** would typically be equipped to handle HTTP (hypertext transport protocol) and JAVA. The machine **52** running the Web server **50** may also store the profile repositories **18** referred to previously which are used to store the feature profiles, but preferably Web server **50** simply has access to the profile repositories **18**. As indicated above, accessing a particular feature profile involves access through the service manager nodes **16** to profile information which may be stored on several profile repositories **18**. The machine **52** running the Web server **50** preferably also stores a temporary replica of the feature profile for each DN. Feature profiles stored on the machine **52** will be referred to as "local feature profiles". As indicated, the machine **52** with the Web server **50** is connected to the public Internet **54**, and is accessible on the WWW (World Wide Web). Local feature profiles are formulated as HTML (hypertext mark-up language) pages on the WWW for presentation to the subscribers. These HTML pages have a unique URL (uniform resource locator) which identify their location within the WWW. Communication between the Web server **52** and the service manager nodes **16** may be done over links **56** forming part of a private telephone company network, for example.

The subscriber has (or has access to) an Internet access unit **58** connectable to the Internet **54** or similar communications network through the PSTN **12** and an Internet service provider **60** for example. The Internet access unit **58** is any unit through which a subscriber is capable of connecting to the Internet **54** at a given time. This could be a computer in the subscriber's home connected through one of the previously mentioned service lines **10**, a computer in a hotel, or an Orbiter wireless unit, to name a few examples.

In the above described architecture, the Web server **50** is running on a machine **52** which is separate from the service manager nodes **16**. Alternatively, as depicted in FIG. 3, one of the service manager nodes **16** may be used to run the Web server **50** thereby eliminating the need for a separate machine **52** for the Web server **50** and also eliminating the need for link **56**. In this case the service manager node **16** is connected by link **19** to profile repository **18** on a switch **62** forming part of the PSTN **12** and to a router **64** forming part of the Internet **54**. The service manager node **16** has management software consisting of service managers, HTTP

server software for the Web server **50**, and contains the temporary feature profile as HTML pages for down loading to the subscriber's Internet access unit **58**. In this example, the machine realizing the features is the switch **62**, and the profile repositories are also stored on the switch **62**.

Now referring to both FIGS. **2** and **3**, a subscriber can access and manipulate the feature profile for a given DN by connecting to the Web server **50** through the Internet **54**. This is achieved by using a WWW browser such as Netscape Navigator running on the Internet access unit **58** to go to the unique URL associated with the relevant HTML pages on the Web server **50**. The server **50** performs subscriber authentication by requesting the DN and the PIN (see FIG. **4** for example) through the browser. A security mechanism which could involve encryption and decryption known per se could be used to prevent revealing PINs to those tapping in on communications lines or intermediate servers or routers. Upon verification of this pair of numbers, the Web server **50** provides access to a series of HTML pages containing information about this particular DN. Once the subscriber is given access, the subscriber can navigate through the HTML pages using well understood browsing techniques.

The contents of the HTML pages could be almost without limit, showing perhaps current bill, detailed list of calls etc., as well as current features and cost what-ifs on possible feature complements. Via a mechanism such as an HTML "form" or a Java "applet", a subscriber can activate/deactivate features and change the parameters of those features, on-line. Initially, these changes are made to the local feature profile stored on the machine **52**. The changes are committed to change the real data located in the profile repositories **18** at critical points, such as when the subscriber decides to "submit" one of the HTML forms. The machine **52** may also pre-process and validate the changes requested to reduce errors and improve efficiency.

FIGS. **5-12** illustrate exemplary HTML pages which allow a subscriber to access and amend their feature profiles. FIG. **5** illustrates a first screen display that might be presented after verification. This displays different categories of interest in the form of icons. In the illustrated example, the icons represent the categories Calling Out **80**, People Calling You **82**, Personal Information **84**, Messaging **86**, and Utilities **88**. By pointing and clicking on one of the icons, a more detailed page relating to that icon is displayed. For example, by clicking on the category Calling Out **80** the screen display shown in FIG. **6** is presented. This shows the subscriber the features on his profile which relate to calling out and enables him to update these by pointing and clicking.

FIG. **7** illustrates the display that is presented to allow the subscriber to update his "speed call" list. At the bottom of FIGS. **5,6** and **7**, additional icons are displayed which control various other operations of the HTML page. Clicking on the "Revert" icon **90** causes changes made to be undone, leaving the personal profile unchanged. Clicking on the "Save" icon **92** causes the changes made to be committed. In this case, the Web server **50** communicates with the service manager nodes **16** where the service managers update the actual feature profiles in the profile repositories **18**. The "Exit" icon **94** exits the page, and the "Help" icon **96** provides further information on using the system. Figures **8** and **9** illustrate displays which explain how to use "speed call", FIG. **10** illustrates the display which allows the subscriber to update his "Auto dial" button and FIG. **11** shows how this option can be used, and FIG. **12** is a display confirming the changes that have been made.

When talking about a Web server, we mean a server using the Hyper Text Mark-up Language (HTML) and the Hyper

Text Transfer Protocol (HTTP) for World Wide Web (WWW) style access. Java executable content may or may not be used (will be used in the preferred approach) as part of this HTML mechanism. The Uniform Resource Location (URL) is a unique address given to a browser to find the appropriate server using mechanisms already in place for Internet WWW use. The PIN referred to is a Personal Identity Number, which acts as a "password" to authenticate the customer. ISDN stands for Integrated Services Digital Network, but refers in the field to a single physical telephone line which provides two logical 64 Kb/s content channels and one 8 Kb/s signalling channel, all of which can be used for multiple purposes, hence complicating the feature complements possible. The Transaction Control Protocol (TCP) running over the Internet Protocol (IP) is generally referred to as TCP/IP. Finally "Internet" is a network of networks of a very large number of servers and clients for interchange of data, well described elsewhere.

The invention provides a simple means for a subscriber to control through one medium (the Internet) the features active on another medium (their telephone line) thereby reducing the need for a human service representative to service change requests from the subscriber, and reducing the need for the subscriber to remember meaningless codes. Changes are initially made on an HTML page, and then these changes are sent to the relevant service manager which then updates the actual feature profile in the profile repositories.

Depending on where the actual feature profile information is located, there are many ways for realizing the step of sending the changes from the Web server **50** to an individual profile repository **18**. These will vary depending on whether the features involved are switch based features, or peripheral platform based, and will vary depending on the way in which the Web server **50** is connected to the service manager nodes **16**. These differences however are transparent to a subscriber. A subscriber will be presented a unified view of their feature profile which is uniform across different subscriber lines, line types, and service providers etc.

The logical architecture of the SSPM according to the invention will be described with reference to FIG. **13**. In this view of the invention, no attempt is made to map functionality onto specific hardware components. The logical entities described for FIG. **13** are realized by specific hardware components in the two specific examples described previously with reference to FIG. **2** and **3**. The user **100** is a subscriber or human agent interacting with the SSPM. A service manager **102** is used by service providers to control the provision of services. The logical service manager **102** is related to the service managers running on the service manager nodes of FIGS. **2,3**. It provides an interface to the profile repository and has a transactional interface to the rest of the world (create, read, update, delete). There may be many service managers if the user subscribes to many lines (wireline, wireless) or different services (pager, local and long distance) etc. The service change agent **104** is an application providing a graphical user interface which presents the user's service profile, allows the user **100** to modify it, and sends appropriate transactions to the requisite service managers **102** for update. In FIGS. **2** and **3**, the Web server **50** produces the service change agent functionality. The service change agent **104** first validates the user **100** using an authentication server **106** prior to accessing any profile data. The DN name mapping server **108** is used to determine which service manager **102** is involved with the management of a specific service for a specific DN.

Many ways of mapping the functionality of FIG. **13** onto specific equipment exist and FIGS. **2** and **3** provide only two

examples of these. A high level design view of a preferred embodiment of an SSPM according to the invention will be described with reference to FIG. 14. This particular high level design may be broken down into three main components, these being a browser/client 120, an SSPM server 122, and a service management node 126. These components relate to the blocks in FIG. 2 and 3. The service manager nodes 126 are related to the service manager nodes 16 of FIGS. 1 and 2. The browser/client 120 is related to the Internet access unit 58 of FIGS. 2 and 3. The SSPM server 122 is related to the SSPM server 50 of FIGS. 2 and 3.

The browser/client 120 includes a Web browser 128 which provides a Java-supporting environment for the user on their computer. It is used to acquire an applet which is to run as the service change agent, launch the applet, and provide the necessary supporting context. It is also used to interpret HTML documents.

The service change agent 130 provides a user interface for accessing, browsing, and modifying subscriber feature profile information. It interacts with the SSPM server 122 to query and modify feature profile information. It performs limited pre-validation of the service options selected by the user, final validation being performed by a relevant service manager 142 or switch. It interacts with an authentication server 136 forming part of the SSPM server 122 to verify user and access privileges. It interacts with service managers 142 from service providers. All interactions are routed through a dispatcher 132 forming part of the SSPM server 122. The service change agent 130 runs in the user's environment as a user client. It also acts as a repository for the service change agent applets.

The SSPM server 122 has a dispatcher 132, a DN name mapper 134, an authentication server 136, and a service manager adaptor 138. The dispatcher 132 receives service change transactions from the service change agent 130 and routes them to the appropriate service manager 140 via the service manager adaptor 138, and routes service manager responses back to the service change agent. It also routes transactions to the DN name mapper 134 to resolve the subscriber's DN into the appropriate service manager type and specific address. The actual connections are managed by the service manager adaptor 138. The dispatcher 132 bridges the Internet and telephone company Intranet access domains, receiving Internet transactions and dispatching Intranet transactions to service managers 142 over proprietary telephone company links. It provides per transaction authentication using the authentication server 136, and may participate in encryption schemes as required.

The authentication server 136 validates the user's right to modify services for the specified DN through the user of a password, personal identification number, or some other mechanism. It performs individual authentication on a per transaction basis.

The service manager adaptor 138 encapsulates the specific protocols to be used to communicate with each class of service manager. It establishes and manages connections with a service manager 142 on a per transaction basis. It receives transactions from the dispatcher 132, formats them in a service manager specific protocol, and sends them to the service manager 142. It returns results generated by the service manager 142, formats them for sending to the dispatcher 132 which re-encapsulates them into the proper protocol for being sent to the service change agent 130.

The service manager interface 140 provides the service manager 142 end of the communications with the service manager adaptor 138.

The DN name mapper 134 maps Directory Numbers to specific service managers, and returns a service manager class to support selecting the appropriate service manager adaptor 138. It also returns a specific service manager 142 address which is typically in the service provider's private communication network. Mapping data may either be maintained locally, or be acquired dynamically through interactions with the telephone company OSS's or nodes.

Another preferred aspect of the invention will be described with reference to FIGS. 15 and 16. According to this aspect of the invention, the machine implementing the features is a switch such as a DMS (digital multiplexed switch) 160 manufactured by Nortel. A system manager 162 is used to manage the operation of features on the switch 160 and to thereby assume the service manager role. The system manager 162 would normally be connected to a plurality of switches. The SDM performs 055 functions. The system manager may be a SDM (SuperNode Data Manager) also of Nortel which is a high performance computing platform that provides service management services to DMS switches. Tables stored on the DMS switch 160 contain tuples which indicate which features are active for a given DN. These tables assume the role of the profile repositories. The SDM can read, change, delete and add tuples to DMS tables, thus changing customer's service profiles. As before, a user is equipped with a unit for accessing the Internet. This may be a computer connected to the Internet, a screen based telephone set such as a Vista 350 connected to the Internet, or an Orbiter wireless unit connected to the Internet. Internet service providers typically mediate these connections to the Internet. An SSPM server is shown connected to the Internet also, and this provides the interface through which the user can access and modify his/her feature profile. Changes requested are communicated through the telephone company intranet to the SDM 162 to the DMS where they are implemented. The SDM 162 performs validation along the way.

In one implementation of the invention for this DMS/SDM environment, the SDM is equipped with the HTTP server and the SDM itself is connected to the Internet. As an alternative, if the SDM is not connected to the Internet, but is connected to a telephone company LAN (local area network), it only requires that somewhere on the LAN there be an HTTP server connected to the public Internet. In either case, the subscribers will be able to access the HTTP server from the public Internet. The HTTP server has a communication link to the DMS switch through the SDM. Through this link the HTTP server will be able to query and change the data tables on the DMS.

A high-level walkthrough for the use of the embodiment depicted in block form in FIG. 15 will be described with reference to FIG. 16. A user initially makes a connection to the Internet through their own Internet service provider, and brings up an Internet browser function. They then select a connection to their telephone company WWW server through an HTTP request (step 200). In response to this, the telephone company WWW server sends the server selection page back to the browser where it is displayed to the user (step 202). The telephone company WWW page may include a number of options, and the user selects the Subscriber Service Provisioning Manager option (step 204). This is sent to the SSPM server which returns a Login HTML page for display by the browser (step 206). The user completes the Login HTML page by typing in a phone number, PIN etc, and submits this as a further HTTP request (step 208). The SSPM server sends this information to an authentication server (step 210) which, after successfully

authenticating the user information returns an "identity authenticated" message back to the SSPM server (step 212). If access is denied, then the user is given another opportunity to enter identification information (step 213). If the identity was successfully authenticated, then the SSPM Service Order application is started for that user. The service order application first sends a query to the DMS switch for the feature profile for the DN entered (step 214). This could be done either directly by the SSPM as shown in FIG. 16 or through the service change agent on the SDM, and with DMS table control facilities. The DMS sends back the service profile for that DN, and also sends back a list of the available services (step 216). The SSPM server uses this information to build a customized page to be sent to the browser. This page is generated based upon HTML templates in the SSPM database. It may include various applets and HTML entities for user interaction. These are sent back to the browser for display on the browser and use by the user (step 218). The user may select service changes. The applet may perform calculations based upon the changes requested and present the user with a calculated monthly cost for example. When a change is submitted, this is sent back to the SSPM server in response to which a "request processing" application will be started up (step 220). The service order request is translated into a series of DMS table change requests. These are sent to the DMS over the telephone company intranet (step 222). The DMS sends table change confirmation message back to the SSPM server (step 224), and the SSPM server then sends a service change confirmation back to the browser (step 226).

Numerous modifications and variations of the present invention are possible in light of the above teachings. It is therefore to be understood that within the scope of the appended claims, the invention may be practiced otherwise than as specifically described herein.

We claim:

1. A feature ordering system for use in connection with a telephone network which implements features for individual subscribers on the basis of a feature profile stored for each subscriber DN (directory number), the feature ordering system comprising:

a server acting directly or indirectly on the feature profiles, the server being connected to an information communications network and accessible by subscribers through the information communications network and permitting, when accessed by a subscriber, access to that subscriber's telephone feature profile for viewing and optionally changing, adding, or deleting features by the subscriber; and

a profile repository storing the feature profiles, the profile repository managed by a service manager program on a service manager node, wherein the server performs a protocol conversion dependent on the type of the service manager node.

2. A system according to claim 1 wherein the server obtains the feature profiles through the service manager program and presents these to the subscriber on a subscriber access device, receives changes, additions, or deletions from the subscriber access device, and sends them to the service manager program which then changes the feature profiles stored in the profile repository.

3. A system according to claim 1 further comprising a subscriber authentication server, wherein a subscriber is prompted to enter identification information which is then authenticated by the authentication server before the subscriber is allowed to view or change the feature profile.

4. A system according to claim 1 wherein said server also provides access to billing information in relation to the DN.

5. A system according to claim 1 wherein said server provides cost estimates for features selected by the subscriber.

6. The system according to claim 1, wherein the server and the service manager program are each run on the service manager node, and the profile repository is stored on the service manager node.

7. A service order system for allowing a subscriber having access to an Internet browser to select which features are active on a subscriber line having a particular directory number, the features being provided by a service provider having a feature profile repository containing feature profile information determining which features are active on the subscriber line, the service order system comprising:

a server in communication with the feature profile repository and also with a communications network for presenting feature profile information on a subscriber's access unit connected to the server through the communications network, and for receiving changes, additions or deletions requested by the subscriber through their access unit, wherein the feature profile repository is managed by a service manager program on a service manager node, and the server performs a protocol conversion dependent on the type of the service manager node.

8. A service order system according to claim 7 wherein the profile repository is stored on a switch forming part of the PSTN (public switched telephone network), and the server is an HTTP (hypertext transport protocol) server which downloads feature profile information to the subscriber's access unit in the form of HTML (hypertext mark-up language) pages.

9. A service order system according to claim 8 wherein there are a plurality of said profile repositories each managed by a respective service manager program on a respective service manager node, each service manager node having a type;

wherein the server performs a protocol conversion to convert the profile information received from each service manager node to a form suitable for inclusion in the HTML pages, the protocol conversion being dependent on the type of the service manager node.

10. A service order system according to claim 9 further comprising a name mapper which determines which service manager controls the feature profile information for a given subscriber directory number.

11. A method of updating features which are active on a subscriber line having a particular DN (directory number), the method comprising:

a subscriber accessing a feature management server with an access device with a connection through a communications network;

the feature management server presenting a series of pages on the access device;

the subscriber entering their DN on one of the pages and submitting this to the server;

the server collecting from a feature profile repository feature profile information relevant to the DN entered by the subscriber, performing a protocol conversion dependent upon a type of service node containing a service manager program that manages the feature profile repository, and presenting this feature profile information on one or more of the pages;

the subscriber selecting, on one or more of the pages, changes, additions, or deletions for the feature profile information and submitting this to the server; and

11

the server making corresponding changes to the feature profile repository.

12. A method according to claim **11** further comprising: the subscriber entering security information together with the DN; and

the server performing authentication on the security information before allowing the subscriber access to the feature profile information.

13. A method according to claim **11** further comprising the server providing on the access device information pertaining to the cost of the selected feature profile, wherein the subscriber is given the option of cancelling the submission of the changes made to the feature profile.

14. A method of updating features which are active on a subscriber line having a particular DN (directory number), the method comprising:

a subscriber accessing a feature management server with an access device over a communications network;

the subscriber receiving from the feature management server one or more pages on the access device;

the subscriber entering a DN on at least one of the one or more pages and submitting this to the feature management server;

the subscriber receiving feature profile information on one or more additional pages, wherein the feature profile information is from a feature profile repository which is managed by a service manager program on a service manager node, the feature profile information is relevant to the DN entered by the subscriber, and a

12

protocol conversion is performed dependent upon a type of the service manager node; and

the subscriber selecting, on at least one of the one or more additional pages, changes, additions, or deletions for the feature profile information and submitting this to the feature management server.

15. A method of updating features which are active on a subscriber line having a particular DN (directory number), the method comprising:

a feature management server being accessed by an access device;

the feature management server sending at least one first page to the access device;

the feature management server receiving at least one second page in which a DN has been entered;

the feature management server collecting from a feature profile repository feature profile information relevant to the DN, performing a protocol conversion dependent upon a type of a service node containing a service manager program that manages the feature profile repository, and sending this feature profile information in at least one third page;

the feature management server receiving at least one fourth page containing at least one change, addition, or deletion to the feature profile information; and

the feature management server making one or more corresponding changes to the feature profile repository.

* * * * *