# JULING PROPRIETARY

$\mathbf{n}$		-1	/	V	1	2	•
-	-	~	-	-	-	-	

# INVENTION DISCLOSURE

Ja <sup>-40-52</sup>	UL INIT	INVENTION I	DISCLOSURE	Page 1 of 19
	This form is to imp	be used for disclosure to The E rovements or Innovations, whet See above for	her or not considered patentab	discoveries,
Γ		TITLE OF INVENTION (	Descriptive and Concise)	
A	SWAN: Small-Wor	12 Wide Aren Network	ing	
Γ		INVENTOR INFORMATION (Us	e Additional Sheet If Necessary)	
	INVENTOR NAME (FIRST, M.I., LAST)	INVENTOR NAME (FIRST, M.I., LAST) 2	INVENTOR NAME (FIRST, M.I., LAST) 3	INVENTOR NAME (FIRST, M.I., LAST) 4
	Virail E. Bourasa	Fred B. Holt		
	SOCIAL SECURITY NO.	SOCIAL SECURITY NO.	SOCIAL SECURITY NO.	SOCIAL SECURITY NO.
	Source Scontra No.	Soone Scoonin Ho.		
	ORG, NO. MAIL STOP	ORG, NO. MAIL STOP	ORG, NO. MAIL STOP	ORG, NQ. MAIL STOP
	PHONE	PHONE	PHONE	PHONE
В				
	BOEING EMPLOYEE (ADD SUBSIDIARY)	BOEING EMPLOYEE (ADD SUBSIDIARY)	BOEING EMPLOYEE (ADD SUBSIDIARY	BOEING EMPLOYEE (ADD SUBSIDIARY)
	Boeing SSG	Boeing SSG	Boeing	Boeing
	BNA MDC	BNA MDC	BNA	BNA
	CONTRACT EMPLOYEE	CONTRACT EMPLOYEE	CONTRACT EMPLOYEE	CONTRACT EMPLOYEE
	OTHER (SPECIFY)	OTHER (SPECIFY)	OTHER (SPECIFY)	OTHER (SPECIFY)
	MANAGER'S NAME	MANAGER'S NAME	MANAGER'S NAME	MANAGER'S NAME
	PHONE Abertanel		PHONE	PHONE
	PHONE	PHONE STATE OF DEVELOPMEN	T (See Remarks On Back)	
	DATE CONCEIVED CONCEP		DATE SATISFACTORILY TESTED	PROTOTYPE , ,
С		ANALYTICALLY 8/30/99	9/16/99	IN PRODUCTION 11/11/99DATE
	11/96 PROVEN	COMPLETE	1/10/17	
			F THE INVENTION	
	PRODUCT/PROCEAN	PRODUCTI	ION RELEASE E.G. PRR NO.	DATE 9/59
	POTENTIAL CUSTOMER(S)			
	IN ADDITION TO BOEING	and a second		· · · · · · · · · · · · · · · · · · ·
		DISCLOSURE OF INVEN	TION OUTSIDE BOEING	DATE(S)
			4	4/8/99
				12/9/99
	PUBLISHED _ PUBLICATION NAN	AE )	DATE	VOLUME NO. PAGE
	YES NO			
			ENT HISTORY	
		RK ORDER WERE YOU CHARGING TO W		
	ACCOUNT OR WORK ORDER NO.	FOR EACH INVENTOR (16-DIGIT CHARG 3)	ELINE) 1)	
	2. CHECK AS APPLICABLE:			
F		EIVED OR FIRST BUILT AND TESTED IN T	THE COURSE OF WORK UNDER A U.S. G	OVERNMENT CONTRACT.
.	CONTRACT	NO. OR OTHER IDENTIFICATION		
	THIS INVENTION WAS NEITH	ER CONCEIVED NOR FIRST BUILT AND T	ESTED IN THE COURSE OF WORK UND	ER A U.S. GOVERNMENT CONTRACT.
	THE FOLLOWING ADDITIONA	L PARTIES MAY HAVE RIGHTS TO THIS I	NVENTION: N/A	
	3. RELATED INVENTION DISCLOSU			
			BELOW THIS LINE	

DISCLOSURE NO.	DATE RECEIVED	DISCLOSURE ASSIGNED TO:	PE	IP

# SWAN: SMALL-WORLD WIDE AREA NETWORKING

## Introduction

The need has been increasing in large software projects, in collaborative workflow, and to facilitate enterprise-wide-engineering, for an effective means to allow scalable and reliable sharing of information across multiple processes. For example, the

The the the state of the state

## **Problem Solved By This Invention**

SWAN provides general world-wide ("wide-area") peer-to-peer communications among computer processes. It achieves this with high reliability and low latency, scaling from a single process to thousands of participating processes. The system is completely distributed among the participants, which may join, depart, or even fail, at any time and in any order.

The implementation doesn't require special hardware, or the intervention of system administrators. All computers can participate, without requiring root access, daemons, kernel modifications, or the addition of "well-known" port numbers.

Though openly accessible, SWAN does have rudimentary security. Joining a session is restricted to those processes sharing the SWAN code base and aware of the correct channel designation.

### Background

There are four categories of computer network communication systems that might be applied to the problem of wide-area simultaneous sharing of information for the purpose of collaborative processing. These are: 1) point-to-point networking protocols, 2) client-server middleware, 3) multicast networking protocols, and 4) peer-to-peer middleware.

#### **Point-To-Point Networking Protocols**

A number of point-to-point networking protocols exist to allow direct one- or two-way communication between two computer processes. Examples include UNIX pipes, TCP/IP, UDP, IBM's SNA, and Xerox' XNS. Of these, only TCP/IP and UDP are universally available for communication between computers connected via the Internet or on the Boeing Intranet.

Using point-to-point connections directly does not scale easily as the number of participating processes grows. A process is limited in the number of such connections that can be made (roughly 60), and managing even a single connection is a complex task for programmers. Coordinating a communication session involving even a modest number of connections exacerbates the program complexity enormously. For all of these reasons, direct use of a point-

THE FOREGOING WAS EXPLAINED TO AND UNDERSTOOD BY WITNESS SIGNATUR 12/23/99 Robert M Abarbano, a PHONE OR DATE 12/23/49 COR-SIGNATURE DATE INVENTOR SIGNATURE DATE 99 23 23 E NO. (ASSIGNED BY PATENT STAFF) DATE

2

to-point networking protocol is not a feasible mechanism for sharing information across a medium- to large-scale collaboration across a wide-area network.

### **Client-Server Middleware**

To alleviate the complexity of programming directly at the network protocol level, client-server middleware is available to provide an easier programming abstraction. In client-server middleware, a number of "client" processes find or instantiate a single "server" process, forming a direct network connection between them. The client may then request services from the server, which often is given central authority over a resource, such as a database. Examples include database servers, remote procedure calls (RPC), and CORBA.

The client-server paradigm provided by this middleware, while providing a mechanism for sequenced resource sharing, is not feasible for collaborative information sharing. One client may be able to convey information directly to the server, but the other clients are unaware that the server has new information, forcing them to poll the server for possible new information. This creates a performance bottleneck as the number of participants increases, adds undue latency in disseminating the information, and wastes processing time as client processes continue to check for new information.

Some client-server middleware packages, such as CORBA, allow clients to register "callbacks," functions to be invoked when an event occurs. While this facility may make collaborative information sharing less onerous, for medium- to large-scale applications the single server is still a performance bottleneck.


Furthermore, the reliability of a collaborative application relying on a single server is poor, as loss of the server or difficulty in its instantiation completely destroys the integrity of the collaborative session.

#### **Multicast Networking Protocols**

Multicast networking protocols allow selective broadcast of messages to multiple recipients. It retains the complexity of direct network communication mentioned above, but is a natural choice for collaborative sharing. Currently, multicast is available for UDP messages, but virtually all UDP multicast traffic is limited to a single local-area network or, at most, a small set of connected local-area networks. UDP multicast, in its current implementation, could easily swamp the Internet otherwise, as it would have to saturate the Internet with each message to find all possible participants.

Several wide-area multicast networking protocols have been proposed, and some, such as IP Multicast, are in limited commercial and/or research deployment. These solutions require special router hardware and/or software to achieve data sharing without overwhelming the participating networks. Even if a standard solution were selected today, it would take years, or possibly decades, before the entire Internet infrastructure could be completely retrofitted with the new technology.

Additionally, the solutions proposed in this area, in an attempt to conserve bandwidth, are not constructed with reliability as a concern. By using minimum spanning trees among the routers

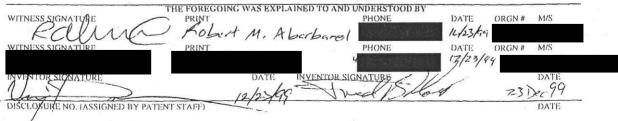

3

involved, any router failure can partition the collaborative session.

### Peer-To-Peer Middleware

Peer-to-peer middleware provides the programmer with a software library that is intended to provide an easy-to-use abstraction, such as "publish-and-subscribe" or "shared objects," for immediately sharing information among a set of collaborating processes. Hidden from the programmer is how the actual communication takes place.

The underlying communication infrastructure may make use of a multicast network protocol, or a graph of point-to-point network protocols, or a combination of the two. The infrastructure in commercial use today, in products such as IBM's Sametime, Data Connection's DC-Share, and Microsoft's NetMeeting, is the T.120 Internet standard. That used in the current **Microsoft's** infrastructure is called the **Microsoft's**. Both have the user (*not* the programmer), assemble a point-to-point graph of connections. For this reason, and others, neither is suitable for the needs of medium- to large-scale collaboration.

#### T.120 Internet Standard


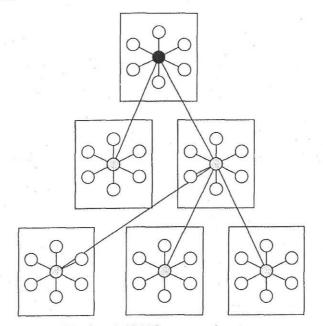


Figure 1. T.120 connection tree.

An example of a T.120 communication session is depicted in Figure 1. When first connecting to a session on a given host computer, a proxy process (depicted in gray and black in the figure), called an MCU, is instantiated by a daemon process (a resident process that listens for such requests, not depicted). This MCU forms a direct connection to the MCU of another host designated by the application user, or is designated as the *root* of the session (the black dot). The requesting process

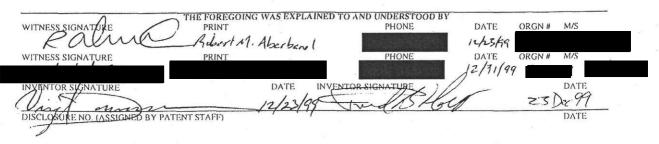

4

and all additional processes on the host wishing to join the session form a direct connection to the MCU process on that host. To share information, a process sends a message to its MCU, which is sent up the tree of MCUs to the root, then down the tree of MCUs and disseminated among their attached processes.

This scheme fails to solve the problem of medium- to large-scale collaboration for a number of reasons. First, the responsibility of determining the topology of the connection graph is foisted off on the application users, which, in addition to being a nuisance to the users, is not likely to result in an efficient structure for performance. The most common kind of connection scheme seen in practice is for all host MCUs to connect directly to the root MCU.


Second, the MCUs are performance, reliability, and scalability bottlenecks. All messages must be serialized through each MCU to a potentially large number of processes on the host. Loss of an MCU not only removes all of the processes on the host, but also prunes the subtree attached to it from the session. Furthermore, given operating system limitations, each MCU can accommodate, at most, about 60 client processes.


Third, the need to coordinate all messages through the root MCU not only makes that process a performance bottleneck, and a single point of failure for the session, but also causes the speed of communication to be limited by the slowest host and/or communication link in the tree. For example, NetMeeting's performance is reported to be intolerable with about 20 participants.

Finally, the T.120 daemon must be installed on each host participating in a session. This requires additional administration and maintenance, and limits the set of hosts that can join in a session. It also requires an additional "well-known" port number, which must be coordinated globally among all computers on the Internet.

-				na nanana amarana amarana b		1	
i		아 가만 같		•			1 77 100
		1-10 - 1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1			100	1 1 0	•
<u></u>			~ • •	0		1 1 1	
0	20	1	• • • • •	•			
			3				
				a i			
						-	
			<i>w</i> .				
			ARROANC WAC PA	DI A INED TO AN	IN UNIVERSION BY		
TTNESS	SIGNATURE	PF	UNT		D UNDERSTOOD BY PHONE	DATE ORGN #	M/S
K	an		obort M. AL	Bibanel		11/23/99	<i>, , ,</i>
TTMECC	SIGNATURE	pr	INT		PHONE	DATE ORGN#	M/S
VENEROE	SKANTURE		DATE	INVENTOR	SIGNATURE	7 4/2/14/	DATE
1).~	$\langle \rangle$	2	12/25	lag fre	152feet	237	DATE Dec. 99
ISCLOR	RENO LASSIGNE	DAY PATENT STA	FF)		1004		DATE
/ 1						1 C	

5



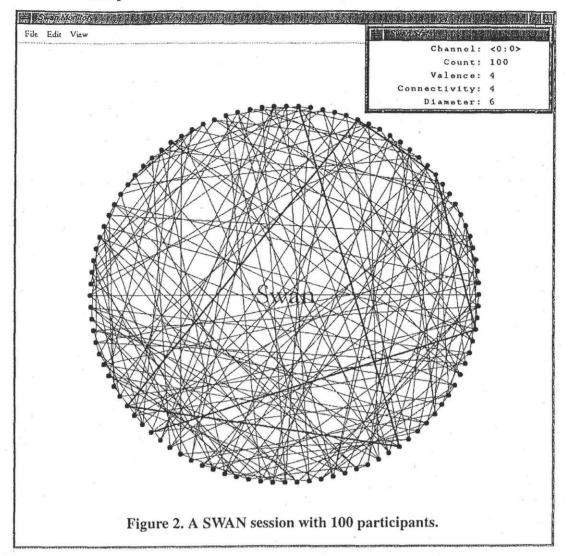

SWAN is a communications library that allows any number of computer processes to share information across a wide-area network using generally available point-to-point network communication protocols. The SWAN solution supports peer-to-peer middleware by weaving together a fabric of point-to-point TCP/IP connections into a 4-regular graph with high connectivity and minimal latency (see Figure 2). It avoids synchronization difficulties by making use of the "small-world effect," namely, using only local knowledge to achieve global properties of effectiveness.

Several innovations are made in SWAN to support easy, quick, and reliable large-scale


information sharing around the globe. By using existing Internet protocols in non-invasive ways, THE FOREGOING WAS EXPLAINED TO AND UNDERSTOOD BY PRINT PHONE DATE ORGN# M/S Ray 12/3/95 Rubert M. Aberbanel WITNESS SIGNATURE PRINT PHONE DATE ORGN # M/S 712/23/49 INVENTOR SIGNATURE DATE DATE INVENTOR SIGNATURE 23 Dec 97 10 OSPRE NO. (ASSIGNED BY PATENT STAFF) DATE

6

December 23, 1999 2:21 pm

	المنتخلية المنتخلية المنتخلية
	· · · · ·
THE FOREGOING WAS EXPLAINED TO AND UNDERSTOOD BY	
WITNESS SIGNATORE PRINT PRINT PHONE DATE ORG Rebert M. Abarbarel 12/25/55	N # M/S
WITNESS SIGNATURE PRINT PHONE DATE ORG	N# M/S
INVENTOR SIGNATURE DATE INVENTOR SIGNATURE 7/1 -	DATE
INVENTOR SIGNATURE DATE INVENTOR SIGNATURE	3 Da-99

7

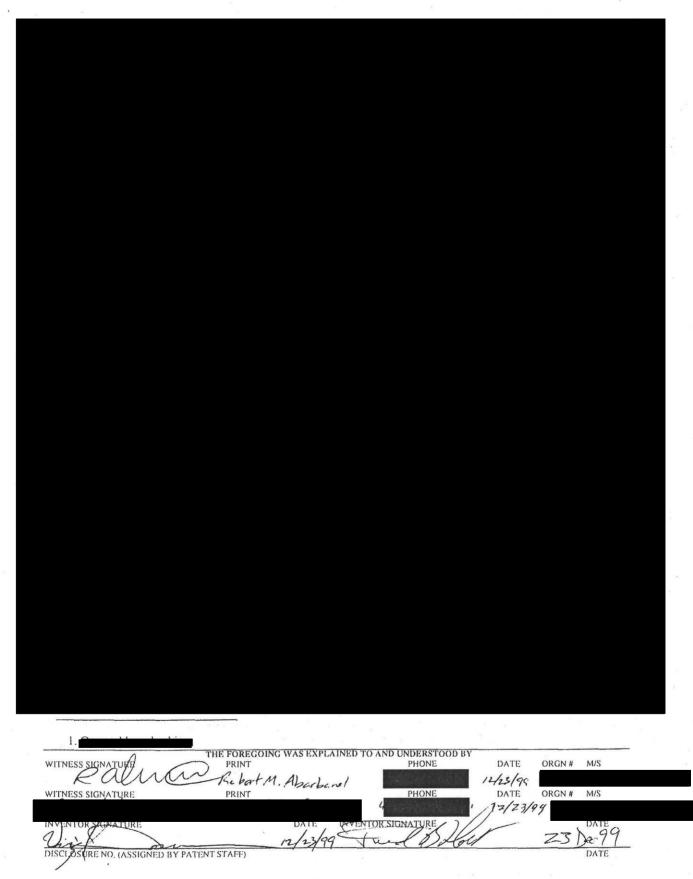


8

December 23, 1999 2:21 pm

	24 <b>- 1</b> 4				1		•	10	% <b>.</b>	
			***** * * * * * * * * * * * * * * * *	11 001	1 1			<u> </u>	and the second sec	
	<u><u> </u></u>		i i i i i i i i i i i i i i i i i i i					1 1		
×					i i	11		ì		
	** *	·							•	
		0.1. I.			C					
						1				
				. · ·					C 11	
					OTT I ST	<b>**</b> • • •				
1.1		×						*****		
#/			<b>2</b> 1	1 1		1	0			
		22		•		1 1 1	., .			
				GTTT+ 1 T T			C		1.112.00.00 <b>1</b> .000.000	
				<u> </u>	• •	<u> </u>		, , ,		
/ S			ĺ		· • •					
				ц.						
							GIVIN			, Ľ
					<u> </u>					1
									10	1 1 1
					1	. 11				
	i.	ene soo								
0	11 22									
			(1 - F - F - F - F - F - F - F - F - F -	* * * * * *	· · · · · ·		•			
				2	•	1. f	1		\$\$71	1 1
_				C C					11 T (1	
			0							
		1		1	ee i	· 1'				•
	0		THE FOREGO	ING WAS EXPL	AINED TO AN	ND UNDERSTO	OOD BY			
Wr		1h	PRINT	M. Abaik	1	PHONE		DATE	ORGN # M	/S
WI	TNESS SIGNATURE	ive-	PRINT	Hbaik	and.	PHONE	6	DATE 12/23/9	ORGN # . M	/S
					1			12/23/9	/	
	INTOR SIGNATURE		-	DATE	INCHENTOR	SIGNATOR	11	-		G9
(	CLOPARE NO. TASSI	mon	ــــــــــــــــــــــــــــــــــــــ	14234	19 70-	. North	guy _		23 Da	ATE

9

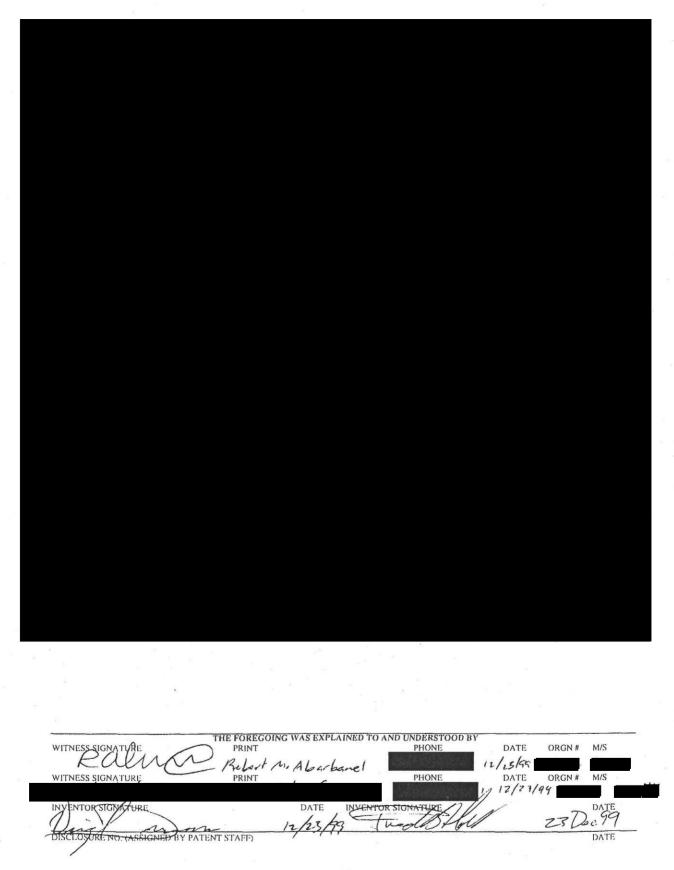


10





WITNESS SIGNATURE	WAS EXPLAINED TO AND UNDERSTOOD BY PHONE	DATE	ORGN #	M/S
		12/23/95		
WITNESS SIGNATURE PRINT	PHONE	DATE		M/S
		12/23/	99	÷۲ ک
INVERTOR JOIN LUKE	DATE INVENTOR SIGNATURE	1	2	DATE
Civit mon	12/23/99 Wall Holl	4	23 ] Jec	
DISCLOSURE NO (ASSIGNED BY PATENT STAFF)	2			DATE


11


December 23, 1999 2:21 pm

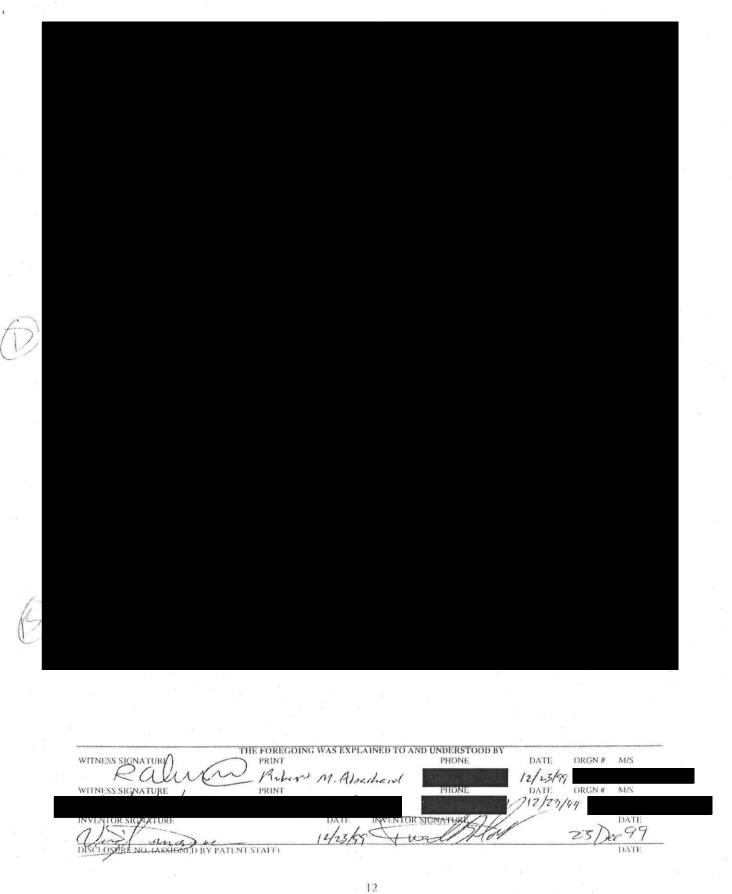

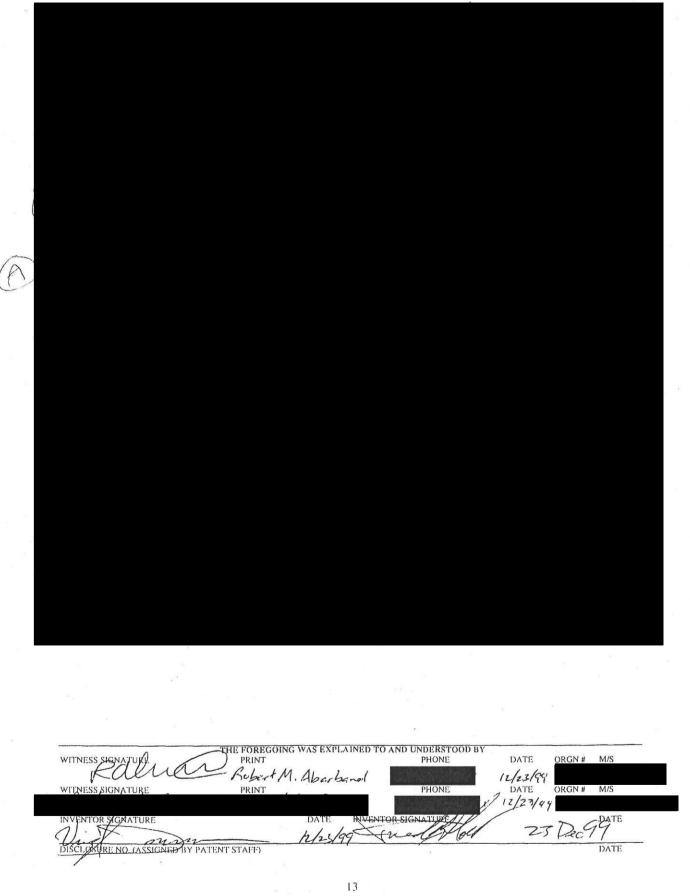

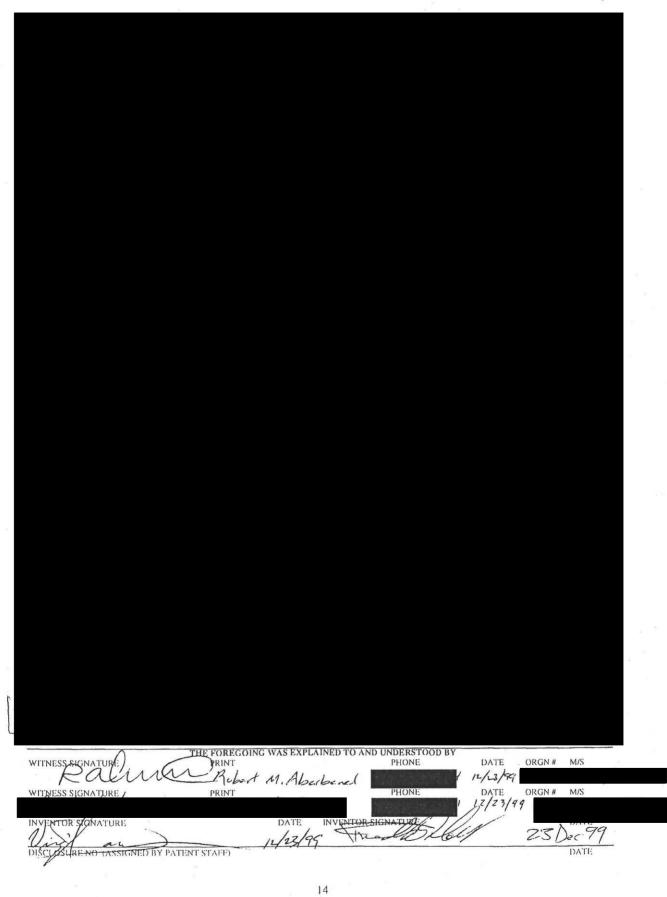

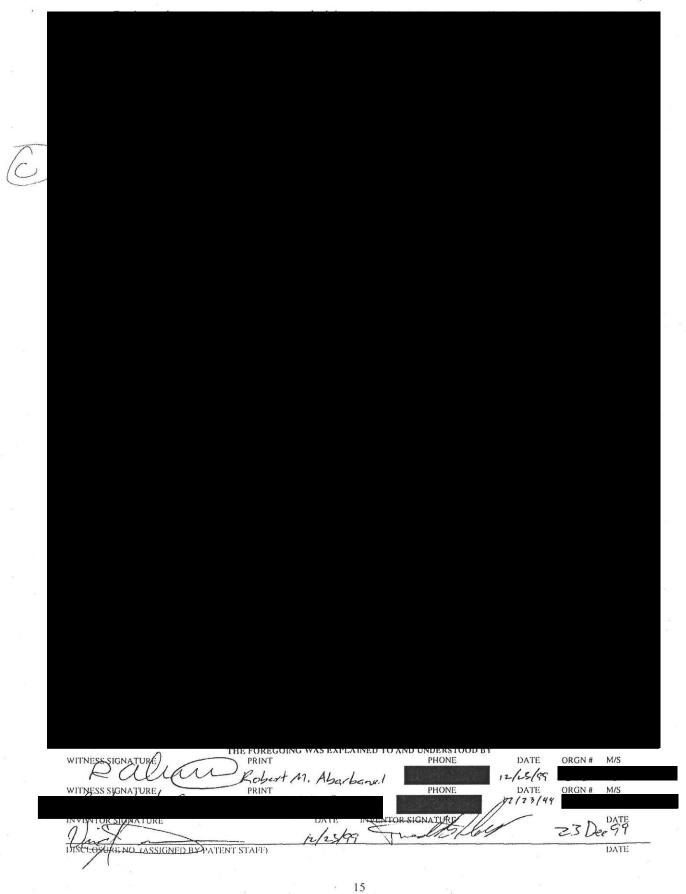


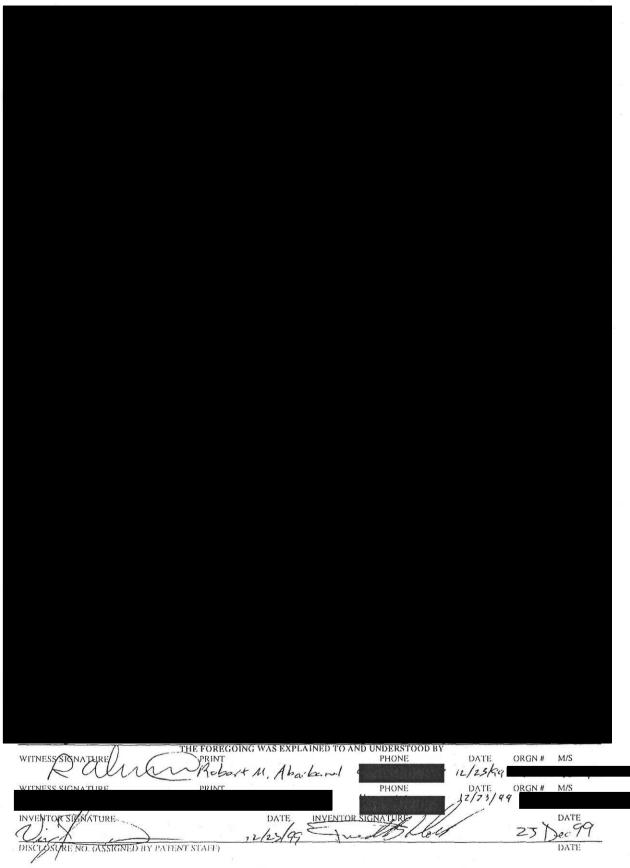


16


WITNESS SIGNATURE	EXPLAINED TO AND UNDERSTOOD I PHONE		DRGN # M/S	
Raun Bolert M.	Abarbanel	1 11/23/99		
WITNESS SIGNATURE / PRINT	PHONE		DRGN # M/S	
		12/23/94		
INVENTOR SIGNATURE D	TE INVENTOR SIGNATURE	1.1	DAT	TE
Unit ann 12,	2799 Jund Ho	als 2	23 269	9
DISCLOSURE NO. (ASSIGNED BY PATENT STAFF)			DAT	1:

17

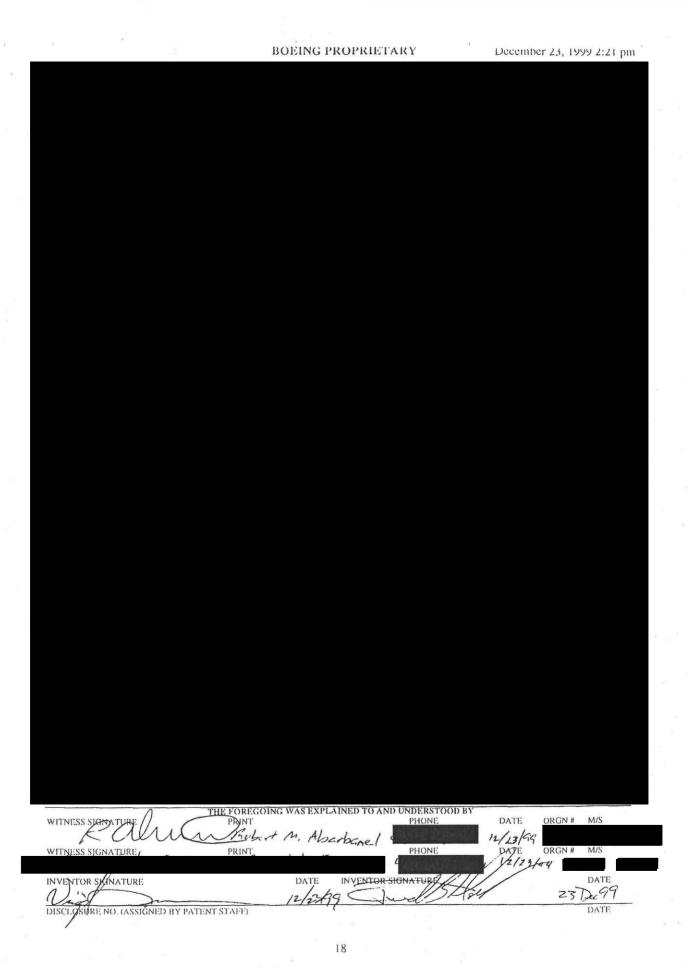

December 23, 1999 2:21 pm

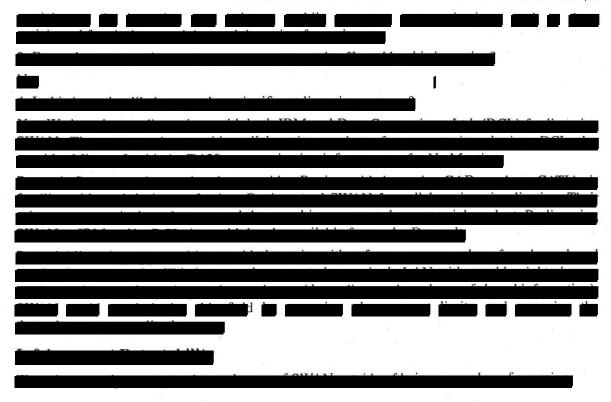

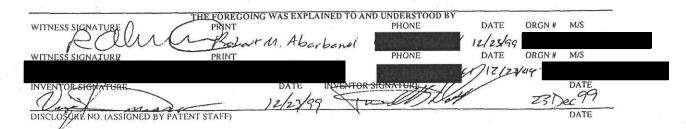

19