

13 SEPTEMBER 1999

VOLUME 75 NUMBER 11

APPLIED PHYSICS LETTERS

AVAILABLE ONLINE—See <http://ojps.aip.org/aplo/>

AMERICAN
INSTITUTE
OF PHYSICS



0003-6951(19990913)75:11;1-S

APPLIED PHYSICS LETTERS

CODEN: APPLAB

ISSN: 0003-6951

URL: <http://ojps.aip.org/aplo/>

Editor

Nghi Q. Lam

Argonne National Laboratory
Argonne, IL

Associate Editors

Charles W. Allen
Samuel D. Bader
Alan R. Krauss
David S. Kupperman
F. Paul Mooring

Walter Pötz
David Long Price
Lynn E. Rehn
Jules Routbort
Linda Young

Editorial Board

Term ending 31 December 1999

David B. Geohegan (Oak Ridge Nat'l Lab., Oak Ridge, TN)
Andreas Mandelis (Univ. of Toronto, Toronto, Canada)
Teh Y. Tan (Duke Univ., Durham, NC)
Akira Tonomura (Hitachi, Ltd., Saitama, Japan)

Term ending 31 December 2000

Robert Hull (Univ. of Virginia, Charlottesville, VA)
Georges Martin (Commissariat à l'Energie Atomique, Saclay, France)
Jerry R. Meyer (Naval Research Lab., Washington, DC)

Term ending 31 December 2001

Shuji Nakamura (Nichia Chemical Industries, Ltd., Tokushima, Japan)
R. Ramesh (University of Maryland, College Park, MD)
Frans Spaepen (Harvard University, Cambridge, MA)

Information for Authors

Submissions: Submit manuscripts (3 copies) to Editor, *Applied Physics Letters*, Argonne National Laboratory, Bldg. 203, Room R-127, P.O. Box 8296, 9700 South Cass Avenue, Argonne, IL 60439-4871; E-mail: apl@anl.gov. Submission implies that the manuscript has not been published previously, and is not currently submitted for publication elsewhere. For detailed information for contributors, visit the above URL.

Publication Charge: To support the cost of wide dissemination of research results through publication of journal pages and production of a database of articles, the author's institution is requested to pay a *page charge* of \$105 per page (with a one-page minimum) and an *article charge* of \$20 per article. For Errata the minimum page charge is \$10, with no article charge.

Reprints: Authors may order reprints with or without covers only in multiples of 50 (with a minimum of 100 in each category) from AIP, Circulation & Fulfillment/Reprints, Suite 1NO1, 2 Huntington Quadrangle, Melville, NY 11747-4502; Fax: 516-576-2234; Telephone: 800-344-6909 (U.S. and Canada), or 516-576-2234.

Electronic Physics Auxiliary Publication Service (E-PAPS): For a nominal fee, authors may submit material that is supplemental to a paper. E-PAPS deposits must be in electronic media, and can include text, figures, movies, computer programs, etc. Retrieval instructions are footnoted in the related published paper. Direct requests to the Editor; for additional information see <http://www.aip.org/pubserv/paps.html>

Comments: Authors may direct comments on the journal or on the editorial process to Doreene Berger, Manager, Editorial Operations, AIP, Suite 1NO1, 2 Huntington Quadrangle, Melville, NY 11747-4502; Telephone: 516-576-2444; Fax: 516-576-2450; E-mail: dberger@aip.org.

Applied Physics Letters features concise, up-to-date reports on significant new findings in applied physics. Emphasizing rapid dissemination of key data and new physical insights, the Journal offers prompt publication of new experimental and theoretical papers bearing on applications of physics phenomena to all branches of science, engineering, and modern technology.

Editorial Office Staff: Diane M. Kurtz, *Editorial Supervisor*; Kathleen O'Hare, *Editorial Assistant*; Lori A. Randolph, Leslie A. Weltmeyer, Ariene J. Niemann, Lucila Morales, Bonnie S. Peters, Suzanne C. Marik, *Editorial Support*

AIP Production: Deborah McHone, *Editorial Supervisor*; Margaret Reilly, *Journal Coordinator*; Greg Domke, *Chief Production Editor*; Michael Zurell, *Production Editor*

Prices

1999 Subscriptions

	U.S.A. & Poss.	Can., Mex., Central & S. Amer. & Caribbean	Foreign Surface Mail	Air Freight	Optional Air Freight
				Europe, Asia, Africa & Oceania	
Members^a					
Print+online	\$180 ^c	\$245	\$245	—	\$325
Online only ^b	\$110	\$110	\$110	—	\$110
Nonmembers					
Print+online	\$1675 ^c	\$1740	\$1740	\$1820	—
Online only ^b	\$1510	\$1510	\$1510	\$1510	—

^aMembers of AIP Member and Affiliated Societies.

^bAnnual CD-ROM is an additional \$30 for members and \$50 for nonmembers.

^cThis rate also applies to Microfiche+online, to all destinations.

Back Issues: 1999 single copies: \$40. Prior to 1999 single copies: \$27 for members; \$40 for nonmembers.

Additional Availability

Online Access: *Applied Physics Letters* is available online to print subscribers at no additional charge; for details, please see <http://www.aip.org/ojs/>. Abstracts of journal articles are available from AIP's SPIN Database, via AIP's Online Journal Publishing Service (OJPS) (<http://ojps.aip.org>).

Microform: *Applied Physics Letters* is available on microfiche issued at the same frequency as the printed journal, and annually on microfilm. A microform catalog is available from AIP, Circulation & Fulfillment/Single Copy Sales, Suite 1NO1, 2 Huntington Quadrangle, Melville, NY 11747-4502; Fax: 516-349-9704; Telephone: 800-344-6908 (U.S. and Canada) or 516-576-2277.

Document Delivery: Copies of journal articles can be ordered for online delivery from the Articles in Physics online document delivery service (<http://ojps.aip.org/jhtml/artinphys/>).

Customer Service

Subscription Orders, Renewals, and Address Changes should be addressed to AIP Circulation & Fulfillment Division, Suite 1NO1, 2 Huntington Quadrangle, Melville, NY 11747-4502. Allow at least six weeks advance notice. For address changes, please send both old and new addresses and, if possible, include the mailing label from a recent issue.

Claims, Single Copy Replacements, and Back Volumes: Missing issue requests will be honored only if received within six months of publication date (nine months for Australia and Asia). Single copies of a journal may be ordered and back volumes are available in print or microform. Contact AIP Customer Services at 800-344-6902 (U.S. and Canada) or 516-576-2270; Fax: 516-349-9704; E-mail: subs@aip.org.

Reprint Billing: Contact AIP Publication Charge and Reprints/CFD, Suite 1NO1, 2 Huntington Quadrangle, Melville, NY 11747-4502; Telephone: 516-576-2230 (800-344-6909); E-mail: pcr@aip.org.

Advertising: Rates will be supplied on request. Orders, advertising copy, and offset negatives should be sent to: Nancy Kuhle, Advertising Department, AIP, Suite 1NO1, 2 Huntington Quadrangle, Melville, NY 11747-4502; Telephone: 516-576-2449; Fax: 516-576-2481.

Rights and Permissions

Copying: Single copies of individual articles may be made for private use or research. Authorization is given (as indicated by the Item Fee Code for this publication) to copy articles beyond the use permitted by Sections 107 and 108 of the U.S. Copyright Law, provided the copying fee of \$15 per copy per article is paid to the Copyright Clearance Center, 222 Rosewood Drive, Danvers, MA 01923, USA. Persons desiring to photocopy materials for classroom use should contact the CCC Academic Permissions Service. The Item Fee Code for this publication is 0003-6951/99 \$15.00.

Authorization does not extend to systematic or multiple reproduction, to copying for promotional purposes, to electronic storage or distribution, or to republication in any form. In all such cases, specific written permission from AIP must be obtained.

Other Use: Permission is granted to quote from the journal with the customary acknowledgment of the source. To reprint a figure, table, or other excerpt requires the consent of one of the authors and notification to AIP.

Requests for Permission: Address requests to AIP Office of Rights and Permissions, Suite 1NO1, 2 Huntington Quadrangle, Melville, NY 11747-4502; Telephone: 516-576-2268; Fax: 516-576-2327; E-mail: rights@aip.org.

Applied Physics Letters (ISSN: 0003-6951) is published weekly by the American Institute of Physics, Suite 1NO1, 2 Huntington Quadrangle, Melville, NY 11747-4502. 1999 subscription rates are: US\$1675. POSTMASTER: Send address changes to *Applied Physics Letters*, AIP, Suite 1NO1, 2 Huntington Quadrangle, Melville, NY 11747-4502. Periodicals postage rates are paid at Huntington Station, NY, and at additional mailing offices.

Copyright © 1999 American Institute of Physics. All rights reserved.

SEP 21 1999

PHYSICS COLLECTION
UCLA

LASERS, OPTICS, AND OPTOELECTRONICS

- 1491 **1.55 μm single mode lasers with complex coupled distributed feedback gratings fabricated by focused ion beam implantation**
- 1494 **Growth of InGaN/GaN multiple-quantum-well blue light-emitting diodes on silicon by metalorganic vapor phase epitaxy**
- 1497 **Photonic band engineering through tailored microstructural order**
- 1500 **Precise control of 1.55 μm vertical-cavity surface-emitting laser structure with InAlGaAs/InAlAs Bragg reflectors by *in situ* growth monitoring**
- 1503 **Identification of the intrinsic self-trapped hole center in KD_2PO_4**
- 1506 **Photothermal fixation of laser-trapped polymer microparticles on polymer substrates**
- 1509 **Electrically tunable, room-temperature quantum-cascade lasers**
- 1512 **Self-aligned current confinement structure using AlAs/InP tunnel junction in GaInAsP/InP semiconductor lasers**
- 1515 **High-power laser light source for near-field optics and its application to high-density optical data storage**

H. König, S. Rennon,
J. P. Reithmaier, A. Forchel,
J. L. Gentner, L. Goldstein

Chuong A. Tran, A. Osinski,
R. F. Karlicek, Jr., I. Berishev

John Ballato, Jeffrey Dimaio,
Andrew James, Eric Gulliver

Jong-Hyeob Baek, In Hoon Choi,
Bun Lee, Won Seok Han,
Hyung Koun Cho

K. T. Stevens, N. Y. Garces,
L. E. Halliburton, M. Yan,
N. P. Zaitseva, J. J. DeYoreo,
G. C. Catella, J. R. Luken

Jaihyung Won, Takanori Inaba,
Hiroshi Masuhara, Hideki Fujiwara,
Keiji Sasaki, Shigeru Miyawaki,
Setsuya Sato

Antoine Müller, Mattias Beck,
Jérôme Faist, Ursula Oesterle,
Marc Illegems

Shigeaki Sekiguchi,
Tomoyuki Miyamoto,
Tadayoshi Kimura, Fumio Koyama,
Kenichi Iga

Afshin Partovi, David Peale,
Matthias Wuttig, Cherry A. Murray,
George Zydzik, Leslie Hopkins,
Kirk Baldwin, William S. Hobson,
James Wynn, John Lopata,
Lisa Dhar, Rob Chichester,
James H-J Yeh

STRUCTURAL, MECHANICAL, THERMODYNAMIC, AND OPTICAL PROPERTIES OF CONDENSED MATTER

- 1518 **Polaron dissociation in conducting polymers by high electric fields**
- 1521 **Metal-organic atomic-layer deposition of titanium-silicon-nitride films**
- 1524 **Resonantly enhanced Raman scattering and high-order Raman spectra of single-walled carbon nanotubes**
- 1527 **Size effect on the superconducting transition of embedded lead particles in an Al-Cu-V amorphous matrix**
- 1529 **Waveguide luminescence and Raman spectroscopy: Characterization of an inhomogeneous film at different depths**
- 1532 **Nonlinear optical properties of a coherent array of submicron SiO_2 spheres (opal) embedded with Si nanoparticles**
- 1535 **Characterization of silicon/oxide/nitride layers by x-ray photoelectron spectroscopy**
- 1538 **Excitons bound to nitrogen clusters in GaAsN**

S. V. Rakhmanova, E. M. Conwell

Jae-Sik Min, Hyung-Sang Park,
Sang-Won Kang

PingHeng Tan, Yan Tang,
Yuan Ming Deng, Feng Li,
Yong Liang Wei, Hui Ming Cheng

A. P. Tsai, N. Chandrasekhar,
K. Chattopadhyay

M. Ferrari, M. Montagna,
S. Ronchin, F. Rossi, G. C. Righini

M. Ajgaonkar, Y. Zhang, H. Grebel,
C. W. White

Walter Hansch, Anri Nakajima,
Shin Yokoyama

S. Francoeur, S. A. Nikishin, C. Jin,
Y. Qiu, H. Temkin

(Continued)

- 1541 **Electrochromic coloration efficiency of $a\text{-WO}_{3-y}$ thin films as a function of oxygen deficiency**
- 1544 **Boron retarded self-interstitial diffusion in Czochoalski growth of silicon crystals and its role in oxidation-induced stacking-fault ring dynamics**
- 1547 **Nonlinear optical properties of self-organized complex oxide Ce:BaTiO_3 quantum dots grown by pulsed laser deposition**
- 1550 **Substitution sites of Pb and Y in $\text{Bi}_2\text{Sr}_2\text{Ca}_1\text{Cu}_2\text{O}_{8+\delta}$: X-ray photoelectron diffraction as fingerprinting tool**

Se-Hee Lee, Hyeonsik M. Cheong,
C. Edwin Tracy,
Angelo Mascarenhas,
A. W. Czanderna, Satyen K. Deb

Talid Sinno, Hendi Susanto,
Robert A. Brown,
Wilfried von Ammon,
Erich Dornberger

Wensheng Shi, Zhenghao Chen,
Ningning Liu, Huibin Lu,
Yueliang Zhou, Dafu Cui,
Guozhen Yang

Th. Pillo, J. Hayoz, P. Schwaller,
H. Berger, P. Aebi, L. Schlapbach

ELECTRONIC TRANSPORT AND SEMICONDUCTORS

- 1553 **Performance and stability of Si:H $p-i-n$ solar cells with i layers prepared at the thickness-dependent amorphous-to-microcrystalline phase boundary**
- 1556 **Reversible gas doping of bulk α -hexathiophene**
- 1559 **InGaAs heteroepitaxy on GaAs compliant substrates: X-ray diffraction evidence of enhanced relaxation and improved structural quality**
- 1562 **Attenuated total reflection Fourier transform infrared spectroscopy study of the adsorption of organic contaminants on a hydrogen-terminated Si(111) surface in air**
- 1565 **The Bloch-Grüneisen mobility of two-dimensional electron gas in AlGaIn/GaN heterostructures**
- 1568 **Shallow p -type SiGeC layers synthesized by ion implantation of Ge, C, and B in Si**
- 1571 **Boron-related minority-carrier trapping centers in p -type silicon**
- 1574 **Fluorescence scanning near-field optical microscopy of conjugated polymer blends**
- 1577 **Surface plasmon-enhanced photoluminescence from a single quantum well**
- 1580 **Effects of deep levels on transconductance dispersion in AlGaAs/InGaAs pseudomorphic high electron mobility transistor**
- 1583 **Electroabsorption and retardation due to intersubband transitions in coupled quantum wells**
- 1586 **A surfactant-mediated relaxed $\text{Si}_{0.5}\text{Ge}_{0.5}$ graded layer with a very low threading dislocation density and smooth surface**

Randy J. Koval, Joohyun Koh, Z. Lu,
L. Jiao, R. W. Collins, C. R. Wronski

J. H. Schön, Ch. Kloc, B. Batlogg

P. D. Moran, D. M. Hansen,
R. J. Matyi, J. G. Cederberg,
L. J. Mawst, T. F. Kuech

Shen Ye, Taro Ichihara,
Kohei Uosaki

N. A. Zakhleniuk, C. R. Bennett,
M. Babiker, B. K. Ridley

H. Kurata, K. Suzuki, T. Futatsugi,
N. Yokoyama

Daniel Macdonald, Mark Kerr,
Andrés Cuevas

R. Stevenson, M. Granström,
D. Richards

N. E. Hecker, R. A. Höpfel,
N. Sawaki, T. Maier, G. Strasser

Kyoung Jin Choi, Jong-Lam Lee,
Hyung Mo Yoo

R. Kapon, N. Cohen, A. Sa'ar,
V. Thierry-Mieg, R. Planel

J. L. Liu, C. D. Moore, G. D. U'Ren,
Y. H. Luo, Y. Lu, G. Jin,
S. G. Thomas, M. S. Goorsky,
K. L. Wang

MAGNETISM AND SUPERCONDUCTIVITY

- 1589 **Influence of target-substrate angle on the elemental concentration of c -axis $\text{YBa}_2\text{Cu}_3\text{O}_{7-x}$ thin films**
- 1592 **Ferromagnetic cluster behaviors and magnetoresistance in Ni-doped LaSrMnO_3 systems**
- 1595 **Determination of critical current density in bulk melt-processed high temperature superconductors from levitation force measurements**
- 1598 **Anisotropic electrical transport property in $\text{La}_4\text{BaCu}_5\text{O}_{13+\delta}$ and $\text{La}_4\text{BaCu}_4\text{NiO}_{13+\delta}$ epitaxial thin films**

D. E. Pugel, L. H. Greene

Ji-Wen Feng, Lian-Pin Hwang

A. A. Kordyuk,
V. V. Nemoshkalenko,
R. V. Voznichenko, W. Gawalek,
T. Habisreuther

A. Venimadhav,
P. Subramanya Herle, M. Vedawyas,
C. Shivakumara, M. S. Hegde

(Continued)

1601 **High-performance resin-bonded magnets produced from zinc metal-coated $\text{Sm}_2(\text{Fe}_{0.9}\text{Co}_{0.1})_{17}\text{N}_x$ fine powders**

K. Noguchi, K. Machida,
K. Yamamoto, M. Nishimura,
G. Adachi

1604 **Thermal stability of longitudinal magnetic recording media**

A. Moser, D. Weller, M. F. Doerner

DIELECTRICS AND FERROELECTRICITY

1607 **Dielectric properties of C_{60} films in the high-temperature region**

J. S. Su, Y. F. Chen, K. C. Chiu

1610 **Domain imaging and local piezoelectric properties of the (200)-predominant $\text{SrBi}_2\text{Ta}_2\text{O}_9$ thin film**

G. D. Hu, J. B. Xu, I. H. Wilson

1613 **Memory properties of $\text{SrBi}_2\text{Ta}_2\text{O}_9$ thin films prepared on SiO_2/Si substrates**

Si-Bei Xiong, Shigeki Sakai

DEVICE PHYSICS

1616 **High breakdown voltage symmetric double δ -doped $\text{In}_{0.49}\text{Ga}_{0.51}\text{P}/\text{In}_{0.25}\text{Ga}_{0.75}\text{As}/\text{GaAs}$ high electron mobility transistor**

Y. S. Lin, W. C. Hsu, C. H. Wu,
W. Lin, R. T. Hsu

1619 **Ion-beam-induced surface damages on tris-(8-hydroxyquinoline) aluminum**

L. S. Liao, L. S. Hung, W. C. Chan,
X. M. Ding, T. K. Sham, I. Bello,
C. S. Lee, S. T. Lee

1622 **$2e^2/h$ to e^2/h switching of quantum conductance associated with a change in nanoscale ferromagnetic domain structure**

Teruo Ono, Yutaka Ooka,
Hideki Miyajima, Yoshichika Otani

1625 **Experimental demonstration of electrically controllable photonic crystals at centimeter wavelengths**

A. de Lustrac, F. Gadot, S. Cabaret,
J.-M. Lourtioz, T. Brillat, A. Priou,
E. Akmansoy

1628 **The cause of the anomalously small electric field effect in thin films of Bi**

A. V. Butenko, Dm. Shvarts,
V. Sandomirsky, Y. Schlesinger

INTERDISCIPLINARY AND GENERAL PHYSICS

1631 **Nanofabrication using a stencil mask**

Mandar M. Deshmukh, D. C. Ralph,
M. Thomas, J. Silcox

1634 **Origin of yield problems of single electron devices based on evaporated granular films**

H.-O. Müller, M. Boero,
J. K. Vincent, J. C. Inkson,
H. Mizuta, P. A. Mulheran

1637 **Dual integrated actuators for extended range high speed atomic force microscopy**

T. Sulchek, S. C. Minne,
J. D. Adams, D. A. Fletcher,
A. Atalar, C. F. Quate,
D. M. Adderton

1640 **Atomic steps with tuning-fork-based noncontact atomic force microscopy**

W. H. J. Rensen, N. F. van Hulst,
A. G. T. Ruiter, P. E. West

1643 **A mesoscopic terahertz pulse detector**

P. Orellana, F. Claro

ERRATA

1646 **Erratum: "Enhanced GaN decomposition in H_2 near atmospheric pressures" [Appl. Phys. Lett. 73, 2018 (1998)]**

D. D. Koleske, A. E. Wickenden,
R. L. Henry, M. E. Twigg,
J. C. Culbertson, R. J. Gorman

1647 **CUMULATIVE AUTHOR INDEX**

Metal-organic atomic-layer deposition of titanium-silicon-nitride films

Jae-Sik Min, Hyung-Sang Park, and Sang-Won Kang^{a)}

Department of Materials Science and Engineering, Korea Advanced Institute of Science and Technology, Taejeon, Korea

(Received 11 May 1999; accepted for publication 19 July 1999)

Titanium-silicon-nitride films were grown by metal-organic atomic-layer deposition at 180 °C. When silane was supplied separately in the sequence of a tetrakis(dimethylamido) titanium pulse, silane pulse, and ammonia pulse, the Si content in the deposited films and the deposition thickness per cycle remained almost constant at 18 at. % and 0.22 nm/cycle, even though the silane partial pressure varied from 0.27 to 13.3 Pa. Especially, the Si content dependence is strikingly different from the conventional chemical-vapor deposition. The capacitance-voltage measurement revealed that the Ti-Si-N film prevents the diffusion of Cu up to 800 °C for 60 min. Step coverage was approximately 100% even on the 0.3 μm diam hole with slightly negative slope and 10:1 aspect ratio. © 1999 American Institute of Physics. [S0003-6951(99)01137-7]

As the minimum feature size of semiconductor devices shrinks, the Cu diffusion barrier must be effective even when it is as thin as 10 nm because thick diffusion barriers leave little space for Cu, and thus, nullify the advantage of Cu metallization.^{1,2} In this respect, more effective Cu diffusion barrier materials with a thinner thickness are required. Amorphous refractory ternary metals such as (Ti, Ta, W)-Si-N, W-B-N do not have fast diffusion paths such as a grain boundary present in polycrystalline materials and are promising candidates for these applications.^{3,4} These diffusion barriers need to be deposited with good step coverage, especially on the sidewall, as the aspect ratio of contact/via/trench increases.

Metal-organic atomic-layer deposition (MOALD) achieves near-perfect step coverage and can control precisely the thickness and composition of grown films.⁵ We have already demonstrated that TiN film could be grown with excellent conformality by MOALD using tetrakis(ethylmethylamido)titanium and NH_3 .⁶ However, MOALD of a ternary system may not be as easy to demonstrate as much as it is for a binary system and may not be understood straightforwardly in terms of chemical composition and growth kinetics. Therefore, in the present study, we have developed a MOALD technique for ternary Ti-Si-N films using a sequential supply of $\text{Ti}[\text{N}(\text{CH}_3)_2]_4$ [tetrakis(dimethylamido) titanium: TDMAT], silane (SiH_4), and ammonia (NH_3), and evaluated the Cu diffusion barrier characteristics of a 10 nm Ti-Si-N film with high-frequency small-signal capacitance-voltage ($C-V$) measurements.

A MOALD apparatus was used to grow Ti-Si-N films, which is schematically similar to the one described previously.⁶ All the films were grown on SiO_2 (100 nm)/Si wafers at the substrate temperature of 180 °C and with the reactor pressure maintained at 133 Pa. TDMAT was delivered from the bubbler (30 °C) to the reactor using Ar (70 sccm) as a carrier gas. Also, the flow rates of NH_3 and SiH_4 (forming gas with 10% SiH_4 /90% Ar) diluted in Ar were fixed at 70 sccm. The film thicknesses were measured by the

surface profilometer. The composition of the grown film was analyzed using 9.0 MeV Cl^{5+} elastic recoil detection time of flight (ERD-TOF), 2.43 MeV He^{2+} Rutherford backscattering spectroscopy (RBS), and Auger electron spectroscopy (AES).

Figure 1 shows the dependence of the Si content in the Ti-Si-N film and the film deposition thickness per cycle on SiH_4 partial pressure. In this case, Ti-Si-N films were grown by a sequential supply of TDMAT for 5 s, SiH_4 for 10 s, and NH_3 for 10 s in a cyclic manner, and an Ar pulse for 20 s was inserted between each reactant gas pulse in order to isolate the reactant gases from each other. The partial pressure of SiH_4 was varied from 0.27 to 13.3 Pa by mixing with Ar. Despite the wide variation in SiH_4 partial pressure, the Si content in the films and the deposition thickness per cycle remain almost constant at 18 at. % and 0.22 nm/cycle, respectively. The dependence of Si content on the SiH_4 partial pressure in MOALD is quite different from the conventional metal-organic chemical-vapor deposition (MOCVD) of Ti-Si-N, in which the Si content in the film

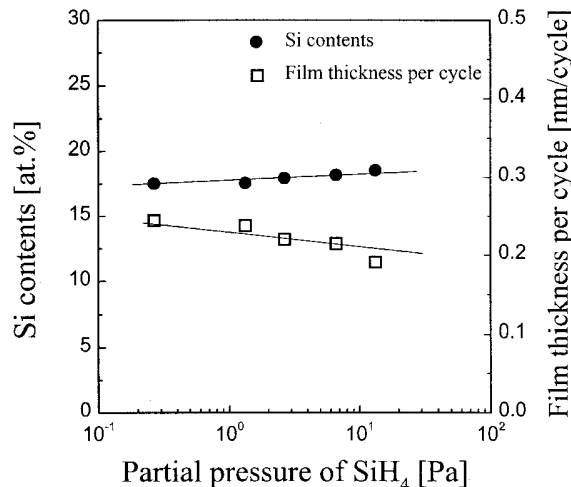


FIG. 1. Dependence of the Si content in the Ti-Si-N films and deposition thickness per cycle on the SiH_4 partial pressure for the films grown on SiO_2 at the substrate temperature of 180 °C. Ti-Si-N films were grown by sequential supply of TDMAT for 5 s, SiH_4 for 10 s, and NH_3 for 10 s.

^{a)}Electronic mail: swkang@cais.kaist.ac.kr

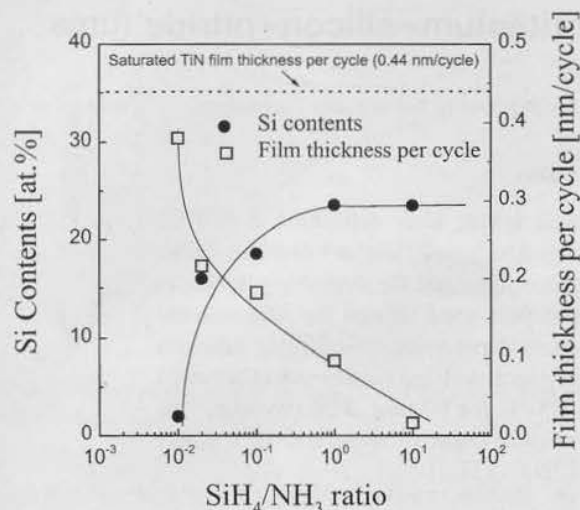


FIG. 2. Dependence of the Si content in the Ti-Si-N films and deposition thickness per cycle on the SiH_4/NH_3 ratio for the films grown on SiO_2 at the substrate temperature of 180 °C. SiH_4 and NH_3 were simultaneously supplied in the sequence of TDMAT for 5 s and SiH_4/NH_3 for 10 s. On the contrary, when TDMAT and NH_3 were alternately supplied without SiH_4 , the saturated TiN deposition thickness per cycle was 0.44 nm/cycle.

increases logarithmically as the partial pressure of SiH_4 increases.⁷

The difference between MOALD and MOCVD may originate from the fact that the Si content in the MOALD is controlled by the amount of SiH_4 that can be adsorbed on the surface during a SiH_4 pulse. As a preliminary experiment, it was observed that there was no reaction between SiH_4 and TDMAT, or SiH_4 and NH_3 at 180 °C. These results indicate that SiH_4 cannot react directly with TDMAT or NH_3 at this temperature. Thus, the amount of available adsorption sites for SiH_4 would be limited, since most of the available adsorption sites on the surface have been already occupied by TDMAT molecules, which were chemisorbed on the surface during the prior injection of the TDMAT pulse. Therefore, the Si content in the Ti-Si-N films will be controlled by the amount of SiH_4 adsorbed on the surface, not by the SiH_4 partial pressure.

On the other hand, the Ti-Si-N deposition thickness per cycle, 0.22 nm/cycle, is nearly half the value of TiN (0.44 nm/cycle, shown in Fig. 2). As mentioned above, SiH_4 cannot react directly with TDMAT or NH_3 at this MOALD temperature of 180 °C. Thus, SiH_4 can only take part in the Ti-Si-N formation during the reaction between TDMAT and NH_3 . Therefore, when the substrate covered with both TDMAT and SiH_4 is exposed to the NH_3 pulse, the reaction between TDMAT and NH_3 should at first occur on the surface. And then, the SiH_4 adsorbed on the surface could be involved into the Ti-Si-N formation. But, excess SiH_4 would still remain on the surface after the end of the NH_3 pulse and act as a blockade toward the adsorption of TDMAT during the following TDMAT pulse of the next cycle. Consequently, the total quantity of TDMAT and NH_3 that contributes to the film growth during one cycle would be decreased, and it would result in reduction of the Ti-Si-N deposition thickness per cycle.

Figure 2 shows the dependence of the Si content and the deposition thickness per cycle on the SiH_4/NH_3 ratio. In this

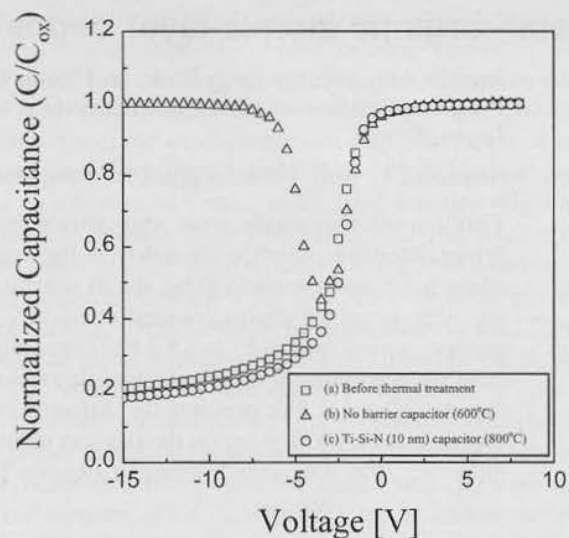


FIG. 3. 1 kHz C-V measurements for MOS capacitors. Cu (100 nm)/10 nm Ti-Si-N barrier layer (or without the barrier layer)/ SiO_2 (100 nm)/N-type Si. (a) and (b) are the C-V profiles for the MOS capacitor without the barrier layer before and after thermal treatment at 600 °C for 60 min in H_2 (10%)/Ar (90%), respectively. (c) is the C-V profiles for the MOS capacitor with a 10 nm Ti-Si-N barrier layer after thermal treatment at 800 °C for 60 min in H_2 (10%)/Ar (90%).

experiment, SiH_4 and NH_3 were simultaneously supplied in the sequence of the TDMAT pulse for 5 s and the SiH_4/NH_3 pulse for 10 s. The Si content increases as the SiH_4/NH_3 ratio increases and is saturated at 23 at. %. It is comparable to the conventional CVD that the Si content increases according to the SiH_4 partial pressure. The deposition thickness per cycle decreases continuously as the Si content in the film increases. Two possible reasons can be considered. The first reason is that the number of reactant molecules that contribute to the film deposition during one cycle decreases due to the SiH_4 blocking effect, as mentioned in Fig. 1. And the second reason is that the deficiency of NH_3 can also reduce the overall reaction rate during one cycle.

Metal-oxide-semiconductor (MOS) capacitors, Cu (100 nm)/barrier layer (or without the barrier layer)/ SiO_2 (100

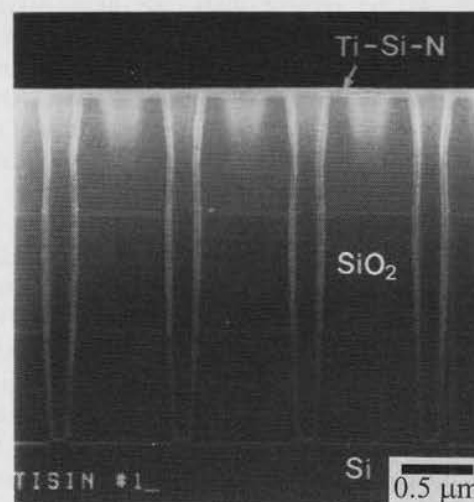


FIG. 4. Cross-sectional SEM micrograph of a 50 nm Ti-Si-N film grown by MOALD at 180 °C. Step coverage of the Ti-Si-N film is approximately 100% even on the 0.3 μm diam hole with slightly negative slope and 10:1 aspect ratio.

nm)/*N*-type Si, were fabricated to investigate the Cu diffusion barrier characteristics of the MOALD Ti–Si–N film. Figure 3 shows the *C–V* profiles measured at the 1 kHz frequency of a small signal. In Fig. 3, (a) and (b) are the *C–V* profiles for the MOS capacitor without the barrier layer before and after thermal treatment at 600 °C for 60 min in H₂ (10%)/Ar (90%), respectively. (c) is the *C–V* profile for the MOS capacitor with a 10 nm Ti_{0.32}Si_{0.18}N_{0.50} barrier layer after thermal treatment at 800 °C for 60 min in H₂ (10%)/Ar (90%). In the case of (a), the *C–V* profile shows the typical high-frequency small-signal *C–V* characteristics. However, in the case of (b), the *C–V* profile shows low-frequency *C–V* characteristics in spite of the 1 kHz small-signal *C–V* measurement. This will come from the Cu atoms diffused into the *N*-type Si, because Cu atoms form deep donor levels and can act as the generation and recombination centers of electron–hole pairs. But, in the case of (c), the *C–V* profile shows no change by thermal treatment at 800 °C for 60 min, compared with the case of (a). It is revealed that the 10 nm Ti–Si–N film grown by MOALD performs the role of the Cu diffusion barrier up to 800 °C for the 60 min well.

The MOALD process has great potential for excellent step coverage on severe surface topography due to the com-

plete surface reaction. Figure 4 shows the cross-sectional scanning electron microscope (SEM) image of the 50 nm Ti–Si–N film grown by the same method as in Fig. 1. It clearly demonstrates the perfect step coverage of MOALD even on the 0.3 μm diam hole with slightly negative slope and 10:1 aspect ratio.

A MOALD for Ti–Si–N was developed by alternate supply of TDMAT, SiH₄, and NH₃ at 180 °C. The MOALD Ti–Si–N films showed excellent Cu diffusion barrier performance with 10 nm thickness up to 800 °C for 60 min. MOALD is a promising deposition method for Ti–Si–N with less than 10 nm thickness as a Cu diffusion barrier film.

¹S. P. Murarka, J. Steigerwald, and R. J. Gutmann, MRS Bull. **18**, 46 (1993).

²R. J. Gutmann, T. P. Cow, A. E. Kaloyeros, W. A. Lanford, and S. P. Murarka, Thin Solid Films **262**, 177 (1995).

³J. S. Reid, E. Kolawa, R. P. Ruiz, and M. A. Nicolet, Thin Solid Films **236**, 319 (1993).

⁴J. S. Reid, R. Y. Liu, P. M. Sminth, R. P. Ruiz, and M. A. Nicolet, Thin Solid Films **262**, 218 (1995).

⁵C. H. L. Goodman and M. V. Pessa, J. Appl. Phys. **60**, R65 (1986).

⁶J. S. Min, Y. W. Son, W. G. Kang, S. S. Chun, and S. W. Kang, Jpn. J. Appl. Phys., Part 1 **37**, 4999 (1998).

⁷P. M. Smith and J. S. Custer, Appl. Phys. Lett. **70**, 3116 (1997).