



(12) **United States Patent**  
**Aoi**

(10) **Patent No.:** **US 6,197,696 B1**  
(45) **Date of Patent:** **Mar. 6, 2001**

(54) **METHOD FOR FORMING  
INTERCONNECTION STRUCTURE**

(75) Inventor: **Nobuo Aoi**, Hyogo (JP)  
(73) Assignee: **Matsushita Electric Industrial Co.,  
Ltd.**, Osaka (JP)  
(\*) Notice: Subject to any disclaimer, the term of this  
patent is extended or adjusted under 35  
U.S.C. 154(b) by 0 days.

(21) Appl. No.: **09/274,114**  
(22) Filed: **Mar. 23, 1999**  
(30) **Foreign Application Priority Data**  
Mar. 26, 1998 (JP) ..... 10-079371  
(51) **Int. Cl.**<sup>7</sup> ..... **H01L 21/311**  
(52) **U.S. Cl.** ..... **438/700; 438/706**  
(58) **Field of Search** ..... 438/700, 706

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

5,110,712	5/1992	Kessler et al.	438/623
5,518,963 *	5/1996	Park	438/624
5,635,423 *	6/1997	Huang et al.	438/638
5,651,855	7/1997	Dennison et al.	438/628
5,702,982 *	12/1997	Lee et al.	438/620

**FOREIGN PATENT DOCUMENTS**

0 425 787 A2	5/1991	(EP)	H01L/21/90
0 680 085 A1	11/1995	(EP)	H01L/21/768
6-291193	10/1994	(JP)	H01L/21/90
7-153842	6/1995	(JP)	H01L/21/768
9-64034	3/1997	(JP)	H01L/21/3205
9-153545	6/1997	(JP)	H01L/21/768

**OTHER PUBLICATIONS**

European Search Report dated Jul. 1, 1999.

\* cited by examiner

*Primary Examiner*—Benjamin L. Utech  
*Assistant Examiner*—Lynette T. Umez-Eronini  
(74) *Attorney, Agent, or Firm*—Eric J. Robinson; Nixon  
Peabody LLP

(57) **ABSTRACT**

In a method for forming an interconnection structure, first, second and third insulating films and a thin film are sequentially formed over lower-level metal interconnects. Then, the thin film is masked with a first resist pattern and etched to form a mask pattern with openings for interconnects. Next, the third insulating film is masked with a second resist pattern and dry-etched such that the third insulating film and the first and second resist patterns are etched at a high rate and that the second insulating film is etched at a low rate to form openings for contact holes in the third insulating film and remove the first and second resist patterns. Then, the second insulating film is masked with the third insulating film and dry-etched such that the second insulating film is etched at a high rate and that the first and third insulating films are etched at a low rate to form the openings for contact holes in the second insulating film. Then, the third and first insulating films are masked with the mask pattern and the second insulating film, respectively, and dry-etched such that the first and third insulating films are etched at a high rate and that the mask pattern and the second insulating film are etched at a low rate to form wiring grooves and contact holes in the third and first insulating films, respectively. Finally, upper-level metal interconnects and contacts are formed.

**15 Claims, 37 Drawing Sheets**

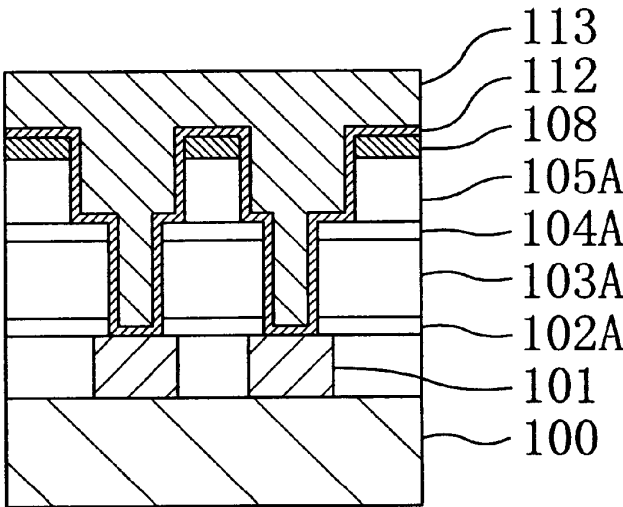


Fig. 1(a)

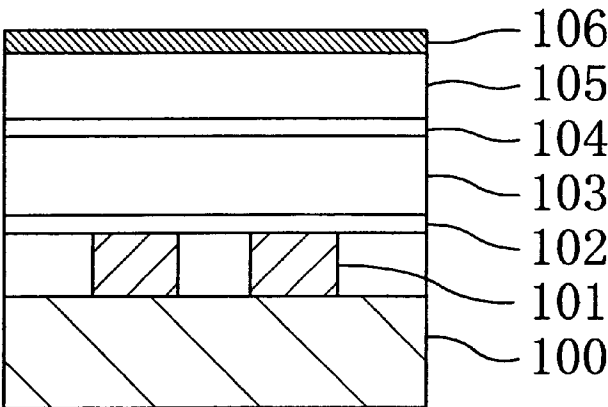


Fig. 1(b)

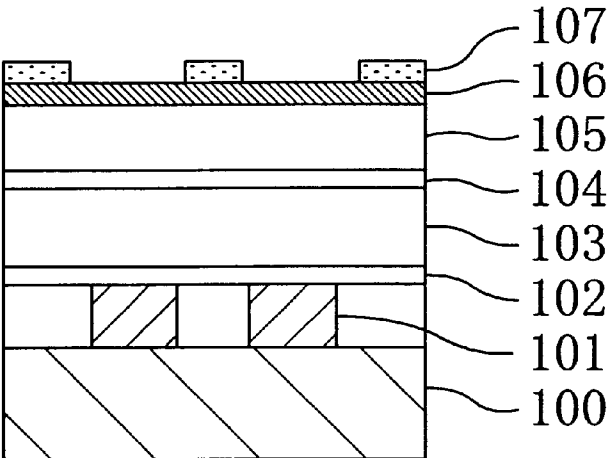


Fig. 1(c)

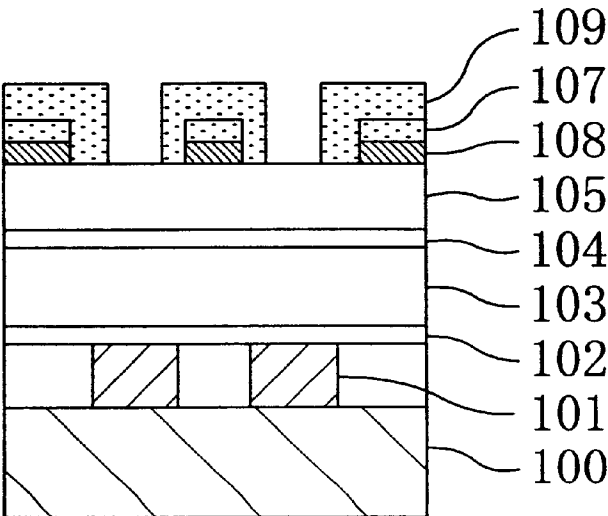


Fig. 2(a)

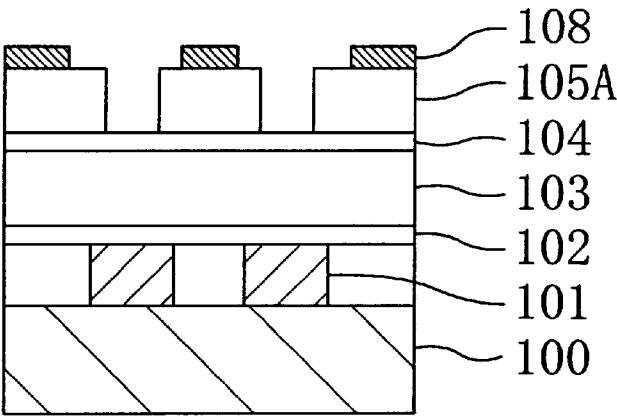


Fig. 2(b)

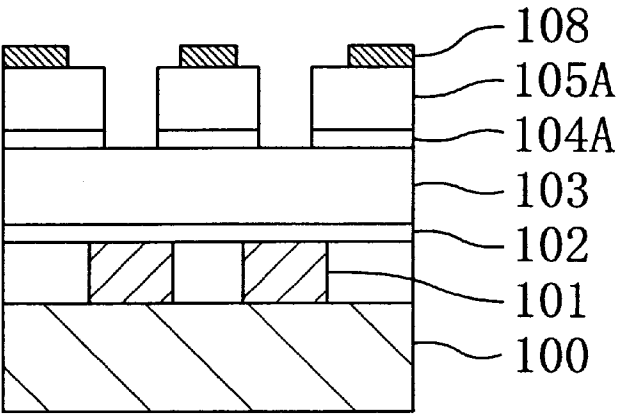


Fig. 2(c)

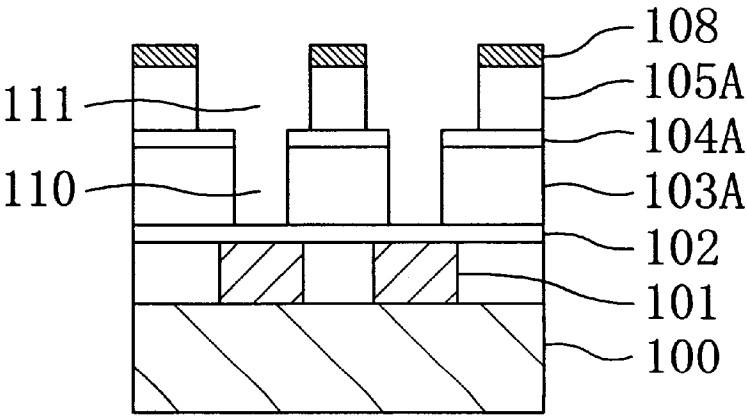


Fig. 3(a)

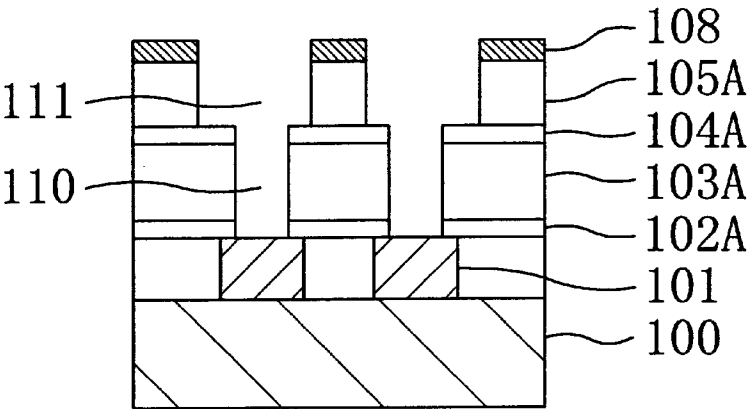


Fig. 3(b)

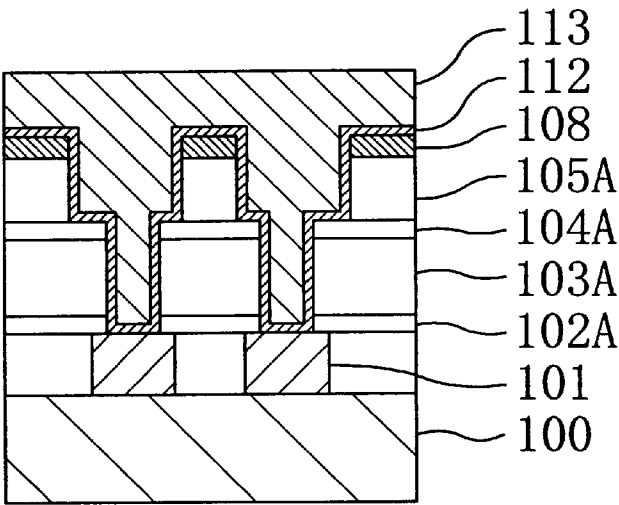


Fig. 3(c)

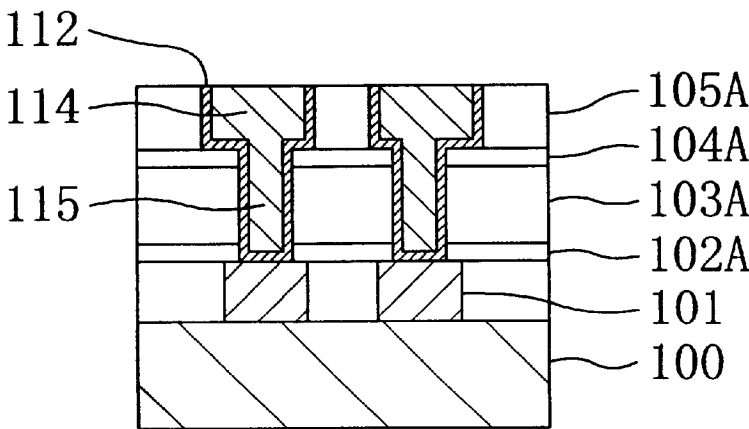


Fig. 4(a)

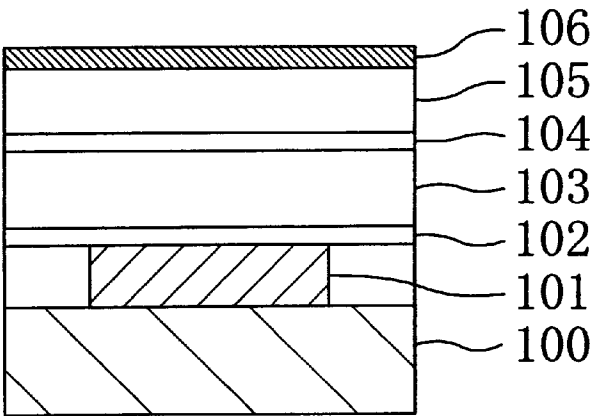


Fig. 4(b)

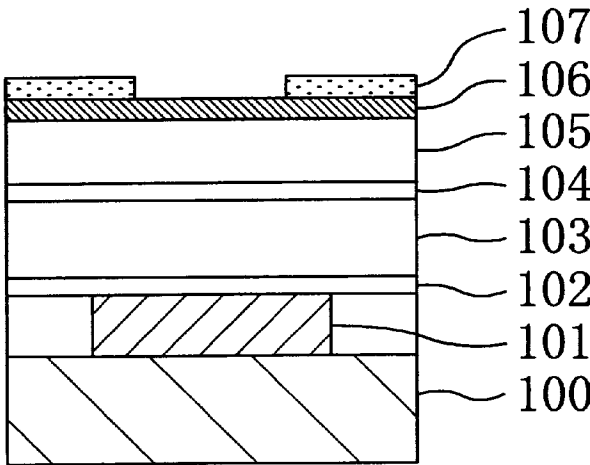


Fig. 4(c)

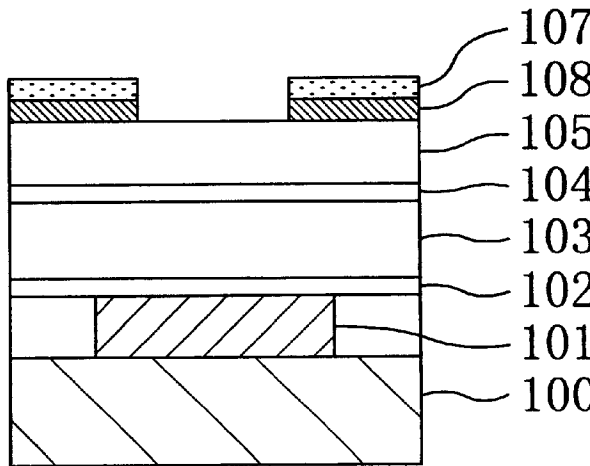


Fig. 5(a)

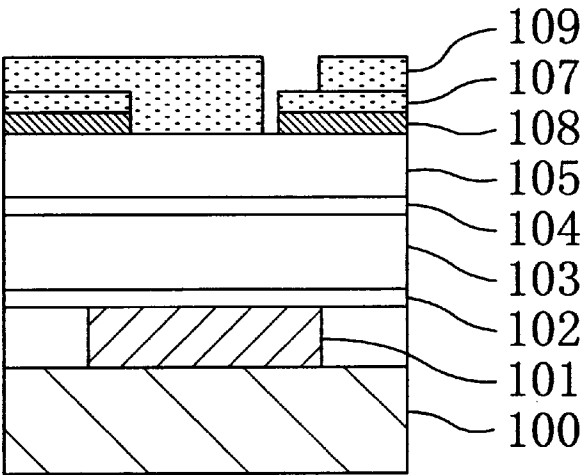


Fig. 5(b)

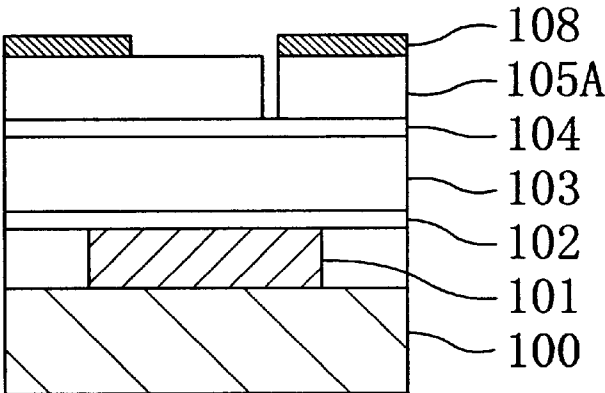


Fig. 5(c)

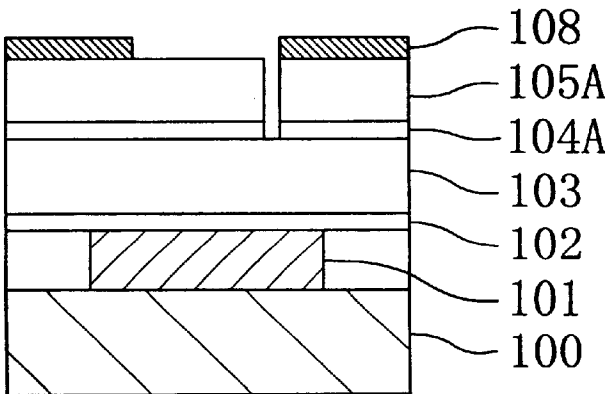


Fig. 6(a)

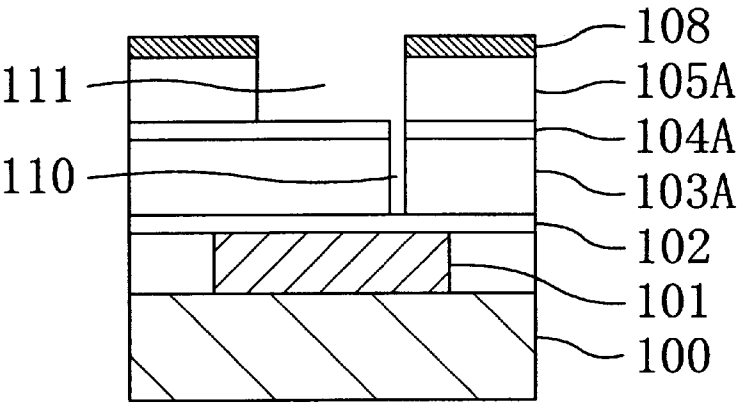


Fig. 6(b)

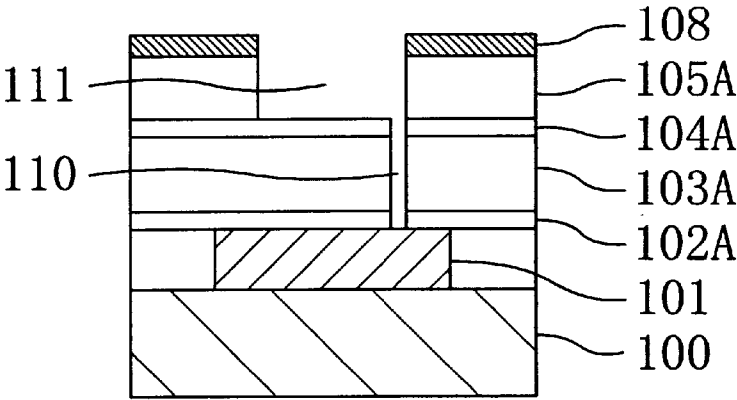


Fig. 6(c)

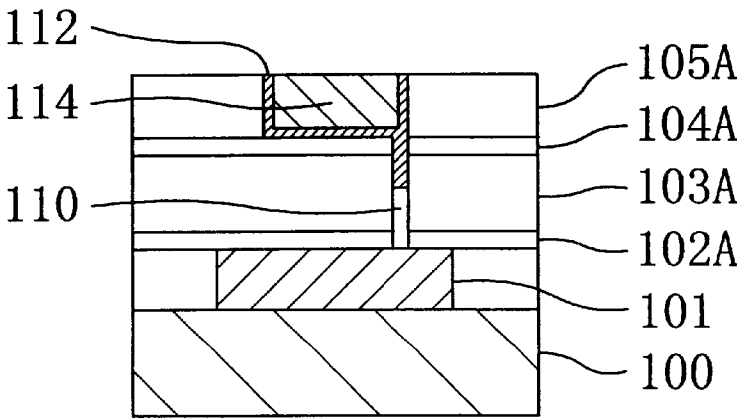


Fig. 7(a)

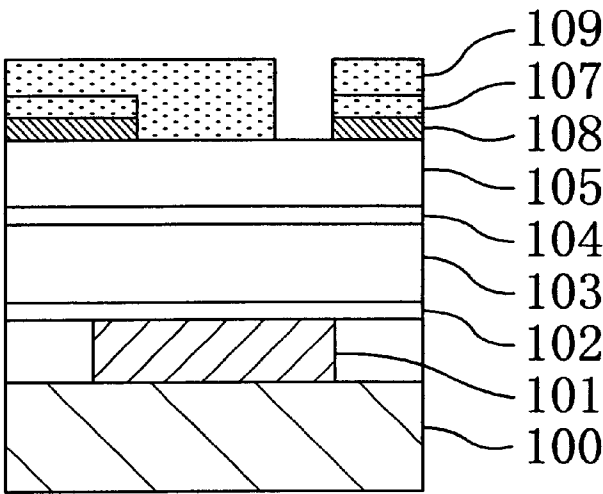


Fig. 7(b)

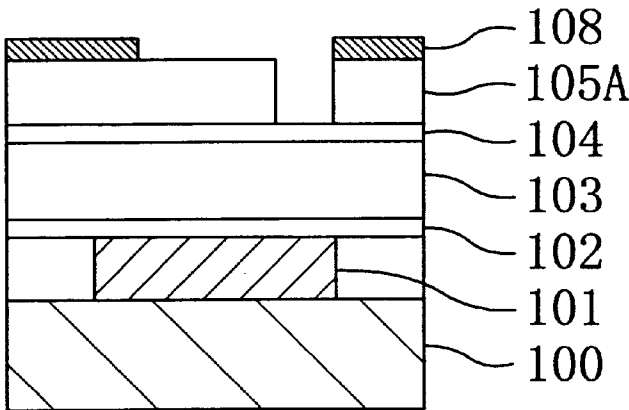


Fig. 7(c)

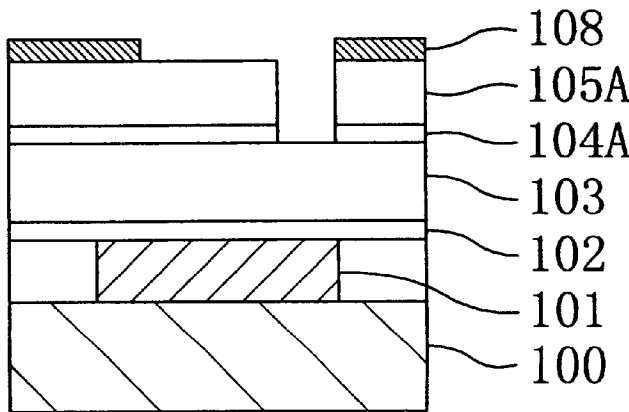




Fig. 8(a)

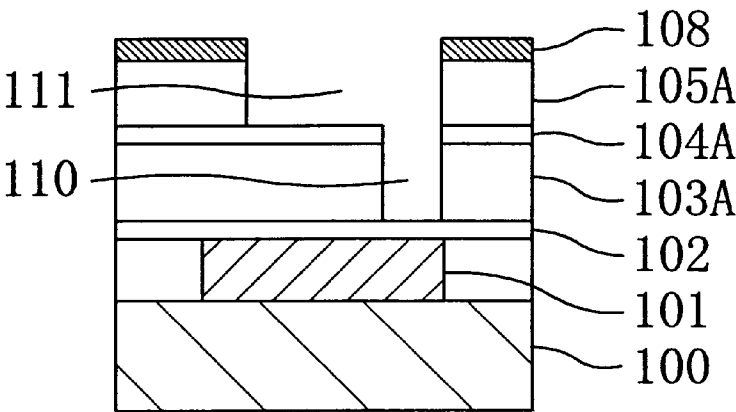


Fig. 8(b)

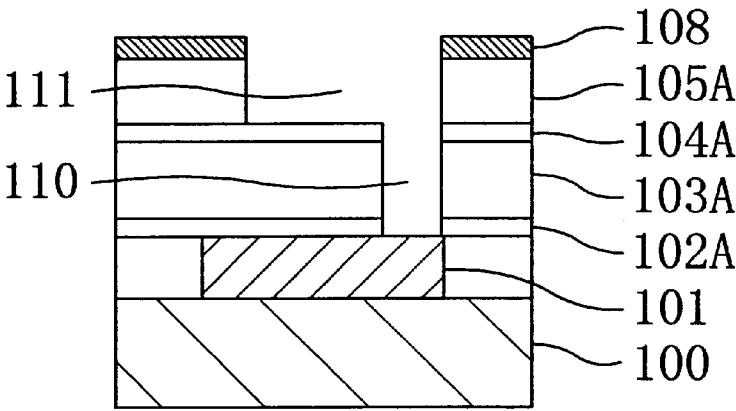


Fig. 8(c)

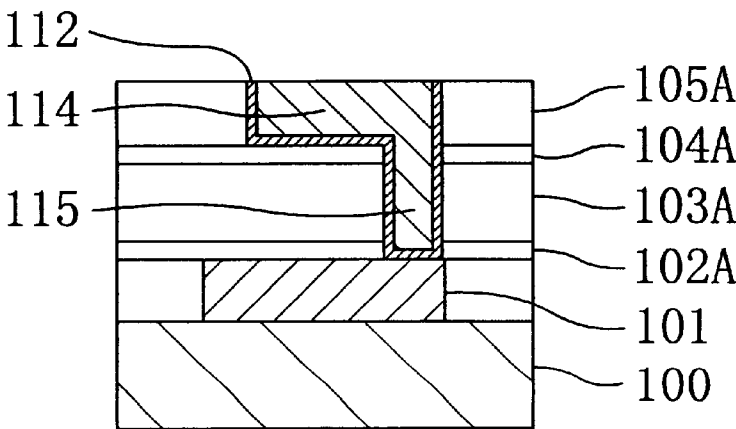


Fig. 9(a)

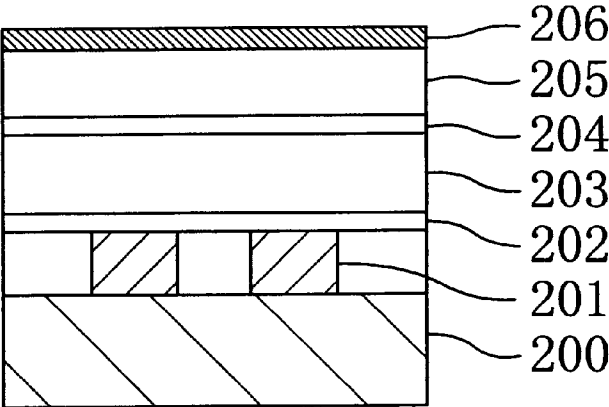


Fig. 9(b)

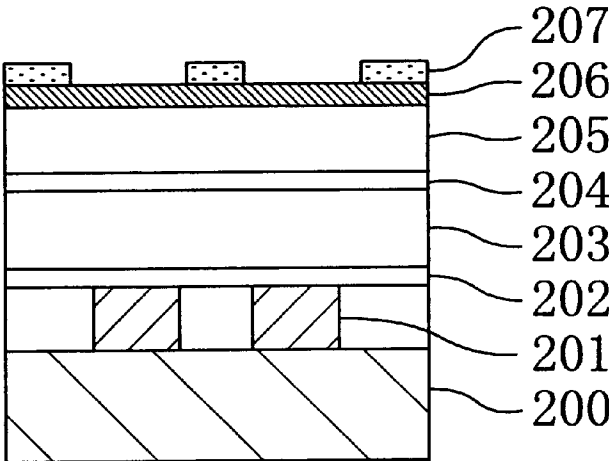


Fig. 9(c)

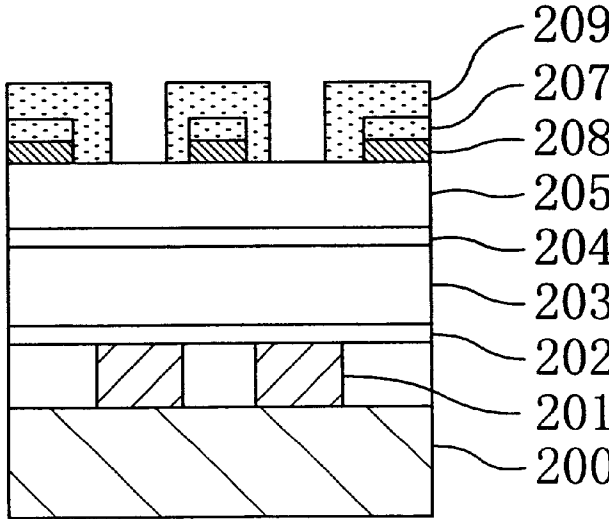


Fig. 10 (a)

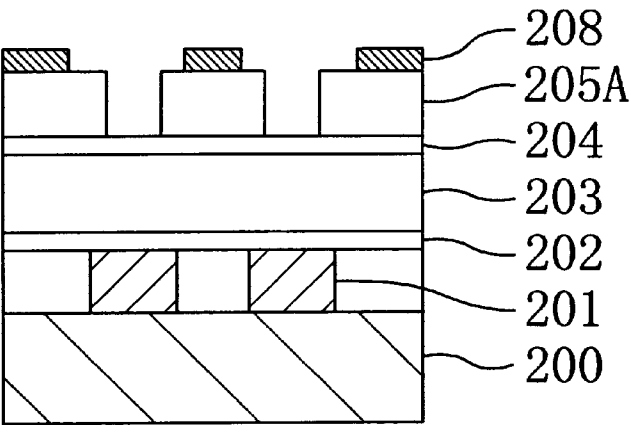


Fig. 10 (b)

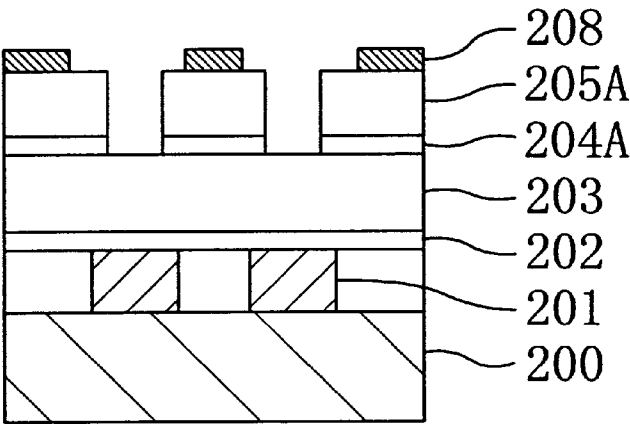


Fig. 10 (c)

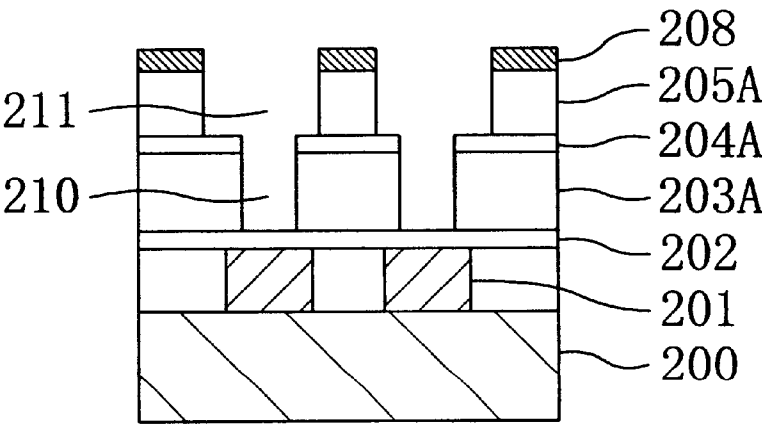


Fig. 11(a)

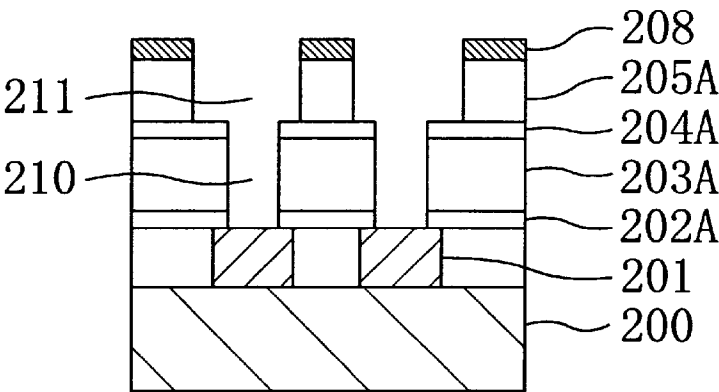


Fig. 11(b)

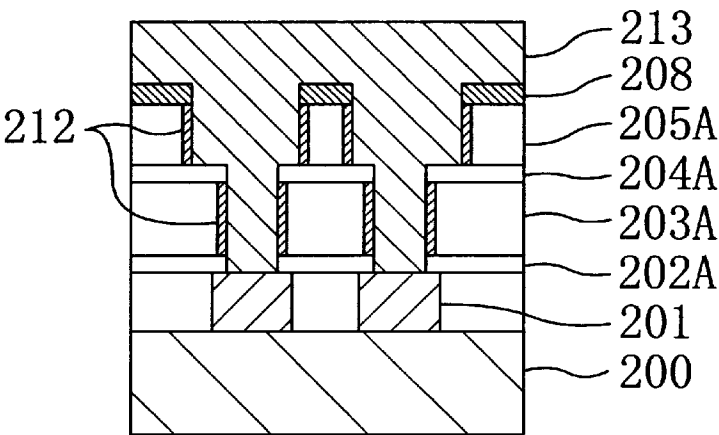


Fig. 11(c)

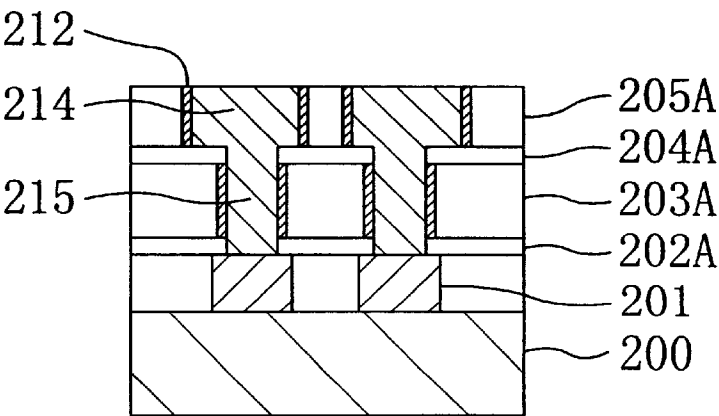


Fig. 12(a)

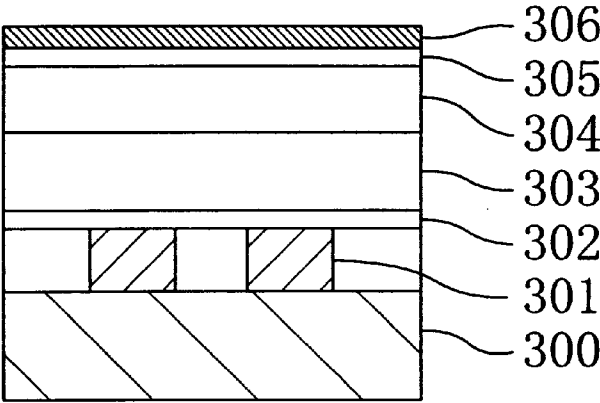


Fig. 12(b)

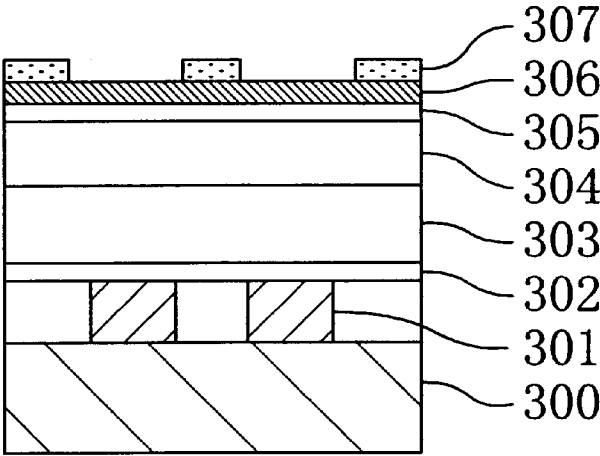


Fig. 12(c)

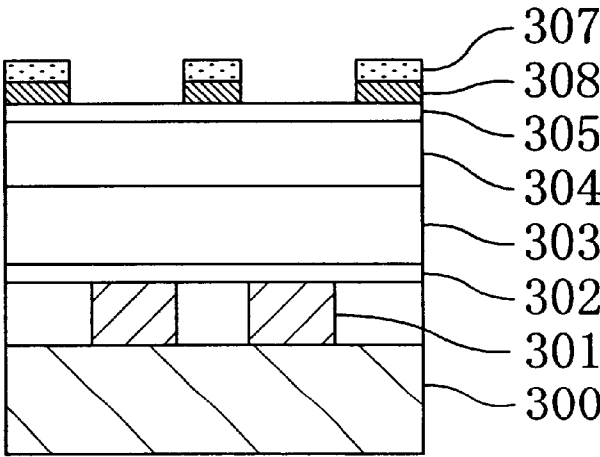


Fig. 13(a)

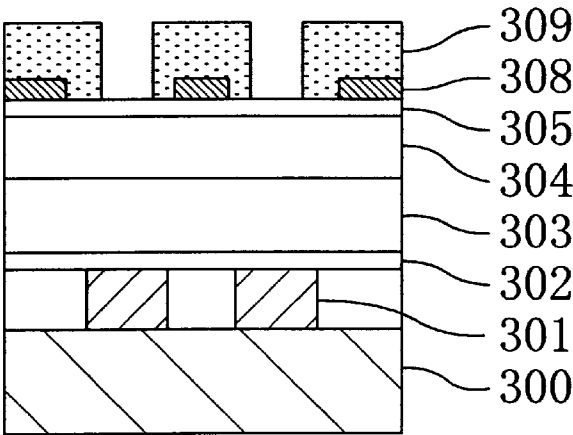


Fig. 13(b)

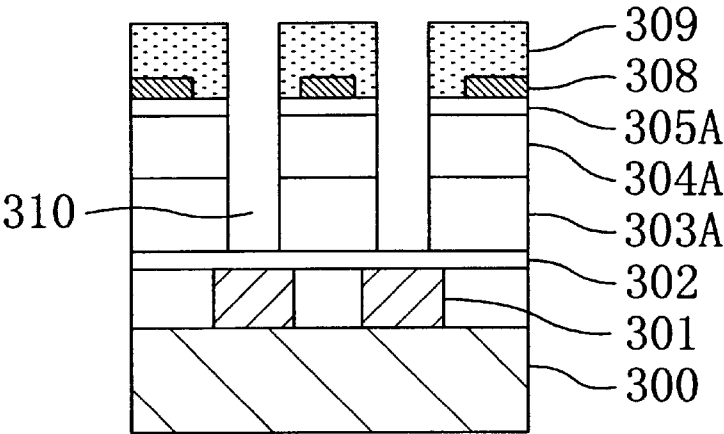


Fig. 13(c)

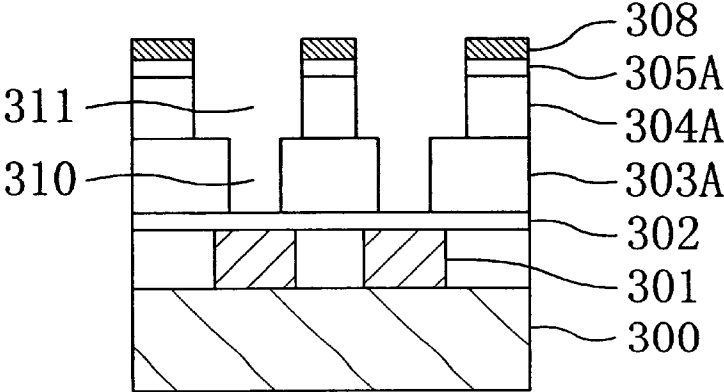


Fig. 14(a)

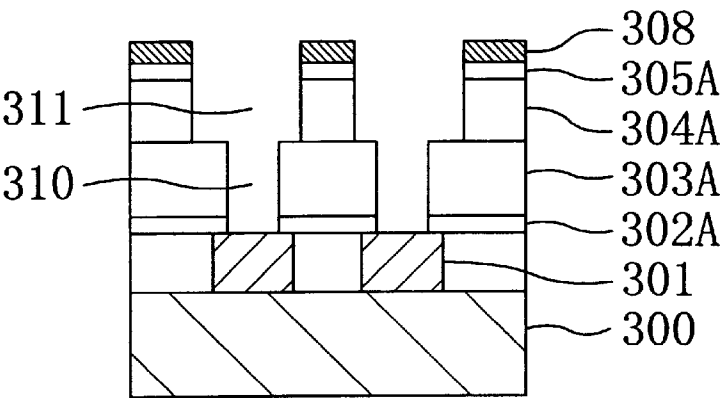


Fig. 14(b)

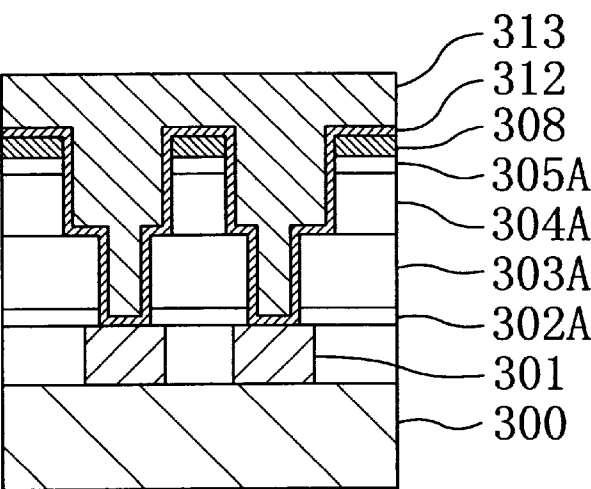


Fig. 14(c)

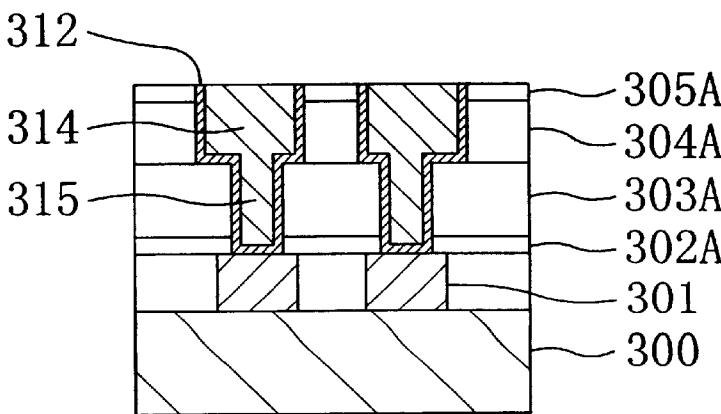


Fig. 15(a)

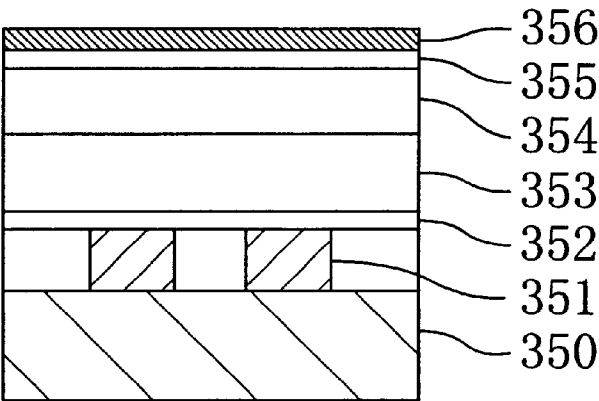


Fig. 15(b)

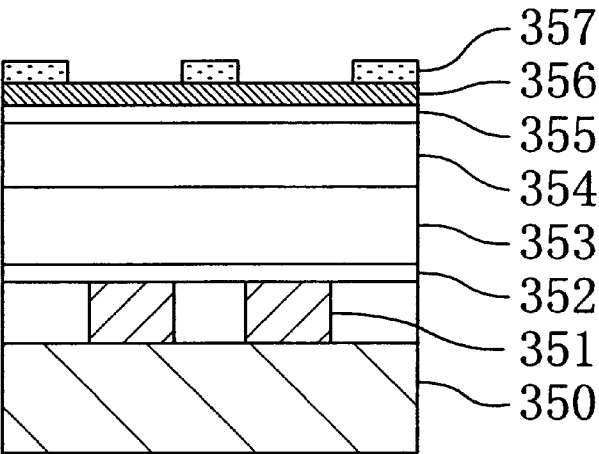


Fig. 15(c)

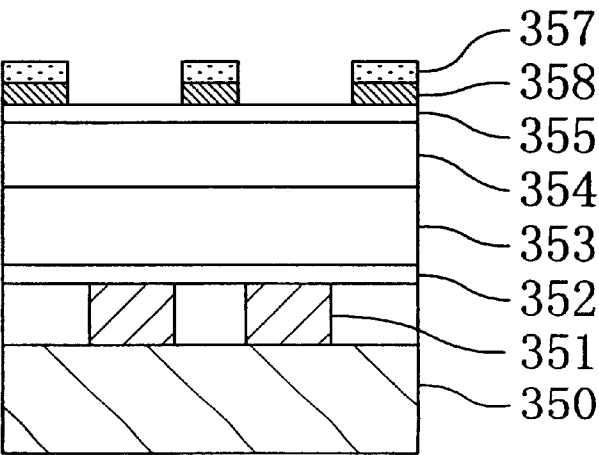




Fig. 16(a)

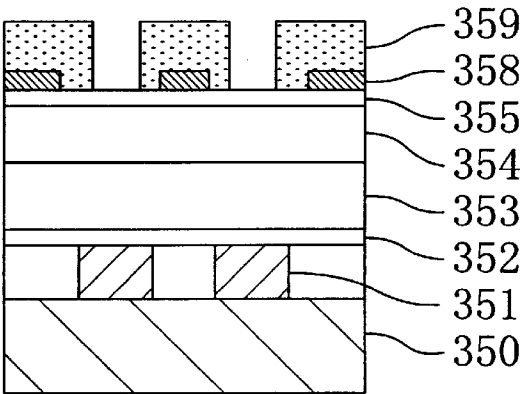


Fig. 16(b)

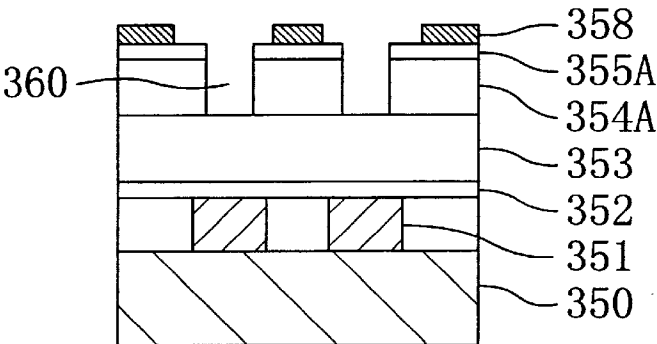


Fig. 16(c)

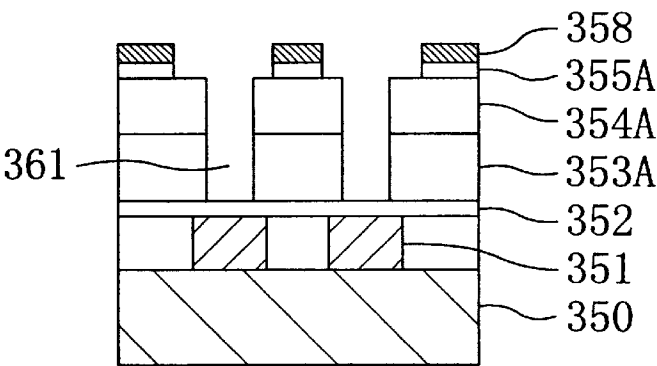


Fig. 16(d)

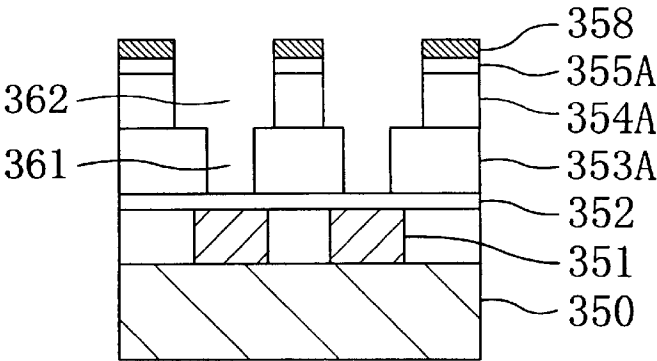


Fig. 17(a)

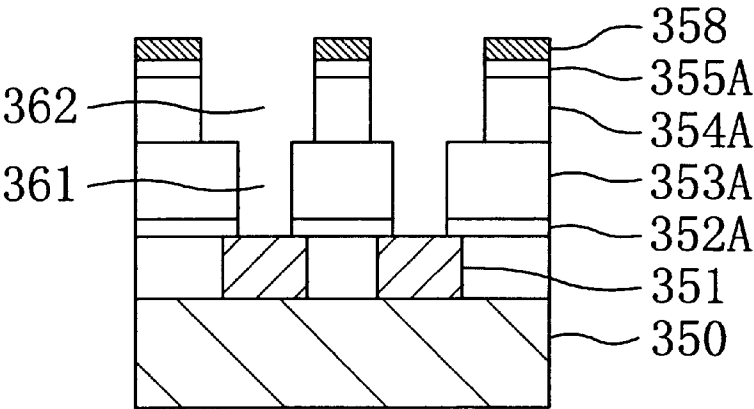


Fig. 17(b)

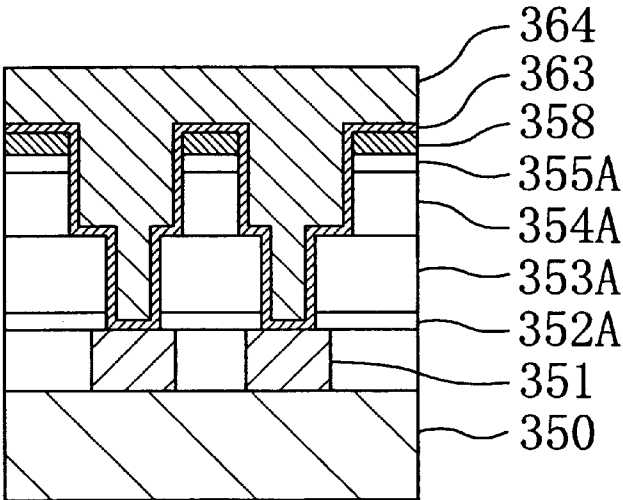


Fig. 17(c)

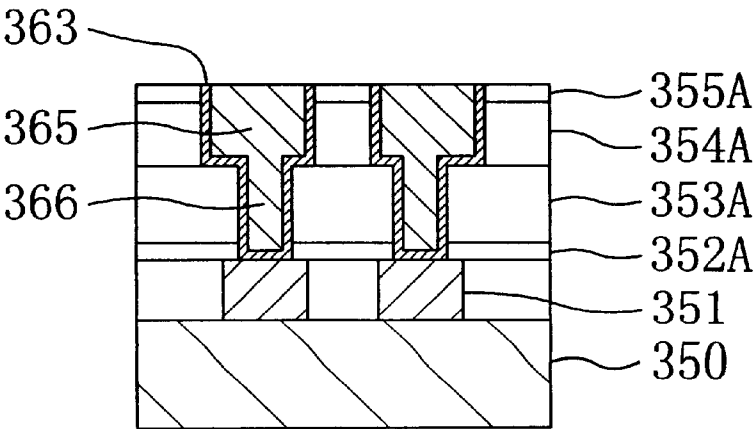


Fig. 18(a)

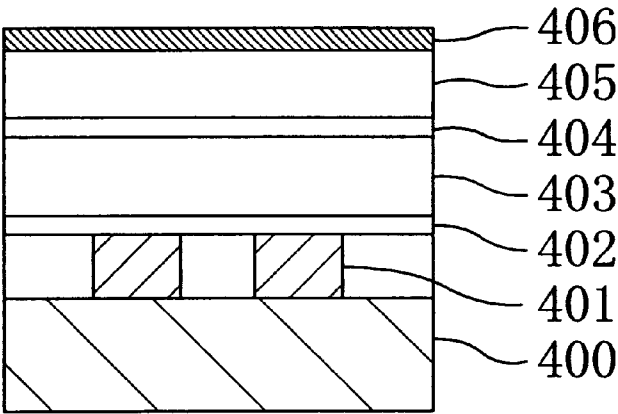


Fig. 18(b)

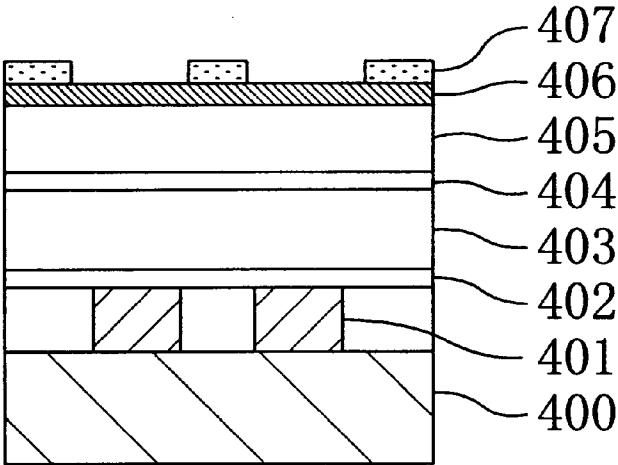


Fig. 18(c)

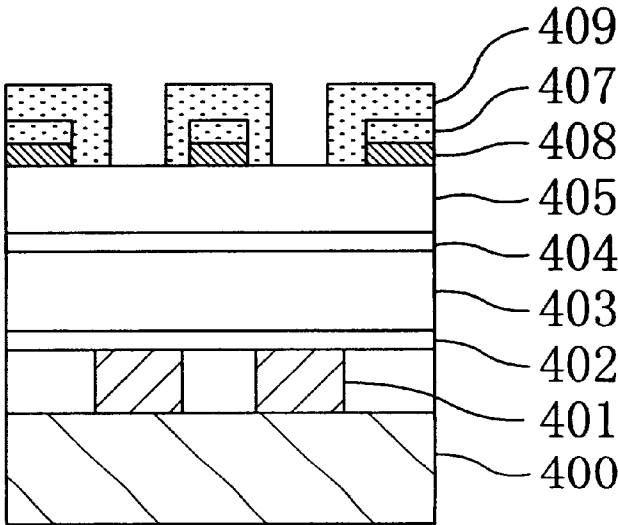


Fig. 19(a)

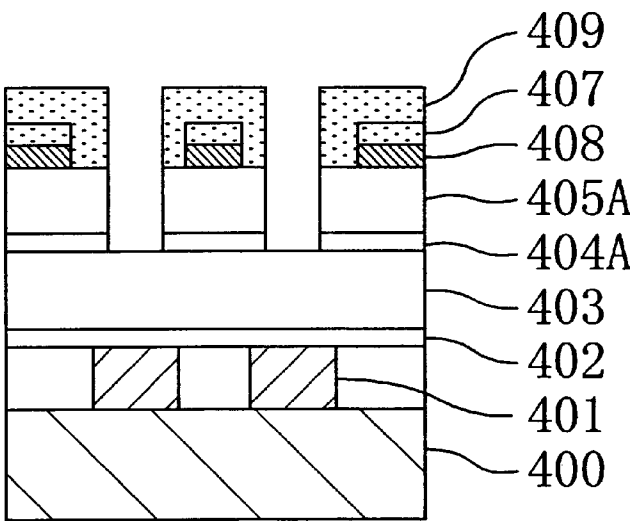


Fig. 19(b)

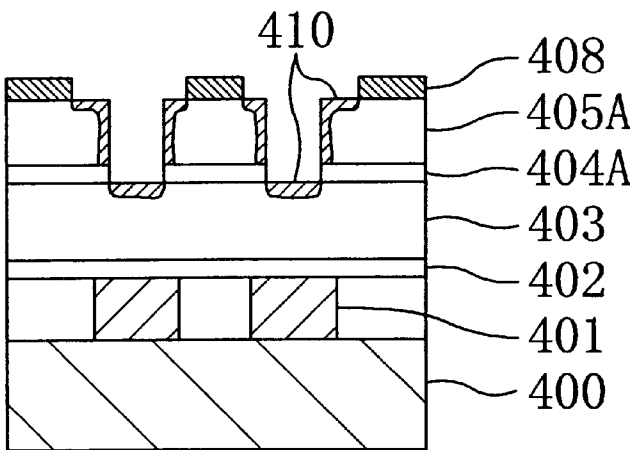


Fig. 19(c)

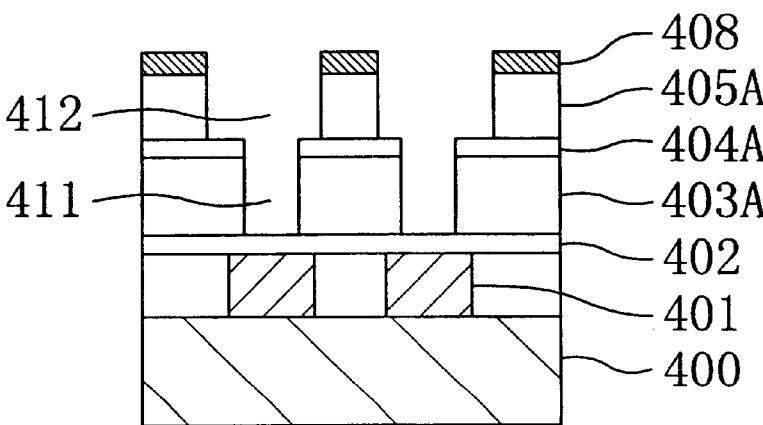


Fig. 20(a)

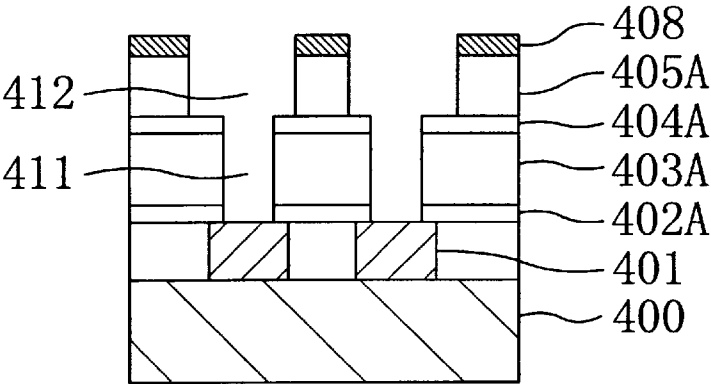


Fig. 20(b)

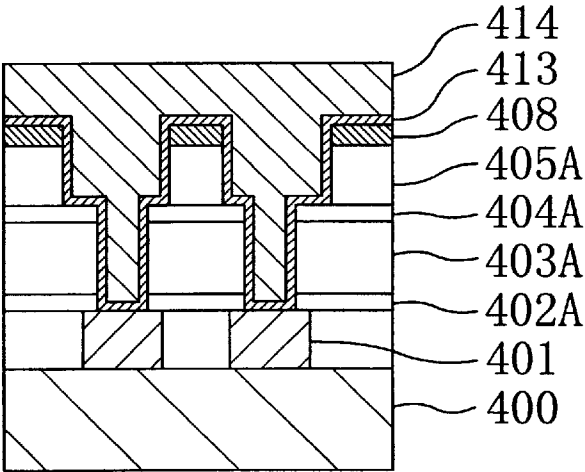


Fig. 20(c)

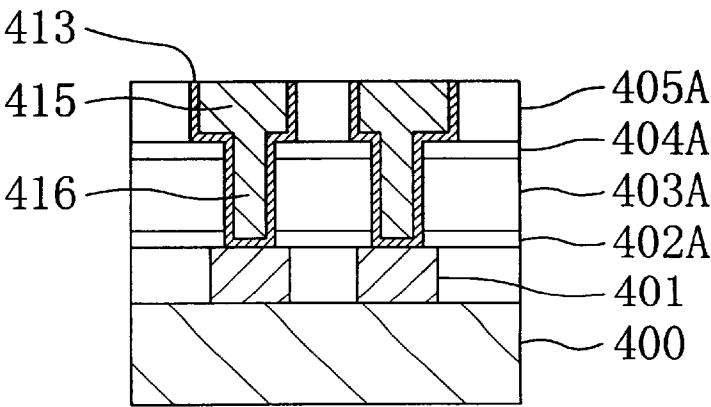


Fig. 21(a)

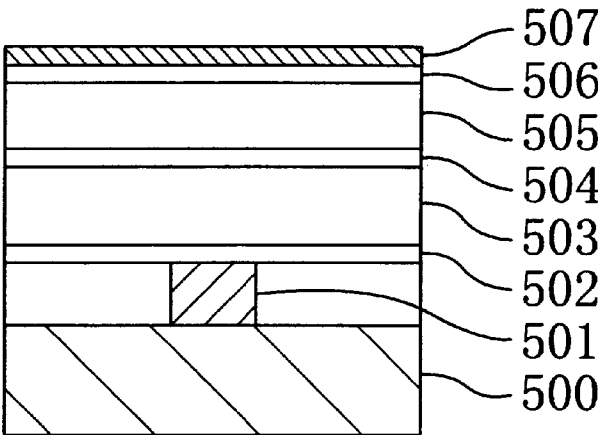


Fig. 21(b)

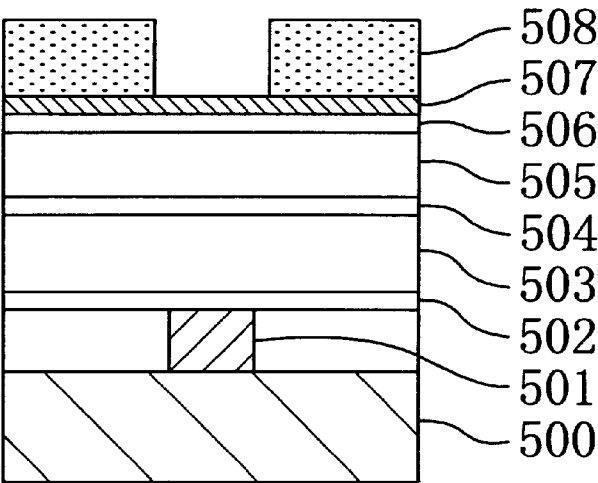


Fig. 21(c)

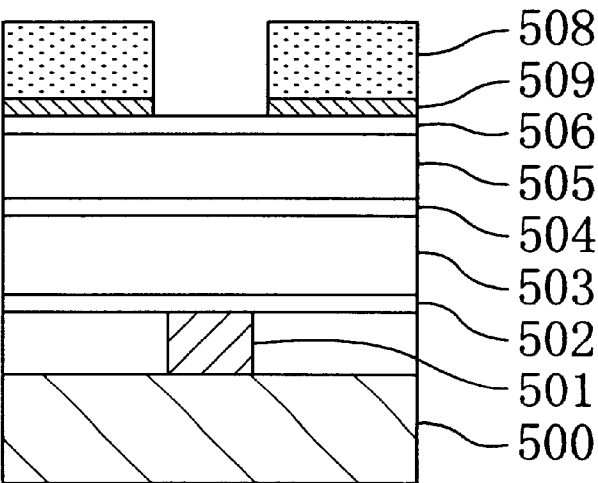


Fig. 22(a)

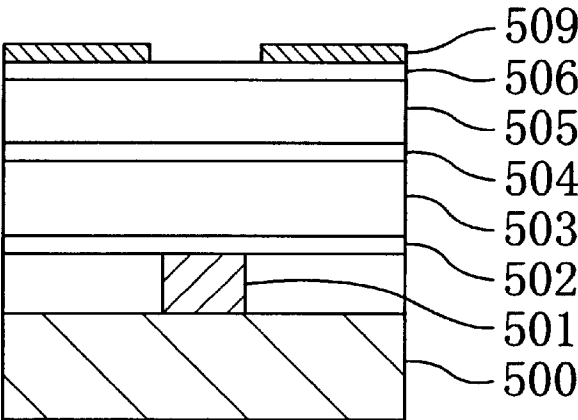


Fig. 22(b)

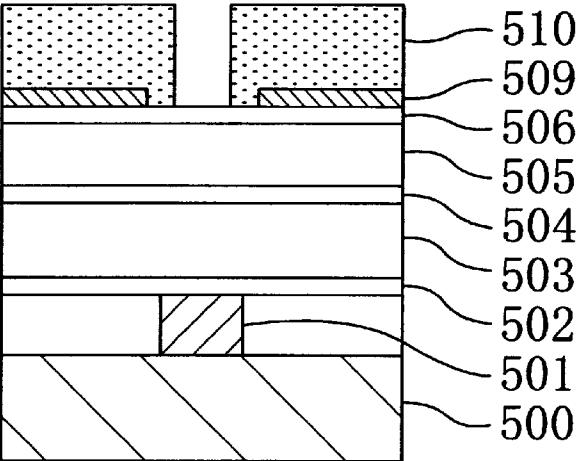


Fig. 22(c)

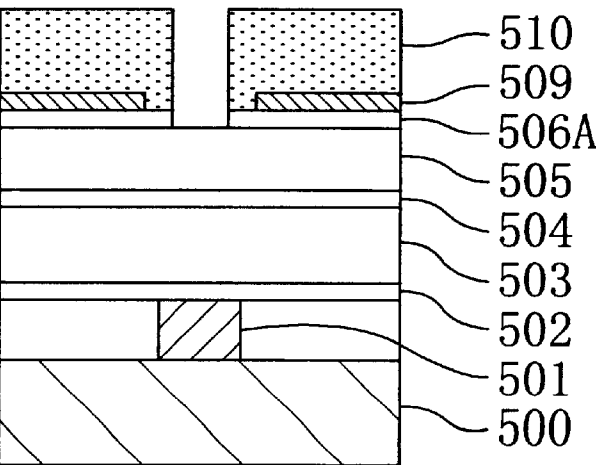


Fig. 23(a)

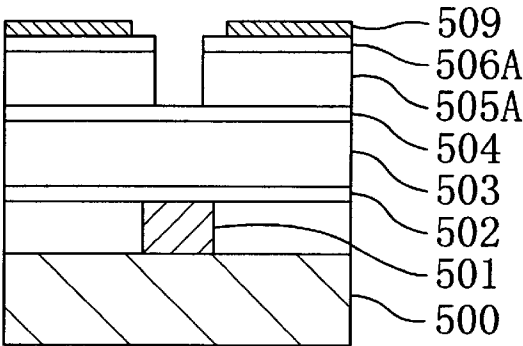


Fig. 23(b)

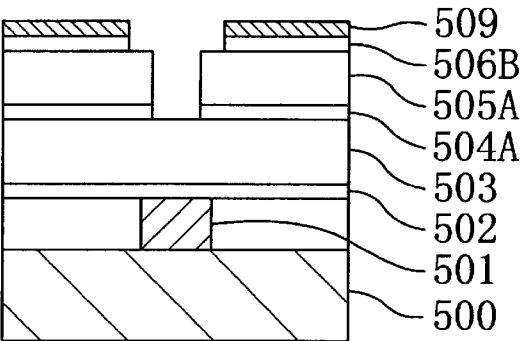


Fig. 23(c)

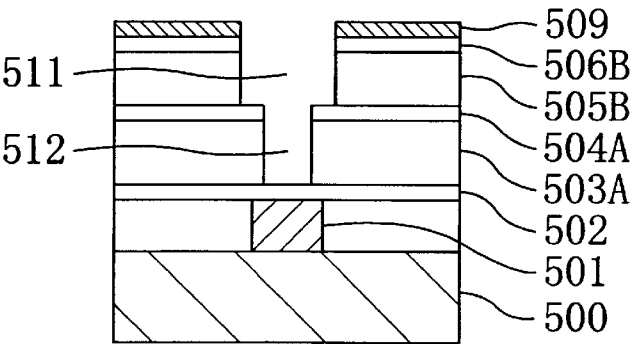


Fig. 23(d)

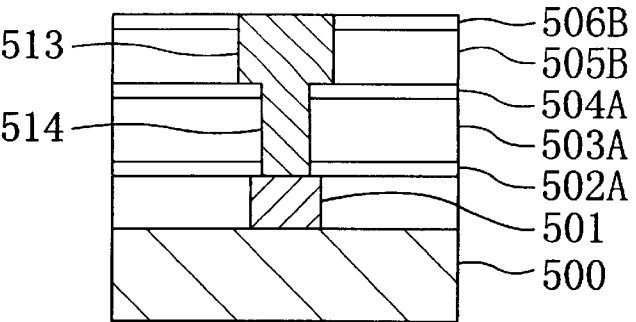




Fig. 24(a)

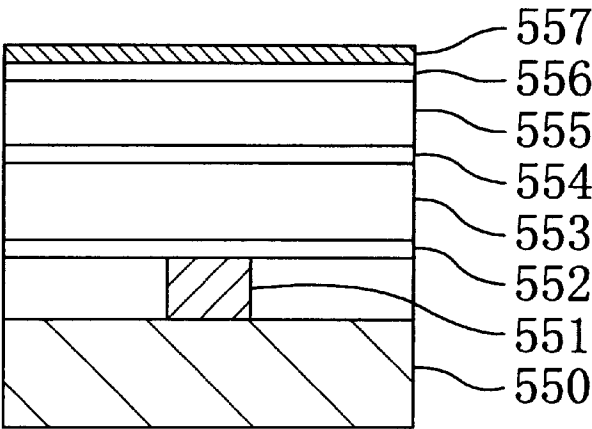


Fig. 24(b)

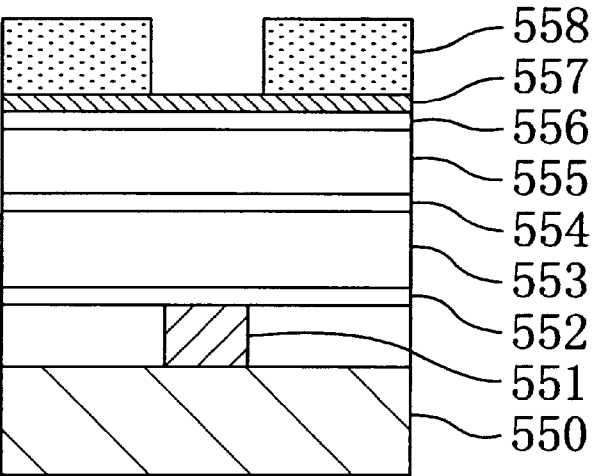


Fig. 24(c)

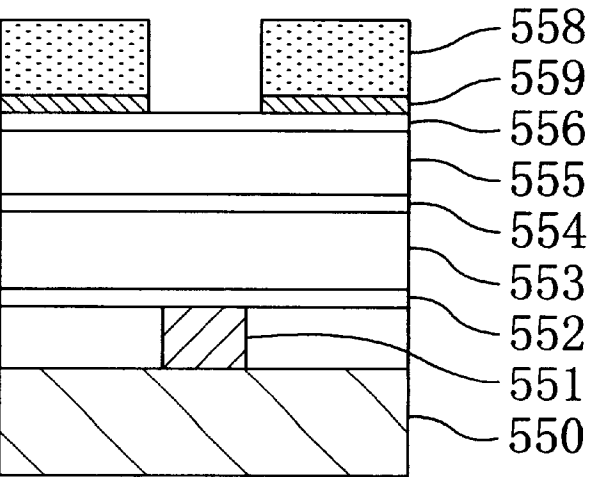


Fig. 25(a)

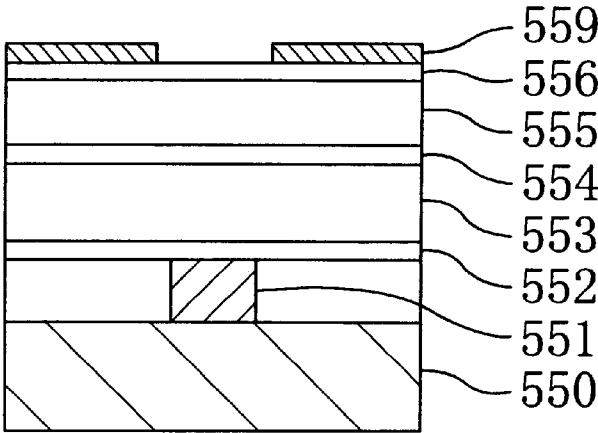


Fig. 25(b)

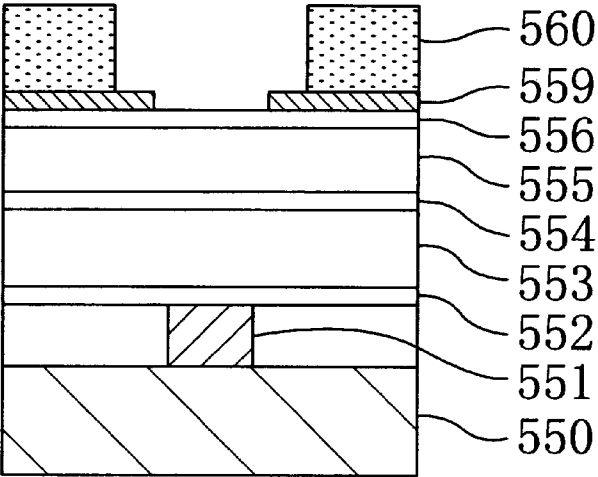


Fig. 25(c)

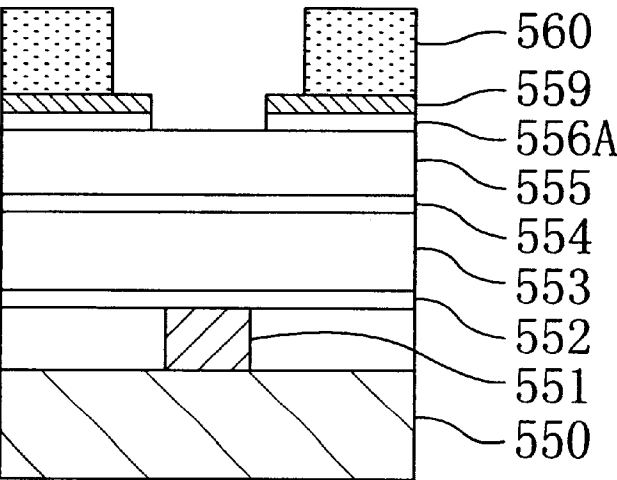


Fig. 26 (a)

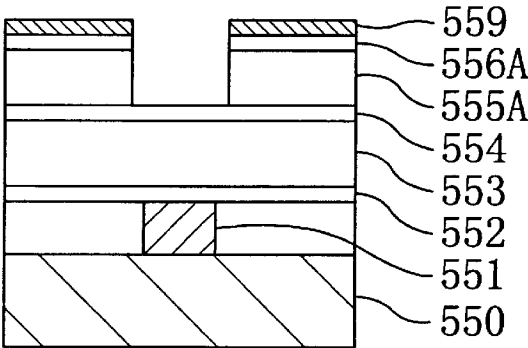


Fig. 26 (b)

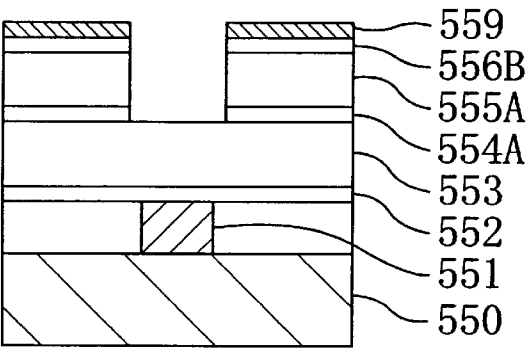


Fig. 26 (c)

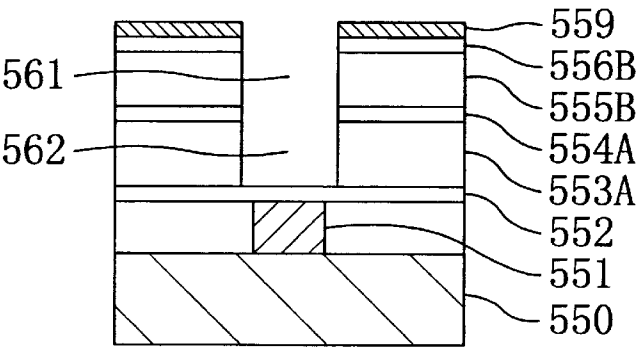


Fig. 26 (d)

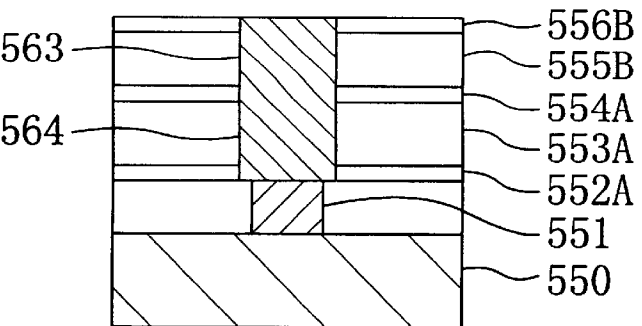


Fig. 27 (a)

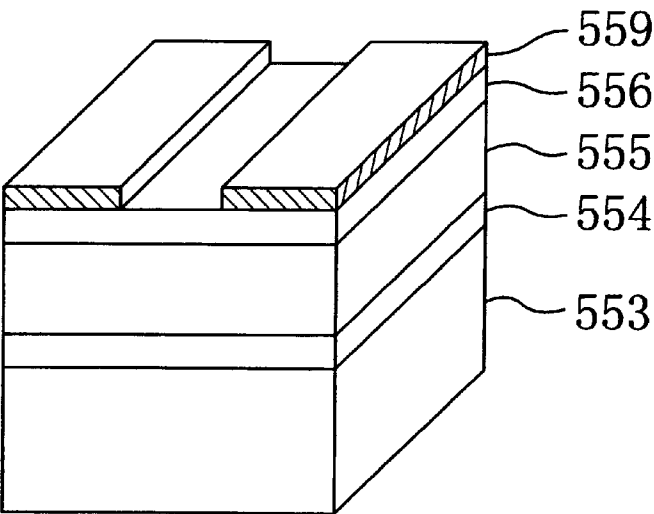


Fig. 27 (b)

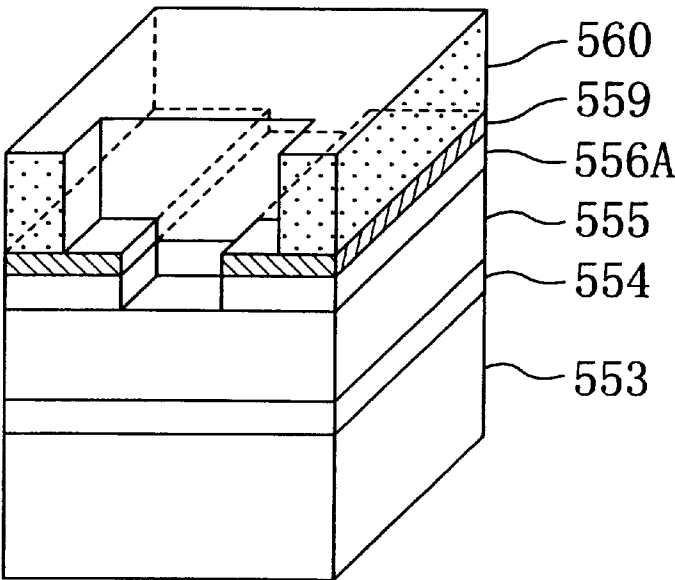


Fig. 28(a)

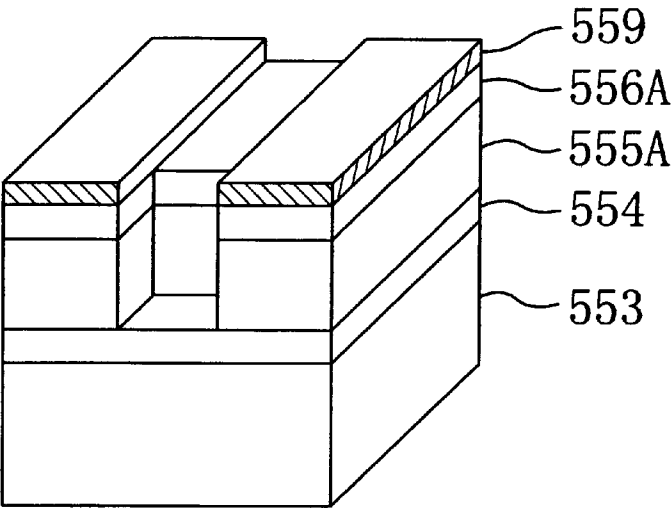


Fig. 28(b)

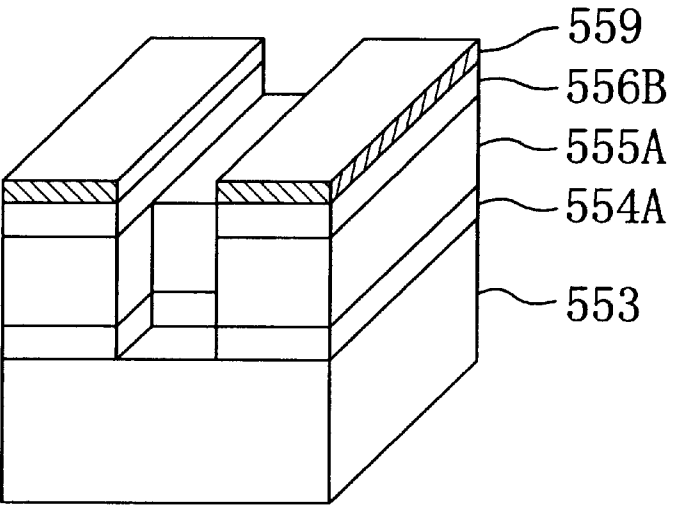


Fig. 29(a)

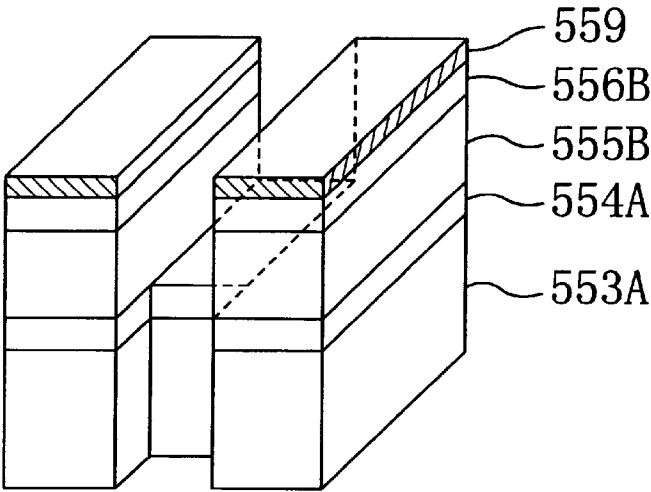


Fig. 29(b)

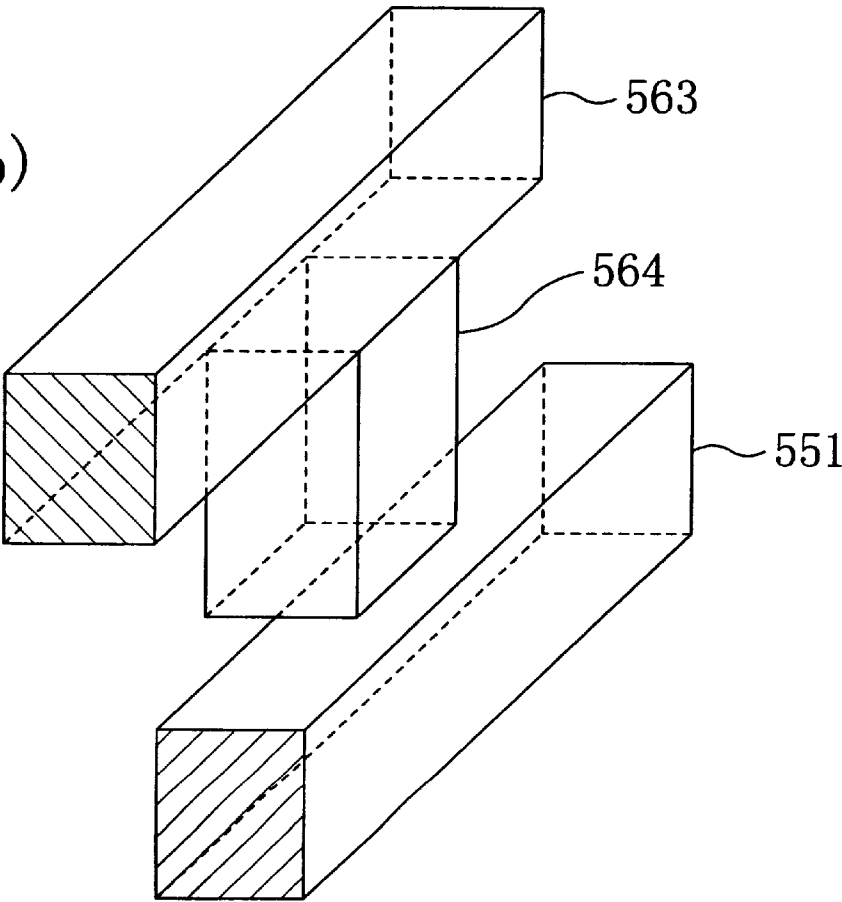


Fig. 30 (a)

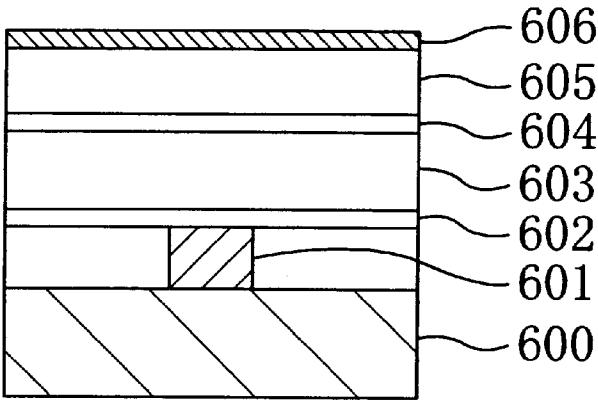


Fig. 30 (b)

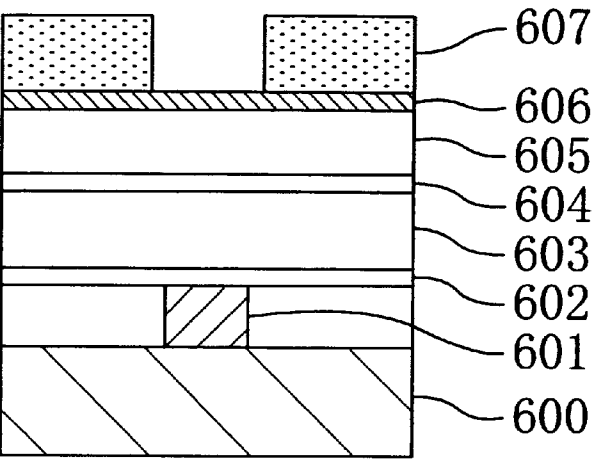


Fig. 30 (c)

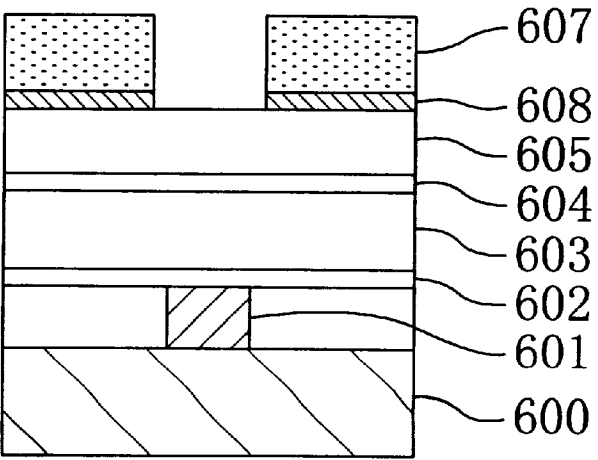


Fig. 31 (a)

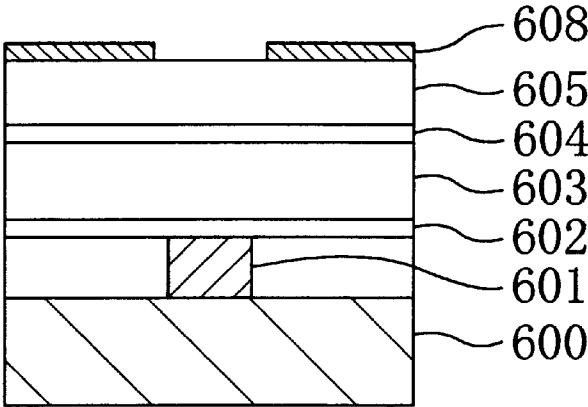


Fig. 31 (b)

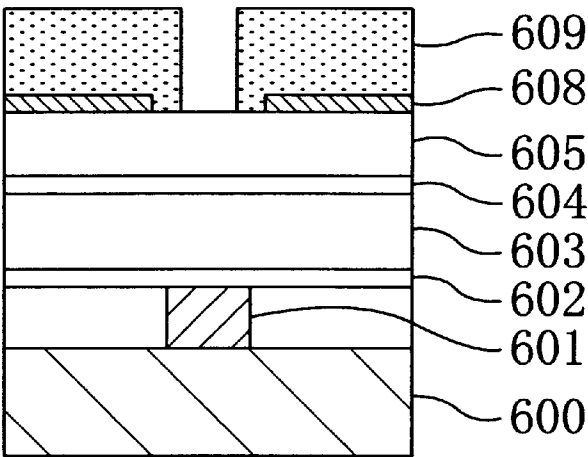


Fig. 31 (c)

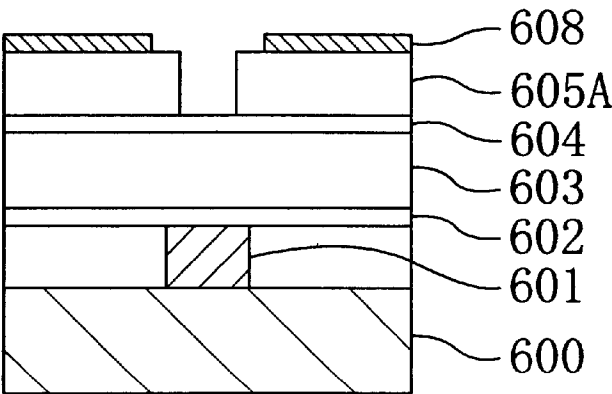




Fig. 32(a)

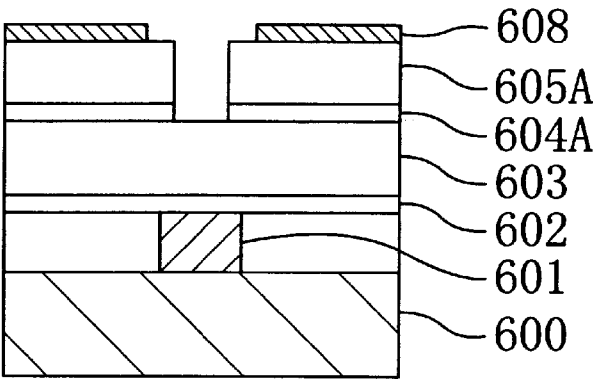


Fig. 32(b)

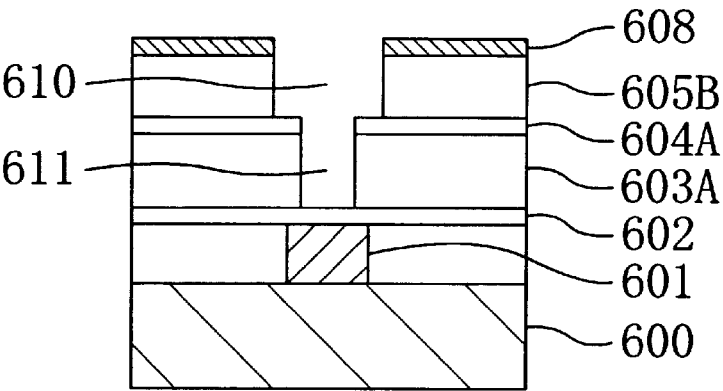


Fig. 32(c)

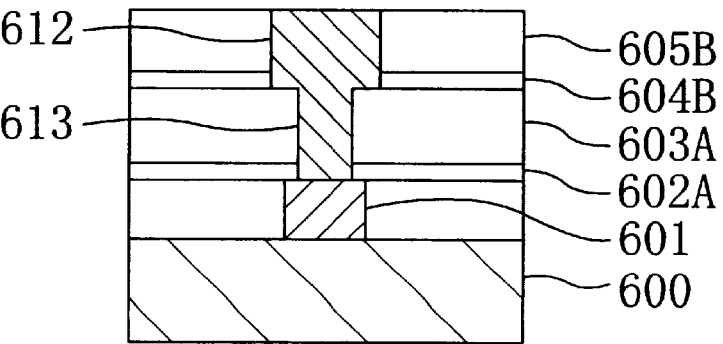


Fig. 33(a)

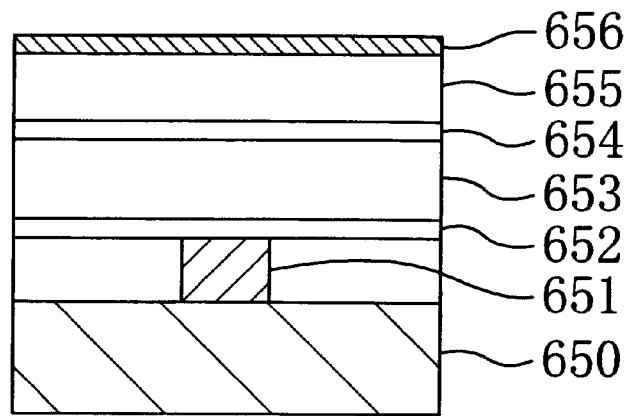


Fig. 33(b)

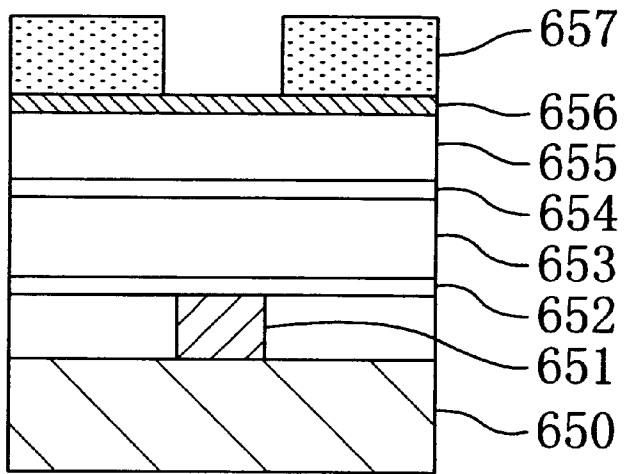


Fig. 33(c)

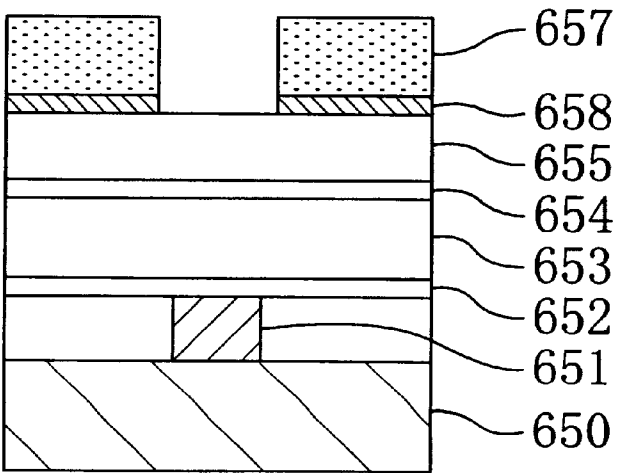


Fig. 34(a)

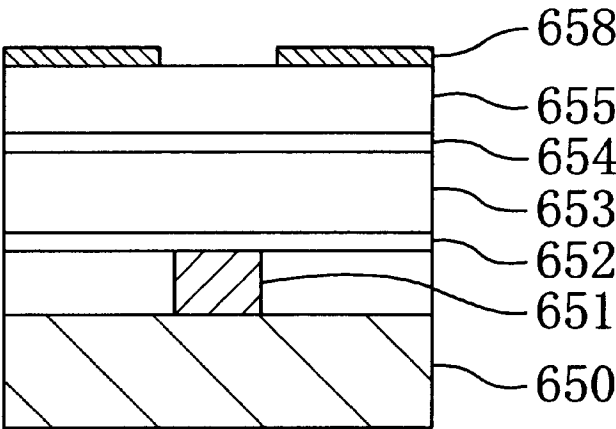


Fig. 34(b)

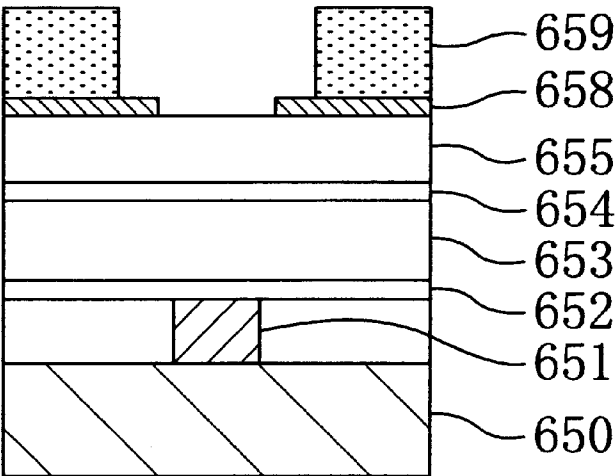


Fig. 34(c)

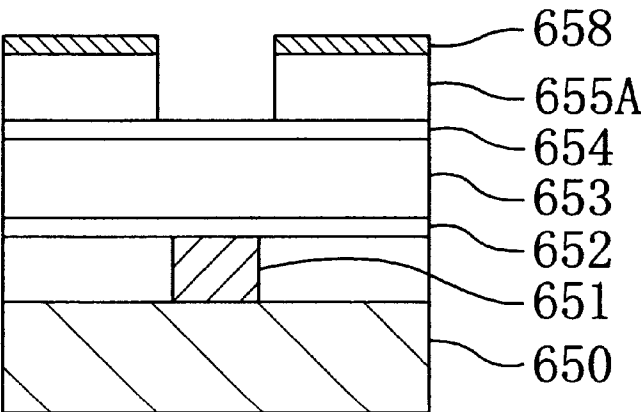


Fig. 35(a)

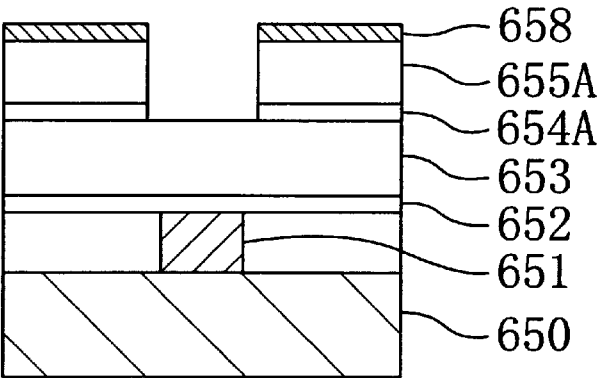


Fig. 35(b)

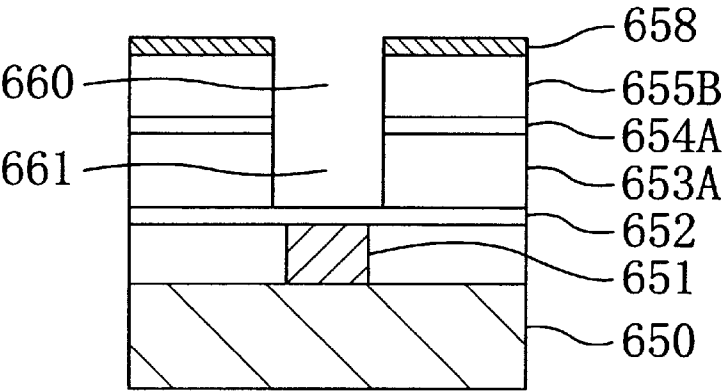


Fig. 35(c)

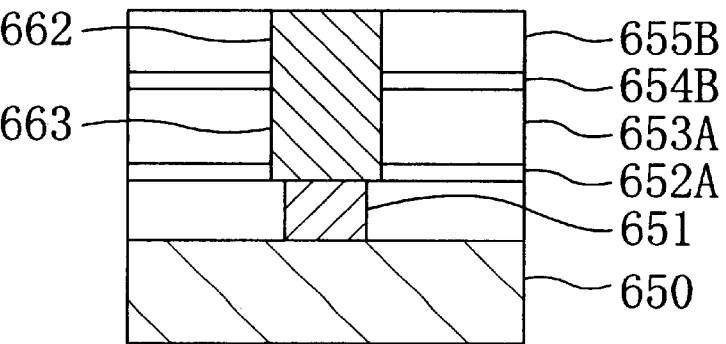


Fig. 36

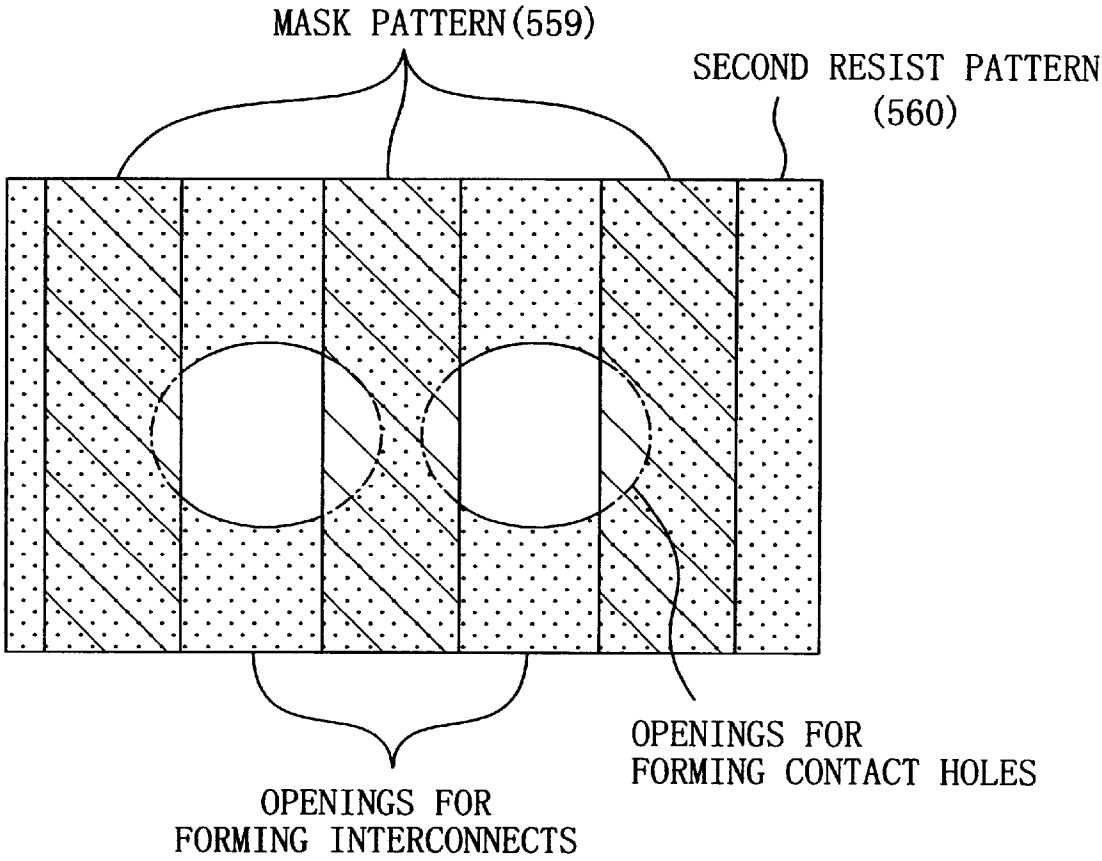


Fig. 37 (a)


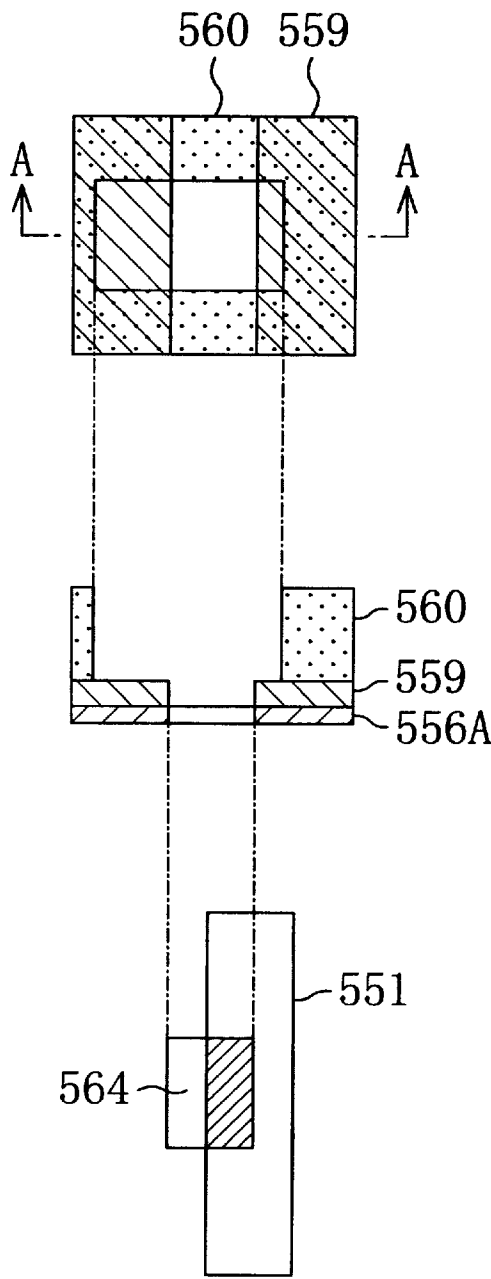


Fig. 37 (b)

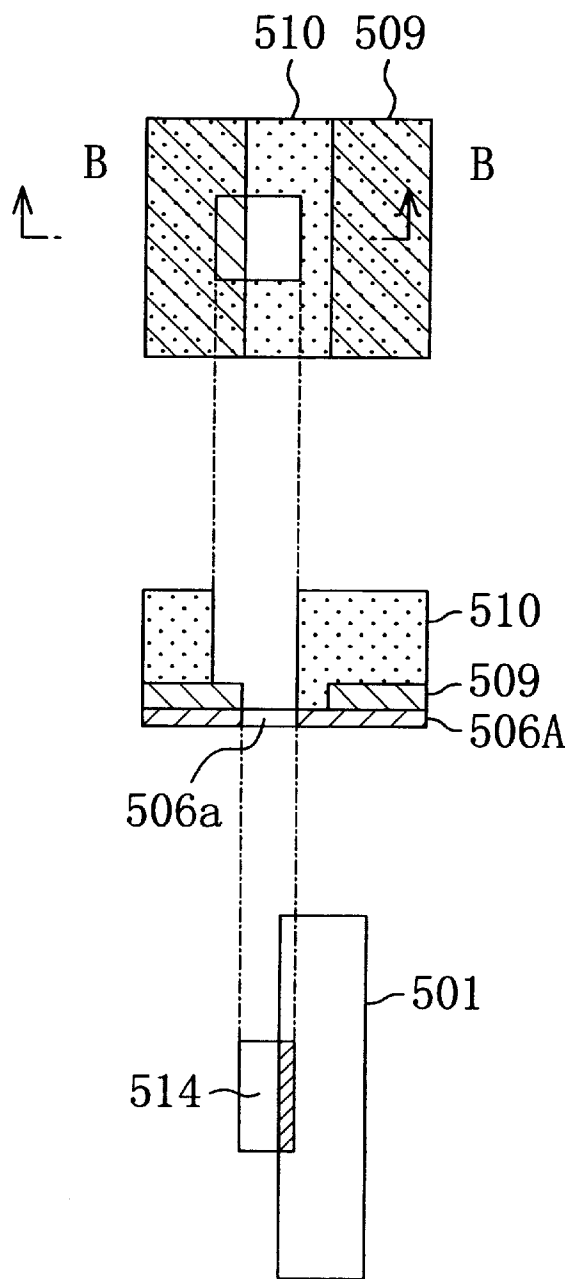

1

## METHOD FOR FORMING INTERCONNECTION STRUCTURE

### BACKGROUND OF THE INVENTION

The present invention relates to a method for forming an interconnection structure in a semiconductor integrated circuit.

As the number of devices, integrated within a single semiconductor integrated circuit, has been tremendously increasing these days, wiring delay has also been increasing noticeably. This is because the larger the number of devices integrated, the larger line-to-line capacitance (i.e., parasitic capacitance between metal interconnects), thus interfering with the performance improvement of a semiconductor integrated circuit. The wiring delay is so-called "RC delay", which is proportional to the product of the resistance of metal interconnection and the line-to-line capacitance.

In other words, to reduce the wiring delay, either the resistance of metal interconnection or the line-to-line capacitance should be reduced.

In order to reduce the interconnection resistance, IBM Corp., Motorola, Inc., etc. have reported semiconductor integrated circuits using copper, not aluminum alloy, as a material for metal interconnects. A copper material has a specific resistance about two-thirds as high as that of an aluminum alloy material. Accordingly, in accordance with simple calculation, the wiring delay involved with the use of a copper material for metal interconnects can be about two-thirds of that involved with the use of an aluminum alloy material therefor. That is to say, the operating speed can be increased by about 1.5 times.

However, the number of devices, integrated within a single semiconductor integrated circuit, is expected to further increase by leaps and bounds from now on, thus increasing the wiring delay considerably. Therefore, it is concerned that even the use of copper as an alternate metal interconnection material would not be able to catch up with such drastic increase. Also, the specific resistance of copper as a metal interconnection material is just a little bit higher than, but almost equal to, that of gold or silver. Accordingly, even if gold or silver is used instead of copper as a metal interconnection material, the wiring delay can be reduced only slightly.

Under these circumstances, not only reducing interconnection resistance but also suppressing line-to-line capacitance play a key role in further increasing the number of devices that can be integrated within a single semiconductor integrated circuit. And the relative dielectric constant of an interlevel insulating film should be reduced to suppress the line-to-line capacitance. A silicon dioxide film has heretofore been used as a typical material for an interlevel insulating film. The relative dielectric constant of a silicon dioxide film is, however, about 4 to about 4.5. Thus, it would be difficult to apply a silicon dioxide film to a semiconductor integrated circuit incorporating an even larger number of devices.

In order to solve such a problem, fluorine-doped silicon dioxide film, low-dielectric-constant spin-on-glass (SOG) film, organic polymer film and so on have been proposed as alternate interlevel insulating films with respective relative dielectric constants smaller than that of a silicon dioxide film.

The relative dielectric constant of a fluorine-doped silicon dioxide film is about 3.3 to about 3.7, which is about 20 percent lower than that of a conventional silicon dioxide

2

film. Nevertheless, a fluorine-doped silicon dioxide film is highly hygroscopic, and easily absorbs water in the air, resulting in various problems in practice. For example, when the fluorine-doped silicon dioxide film absorbs water, SiOH groups, having a high relative dielectric constant, are introduced into the film. As a result, the relative dielectric constant of the fluorine-doped silicon dioxide film adversely increases, or the SiOH groups react with the water during a heat treatment to release H<sub>2</sub>O gas. In addition, fluorine free radicals, contained in the fluorine-doped silicon dioxide film, segregate near the surface thereof during a heat treatment and react with Ti, contained in a TiN layer formed thereon as an adhesion layer, to form a TiF film, which easily peels off.

An HSQ (hydrogen silsesquioxane) film, composed of Si, O and H atoms, is an exemplary low-dielectric-constant SOG film. In the HSQ film, the number of the H atoms is about two-thirds of that of the O atoms. However, the HSQ film releases a larger amount of water than a conventional silicon dioxide film. Accordingly, since it is difficult to form a buried interconnection line in the HSQ film, a patterned metal film should be formed as metal interconnects on the HSQ film.

Also, since the HSQ film cannot adhere so strongly to metal interconnects, a CVD oxide film should be formed between the metal interconnects and the HSQ film to improve the adhesion therebetween. However, in such a case, if the CVD oxide film is formed on the metal interconnects, then the substantial line-to-line capacitance is equal to the serial capacitance formed by the HSQ and CVD films. This is because the CVD oxide film with a high dielectric constant exists between the metal interconnects. Accordingly, the resulting line-to-line capacitance is larger as compared with using the HSQ film alone.

An organic polymer film, as well as the low-dielectric-constant SOG film, cannot adhere strongly to metal interconnects, either. Accordingly, a CVD oxide film should be formed as an adhesion layer between the metal interconnects and the organic polymer film, too.

Moreover, an etch rate, at which an organic polymer film is etched, is approximately equal to an ash rate, at which a resist pattern is ashed with oxygen plasma. Accordingly, a usual resist application process is not applicable in such a situation, because the organic polymer film is likely to be damaged during ashing and removing the resist pattern. Therefore, a proposed alternate process includes: forming a CVD oxide film on an organic polymer film; forming a resist film on the CVD oxide film; and then etching the resist film using the CVD oxide film as an etch stopper, or a protective film.

However, during the step of forming the CVD oxide film on the organic polymer film, the surface of the organic polymer film is exposed to a reactive gas containing oxygen. Accordingly, the organic polymer film reacts with oxygen to take in polar groups such as carbonyl groups and ketone groups. As a result, the relative dielectric constant of the organic polymer film disadvantageously increases.

Also, in forming inlaid copper interconnects in the organic polymer film, a TiN adhesion layer, for example, should be formed around wiring grooves formed in the organic polymer film, because the organic polymer film cannot adhere strongly to the metal interconnects. However, since the TiN film has a high resistance, the effective cross-sectional area of the metal interconnects decreases. Consequently, the intended effect attainable by the use of the copper lines, i.e., reduction in resistance, would be lost.

## 3

## SUMMARY OF THE INVENTION

An object of the present invention is providing a method for forming an interconnection structure in which an insulating film with a low dielectric constant can be formed by an ordinary resist application process.

A first method for forming an interconnection structure according to the present invention includes the steps of: a) forming a first insulating film over lower-level metal interconnects; b) forming a second insulating film, having a different composition than that of the first insulating film, over the first insulating film; c) forming a third insulating film, having a different composition than that of the second insulating film, over the second insulating film; d) forming a thin film over the third insulating film; e) forming a first resist pattern, having a plurality of openings for forming wiring grooves, on the thin film; f) etching the thin film using the first resist pattern as a mask, thereby forming a mask pattern out of the thin film to have the openings for forming wiring grooves; g) forming a second resist pattern, having a plurality of openings for forming contact holes, on the third insulating film; h) dry-etching the third insulating film under such conditions that the third insulating film and the first and second resist patterns are etched at a relatively high rate and that the second insulating film is etched at a relatively low rate, thereby patterning the third insulating film to have the openings for forming contact holes and removing the first and second resist patterns either entirely or partially with respective lower parts thereof left; i) dry-etching the second insulating film using the patterned third insulating film as a mask under such conditions that the second insulating film is etched at a relatively high rate and that the first and third insulating films are etched at a relatively low rate, thereby patterning the second insulating film to have the openings for forming contact holes; j) dry-etching the third and first insulating films using the mask pattern and the patterned second insulating film as respective masks under such conditions that the first and third insulating films are etched at a relatively high rate and that the mask pattern and the second insulating film are etched at a relatively low rate, thereby forming wiring grooves and contact holes in the third and first insulating films, respectively; and k) filling in the wiring grooves and the contact holes with a metal film, thereby forming upper-level metal interconnects and contacts connecting the lower- and upper-level metal interconnects together.

In the first method of the present invention, the third insulating film is dry-etched under such conditions that the third insulating film and the first and second resist patterns are etched at a relatively high rate and that the second insulating film is etched at a relatively low rate, thereby patterning the third insulating film and removing the first and second resist patterns in the step h). Accordingly, it is not necessary to perform the step of ashing and removing the first and second resist patterns with oxygen plasma. In other words, since it is possible to prevent the third insulating film from being damaged during ashing and removing a resist pattern, a low-dielectric-constant insulating film, which would otherwise be damaged easily by oxygen plasma, may be used as the third insulating film. As a result, an interlevel insulating film with a low dielectric constant can be formed by an ordinary resist application process.

In addition, the second insulating film can be used as an etch stopper while the wiring grooves are formed by dry-etching the third insulating film using the mask pattern as a mask in the step j). Accordingly, the depth of each wiring groove can be equalized with the thickness of the third

## 4

insulating film. That is to say, the depth of the wiring grooves can be defined by self-alignment.

Moreover, the composition of the second insulating film is different from that of the third insulating film. Thus, the second insulating film can be used as an etch stopper while the wiring grooves are formed by dry-etching the third insulating film using the mask pattern as a mask in the step j).

In one embodiment of the present invention, the first method preferably further includes the step of forming a metal adhesion layer over part of the third insulating film exposed inside the wiring grooves and part of the first insulating film exposed inside the contact holes between the steps j) and k).

In such an embodiment, the adhesion between the upper-level metal interconnects and the third insulating film and between the contacts and the first insulating film can be improved.

In another embodiment of the present invention, the third insulating film is preferably mainly composed of an organic component.

In such an embodiment, the conditions employed in the step h), i.e., that the third insulating film and the first and second resist patterns are etched at a relatively high rate and that the second insulating film is etched at a relatively low rate, are realized with much more certainty.

In this embodiment, the step c) preferably includes forming the third insulating film by a CVD process using a reactive gas containing perfluorodecalin.

Then, a film mainly composed of an organic component and having a low relative dielectric constant can be formed as the third insulating film with a lot more certainty.

In another embodiment, the first insulating film is also preferably mainly composed of an organic component.

Then, the conditions employed in the step i), i.e., that the second insulating film is etched at a relatively high rate and that the first and third insulating films are etched at a relatively low rate, are realized with much more certainty. At the same time, the conditions employed in the step j), i.e., that the first and third insulating films are etched at a relatively high rate and that the mask pattern and the second insulating film are etched at a relatively low rate, are also realized with much more certainty.

In an embodiment where the first and third insulating films are both mainly composed of organic components, the first method preferably further includes the step of forming an adhesion layer over part of the third insulating film exposed inside the wiring grooves and part of the first insulating film exposed inside the contact holes by a plasma process using a reactive gas containing nitrogen between the steps j) and k).

In such a case, the adhesion between the upper-level metal interconnects and the third insulating film mainly composed of an organic component, and between the contacts and the first insulating film mainly composed of an organic component can be improved substantially without fail.

In the embodiment where the first insulating film is mainly composed of an organic component, the step a) preferably includes forming the first insulating film by a CVD process using a reactive gas containing perfluorodecalin.

In such a case, a film mainly composed of an organic component and having a low relative dielectric constant can be formed as the first insulating film with a lot more certainty.



5

A second method for forming an interconnection structure according to the present invention includes the steps of: a) forming a first insulating film over lower-level metal interconnects; b) forming a second insulating film, having a different composition than that of the first insulating film, over the first insulating film; c) forming a third insulating film, having a different composition than that of the second insulating film, over the second insulating film; d) forming a thin film over the third insulating film; e) forming a first resist pattern, having a plurality of openings for forming wiring grooves, on the thin film; f) etching the thin film using the first resist pattern as a mask, thereby forming a mask pattern out of the thin film to have the openings for forming wiring grooves; g) forming a second resist pattern, having a plurality of openings for forming contact holes, on the third insulating film; h) dry-etching the third insulating film using the first and second resist patterns as a mask under such conditions that the third insulating film is etched at a relatively high rate and that the second insulating film and the first and second resist patterns are etched at a relatively low rate, thereby patterning the third insulating film to have the openings for forming contact holes; i) dry-etching the second insulating film using the first and second resist patterns as a mask under such conditions that the second insulating film is etched at a relatively high rate and that the first and third insulating films and the first and second resist patterns are etched at a relatively low rate, thereby patterning the second insulating film to have the openings for forming contact holes; j) removing the first and second resist patterns; k) dry-etching the third and first insulating films using the mask pattern and the patterned second insulating film as respective masks under such conditions that the first and third insulating films are etched at a relatively high rate and that the mask pattern and the second insulating film are etched at a relatively low rate, thereby forming wiring grooves and contact holes in the third and first insulating films, respectively; and l) filling in the wiring grooves and the contact holes with a metal film, thereby forming upper-level metal interconnects and contacts connecting the lower- and upper-level metal interconnects together.

In the second method of the present invention, even if a damaged layer is formed in respective parts of the first and third insulating films that are exposed inside the openings for forming contact holes in the second insulating film during the step j) of removing the first and second resist patterns, the damaged layer can be removed without fail in the next step k). In this step, the third and first insulating films are dry-etched using the mask pattern and the patterned second insulating film as respective masks under such conditions that the first and third insulating films are etched at a relatively high rate and that the mask pattern and the second insulating film are etched at a relatively low rate, thereby forming wiring grooves and contact holes in the third and first insulating films, respectively. Accordingly, low-dielectric-constant insulating films, which would otherwise be damaged easily by oxygen plasma, can be used as the first and third insulating films. As a result, an interlevel insulating film with a low dielectric constant can be formed by an ordinary resist application process.

In one embodiment of the present invention, the third insulating film is preferably a low-dielectric-constant SOG film with a siloxane skeleton.

In such an embodiment, an interlevel insulating film with a low dielectric constant can be formed by an ordinary resist application process.

A third method for forming an interconnection structure according to the present invention includes the steps of: a)

6

forming a first insulating film over lower-level metal interconnects; b) forming a second insulating film, having a different composition than that of the first insulating film, over the first insulating film; c) forming a third insulating film, having a different composition than that of the second insulating film, over the second insulating film; d) forming a fourth insulating film, having a different composition than that of the third insulating film, over the third insulating film; e) forming a thin film over the fourth insulating film; f) forming a first resist pattern on the thin film, the first resist pattern having openings for forming wiring grooves; g) etching the thin film using the first resist pattern as a mask, thereby forming a mask pattern out of the thin film to have the openings for forming wiring grooves; h) removing the first resist pattern and then forming a second resist pattern on the fourth insulating film and the mask pattern, the second resist pattern having openings for forming contact holes; i) dry-etching the fourth insulating film using the second resist pattern and the mask pattern as a mask, thereby patterning the fourth insulating film to have the openings for forming contact holes; j) dry-etching the third insulating film using the patterned fourth insulating film as a mask, thereby patterning the third insulating film to have the openings for forming contact holes; k) dry-etching the patterned fourth insulating film and the second insulating film using the mask pattern and the patterned third insulating film as respective masks, thereby forming wiring grooves in the patterned fourth insulating film and patterning the second insulating film to have the openings for forming contact holes; l) dry-etching the patterned third insulating film and the first insulating film using the mask pattern and the patterned second insulating film as respective masks, thereby forming the wiring grooves and the contact holes in the patterned third insulating film and the first insulating film, respectively; and m) filling in the wiring grooves and the contact holes with a metal film, thereby forming upper-level metal interconnects and contacts connecting the lower- and upper-level metal interconnects together.

In the third method of the present invention, the fourth insulating film exists on the third insulating film during the removal of the first resist pattern in the step h). Accordingly, even if the first resist pattern is removed by oxygen plasma, the third insulating film is not damaged. Also, the second insulating film exists on the first insulating film during dry-etching the third insulating film in the step j). Accordingly, the first insulating film is not damaged, either. Thus, low-dielectric-constant insulating films, which would otherwise be damaged easily by oxygen plasma or dry etching, can be used as the first and third insulating films. As a result, an interlevel insulating film with a low dielectric constant can be formed by an ordinary resist application process.

In one embodiment of the present invention, at least one of the first and third insulating films is preferably mainly composed of an organic component.

In such an embodiment, the relative dielectric constant of the interlevel insulating film can be reduced.

In another embodiment of the present invention, a size of the openings of the second resist pattern for forming contact holes is preferably larger than a designed size of the contact holes in a direction vertical to a direction in which the upper-level metal interconnects extend.

In such an embodiment, even if the openings of the second resist pattern for forming contact holes have misaligned with the openings of the mask pattern for forming wiring grooves, the openings of the patterned fourth insu-

7

lating film for forming contact holes can be formed to be self-aligned with the openings of the mask pattern for forming wiring grooves. This is because the openings of the patterned fourth insulating film for forming contact holes are formed in respective regions where the openings of the second resist pattern for forming contact holes overlap with corresponding openings of the mask pattern for forming wiring grooves. As a result, the connection between the contacts and the upper-level metal interconnects is ensured.

A fourth method for forming an interconnection structure according to the present invention includes the steps of: a) forming a first insulating film over lower-level metal interconnects; b) forming a second insulating film, having a different composition than that of the first insulating film, over the first insulating film; c) forming a third insulating film, having a different composition than that of the second insulating film, over the second insulating film; d) forming a thin film over the third insulating film; e) forming a first resist pattern on the thin film, the first resist pattern having openings for forming wiring grooves; f) etching the thin film using the first resist pattern as a mask, thereby forming a mask pattern out of the thin film to have the openings for forming wiring grooves; g) removing the first resist pattern and then forming a second resist pattern on the third insulating film and the mask pattern, the second resist pattern having openings for forming contact holes; h) dry-etching the third insulating film using the second resist pattern and the mask pattern as a mask, thereby patterning the third insulating film to have the openings for forming contact holes; i) dry-etching the second insulating film using the patterned third insulating film as a mask, thereby patterning the second insulating film to have the openings for forming contact holes; j) dry-etching the patterned third insulating film and the first insulating film using the mask pattern and the patterned second insulating film as respective masks, thereby forming wiring grooves and contact holes in the patterned third insulating film and the first insulating film, respectively; and k) filling in the wiring grooves and the contact holes with a metal film, thereby forming upper-level metal interconnects and contacts connecting the lower- and upper-level metal interconnects together.

In the fourth method of the present invention, the second insulating film exists on the first insulating film during dry-etching the third insulating film in the step h). Accordingly, the first insulating film is not damaged. Thus, low-dielectric-constant insulating films, which would otherwise be damaged easily by oxygen plasma or dry etching, can be used as the first and third insulating films. As a result, an interlevel insulating film with a low dielectric constant can be formed by an ordinary resist application process.

In one embodiment of the present invention, at least one of the first and third insulating films is preferably mainly composed of an organic component.

In such an embodiment, the relative dielectric constant of the interlevel insulating film can be reduced.

In another embodiment of the present invention, a size of the openings of the second resist pattern for forming contact holes is preferably larger than a designed size of the contact holes in a direction vertical to a direction in which the upper-level metal interconnects extend.

In such an embodiment, even if the openings of the second resist pattern for forming contact holes have misaligned with the openings of the mask pattern for forming wiring grooves, the openings of the patterned third insulating film for forming contact holes can be formed to be self-aligned with the openings of the mask pattern for

8

forming wiring grooves. This is because the openings of the patterned third insulating film for forming contact holes are formed in respective regions where the openings of the second resist pattern for forming contact holes overlap with corresponding openings of the mask pattern for forming wiring grooves. As a result, the connection between the contacts and the upper-level metal interconnects is ensured.

#### BRIEF DESCRIPTION OF THE DRAWINGS

FIGS. 1(a) through 1(c) are cross-sectional views illustrating respective process steps for forming an interconnection structure according to the first embodiment of the present invention.

FIGS. 2(a) through 2(c) are cross-sectional views illustrating respective process steps for forming the interconnection structure of the first embodiment.

FIGS. 3(a) through 3(c) are cross-sectional views illustrating respective process steps for forming the interconnection structure of the first embodiment.

FIGS. 4(a) through 4(c) are cross-sectional views illustrating problems caused by the misalignment of the second resist pattern during the process of forming the interconnection structure of the first embodiment.

FIGS. 5(a) through 5(c) are cross-sectional views illustrating the problems caused by the misalignment of the second resist pattern during the process of forming the interconnection structure of the first embodiment.

FIGS. 6(a) through 6(c) are cross-sectional views illustrating the problems caused by the misalignment of the second resist pattern during the process of forming the interconnection structure of the first embodiment.

FIGS. 7(a) through 7(c) are cross-sectional views illustrating measures to solve the problems caused by the misalignment of the second resist pattern during the process of forming the interconnection structure of the first embodiment.

FIGS. 8(a) through 8(c) are cross-sectional views illustrating the measures to solve the problems caused by the misalignment of the second resist pattern during the process of forming the interconnection structure of the first embodiment.

FIGS. 9(a) through 9(c) are cross-sectional views illustrating respective process steps for forming an interconnection structure according to the second embodiment of the present invention.

FIGS. 10(a) through 10(c) are cross-sectional views illustrating respective process steps for forming the interconnection structure of the second embodiment.

FIGS. 11(a) through 11(c) are cross-sectional views illustrating respective process steps for forming the interconnection structure of the second embodiment.

FIGS. 12(a) through 12(c) are cross-sectional views illustrating respective process steps for forming an interconnection structure according to the third embodiment of the present invention.

FIGS. 13(a) through 13(c) are cross-sectional views illustrating respective process steps for forming the interconnection structure of the third embodiment.

FIGS. 14(a) through 14(c) are cross-sectional views illustrating respective process steps for forming the interconnection structure of the third embodiment.

FIGS. 15(a) through 15(c) are cross-sectional views illustrating respective process steps for forming an interconnection structure according to a modified example of the third embodiment.

FIGS. 16(a) through 16(d) are cross-sectional views illustrating respective process steps for forming the interconnection structure of the modified example of the third embodiment.

FIGS. 17(a) through 17(c) are cross-sectional views illustrating respective process steps for forming the interconnection structure of the modified example of the third embodiment.

FIGS. 18(a) through 18(c) are cross-sectional views illustrating respective process steps for forming an interconnection structure according to the fourth embodiment of the present invention.

FIGS. 19(a) through 19(c) are cross-sectional views illustrating respective process steps for forming the interconnection structure of the fourth embodiment.

FIGS. 20(a) through 20(c) are cross-sectional views illustrating respective process steps for forming the interconnection structure of the fourth embodiment.

FIGS. 21(a) through 21(c) are cross-sectional views illustrating respective process steps for forming an interconnection structure according to the fifth embodiment of the present invention.

FIGS. 22(a) through 22(c) are cross-sectional views illustrating respective process steps for forming the interconnection structure of the fifth embodiment.

FIGS. 23(a) through 23(d) are cross-sectional views illustrating respective process steps for forming the interconnection structure of the fifth embodiment.

FIGS. 24(a) through 24(c) are cross-sectional views illustrating respective process steps for forming an interconnection structure according to a modified example of the fifth embodiment.

FIGS. 25(a) through 25(c) are cross-sectional views illustrating respective process steps for forming the interconnection structure in the modified example of the fifth embodiment.

FIGS. 26(a) through 26(d) are cross-sectional views illustrating respective process steps for forming the interconnection structure in the modified example of the fifth embodiment.

FIGS. 27(a) and 27(b) are perspective views illustrating respective process steps for forming the interconnection structure in the modified example of the fifth embodiment.

FIGS. 28(a) and 28(b) are perspective views illustrating respective process steps for forming the interconnection structure in the modified example of the fifth embodiment.

FIGS. 29(a) and 29(b) are perspective views illustrating respective process steps for forming the interconnection structure in the modified example of the fifth embodiment.

FIGS. 30(a) through 30(c) are cross-sectional views illustrating respective process steps for forming an interconnection structure according to the sixth embodiment of the present invention.

FIGS. 31(a) through 31(c) are cross-sectional views illustrating respective process steps for forming the interconnection structure of the sixth embodiment.

FIGS. 32(a) through 32(c) are cross-sectional views illustrating respective process steps for forming the interconnection structure of the sixth embodiment.

FIGS. 33(a) through 33(c) are cross-sectional views illustrating respective process steps for forming an interconnection structure according to a modified example of the sixth embodiment.

FIGS. 34(a) through 34(c) are cross-sectional views illustrating respective process steps for forming the interconnection structure in the modified example of the sixth embodiment.

FIGS. 35(a) through 35(c) are cross-sectional views illustrating respective process steps for forming the interconnection structure in the modified example of the sixth embodiment.

FIG. 36 is a plan view illustrating a positional relationship between the openings of a mask pattern for forming wiring grooves and the openings of a second resist pattern for forming contact holes in the modified example of the fifth embodiment.

FIG. 37(a) illustrates respective positional relationships between the mask pattern and the second resist pattern and between a first metal interconnect and an associated contact in the modified example of the fifth embodiment; and

FIG. 37(b) illustrates respective positional relationships between the mask pattern and the second resist pattern and between a first metal interconnect and an associated contact in the fifth embodiment.

## DESCRIPTION OF THE PREFERRED EMBODIMENTS

### EMBODIMENT 1

Hereinafter, an exemplary method for forming an interconnection structure according to the first embodiment of the present invention will be described with reference to FIGS. 1(a) through 1(c), FIGS. 2(a) through 2(c) and FIGS. 3(a) through 3(c).

First, as shown in FIG. 1(a), a silicon nitride film 102 is formed over first metal interconnects 101 formed on a semiconductor substrate 100. The silicon nitride film 102 is formed to be 50 nm thick, for example, and used to protect the first metal interconnects 101 during a subsequent etching process step. Thereafter, a first organic film 103 (first insulating film), mainly composed of an organic component, is formed to be 1  $\mu$ m thick, for example, on the silicon nitride film 102. Next, an organic-containing silicon dioxide film 104 (second insulating film), containing an organic component in silicon dioxide, is formed to be 50 nm thick, for example, on the first organic film 103. Then, a second organic film 105 (third insulating film), mainly composed of an organic component, is formed to be 400 nm thick, for example, on the organic-containing silicon dioxide film 104. And a titanium nitride film 106 is formed to be 50 nm thick, for example, on the second organic film 105.

The first and second organic films 103 and 105 may be deposited by any arbitrary technique. For example, these films 103 and 105 may be deposited by a plasma CVD process using a reactive gas mainly composed of perfluorodecalin. Also, hydrocarbon films or fluorine-containing hydrocarbon films, formed by plasma CVD, coating or thermal CVD, may be used as the first and second organic films 103 and 105.

Moreover, the first organic film 103 may be deposited by a plasma CVD process using a reactive gas mainly composed of perfluorodecalin and organic silane such as hexamethyl disiloxane, arylalkoxy silane or alkylalkoxy silane. In such a case, an organic/inorganic hybrid film can be obtained.

Similarly, the organic-containing silicon dioxide film 104 may also be deposited by any arbitrary technique. For instance, the film 104 may be deposited by a CVD process using a reactive gas mainly composed of phenyltrimethoxy silane. In such a case, an organic-containing silicon dioxide film 104, having a structure in which a phenyl group bonded to a silicon atom is introduced into silicon dioxide, can be obtained.

## 11

It should be noted that a thin film showing high etch selectivity with respect to the first and second organic films **103** and **105** and the organic-containing silicon dioxide film **104**, i.e., a film etched at a sufficiently low rate (e.g., silicon nitride film), may be used instead of the titanium nitride film **106**.

Next, as shown in FIG. 1(b), a first resist pattern **107**, having openings for forming wiring grooves, is formed by lithography on the titanium nitride film **106**. Thereafter, the titanium nitride film **106** is dry-etched using the first resist pattern **107** as a mask, thereby forming a mask pattern **108** out of the titanium nitride film **106** as shown in FIG. 1(c).

Subsequently, a second resist pattern **109**, having openings for forming contact holes, is formed by lithography on the second organic film **105** without removing the first resist pattern **107**. Then, the second organic film **105** is dry-etched, thereby forming a patterned second organic film **105A** having the openings for forming contact holes as shown in FIG. 2(a). In this case, since the second organic film **105** and the first and second resist patterns **107** and **109** are all mainly composed of organic components, the second organic film **105** is etched at a substantially equal rate to that of the first and second resist patterns **107** and **109**. Thus, when the second organic film **105** is dry-etched, the first and second resist patterns **107** and **109** are also removed simultaneously.

It should be noted that part of the second resist pattern **109** may be left in the process step of dry-etching the second organic film **105**. This is because the residual second resist pattern **109** can be removed during a subsequent process step of forming wiring grooves **111** in the patterned second organic film **105A** (see FIG. 2(c)).

Then, the organic-containing silicon dioxide film **104** is dry-etched using the patterned second organic film **105A** as a mask, thereby forming a patterned organic-containing silicon dioxide film **104A** having the openings for forming contact holes as shown in FIG. 2(b). In this process step, by selecting such etching conditions that the organic-containing silicon dioxide film **104** is etched at a rate higher than that of the patterned second organic film **105A**, it is possible to prevent the patterned second organic film **105A** from being erroneously etched.

Next, the patterned second organic film **105A** is dry-etched using the mask pattern **108** as a mask, thereby forming the wiring grooves **111** in the patterned second organic film **105A** as shown in FIG. 2(c). At the same time, the first organic film **103** is also dry-etched using the patterned organic-containing silicon dioxide film **104A** as a mask, thereby forming a patterned first organic film **103A** having the contact holes as shown in FIG. 2(c).

Subsequently, the silicon nitride film **102** is dry-etched using the patterned organic-containing silicon dioxide film **104A** as a mask, thereby forming a patterned silicon nitride film **102A** and exposing the first metal interconnects **101** within the contact holes **110** as shown in FIG. 3(a).

Then, as shown in FIG. 3(b), an adhesion layer **112**, made of titanium nitride, is deposited to be 50 nm thick, for example, on the wall faces of the contact holes **110** and the wiring grooves **111**. Thereafter, a metal film **113** is deposited over the entire surface of the substrate to completely fill in the contact holes **110** and the wiring grooves **111**. In this embodiment, the metal film **113** may be made of any arbitrary metal. For example, copper, aluminum, gold, silver, nickel, cobalt, tungsten, or an alloy thereof may be used. Also, the metal film **113** may be deposited by any arbitrary technique. For instance, plating, CVD or sputtering may be employed.

## 12

Finally, as shown in FIG. 3(c), respective portions of the adhesion layer **112**, the metal film **113** and the mask pattern **108**, which are deposited on the patterned second organic film **105A**, are removed by a CMP technique, for example. As a result, second metal interconnects **114** and contacts **115**, connecting the first and second metal interconnects **101** and **114**, are formed out of the metal film **113**.

It should be noted that a multilevel interconnection structure may be formed by forming respective films, interconnects and contacts on the second metal interconnects **114** through the same process steps as those described above.

In the first embodiment, the organic-containing silicon dioxide film **104** is formed by a CVD process using a reactive gas mainly composed of phenyltrimethoxy silane. Accordingly, the film **104** has a structure in which a phenyl group (i.e., an exemplary organic group), bonded to a silicon atom, is introduced into silicon dioxide. Thus, the film **104** can be processed as well as a conventional CVD oxide film, and the relative dielectric constant of the film **104** is as low as that of the conventional CVD oxide film. In addition, the film **104** can adhere strongly to organic film, oxide film and metal film.

After the mask pattern **108** has been formed out of the titanium nitride film **106**, the second resist pattern **109** is formed without removing the first resist pattern **107**, and the first and second resist patterns **107** and **109** are removed while the second organic film **105** is dry-etched. Thus, it is no longer necessary to ash and remove the first and second resist patterns **107** and **109** with oxygen plasma. That is to say, it is possible to prevent the second organic film **105** from being damaged during the step of ashing and removing a resist pattern. Accordingly, although the second organic film **105** with a low relative dielectric constant is used as an interlevel insulating film, an ordinary resist application process is applicable to this embodiment.

Moreover, the wiring grooves **111** are formed by dry-etching the patterned second organic film **105A** using the mask pattern **108** as a mask and using the patterned organic-containing silicon dioxide film **104A** as an etch stopper. Accordingly, the depth of the wiring grooves **111** matches with the thickness of the second organic film **105**. That is to say, the depth of the wiring grooves **111** can be defined by self-alignment.

Hereinafter, problems caused by the misalignment of the second resist pattern **109** with the first resist pattern **107** and the measured taken to solve the problems will be described.

First, it will be described with reference to FIGS. 4(a) through 4(c), FIGS. 5(a) through 5(c) and FIGS. 6(a) through 6(c) what problems are caused if the second resist pattern **109** has misaligned.

As in the first embodiment, a silicon nitride film **102** is first formed to be 50 nm thick, for example, over first metal interconnects **101** formed on a semiconductor substrate **100** as shown in FIG. 4(a). Thereafter, a first organic film **103**, mainly composed of an organic component, is formed to be 1  $\mu$ m thick, for example, on the silicon nitride film **102**.

Next, an organic-containing silicon dioxide film **104**, containing an organic component in silicon dioxide, is formed to be 50 nm thick, for example, on the first organic film **103**. Then, a second organic film **105**, mainly composed of an organic component, is formed to be 400 nm thick, for example, on the organic-containing silicon dioxide film **104**. And a titanium nitride film **106** is formed to be 50 nm thick, for example, on the second organic film **105**.

Next, as shown in FIG. 4(b), a first resist pattern **107**, having openings for forming wiring grooves, is formed on

13

the titanium nitride film **106**. Thereafter, the titanium nitride film **106** is dry-etched using the first resist pattern **107** as a mask, thereby forming a mask pattern **108** out of the titanium nitride film **106** as shown in FIG. 4(c).

Subsequently, a second resist pattern **109**, having openings for forming contact holes, is formed on the second organic film **105** without removing the first resist pattern **107**. As can be seen if FIGS. 5(a) and 1(c) are compared with each other, the second resist pattern **109** has misaligned with the first resist pattern **107** in this case.

Then, the second organic film **105** is dry-etched, thereby forming a patterned second organic film **105A** having the openings for forming contact holes as shown in FIG. 5(a). As in the first embodiment, since the second organic film **105** and the first and second resist patterns **107** and **109** are all mainly composed of organic components, the first and second resist patterns **107** and **109** are removed simultaneously with the dry-etching of the second organic film **105**. In this case, since the second resist pattern **109** has misaligned with the first resist pattern **107**, the diameter of the openings for forming contact holes, which are provided in the second organic film **105A**, is smaller than desired.

Then, the organic-containing silicon dioxide film **104** is dry-etched using the patterned second organic film **105A** as a mask, thereby forming a patterned organic-containing silicon dioxide film **104A** having the openings for forming contact holes as shown in FIG. 5(c).

Next, the patterned second organic film **105A** is dry-etched using the mask pattern **108** as a mask, thereby forming the wiring grooves **111** in the patterned second organic film **105A** as shown in FIG. 6(a). At the same time, the first organic film **103** is also dry-etched using the patterned organic-containing silicon dioxide film **104A** as a mask, thereby forming a patterned first organic film **103A** having the contact holes **110** as shown in FIG. 6(a). Subsequently, the silicon nitride film **102** is dry-etched using the patterned organic-containing silicon dioxide film **104A** as a mask, thereby forming a patterned silicon nitride film **102A** and exposing the first metal interconnects **101** within the contact holes **110** as shown in FIG. 6(b).

Then, an adhesion layer **112**, made of titanium nitride, is deposited to be 50 nm thick, for example, on the wall faces of the contact holes **110** and the wiring grooves **111**. Thereafter, a metal film is deposited over the entire surface of the substrate and respective portions of the adhesion layer **112**, the metal film and the mask pattern **108**, which are deposited on the patterned second organic film **105A**, are removed by a CMP technique, for example. As a result, second metal interconnects **114** are certainly formed. However, since the diameter of the contact holes **110** is smaller than desired, the contact holes **110** cannot be completely filled in with the metal film, and the first and second metal interconnects **101** and **112** cannot be connected to each other, resulting in a contact failure.

Next, it will be described with reference to FIGS. 7(a) through 7(c) and FIGS. 8(a) through 8(c) what measures should be taken to solve the problems caused by the misalignment of the second resist pattern **109**.

First, a second resist pattern **109**, having openings for forming contact holes, is formed through the same process steps as those described with reference to FIGS. 4(a) through 4(c) and FIG. 5(a). In this case, the second resist pattern **109** has also misaligned with the first resist pattern **107** (see FIG. 5(a)).

Thus, as shown in FIG. 7(a), the first resist pattern **107** and the mask pattern **108** are dry-etched using the second

14

resist pattern **109** as a mask. In this manner, portions of the first resist pattern **107**, not overlapping with the second resist pattern **109**, are removed and each opening of the mask pattern **108** is expanded to be equal to or larger than each opening for forming wiring grooves or each opening for forming contact holes. As a result, the pattern for the openings of the second resist pattern for forming contact holes **109** can be transferred to the first resist pattern **107** and the mask pattern **108**.

Then, the second organic film **105** is dry-etched, thereby forming a patterned second organic film **105A** having the openings for forming contact holes as shown in FIG. 7(b). In this case, since the second organic film **105** and the first and second resist patterns **107** and **109** are all mainly composed of organic components, the first and second resist patterns **107** and **109** are removed simultaneously with the dry-etching of the second organic film **105**.

Then, the organic-containing silicon dioxide film **104** is dry-etched using the patterned second organic film **105A** as a mask, thereby forming a patterned organic-containing silicon dioxide film **104A** having the openings for forming contact holes as shown in FIG. 7(c).

As described above, the second resist pattern **109** has misaligned with the first resist pattern **107**. However, in this case, the pattern for the openings of the second resist pattern for forming contact holes **109** has been successfully transferred to the first resist pattern **107** and the mask pattern **108**. Thus, the diameter of the openings for forming contact holes, which have been formed in the patterned second organic film **105A** and the patterned organic-containing silicon dioxide film **104A**, is a predetermined size.

Next, the patterned second organic film **105A** is dry-etched using the mask pattern **108** as a mask, thereby forming the wiring grooves **111** in the patterned second organic film **105A** as shown in FIG. 8(a). At the same time, the first organic film **103** is also dry-etched using the patterned organic-containing silicon dioxide film **104A** as a mask, thereby forming a patterned first organic film **103A** having the contact holes **110** as shown in FIG. 8(a). Subsequently, the silicon nitride film **102** is dry-etched using the patterned organic-containing silicon dioxide film **104A** as a mask, thereby forming a patterned silicon nitride film **102A** and exposing the first metal interconnects **101** within the contact holes **110** as shown in FIG. 8(b).

Then, an adhesion layer **112**, made of titanium nitride, is deposited to be 50 nm thick, for example, on the wall faces of the contact holes **110** and the wiring grooves **111**. Thereafter, a metal film is deposited over the entire surface of the substrate and respective portions of the adhesion layer **112**, the metal film and the mask pattern **108**, which are deposited on the patterned second organic film **105A**, are removed by a CMP technique, for example. As a result, second metal interconnects **114** and contacts **115** are formed out of the titanium nitride film **112** and the metal film as shown in FIG. 8(c).

## EMBODIMENT 2

Next, an exemplary method for forming an interconnection structure according to the second embodiment of the present invention will be described with reference to FIGS. 9(a) through 9(c), FIGS. 10(a) through 10(c) and FIGS. 11(a) through 11(c).

First, as shown in FIG. 9(a), a silicon nitride film **202** is formed to be 50 nm thick, for example, over first metal interconnects **201** formed on a semiconductor substrate **200**. Thereafter, a first organic film **203** (first insulating film),

15

mainly composed of an organic component, is formed to be 1  $\mu\text{m}$  thick, for example, on the silicon nitride film **202**. Next, an organic-containing silicon dioxide film **204** (second insulating film), containing an organic component in silicon dioxide, is formed to be 50 nm thick, for example, on the first organic film **203**. Then, a second organic film **205** (third insulating film), mainly composed of an organic component, is formed to be 400 nm thick, for example, on the organic-containing silicon dioxide film **204**. And a titanium nitride film **206** is formed to be 50 nm thick, for example, on the second organic film **205**.

The first and second organic films **203** and **205** may be deposited by any arbitrary technique. For example, these films **203** and **205** may be deposited by a plasma CVD process using a reactive gas mainly composed of perfluorodecalin. Also, hydrocarbon films or fluorine-containing hydrocarbon films, formed by plasma CVD, coating or thermal CVD, may be used as the first and second organic films **203** and **205**.

Similarly, the organic-containing silicon dioxide film **204** may also be deposited by any arbitrary technique. For instance, the film **204** may be deposited by a CVD process using a reactive gas mainly composed of phenyltrimethoxy silane.

It should be noted that a thin film showing high etch selectivity with respect to the first and second organic films **203** and **205** and the organic-containing silicon dioxide film **204**, i.e., a film etched at a sufficiently low rate (e.g., silicon nitride film), may be used instead of the titanium nitride film **206**.

Next, as shown in FIG. 9(b), a first resist pattern **207**, having openings for forming wiring grooves, is formed by lithography on the titanium nitride film **206**. Thereafter, the titanium nitride film **206** is dry-etched using the first resist pattern **207** as a mask, thereby forming a mask pattern **208** out of the titanium nitride film **206** as shown in FIG. 9(c).

Subsequently, a second resist pattern **209**, having openings for forming contact holes, is formed by lithography on the second organic film **205** without removing the first resist pattern **207**. Then, the second organic film **205** is dry-etched, thereby forming a patterned second organic film **205A** having the openings for forming contact holes as shown in FIG. 10(a). In this case, since the second organic film **205** and the first and second resist patterns **207** and **209** are all mainly composed of organic components, the second organic film **205** is etched at a rate substantially equal to that of the first and second resist patterns **207** and **209**. Accordingly, when the second organic film **205** is dry-etched, the first and second resist patterns **207** and **209** are also removed simultaneously.

If the second resist pattern **209** may have been misaligned with the first resist pattern **207**, then the first resist pattern **207** and the mask pattern **208** should be dry-etched using the second resist pattern **209** as a mask. In this manner, parts of the first resist pattern **207**, not overlapping with the second resist pattern **209**, are removed and the openings of the mask pattern **208** are expanded to be equal to or larger than the openings for forming wiring grooves and contact holes as described in the first embodiment.

Then, the organic-containing silicon dioxide film **204** is dry-etched using the patterned second organic film **205A** as a mask, thereby forming a patterned organic-containing silicon dioxide film **204A** having the openings for forming contact holes as shown in FIG. 10(b). Next, the patterned second organic film **205A** is dry-etched using the mask pattern **208** as a mask, thereby forming the wiring grooves

16

**211** in the patterned second organic film **205A** as shown in FIG. 10(c). At the same time, the first organic film **203** is also dry-etched using the patterned organic-containing silicon dioxide film **204A** as a mask, thereby forming a patterned first organic film **203A** having the contact holes **210** as also shown in FIG. 10(c).

Subsequently, the silicon nitride film **202** is dry-etched using the patterned organic-containing silicon dioxide film **204A** as a mask, thereby forming a patterned silicon nitride film **202A** and exposing the first metal interconnects **201** within the contact holes **210** as shown in FIG. 11(a).

Then, the patterned first and second organic films **203A** and **205A** are subjected to plasma processing using ammonium gas. As a result, as shown in FIG. 11(b), an adhesion layer **212**, including amino and amide groups, is deposited on the wall faces of the patterned first organic film **203A** exposed inside the contact holes **210** and on the wall faces of the patterned second organic film **205A** exposed inside the wiring grooves **211**. Thereafter, a metal film **213** is deposited over the entire surface of the substrate to completely fill in the contact holes **210** and the wiring grooves **211**. In this embodiment, the metal film **213** may be made of any arbitrary metal. For example, copper, aluminum, gold, silver, nickel, cobalt, tungsten, or an alloy thereof may be used. Also, the metal film **213** may be deposited by any arbitrary technique. For instance, plating, CVD or sputtering may be employed.

Finally, as shown in FIG. 11(c), respective portions of the metal film **213** and the mask pattern **208**, which are deposited on the patterned second organic film **205A**, are removed by a CMP technique, for example. As a result, second metal interconnects **214** and contacts **215** are formed out of the metal film **213**.

It should be noted that a multilevel interconnection structure may be formed by forming respective films, interconnects and contacts on the second metal interconnects **214** through the same process steps as those described above.

### EMBODIMENT 3

Next, an exemplary method for forming an interconnection structure according to the third embodiment of the present invention will be described with reference to FIGS. 12(a) through 12(c), FIGS. 13(a) through 13(c) and FIGS. 14(a) through 14(c).

First, as shown in FIG. 12(a), a silicon nitride film **302** is formed over first metal interconnects **301** formed on a semiconductor substrate **300**. The silicon nitride film **302** is formed to be 50 nm thick, for example, and to protect the first metal interconnects **301** during a subsequent etching process step. Thereafter, a first organic-containing silicon dioxide film **303** (first insulating film), containing an organic component in silicon dioxide, is formed to be 1  $\mu\text{m}$  thick, for example, on the silicon nitride film **302**. Next, a low-dielectric-constant SOG film **304** (second insulating film), having a siloxane skeleton, is deposited to be 400 nm thick, for example, on the first organic-containing silicon dioxide film **303**. Then, a second organic-containing silicon dioxide film **305** (third insulating film), containing an organic component in silicon dioxide, is formed to be 50 nm thick, for example, on the low-dielectric-constant SOG film **304**. And a titanium nitride film **306** is formed to be 50 nm thick, for example, on the second organic-containing silicon dioxide film **305**.

The first and second organic-containing silicon dioxide films **303** and **305** may be deposited by any arbitrary technique. For example, these films **303** and **305** may be

17

deposited by a CVD process using a reactive gas mainly composed of phenyltrimethoxy silane. Also, an HSQ film may be used as the low-dielectric-constant SOG film **304** with a siloxane skeleton.

It should be noted that a thin film showing high etch selectivity with respect to the first and second organic-containing silicon dioxide films **303** and **305** and the low-dielectric-constant SOG film **304**, i.e., a film etched at a sufficiently low rate (e.g., silicon nitride film), may be used instead of the titanium nitride film **306**.

Next, as shown in FIG. **12(b)**, a first resist pattern **307**, having openings for forming wiring grooves, is formed by lithography on the titanium nitride film **306**. Thereafter, the titanium nitride film **306** is dry-etched using the first resist pattern **307** as a mask, thereby forming a mask pattern **308** out of the titanium nitride film **306** as shown in FIG. **12(c)**.

Subsequently, as shown in FIG. **13(a)**, the first resist pattern **307** is removed and then a second resist pattern **309**, having openings for forming contact holes, is formed on the second organic-containing silicon dioxide film **305**. Then, the second organic-containing silicon dioxide film **305**, the low-dielectric-constant SOG film **304** and the first organic-containing silicon dioxide film **303** are sequentially dry-etched using the second resist pattern **309** as a mask. As a result, a patterned second organic-containing silicon dioxide film **305A**, a patterned low-dielectric-constant SOG film **304A** and a patterned first organic-containing silicon dioxide film **303A** having contact holes **310** are formed as shown in FIG. **13(b)**.

Next, as shown in FIG. **13(c)**, the second resist pattern **309** is removed and the patterned second organic-containing silicon dioxide film **305A** is dry-etched using the mask pattern **308** as a mask, thereby forming openings for forming wiring grooves in the patterned second organic-containing silicon dioxide film **305A**. Thereafter, the patterned low-dielectric-constant SOG film **304A** is dry-etched using the mask pattern **308** and the patterned second organic-containing silicon dioxide film **305A** having the openings for wiring grooves as a mask, thereby forming the wiring grooves **311**. In forming the wiring grooves **311**, by selecting such etching conditions that the first organic-containing silicon dioxide film **303A** is etched at a rate sufficiently lower than that of the low-dielectric-constant SOG film **304A**, sufficient selectivity can be secured for the patterned first organic-containing silicon dioxide film **303A**. Accordingly, the depth of the wiring grooves **311** can be determined univalently at the sum of the thicknesses of the second organic-containing silicon dioxide film **305** and the low-dielectric-constant SOG film **304**.

If the second resist pattern **309** may have been misaligned with the first resist pattern **307**, the mask pattern **308** should be dry-etched using the second resist pattern **309** as a mask before the second organic-containing silicon dioxide film **305** is dry-etched using the second resist pattern **309** as a mask. That is to say, if the mask pattern **308** is partially exposed inside the openings of the second resist pattern **309** for forming contact holes because of the misalignment of the second resist pattern **309** with the first resist pattern **307**, then the mask pattern **308** is dry-etched using the second resist pattern **309** as a mask. In this manner, the openings of the mask pattern **308** are expanded to include the openings for forming wiring grooves and contact holes.

Subsequently, the silicon nitride film **302** is dry-etched using the patterned first organic-containing silicon dioxide film **303A** as a mask, thereby forming a patterned silicon nitride film **302A** and exposing the first metal interconnects **301** within the contact holes **310** as shown in FIG. **14(a)**.

18

Then, as shown in FIG. **14(b)**, an adhesion layer **312**, made of titanium nitride, is deposited to be 50 nm thick, for example, on the wall faces of the contact holes **310** and the wiring grooves **311**. Thereafter, a metal film **313** is deposited over the entire surface of the substrate to completely fill in the contact holes **310** and the wiring grooves **311**. In this embodiment, the metal film **313** may be made of any arbitrary metal. For example, copper, aluminum, gold, silver, nickel, cobalt, tungsten, or an alloy thereof may be used. Also, the metal film **313** may be deposited by any arbitrary technique. For instance, plating, CVD or sputtering may be employed.

Finally, as shown in FIG. **14(c)**, respective portions of the adhesion layer **312**, the metal film **313** and the mask pattern **308**, which are deposited on the patterned second organic-containing silicon dioxide film **305A**, are removed by a CMP technique, for example. As a result, second metal interconnects **314** and contacts **315**, connecting the first and second metal interconnects **301** and **314**, are formed out of the metal film **313**.

It should be noted that a multilevel interconnection structure may be formed by forming respective films, interconnects and contacts on the second metal interconnects **314** through the same process steps as those described above.

In the third embodiment, while the first resist pattern **307** is ashed and removed with oxygen plasma, the low-dielectric-constant SOG film **304** is not exposed to the oxygen plasma, because the second organic-containing silicon dioxide film **305** exists on the low-dielectric-constant SOG film **304**.

Also, in this embodiment, after the second organic-containing silicon dioxide film **305**, the low-dielectric-constant SOG film **304** and the first organic-containing silicon dioxide film **303** have been sequentially dry-etched using the second resist pattern **309** as a mask, the second resist pattern **309** is ashed and removed with oxygen plasma. Accordingly, the regions of the patterned low-dielectric-constant SOG film **304A**, which are exposed inside the openings for forming contact holes, are exposed to oxygen plasma and damaged. However, the damaged layer, formed in the patterned low-dielectric-constant SOG film **304A**, can be removed when the wiring grooves **311** are formed in the patterned low-dielectric-constant SOG film **304A**, and does not have harmful effects on subsequent process steps.

Accordingly, the low-dielectric-constant SOG film **304** may be made of a material degradable with oxygen plasma. For example, in general, if an HSQ film is exposed to oxygen plasma, the Si—H bonds thereof are oxidized and the content of water and the relative dielectric constant thereof both increase to deteriorate the reliability and performance of the device. However, according to the third embodiment, the patterned low-dielectric-constant SOG film **304A**, in which the wiring grooves **311** have already been formed, is not affected by oxygen plasma. Thus, even if an HSQ film is used as an interlevel insulating film, the deterioration in reliability and performance of the device can be avoided.

#### MODIFIED EXAMPLE OF EMBODIMENT 3

Next, an exemplary method for forming an interconnection structure according to a modified example of the third embodiment of the present invention will be described with reference to FIGS. **15(a)** through **15(c)**, FIGS. **16(a)** through **16(c)** and FIGS. **17(a)** through **17(c)**.

First, as shown in FIG. **15(a)**, a silicon nitride film **352** is formed over first metal interconnects **351** formed on a



semiconductor substrate **350**. The silicon nitride film **352** is formed to be 50 nm thick, for example, and to protect the first metal interconnects **351** during a subsequent etching process step. Thereafter, a first silicon dioxide film **353** (first insulating film) is formed to be 1  $\mu\text{m}$  thick, for example, on the silicon nitride film **352**. Next, an organic film **354** (second insulating film) is deposited to be 400 nm thick, for example, on the first silicon dioxide film **353**. Then, a second silicon dioxide film **355** (third insulating film) is formed to be 50 nm thick, for example, on the organic film **354**. And a titanium nitride film **356** is formed to be 50 nm thick, for example, on the second silicon dioxide film **355**.

The first and second silicon dioxide films **353** and **355** may be deposited by any arbitrary technique. For example, these films **353** and **355** may be deposited by a CVD process using a reactive gas mainly composed of phenyltrimethoxy silane.

It should be noted that a thin film showing high etch selectivity with respect to the first and second silicon dioxide films **353** and **355** and the organic film **354**, i.e., a film etched at a sufficiently low rate (e.g., silicon nitride film), may be used instead of the titanium nitride film **356**.

Next, as shown in FIG. **15(b)**, a first resist pattern **357**, having openings for forming wiring grooves, is formed by lithography on the titanium nitride film **356**. Thereafter, the titanium nitride film **356** is dry-etched using the first resist pattern **357** as a mask, thereby forming a mask pattern **358** out of the titanium nitride film **356** as shown in FIG. **15(c)**.

Subsequently, as shown in FIG. **16(a)**, the first resist pattern **357** is removed and then a second resist pattern **359**, having openings for forming contact holes, is formed on the second silicon dioxide film **355**. Then, the second silicon dioxide film **355** and the organic film **354** are sequentially dry-etched using the second resist pattern **359** as a mask, thereby forming a patterned second silicon dioxide film **355A** and a patterned organic film **354A** having openings **360** for forming contact holes as shown in FIG. **16(b)**. In this case, the second resist pattern **359** is removed during the step of etching the organic film **354**.

Next, as shown in FIG. **16(c)**, the first silicon dioxide film **353** is dry-etched using the patterned second silicon dioxide film **355A** and the patterned organic film **354A** as a mask, thereby forming a patterned first silicon dioxide film **353A** having contact holes **361**. In this etching process step, the mask pattern **358** is transferred to the patterned second silicon dioxide film **355A**. Accordingly, openings for forming wiring grooves are formed in the patterned second silicon dioxide film **355A**.

Thereafter, as shown in FIG. **16(d)**, the patterned organic film **354A** is dry-etched using the mask pattern **358** and the patterned second silicon dioxide film **355A** having the openings for forming wiring grooves as a mask, thereby forming the wiring grooves **362**. In forming the wiring grooves **362**, by selecting such etching conditions that the first silicon dioxide film **353A** is etched at a rate sufficiently lower than that of the organic film **354A**, sufficient selectivity can be secured for the patterned first silicon dioxide film **353A**. Accordingly, the depth of the wiring grooves **362** can be determined univalently at the sum of the thicknesses of the second silicon dioxide film **355** and the organic film **354**.

If the second resist pattern **359** may have been misaligned with the first resist pattern **357**, then the mask pattern **358** should be dry-etched using the second resist pattern **359** as a mask before the second silicon dioxide film **355** is dry-etched using the second resist pattern **359** as a mask. That is

to say, if the mask pattern **358** is partially exposed inside the openings of the second resist pattern **359** for forming contact holes because of the misalignment of the second resist pattern **359** with the first resist pattern **357**, then the mask pattern **358** is dry-etched using the second resist pattern **359** as a mask. In this manner, the openings of the mask pattern **358** are expanded to include the openings for forming wiring grooves and contact holes.

Subsequently, the silicon nitride film **352** is dry-etched using the patterned first silicon dioxide film **353A** as a mask, thereby forming a patterned silicon nitride film **352A** and exposing the first metal interconnects **351** within the contact holes **361** as shown in FIG. **17(a)**.

Then, as shown in FIG. **17(b)**, an adhesion layer **363**, made of titanium nitride, is deposited to be 50 nm thick, for example, on the wall faces of the contact holes **361** and the wiring grooves **362**. Thereafter, a metal film **364** is deposited over the entire surface of the substrate to completely fill in the contact holes **361** and the wiring grooves **362**. In this embodiment, the metal film **364** may be made of any arbitrary metal. For example, copper, aluminum, gold, silver, nickel, cobalt, tungsten, or an alloy thereof may be used. Also, the metal film **364** may be deposited by any arbitrary technique. For instance, plating, CVD or sputtering may be employed.

Finally, as shown in FIG. **17(c)**, respective portions of the adhesion layer **363**, the metal film **364** and the mask pattern **358**, which are deposited on the patterned second silicon dioxide film **355A**, are removed by a CMP technique, for example. As a result, second metal interconnects **365** and contacts **366**, connecting the first and second metal interconnects **351** and **365**, are formed out of the metal film **364**.

It should be noted that a multilevel interconnection structure may be formed by forming respective films, interconnects and contacts on the second metal interconnects **365** through the same process steps as those described above.

In this modified example of the third embodiment, while the first resist pattern **357** is ashed and removed by oxygen plasma, the organic film **354** is not exposed to the oxygen plasma, because the second silicon dioxide film **355** exists on the organic film **354**.

Also, in this example, the second resist pattern **359** is removed while the second silicon dioxide film **355** and the organic film **354** are dry-etched using the second resist pattern **359** as a mask. Accordingly, since there is no need to ash and remove the second resist pattern **359** with oxygen plasma, the organic film **354** is not exposed to oxygen plasma.

#### EMBODIMENT 4

Next, an exemplary method for forming an interconnection structure according to the fourth embodiment of the present invention will be described with reference to FIGS. **18(a)** through **18(c)**, FIGS. **19(a)** through **19(c)** and FIGS. **20(a)** through **20(c)**.

First, as shown in FIG. **18(a)**, a silicon nitride film **402** is formed over first metal interconnects **401** formed on a semiconductor substrate **400**. The silicon nitride film **402** is formed to be 50 nm thick, for example, and to protect the first metal interconnects **401** during a subsequent etching process step. Thereafter, a first low-dielectric-constant SOG film **403** (first insulating film), having a siloxane skeleton, is formed to be 1  $\mu\text{m}$  thick, for example, on the silicon nitride film **402**. Next, an organic-containing silicon dioxide film **404** (second insulating film), containing an organic component in silicon dioxide, is deposited to be 50 nm thick, for



example, on the first low-dielectric-constant SOG film 403. Then, a second low-dielectric-constant SOG film 405 (third insulating film), having a siloxane skeleton, is formed to be 400 nm thick, for example, on the organic-containing silicon dioxide film 404. And a titanium nitride film 406 is formed to be 50 nm thick, for example, on the second low-dielectric-constant SOG film 405.

The first and second low-dielectric-constant SOG films 403 and 405 may be HSQ films, for example. The organic-containing silicon dioxide film 404 may be deposited by any arbitrary technique. For example, the film 404 may be deposited by a CVD process using a reactive gas mainly composed of phenyltrimethoxy silane. Then, an organic-containing silicon dioxide film 404, having a structure in which a phenyl group bonded to a silicon atom is introduced into silicon dioxide, can be obtained.

It should be noted that a thin film showing high etch selectivity with respect to the first and second low-dielectric-constant SOG films 403 and 405 and the organic-containing silicon dioxide film 404, i.e., a film etched at a sufficiently low rate (e.g., silicon nitride film), may be used instead of the titanium nitride film 406.

Next, as shown in FIG. 18(b), a first resist pattern 407, having openings for forming wiring grooves, is formed by lithography on the titanium nitride film 406. Thereafter, the titanium nitride film 406 is dry-etched using the first resist pattern 407 as a mask, thereby forming a mask pattern 408 out of the titanium nitride film 406 as shown in FIG. 18(c).

Subsequently, a second resist pattern 409, having openings for forming contact holes, is formed by lithography on the second low-dielectric-constant SOG film 405 without removing the first resist pattern 407. Then, the second low-dielectric-constant SOG film 405 and the organic-containing silicon dioxide film 404 are sequentially dry-etched using the second resist pattern 409 as a mask, thereby forming a patterned second low-dielectric-constant SOG film 405A and a patterned organic-containing silicon dioxide film 404A as shown in FIG. 19(a).

Next, the first and second resist patterns 407 and 409 are ashed and removed with oxygen plasma. As a result, a damaged layer 410 is unintentionally formed in respective portions of the patterned second low-dielectric-constant SOG film 405A and the first low-dielectric-constant SOG film 403, which are exposed inside the openings for forming contact holes, as shown in FIG. 19(b).

Then, the patterned second low-dielectric-constant SOG film 405A is dry-etched using the mask pattern 408 as a mask, thereby forming wiring grooves 412 in the patterned second low-dielectric-constant SOG film 405A as shown in FIG. 19(c). At the same time, the first low-dielectric-constant SOG film 403 is dry-etched using the patterned organic-containing silicon dioxide film 404A as a mask, thereby forming a patterned first low-dielectric-constant SOG film 403A having contact holes 411 as shown in FIG. 19(c). By performing this dry-etching process step, the damaged layer 410 can be removed from the patterned second low-dielectric-constant SOG films 405A and the first low-dielectric-constant SOG film 403.

Subsequently, the silicon nitride film 402 is dry-etched using the patterned organic-containing silicon dioxide film 404A as a mask, thereby forming a patterned silicon nitride film 402A and exposing the first metal interconnects 401 within the contact holes 411 as shown in FIG. 20(a).

Then, as shown in FIG. 20(b), an adhesion layer 413, made of titanium nitride, is deposited to be 50 nm thick, for example, on the wall faces of the contact holes 411 and the

wiring grooves 412. Thereafter, a metal film 414 is deposited over the entire surface of the substrate to completely fill in the contact holes 411 and the wiring grooves 412. In this embodiment, the metal film 414 may be made of any arbitrary metal. For example, copper, aluminum, gold, silver, nickel, cobalt, tungsten, or an alloy thereof may be used. Also, the metal film 414 may be deposited by any arbitrary technique. For instance, plating, CVD or sputtering may be employed.

Finally, as shown in FIG. 20(c), respective portions of the adhesion layer 413, the metal film 414 and the mask pattern 408, which are deposited on the patterned second low-dielectric-constant SOG film 405A, are removed by a CMP technique, for example. As a result, second metal interconnects 415 and contacts 416, connecting the first and second metal interconnects 401 and 415, are formed out of the metal film 414.

It should be noted that a multilevel interconnection structure may be formed by forming respective films, interconnects and contacts on the second metal interconnects 415 through the same process steps as those described above.

In the fourth embodiment, while the first and second resist patterns 407 and 409 are ashed and removed with oxygen plasma, a damaged layer 410 is formed in the first low-dielectric-constant SOG film 403 and the patterned second low-dielectric-constant SOG film 405A. But the damaged layer 410 can be removed while the contact holes 411 and the wiring grooves 412 are formed.

Accordingly, the first and second low-dielectric-constant SOG films 403 and 405 may be made of a material degradable with oxygen plasma. For example, in general, if an HSQ film is exposed to oxygen plasma, Si—H bonds thereof are oxidized and the content of water and the relative dielectric constant thereof both increase to deteriorate the reliability and performance of the device. However, according to the fourth embodiment, the patterned first low-dielectric-constant SOG film 403A, in which the contact holes 411 have already been formed, and the patterned second low-dielectric-constant SOG film 405A, in which the wiring grooves 412 have already been formed, are not affected by oxygen plasma any more. Thus, even if an HSQ film is used as an interlevel insulating film, the deterioration in reliability and performance of the device can be avoided.

## EMBODIMENT 5

Next, an exemplary method for forming an interconnection structure according to the fifth embodiment of the present invention will be described with reference to FIGS. 21(a) through 21(c), FIGS. 22(a) through 22(c) and FIGS. 23(a) through 23(d).

First, as shown in FIG. 21(a), a silicon nitride film 502 is formed over first metal interconnects 501 formed on a semiconductor substrate 500. The silicon nitride film 502 is formed to be 50 nm thick, for example, and to protect the first metal interconnects 501 during a subsequent etching process step. Thereafter, a first organic film 503 (first insulating film), mainly composed of an organic component, is deposited to be 400 nm thick, for example, on the silicon nitride film 502. Then, a first silicon dioxide film 504 (second insulating film) is deposited to be 100 nm thick, for example, on the first organic film 503. Subsequently, a second organic film 505 (third insulating film), mainly composed of an organic component, is deposited to be 300 nm thick, for example, on the first silicon dioxide film 504. Next, a second silicon dioxide film 506 (fourth insulating film) is deposited to be 200 nm thick, for example, on the

23

second organic film **505**. And a titanium nitride film **507** (thin film) is deposited to be 50 nm thick, for example, on the second silicon dioxide film **506**.

The first and second organic films **503** and **505** may be deposited by any arbitrary technique. For example, these films **503** and **505** may be deposited by a plasma CVD process using a reactive gas mainly composed of perfluorodecalin. Also, hydrocarbon films or fluorine-containing hydrocarbon films, formed by plasma CVD, coating or thermal CVD, may be used as the first and second organic films **503** and **505**. More specifically, the organic films **503** and **505** may be made of polytetrafluoroethylene, oxygen-containing polytetrafluoroethylene, polyimide fluoride or polyaryl ether.

The first and second silicon dioxide films **504** and **506** may also be deposited by any arbitrary technique. For example, these films **504** and **506** may be deposited by a plasma CVD process.

It should be noted that a thin film showing high etch selectivity with respect to the first and second organic films **503** and **505** and the first and second silicon dioxide films **504** and **506**, i.e., a thin film etched at a sufficiently low rate (e.g., silicon nitride film), may be used instead of the titanium nitride film **507**.

Next, as shown in FIG. 21(b), a first resist pattern **508**, having openings for forming wiring grooves, is formed by lithography on the titanium nitride film **507**. Thereafter, the titanium nitride film **507** is dry-etched using the first resist pattern **508** as a mask, thereby forming a mask pattern **509**, having openings for forming wiring grooves, out of the titanium nitride film **507** as shown in FIG. 21(c).

Subsequently, as shown in FIG. 22(a), the first resist pattern **508** is removed by oxygen plasma, for example. In this case, even if the first resist pattern **508** is ashed and removed using oxygen plasma, the quality of the second organic film **505** does not degrade, because the second silicon dioxide film **506** exists on the second organic film **505** mainly composed of an organic component.

Then, as shown in FIG. 22(b), a second resist pattern **510**, having openings for forming contact holes, is formed by lithography on the mask pattern **509**. Thereafter, the second silicon dioxide film **506** is dry-etched using the second resist pattern **510** and the mask pattern **509** as a mask, thereby forming a patterned second silicon dioxide film **506A** having openings for forming contact holes as shown in FIG. 22(c).

Next, the second organic film **505** is dry-etched using the patterned second silicon dioxide film **506A** as a mask, thereby forming a patterned second organic film **505A** having openings for forming contact holes as shown in FIG. 23(a). In this case, the second organic film **505** and the second resist pattern **510** are both mainly composed of organic components, the second organic film **505** is etched at a substantially equal rate to that of the second resist pattern **510**. Thus, when the second organic film **505** is dry-etched, the second resist pattern **510** is also removed simultaneously. The patterned second silicon dioxide film **506A** functions as an etch stopper during dry-etching the second resist pattern **510**.

It should be noted that part of the second resist pattern **510** may be left in the process step of dry-etching the second organic film **505**. This is because the residual second resist pattern **510** can be removed during a subsequent process step of dry-etching the first organic film **503** (see FIG. 23(c)).

Thereafter, the patterned second silicon dioxide film **506A** and the first silicon dioxide film **504** are dry-etched using the

24

mask pattern **509** and the patterned second organic film **505A** as respective masks, thereby forming a patterned second silicon dioxide film **506B** having openings for forming wiring grooves and a patterned first silicon dioxide film **504A** having openings for forming contact holes as shown in FIG. 23(b).

Then, the patterned second organic film **505A** and the first organic film **503** are dry-etched using the mask pattern **509** and the patterned first silicon dioxide film **504A** as respective masks, thereby forming a patterned second organic film **505B** having wiring grooves **511** and a patterned first organic film **503A** having contact holes **512** as shown in FIG. 23(c).

Subsequently, the silicon nitride film **502** is dry-etched using the patterned first silicon dioxide film **504A** as a mask, thereby forming a patterned silicon nitride film **502A** (see FIG. 23(d)) and exposing the first metal interconnects **501** within the contact holes **512**. Then, although not shown, an adhesion layer, made of titanium nitride, is deposited to be 50 nm thick, for example, on the wall faces of the contact holes **512** and the wiring grooves **511** as in the first embodiment. Thereafter, a metal film is deposited over the entire surface of the substrate to completely fill in the contact holes **512** and the wiring grooves **511**. In this embodiment, the metal film may be made of any arbitrary metal. For example, copper, aluminum, gold, silver, nickel, cobalt, tungsten, or an alloy thereof may be used. Also, the metal film may be deposited by any arbitrary technique. For instance, plating, CVD or sputtering may be employed. Finally, respective portions of the adhesion layer, the metal film and the mask pattern **509**, which are deposited on the patterned second silicon dioxide film **506B**, are removed by a CMP technique, for example. As a result, second metal interconnects **513** and contacts **514**, connecting the first and second metal interconnects **501** and **513** together, are formed as shown in FIG. 23(d).

It should be noted that a multilevel interconnection structure may be formed by forming respective films, interconnects and contacts on the second metal interconnects **513** through the same process steps as those described above.

In the fifth embodiment, while the first resist pattern **508** is being removed by oxygen plasma, for example, the quality of the second organic film **505** does not degrade. This is because the second silicon dioxide film **506** exists on the second organic film **505**, which is likely to be damaged by oxygen plasma.

Also, in this embodiment, the first silicon dioxide film **504** functions as an etch stopper during dry-etching the second organic film **505**. Accordingly, it is possible to prevent the quality of the first organic film **503** from being degraded.

#### MODIFIED EXAMPLE OF EMBODIMENT 5

Next, a method for forming an interconnection structure according to a modified example of the fifth embodiment will be described with reference to FIGS. 24(a) through 24(c), FIGS. 25(a) through 25(c), FIGS. 26(a) through 26(d), FIGS. 27(a) and 27(b), FIGS. 28(a) and 28(b) and FIGS. 29(a) and 29(b).

First, as shown in FIG. 24(a), a silicon nitride film **552** is formed over first metal interconnects **551** formed on a semiconductor substrate **550**. The silicon nitride film **552** is formed to be 50 nm thick, for example, and to protect the first metal interconnects **551** during a subsequent etching process step. Thereafter, a first organic film **553** (first insulating film), mainly composed of an organic component, is deposited to be 400 nm thick, for example, on the silicon

25

nitride film **552**. Then, a first silicon dioxide film **554** (second insulating film) is formed to be 100 nm thick, for example, on the first organic film **553**. Subsequently, a second organic film **555** (third insulating film), mainly composed of an organic component, is deposited to be 300 nm thick, for example, on the first silicon dioxide film **554**. Next, a second silicon dioxide film **556** (fourth insulating film) is deposited to be 200 nm thick, for example, on the second organic film **555**. And a titanium nitride film **557** is deposited to be 50 nm thick, for example, on the second silicon dioxide film **556**.

The first and second organic films **553** and **555** and the first and second silicon dioxide films **554** and **556** may be deposited by any arbitrary technique as in the fifth embodiment. Also, a thin film showing high etch selectivity with respect to the first and second organic films **553** and **555** and the first and second silicon dioxide films **554** and **556** may be used instead of the titanium nitride film **557**.

Next, as shown in FIG. **24(b)**, a first resist pattern **558**, having openings for forming wiring grooves, is formed on the titanium nitride film **557**. Thereafter, the titanium nitride film **557** is dry-etched using the first resist pattern **558** as a mask, thereby forming a mask pattern **559**, having openings for forming wiring grooves, out of the titanium nitride film **557** as shown in FIG. **24(c)**.

Subsequently, as shown in FIGS. **25(a)** and **27(a)**, the first resist pattern **558** is removed. Then, a second resist pattern **560**, having openings for forming contact holes, is formed on the mask pattern **559** as shown in FIG. **25(b)**. in this modified example of the fifth embodiment, the sizes of the openings of the second resist pattern **560** for forming contact holes are set larger than designed sizes of the contact holes in respective directions vertical and parallel to wiring grooves for forming second metal interconnects. The reason thereof will be described later.

Then, the second silicon dioxide film **556** is dry-etched using the second resist pattern **560** and the mask pattern **559** as a mask, thereby forming a patterned second silicon dioxide film **556A** having openings for forming contact holes as shown in FIGS. **25(c)** and **27(b)**.

As described above, the sizes of the openings of the second resist pattern **560** for forming contact holes are set larger than designed sizes of the contact holes in respective directions vertical and parallel to wiring grooves for forming second metal interconnects. Accordingly, even if the openings of the second resist pattern **560** for forming contact holes have misaligned with the openings of the mask pattern **559** for forming wiring grooves, the openings of the patterned second silicon dioxide film **556A** for forming contact holes can be formed to be self-aligned with the openings of the mask pattern **559** for forming wiring grooves. This is because the openings of the patterned second silicon dioxide film **556A** for forming contact holes are formed in respective regions where the openings of the second resist pattern **560** for forming contact holes overlap with corresponding openings of the mask pattern **559** for forming wiring grooves.

In addition, the size of the openings of the second resist pattern **560** for forming contact holes is also extended in the direction parallel to the wiring grooves for forming second metal interconnects. Thus, the contact area between contacts **564** to be formed later and second metal interconnects **563** (see FIG. **26(d)**) expands. As a result, the contacts **564** can connect the first and second metal interconnects **551** and **563** together with a lot more certainty.

Next, the second organic film **555** is dry-etched using the patterned second silicon dioxide film **556A** as a mask,

26

thereby forming a patterned second organic film **555A** having openings for forming contact holes as shown in FIGS. **26(a)** and **28(a)**. In this case, the second organic film **555** and the second resist pattern **560** are both mainly composed of organic components, the second organic film **555** is etched at a substantially equal rate to that of the second resist pattern **560**. Thus, when the second organic film **555** is dry-etched, the second resist pattern **560** is also removed simultaneously. It should be noted that part of the second resist pattern **560** may be left in the process step of dry-etching the second organic film **555**. This is because the residual second resist pattern **560** can be removed during a subsequent process step of dry-etching the first organic film **553** (see FIG. **26(c)**).

Thereafter, the patterned second silicon dioxide film **556A** and the first silicon dioxide film **554** are dry-etched using the mask pattern **559** and the patterned second organic film **555A** as respective masks, thereby forming a patterned second silicon dioxide film **556B** having wiring grooves and a patterned first silicon dioxide film **554A** having openings for forming contact holes as shown in FIGS. **26(b)** and **28(b)**. Then, the patterned second organic film **555A** is dry-etched using the mask pattern **559** and the patterned second silicon dioxide film **556B** as a mask, and the first organic film **553** is dry-etched using the patterned first silicon dioxide film **554A** as a mask, thereby forming a patterned second organic film **555B** having wiring grooves **561** and a patterned first organic film **553A** having contact holes **562** as shown in FIGS. **26(c)** and **29(a)**.

Subsequently, the silicon nitride film **552** is dry-etched using the patterned first silicon dioxide film **554A** as a mask, thereby forming a patterned silicon nitride film **552A** (see FIG. **26(d)**) having contact holes, and exposing the first metal interconnects **551** within the contact holes **562**. Then, although not shown, an adhesion layer, made of titanium nitride, is deposited to be 50 nm thick, for example, on the wall faces of the contact holes **562** and the wiring grooves **561** as in the first embodiment. Thereafter, a metal film is deposited over the entire surface of the substrate to completely fill in the contact holes **562** and the wiring grooves **561**. Finally, respective portions of the adhesion layer, the metal film and the mask pattern **559**, which are deposited on the patterned second silicon dioxide film **556B**, are removed by a CMP technique, for example. As a result, second metal interconnects **563** and contacts **564**, connecting the first and second metal interconnects **551** and **563** together, are formed as shown in FIGS. **26(d)** and **29(b)**.

It should be noted that a multilevel interconnection structure may be formed by forming respective films, interconnects and contacts on the second metal interconnects **563** through the same process steps as those described above.

According to this modified example of the fifth embodiment, the sizes of the openings of the second resist pattern **560** for forming contact holes are set larger than designed sizes of the contact holes in respective directions vertical and parallel to the wiring grooves for forming the second metal interconnects. Thus, even if the openings of the second resist pattern **560** for forming contact holes have misaligned with the openings of the mask pattern **559** for forming wiring grooves, the openings of the patterned second silicon dioxide film **556A** for forming contact holes can be formed to be self-aligned with the openings of the mask pattern **559** for forming wiring grooves. This is because the openings of the patterned second silicon dioxide film **556A** for forming contact holes are formed in respective regions where the openings of the second resist pattern **560** for forming contact holes overlap with corresponding open-

27

ings of the mask pattern **559** for forming wiring grooves. Accordingly, the connection between the contacts **564** and the second metal interconnects **563** is ensured.

In addition, the size of the openings of the second resist pattern **560** for forming contact holes is also extended in the direction parallel to the wiring grooves for forming the second metal interconnects. Thus, the contact area between contacts **564** and the second metal interconnects **563** expands. As a result, the contacts **564** can connect the first and second metal interconnects **551** and **563** together with a lot more certainty.

FIG. **36** illustrates a positional relationship between the openings of the mask pattern **559** for forming wiring grooves and those of the second resist pattern **560** for forming contact holes in this modified example of the fifth embodiment. As shown in FIG. **36**, the size of the openings of the second resist pattern **560** for forming contact holes are larger than the designed size.

FIG. **37(a)** illustrates respective positional relationships between the mask pattern **559** and the second resist pattern **560** and between a first metal interconnect **551** and a contact **564** in this modified example of the fifth embodiment. Specifically, the upper part of FIG. **37(a)** illustrates a positional relationship between an opening of the mask pattern **559** for forming a wiring groove and an associated opening of the second resist pattern **560** for forming a contact hole. The middle part of FIG. **37(a)** illustrates the cross section of the upper part taken along the line A—A. And the lower part of FIG. **37(a)** illustrates a positional relationship between a first metal interconnect **551** and an associated contact **564**. FIG. **37(b)** illustrates respective positional relationships between the mask pattern **509** and the second resist pattern **510** and between a first metal interconnect **501** and a contact **514** in the fifth embodiment. Specifically, the upper part of FIG. **37(b)** illustrates a positional relationship between an opening of the mask pattern **509** for forming a wiring groove and an associated opening of the second resist pattern **510** for forming a contact hole. The middle part of FIG. **37(b)** illustrates the cross section of the upper part taken along the line B—B. And the lower part of FIG. **37(b)** illustrates a positional relationship between a first metal interconnect **501** and an associated contact **514**.

Setting the size of an opening of the second resist pattern **510** for forming a contact hole at the designed size thereof as in the fifth embodiment, if the opening of the second resist pattern **510** for forming a contact hole has misaligned with an associated opening of the mask pattern **509** for forming a wiring groove, then the contact area (indicated by hatching) between the contact **514** and the first metal interconnect **501** greatly decreases as can be seen from FIG. **37(b)**. In contrast, setting the size of an opening of the second resist pattern **560** for forming a contact hole larger than the designed size thereof as in this modified example of the fifth embodiment, even if the opening of the second resist pattern **560** for forming a contact hole has misaligned with an associated opening of the mask pattern **559** for forming a wiring groove, the contact area (indicated by hatching) between the contact **564** and the first metal interconnect **551** does not decrease so much as can be seen from FIG. **37(a)**.

#### EMBODIMENT 6

Next, an exemplary method for forming an interconnection structure according to the sixth embodiment of the present invention will be described with reference to FIGS. **30(a)** through **30(c)**, FIGS. **31(a)** through **31(c)** and FIGS. **32(a)** through **32(c)**.

28

First, as shown in FIG. **30(a)**, a silicon nitride film **602** is formed over first metal interconnects **601** formed on a semiconductor substrate **600**. The silicon nitride film **602** is formed to be 50 nm thick, for example, and to protect the first metal interconnects **601** during a subsequent etching process step. Thereafter, a first organic film **603** (first insulating film), mainly composed of an organic component, is deposited to be 400 nm thick, for example, on the silicon nitride film **602**. Then, a silicon dioxide film **604** (second insulating film) is deposited to be 100 nm thick, for example, on the first organic film **603**. Subsequently, a second organic film **605** (third insulating film), mainly composed of an organic component, is deposited to be 300 nm thick, for example, on the silicon dioxide film **604**. And a titanium nitride film **606** (thin film) is deposited to be 50 nm thick, for example, on the second organic film **605**.

The first and second organic films **603** and **605** may be deposited by any arbitrary technique. For example, these films **603** and **605** may be deposited by a plasma CVD process using a reactive gas mainly composed of perfluorodecalin. Also, hydrocarbon films or fluorine-containing hydrocarbon films, formed by plasma CVD, coating or thermal CVD, may be used as the first and second organic films **603** and **605**. More specifically, the organic films **603** and **605** may be made of polytetrafluoroethylene, oxygen-containing polytetrafluoroethylene, polyimide fluoride or polyaryl ether.

The silicon dioxide film **604** may also be deposited by any arbitrary technique. For example, the film **604** may be deposited by a plasma CVD process.

It should be noted that a thin film showing high etch selectivity with respect to the first and second organic films **603** and **605** and the silicon dioxide film **604**, i.e., a thin film etched at a sufficiently low rate (e.g., silicon nitride film), may be used instead of the titanium nitride film **606**.

Next, as shown in FIG. **30(b)**, a first resist pattern **607**, having openings for forming wiring grooves, is formed by lithography on the titanium nitride film **606**. Thereafter, the titanium nitride film **606** is dry-etched using the first resist pattern **607** as a mask, thereby forming a mask pattern **608**, having openings for forming wiring grooves, out of the titanium nitride film **606** as shown in FIG. **30(c)**.

Subsequently, as shown in FIG. **31(a)**, the first resist pattern **607** is removed using an organic parting agent, for example. In such a case, since the second organic film **605** is not exposed to oxygen plasma, the quality of the second organic film **605** does not degrade.

Then, as shown in FIG. **31(b)**, a second resist pattern **609**, having openings for forming contact holes, is formed by lithography on the mask pattern **608**. Then, the second organic film **605** is dry-etched using the second resist pattern **609** and the mask pattern **608** as a mask, thereby forming a patterned second organic film **605A** having openings for forming contact holes as shown in FIG. **31(c)**. In this case, the second organic film **605** and the second resist pattern **609** are both mainly composed of organic components, the second organic film **605** is etched at a substantially equal rate to that of the second resist pattern **609**. Thus, when the second organic film **605** is dry-etched, the second resist pattern **609** is also removed simultaneously.

It should be noted that part of the second resist pattern **609** may be left in the process step of dry-etching the second organic film **605**. This is because the residual second resist pattern **609** can be removed during a subsequent process step of dry-etching the first organic film **603** (see FIG. **32(b)**).

Thereafter, the silicon dioxide film **604** is dry-etched using the patterned second organic film **605A** as a mask, thereby forming a patterned silicon dioxide film **604A** having openings for forming contact holes as shown in FIG. **32(a)**.

Then, the patterned second organic film **605A** and the first organic film **603** are dry-etched using the mask pattern **608** and the patterned silicon dioxide film **604A** as respective masks, thereby forming a patterned second organic film **605B** having wiring grooves **610** and a patterned first organic film **603A** having contact holes **611** as shown in FIG. **32(b)**.

Subsequently, the patterned silicon dioxide film **604A** and the silicon nitride film **602** are dry-etched using the mask pattern **608** and the patterned first organic film **603A** as respective masks, thereby forming a patterned silicon dioxide film **604B** having wiring grooves (see FIG. **32(c)**) and a patterned silicon nitride film **602A** having the contact holes (see FIG. **32(c)**), and exposing the first metal interconnects **601** within the contact holes **611**. Then, although not shown, an adhesion layer, made of titanium nitride, is deposited to be 50 nm thick, for example, on the wall faces of the contact holes **611** and the wiring grooves **610** as in the first embodiment. Thereafter, a metal film is deposited over the entire surface of the substrate to completely fill in the contact holes **611** and the wiring grooves **610**. In this embodiment, the metal film may be made of any arbitrary metal. For example, copper, aluminum, gold, silver, nickel, cobalt, tungsten, or an alloy thereof may be used. Also, the metal film may be deposited by any arbitrary technique. For instance, plating, CVD or sputtering may be employed. Finally, respective portions of the adhesion layer, the metal film and the mask pattern **608**, which are deposited on the patterned second organic film **605B**, are removed by a CMP technique, for example. As a result, second metal interconnects **612** and contacts **613**, connecting the first and second metal interconnects **601** and **612** together, are formed as shown in FIG. **32(c)**.

It should be noted that a multilevel interconnection structure may be formed by forming respective films, interconnects and contacts on the second metal interconnects **612** through the same process steps as those described above.

In the sixth embodiment, a patterned second organic film **605B**, having wiring grooves **610**, and a patterned first organic film **603A**, having contact holes **611**, are formed by a single dry-etching process using the mask pattern **608**, having the openings for forming wiring grooves, and the patterned silicon dioxide film **604A** as respective masks. That is to say, the wiring grooves **610** and the contact holes **611** can be formed during the same etching process step. Accordingly, a dual damascene structure can be formed with the increase in number of process steps suppressed.

Also, in the sixth embodiment, since the first resist pattern **607** is removed by an organic parting agent, for example, the quality of the second organic film **605** does not degrade.

Furthermore, in this embodiment, the silicon dioxide film **604** functions as an etch stopper during dry-etching the second organic film **605**. Accordingly, it is possible to prevent the quality of the first organic film **603** from being degraded.

#### MODIFIED EXAMPLE OF EMBODIMENT 6

Next, a method for forming an interconnection structure according to a modified example of the sixth embodiment will be described with reference to FIGS. **33(a)** through **33(c)**, FIGS. **34(a)** through **34(c)** and FIGS. **35(a)** through **35(c)**.

First, as shown in FIG. **33(a)**, a silicon nitride film **652** is formed over first metal interconnects **651** formed on a semiconductor substrate **650**. The silicon nitride film **652** is formed to be 50 nm thick, for example, and to protect the first metal interconnects **651** during a subsequent etching process step. Thereafter, a first organic film **653** (first insulating film), mainly composed of an organic component, is deposited to be 400 nm thick, for example, on the silicon nitride film **652**. Then, a silicon dioxide film **654** (second insulating film) is deposited to be 100 nm thick, for example, on the first organic film **653**. Subsequently, a second organic film **655** (third insulating film), mainly composed of an organic component, is deposited to be 300 nm thick, for example, on the silicon dioxide film **654**. And a titanium nitride film **656** (thin film) is deposited to be 50 nm thick, for example, on the second organic film **655**.

The first and second organic films **653** and **655** may be deposited by any arbitrary technique. For example, these films **653** and **655** may be deposited by a plasma CVD process using a reactive gas mainly composed of perfluorodecalin. Also, hydrocarbon films or fluorine-containing hydrocarbon films, formed by plasma CVD, coating or thermal CVD, may be used as the first and second organic films **653** and **655**. More specifically, the organic films **653** and **655** may be made of polytetrafluoroethylene, oxygen-containing polytetrafluoroethylene, polyimide fluoride or polyaryl ether.

The silicon dioxide film **654** may also be deposited by any arbitrary technique. For example, the film **654** may be deposited by a plasma CVD process.

It should be noted that a thin film showing high etch selectivity with respect to the first and second organic films **653** and **655** and the silicon dioxide film **654**, i.e., a thin film etched at a sufficiently low rate (e.g., silicon nitride film), may be used instead of the titanium nitride film **656**.

Next, as shown in FIG. **33(b)**, a first resist pattern **657**, having openings for forming wiring grooves, is formed by lithography on the titanium nitride film **656**. Thereafter, the titanium nitride film **656** is dry-etched using the first resist pattern **657** as a mask, thereby forming a mask pattern **658**, having openings for forming wiring grooves, out of the titanium nitride film **656** as shown in FIG. **33(c)**.

Subsequently, as shown in FIG. **34(a)**, the first resist pattern **657** is removed by an organic parting agent, for example. In such a case, since the second organic film **655** is not exposed to oxygen plasma, the quality of the second organic film **655** does not degrade.

Then, as shown in FIG. **34(b)**, a second resist pattern **659**, having openings for forming contact holes, is formed by lithography on the mask pattern **658**. In this modified example of the sixth embodiment, the sizes of the openings of the second resist pattern **659** for forming contact holes are set larger than designed sizes of the contact holes in respective directions vertical and parallel to the wiring grooves for forming second metal interconnects. The reason thereof will be described later.

Next, the second organic film **655** is dry-etched using the second resist pattern **659** and the mask pattern **658** as a mask, thereby forming a patterned second organic film **655A** having openings for forming contact holes as shown in FIG. **34(c)**. In this case, the second organic film **655** and the second resist pattern **659** are both mainly composed of organic components, the second organic film **655** is etched at a substantially equal rate to that of the second resist pattern **659**. Thus, when the second organic film **655** is dry-etched, the second resist pattern **659** is also removed

31

simultaneously. It should be noted that part of the second resist pattern **659** may be left in the process step of dry-etching the second organic film **655**. This is because the residual second resist pattern **659** can be removed during a subsequent process step of dry-etching the first organic film **653** (see FIG. **35(b)**).

Thereafter, the silicon dioxide film **654** is dry-etched using the patterned second organic film **655A** as a mask, thereby forming a patterned second silicon dioxide film **654A** having openings for forming contact holes as shown in FIG. **35(a)**.

Then, the patterned second organic film **655A** and the first organic film **653** are dry-etched using the mask pattern **658** and the patterned silicon dioxide film **654A** as respective masks, thereby forming a patterned second organic film **655B** having wiring grooves **660** and a patterned first organic film **653A** having contact holes **661** as shown in FIG. **35(b)**.

Subsequently, the patterned silicon dioxide film **654A** and the silicon nitride film **652** are dry-etched using the mask pattern **658** and the patterned first organic film **653A** as respective masks, thereby forming a patterned silicon dioxide film **654B** having wiring grooves (see FIG. **35(c)**) and a patterned silicon nitride film **652A** having the contact holes (see FIG. **35(c)**), and exposing the first metal interconnects **651** within the contact holes **661**. Then, although not shown, an adhesion layer, made of titanium nitride, is deposited to be 50 nm thick, for example, on the wall faces of the contact holes **661** and the wiring grooves **660** as in the first embodiment. Thereafter, a metal film is deposited over the entire surface of the substrate to completely fill in the contact holes **661** and the wiring grooves **660**. In this embodiment, the metal film may be made of any arbitrary metal. For example, copper, aluminum, gold, silver, nickel, cobalt, tungsten, or an alloy thereof may be used. Also, the metal film may be deposited by any arbitrary technique. For instance, plating, CVD or sputtering may be employed. Finally, respective portions of the adhesion layer, the metal film and the mask pattern **658**, which are deposited on the patterned second organic film **655B**, are removed by a CMP technique, for example. As a result, second metal interconnects **662** and contacts **663**, connecting the first and second metal interconnects **651** and **662** together, are formed as shown in FIG. **35(c)**.

It should be noted that a multilevel interconnection structure may be formed by forming respective films, interconnects and contacts on the second metal interconnects **662** through the same process steps as those described above.

In this modified example of the sixth embodiment, the sizes of the openings of the second resist pattern **659** for forming contact holes are set larger than designed sizes of the contact holes in respective directions vertical and parallel to the wiring grooves for forming the second metal interconnects. Accordingly, even if the openings of the second resist pattern **659** for forming contact holes have misaligned with the openings of the mask pattern **658** for forming wiring grooves, the openings of the patterned second organic film **655A** for forming contact holes can be formed to be self-aligned with the openings of the mask pattern **658** for forming wiring grooves. This is because the openings of the patterned second organic film **655A** for forming contact holes are formed in respective regions where the openings of the second resist pattern **659** for forming contact holes overlap with corresponding openings of the mask pattern **658** for forming wiring grooves. Accordingly, the connection between the contacts **663** and the second metal interconnects **662** is ensured.

32

In addition, the size of the openings of the second resist pattern **659** for forming contact holes is also extended in the direction parallel to the wiring grooves for forming second metal interconnects. Thus, the contact area between the contacts **663** and the second metal interconnects **662** expands.

As a result, the contacts **663** can connect the first and second metal interconnects **651** and **662** together with a lot more certainty.

What is claimed is:

1. A method for forming an interconnection structure, comprising the steps of:

- a) forming a first insulating film over lower-level metal interconnects;
- b) forming a second insulating film, having a different composition than that of the first insulating film, over the first insulating film;
- c) forming a third insulating film, having a different composition than that of the second insulating film, over the second insulating film;
- d) forming a thin film over the third insulating film;
- e) forming a first resist pattern on the thin film, the first resist pattern having openings for forming wiring grooves;
- f) etching the thin film using the first resist pattern as a mask, thereby forming a mask pattern out of the thin film to have the openings for forming wiring grooves;
- g) forming a second resist pattern on the third insulating film, the second resist pattern having openings for forming contact holes;
- h) dry-etching the third insulating film under such conditions that the third insulating film and the first and second resist patterns are etched at a relatively high rate and that the second insulating film is etched at a relatively low rate, thereby patterning the third insulating film to have the openings for forming contact holes and removing the first and second resist patterns either entirely or partially with respective lower parts thereof left;
- i) dry-etching the second insulating film using the patterned third insulating film as a mask under such conditions that the second insulating film is etched at a relatively high rate and that the first and third insulating films are etched at a relatively low rate, thereby patterning the second insulating film to have the openings for forming contact holes;
- j) dry-etching the third and first insulating films using the mask pattern and the patterned second insulating film as respective masks under such conditions that the first and third insulating films are etched at a relatively high rate and that the mask pattern and the second insulating film are etched at a relatively low rate, thereby forming wiring grooves and contact holes in the third and first insulating films, respectively; and
- k) filling in the wiring grooves and the contact holes with a metal film, thereby forming upper-level metal interconnects and contacts connecting the lower- and upper-level metal interconnects together.

2. The method of claim 1, further comprising the step of forming a metal adhesion layer over part of the third insulating film exposed inside the wiring grooves and part of the first insulating film exposed inside the contact holes between the steps j) and k).

3. The method of claim 1, wherein the third insulating film is mainly composed of an organic component.

33

4. The method of claim 3, wherein the step c) includes forming the third insulating film by a CVD process using a reactive gas containing perfluorodecalin.

5. The method of claim 3, wherein the first insulating film is mainly composed of an organic component.

6. The method of claim 5, further comprising the step of forming an adhesion layer over part of the third insulating film exposed inside the wiring grooves and part of the first insulating film exposed inside the contact holes by a plasma process using a reactive gas containing nitrogen between the steps j) and k).

7. The method of claim 3, wherein the step a) includes forming the first insulating film by a CVD process using a reactive gas containing perfluorodecalin.

8. A method for forming an interconnection structure, comprising the steps of:

- a) forming a first insulating film over lower-level metal interconnects;
- b) forming a second insulating film, having a different composition than that of the first insulating film, over the first insulating film;
- c) forming a third insulating film, having a different composition than that of the second insulating film, over the second insulating film;
- d) forming a thin film over the third insulating film;
- e) forming a first resist pattern on the thin film, the first resist pattern having openings for forming wiring grooves;
- f) etching the thin film using the first resist pattern as a mask, thereby forming a mask pattern out of the thin film to have the openings for forming wiring grooves;
- g) forming a second resist pattern on the third insulating film, the second resist pattern having openings for forming contact holes;
- h) dry-etching the third insulating film using the first and second resist patterns as a mask under such conditions that the third insulating film is etched at a relatively high rate and that the second insulating film and the first and second resist patterns are etched at a relatively low rate, thereby patterning the third insulating film to have the openings for forming contact holes;
- i) dry-etching the second insulating film using the first and second resist patterns as a mask under such conditions that the second insulating film is etched at a relatively high rate and that the first and third insulating films and the first and second resist patterns are etched at a relatively low rate, thereby patterning the second insulating film to have the openings for forming contact holes;
- j) removing the first and second resist patterns;
- k) dry-etching the third and first insulating films using the mask pattern and the patterned second insulating film as respective masks under such conditions that the first and third insulating films are etched at a relatively high rate and that the mask pattern and the second insulating film are etched at a relatively low rate, thereby forming wiring grooves and contact holes in the third and first insulating films, respectively; and
- l) filling in the wiring grooves and the contact holes with a metal film, thereby forming upper-level metal interconnects and contacts connecting the lower- and upper-level metal interconnects together.

9. The method of claim 8, wherein the third insulating film is a low-dielectric-constant SOG film with a siloxane skeleton.

34

10. A method for forming an interconnection structure, comprising the steps of:

- a) forming a first insulating film over lower-level metal interconnects;
- b) forming a second insulating film, having a different composition than that of the first insulating film, over the first insulating film;
- c) forming a third insulating film, having a different composition than that of the second insulating film, over the second insulating film;
- d) forming a fourth insulating film, having a different composition than that of the third insulating film, over the third insulating film;
- e) forming a thin film over the fourth insulating film;
- f) forming a first resist pattern on the thin film, the first resist pattern having openings for forming wiring grooves;
- g) etching the thin film using the first resist pattern as a mask, thereby forming a mask pattern out of the thin film to have the openings for forming wiring grooves;
- h) removing the first resist pattern and then forming a second resist pattern on the fourth insulating film and the mask pattern, the second resist pattern having openings for forming contact holes;
- i) dry-etching the fourth insulating film using the second resist pattern and the mask pattern as a mask, thereby patterning the fourth insulating film to have the openings for forming contact holes;
- j) dry-etching the third insulating film using the patterned fourth insulating film as a mask, thereby patterning the third insulating film to have the openings for forming contact holes;
- k) dry-etching the patterned fourth insulating film and the second insulating film using the mask pattern and the patterned third insulating film as respective masks, thereby forming wiring grooves in the patterned fourth insulating film and patterning the second insulating film to have the openings for forming contact holes;
- l) dry-etching the patterned third insulating film and the first insulating film using the mask pattern and the patterned second insulating film as respective masks, thereby forming the wiring grooves and the contact holes in the patterned third insulating film and the first insulating film, respectively; and
- m) filling in the wiring grooves and the contact holes with a metal film, thereby forming upper-level metal interconnects and contacts connecting the lower- and upper-level metal interconnects together.

11. The method of claim 10, wherein at least one of the first and third insulating films is mainly composed of an organic component.

12. The method of claim 10, wherein a size of the openings of the second resist pattern for forming contact holes is larger than a designed size of the contact holes in a direction vertical to a direction in which the upper-level metal interconnects extend.

13. A method for forming an interconnection structure, comprising the steps of:

- a) forming a first insulating film over lower-level metal interconnects;
- b) forming a second insulating film, having a different composition than that of the first insulating film, over the first insulating film;
- c) forming a third insulating film, having a different composition than that of the second insulating film, over the second insulating film;

35

- d) forming a thin film over the third insulating film;
- e) forming a first resist pattern on the thin film, the first resist pattern having openings for forming wiring grooves;
- f) etching the thin film using the first resist pattern as a mask, thereby forming a mask pattern out of the thin film to have the openings for forming wiring grooves; 5
- g) removing the first resist pattern and then forming a second resist pattern on the third insulating film and the mask pattern, the second resist pattern having openings for forming contact holes; 10
- h) dry-etching the third insulating film using the second resist pattern and the mask pattern as a mask, thereby patterning the third insulating film to have the openings for forming contact holes; 15
- i) dry-etching the second insulating film using the patterned third insulating film as a mask, thereby patterning the second insulating film to have the openings for forming contact holes;

36

- j) dry-etching the patterned third insulating film and the first insulating film using the mask pattern and the patterned second insulating film as respective masks, thereby forming wiring grooves and contact holes in the patterned third insulating film and the first insulating film, respectively; and
- k) filling in the wiring grooves and the contact holes with a metal film, thereby forming upper-level metal interconnects and contacts connecting the lower- and upper-level metal interconnects together.

14. The method of claim 13, wherein at least one of the first and third insulating films is mainly composed of an organic component.

15. The method of claim 13, wherein a size of the openings of the second resist pattern for forming contact holes is larger than a designed size of the contact holes in a direction vertical to a direction in which the upper-level metal interconnects extend.

\* \* \* \* \*