



12 Exhibit C- EUT Photos


12.1 EUT Top View

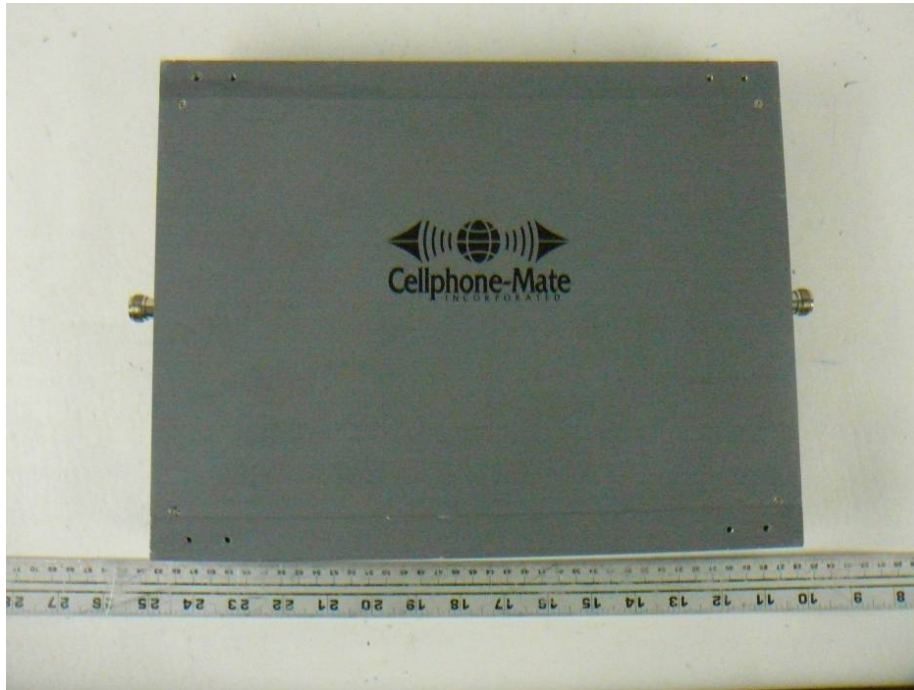

12.2 EUT - Bottom View

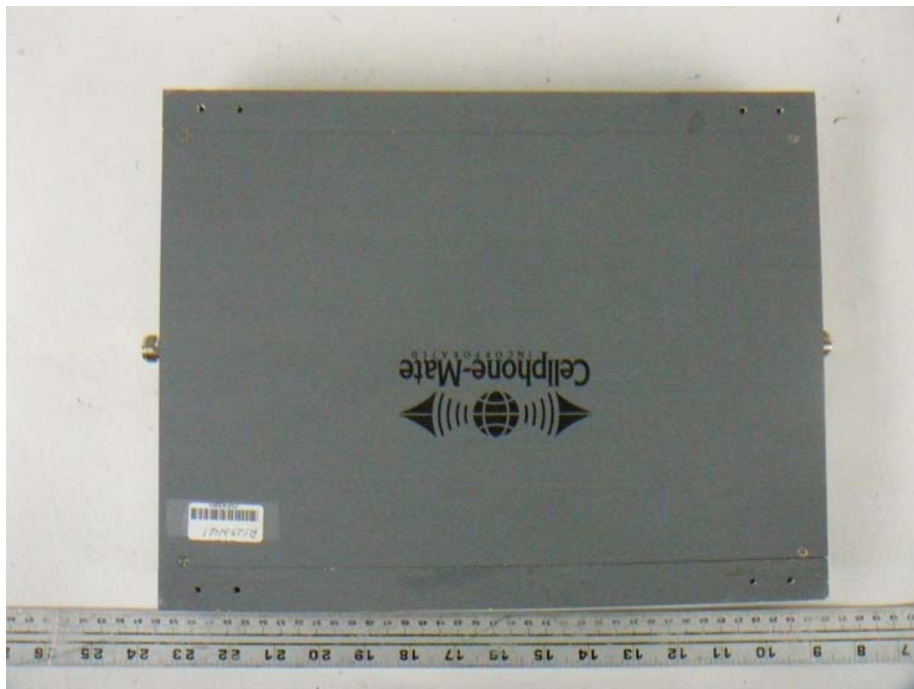

12.3 EUT - Port View (1)

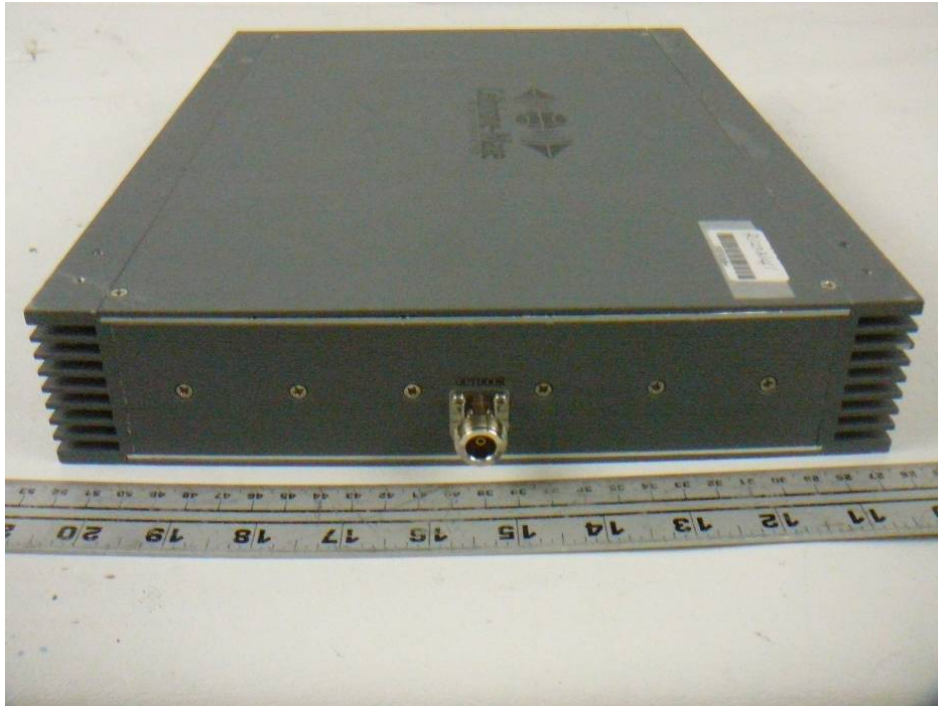

12.4 EUT - Port View (2)



12.5 EUT – Side View



**Cellphone-Mate
Inc.**

48820 Kato Rd. Suite 300B,
Fremont, CA 94538
Tel: 1 888 365 MATE (6283)
Fax: 510 996 7250
<http://www.cellphone-mate.com>



FCC Confidential Authorization

March 13th, 2012

FEDERAL COMMUNICATIONS COMMISSIONS
Authorization and Evaluation Division
7435 Oakland Mills Road
Columbia, MD 21046

Subject: Confidentiality Request regarding application for certification of
RSNCM5000

In accordance with Sections 0.457 and 0.459 of the Commission's Rules, Cellphone-Mate Inc. hereby requests long-term confidential treatment of information accompanying this application as outlined below:

- Block Diagram
- Schematics
- Operation Description
- Part list

The above materials contain proprietary and confidential information not customarily released to the public. The public disclosure of these materials provides unjustified benefits to its competitors in the market.

Sincerely,

A handwritten signature in black ink, appearing to read "Hongtao Zhan", is written above the printed name.

Hongtao Zhan
CEO
Cellphone-Mate Inc.

48820 Kato Rd. Suite 300B,
Fremont, CA 94538

10 Exhibit A - FCC ID Labeling Requirements

10.1 FCC ID Label Requirement

FCC § 2.925 Identification of equipment


(a) Each equipment covered in an application for equipment authorization shall bear a nameplate or label listing the following:

(1) FCC Identifier consisting of the two elements in the exact order specified in §2.926. The FCC Identifier shall be preceded by the term *FCC ID* in capital letters on a single line, and shall be of a type size large enough to be legible without the aid of magnification.


Example: FCC ID XXX123. XXX—Grantee Code 123—Equipment Product Code

FCC ID: XXX-XXXXXX

10.2 FCC ID Label Content

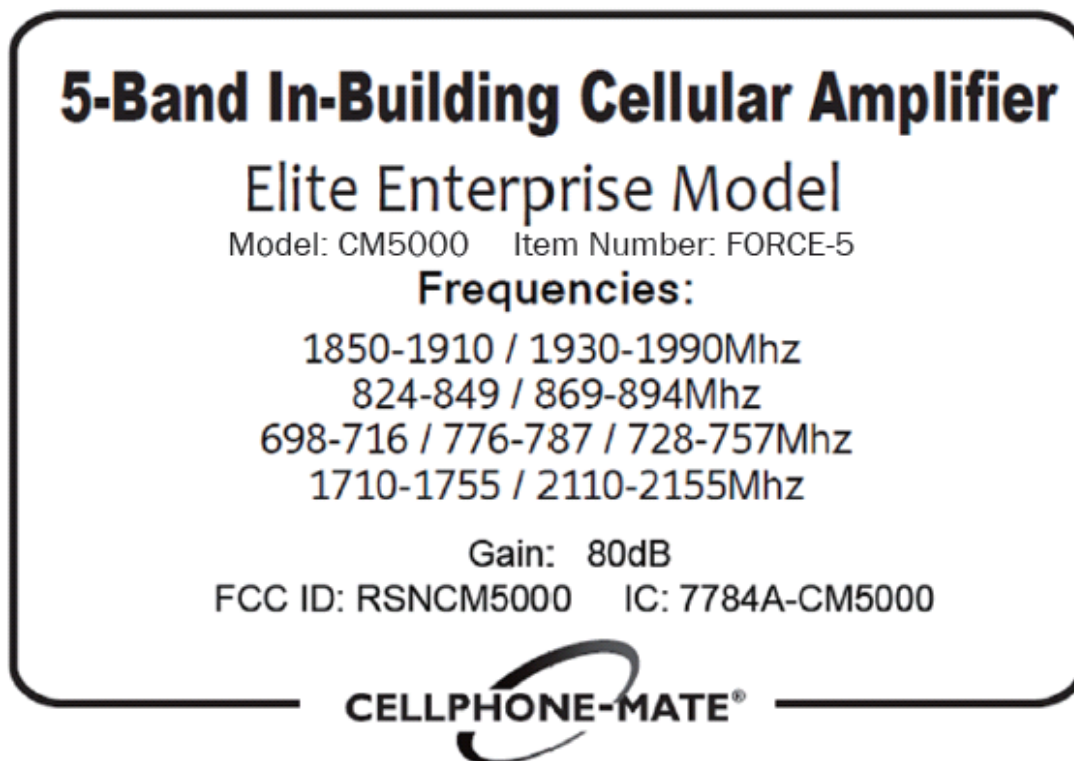


10.3 FCC Label Location on EUT

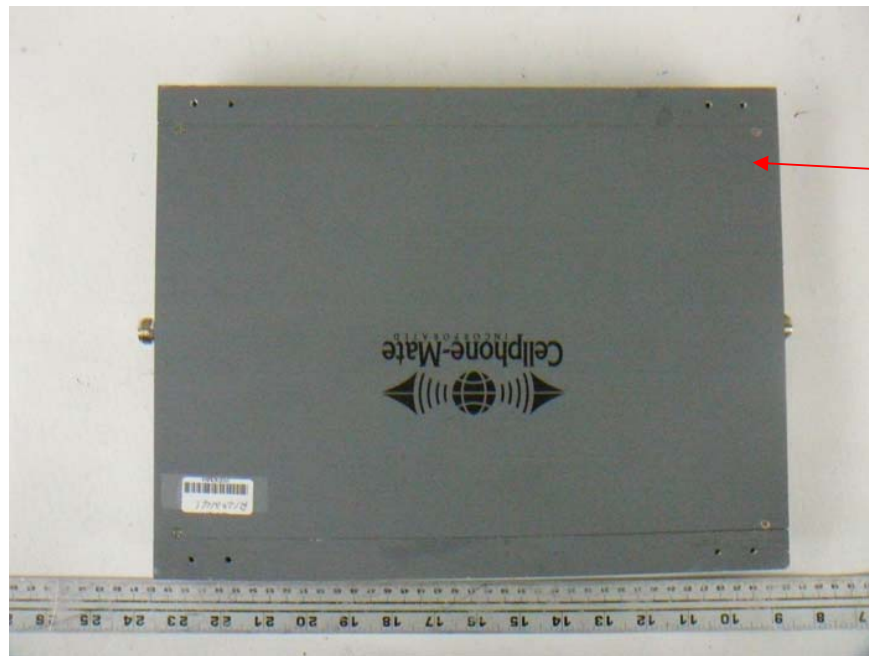


Label here


12.6 EUT – PCB Top View

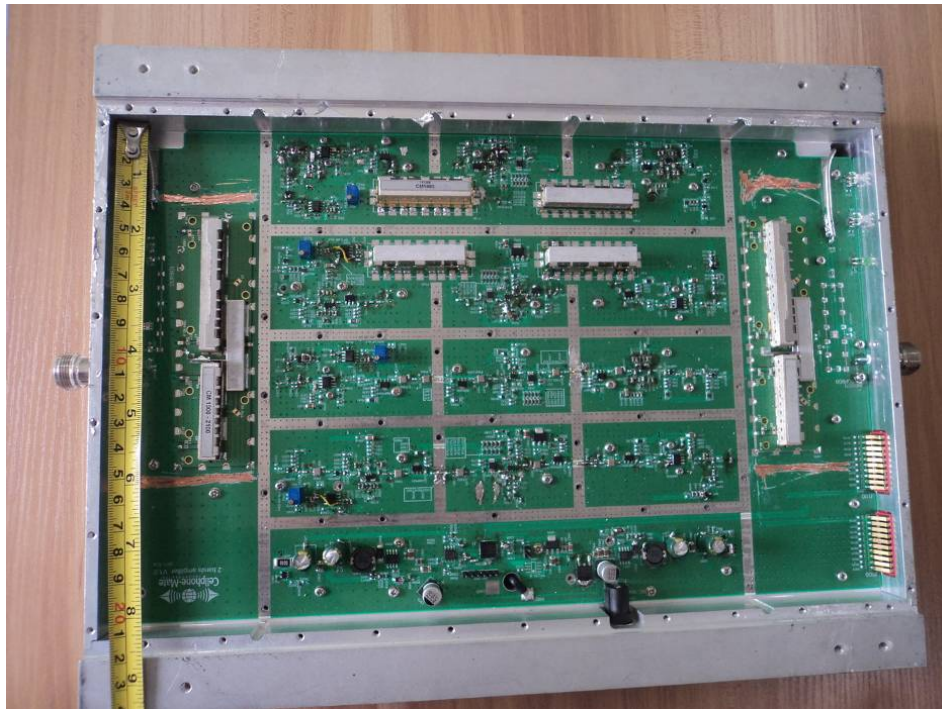

12.7 EUT – PCB Bottom View

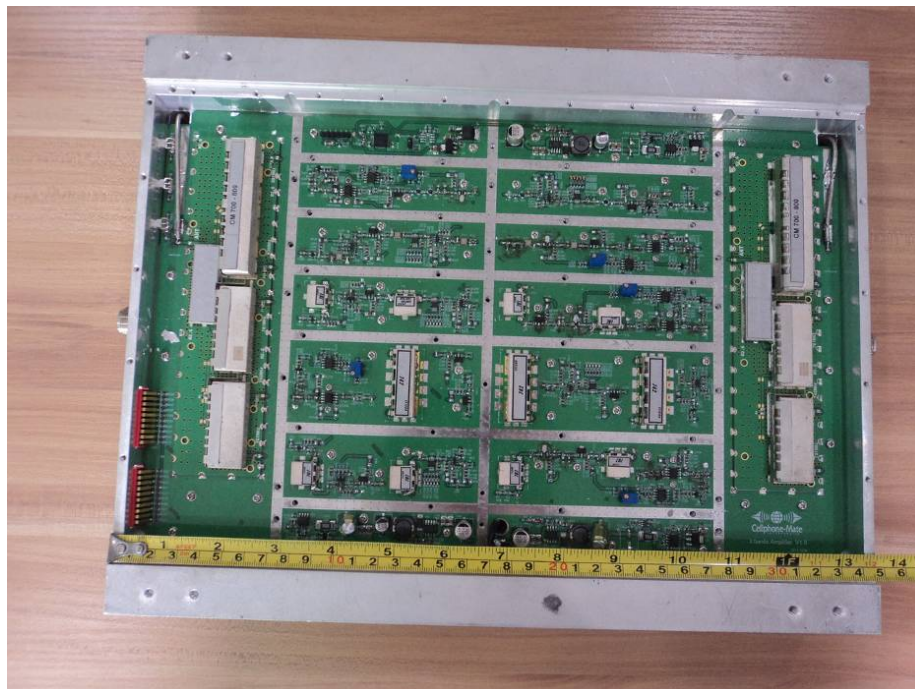

12.8 EUT – AC/DC Adapter View

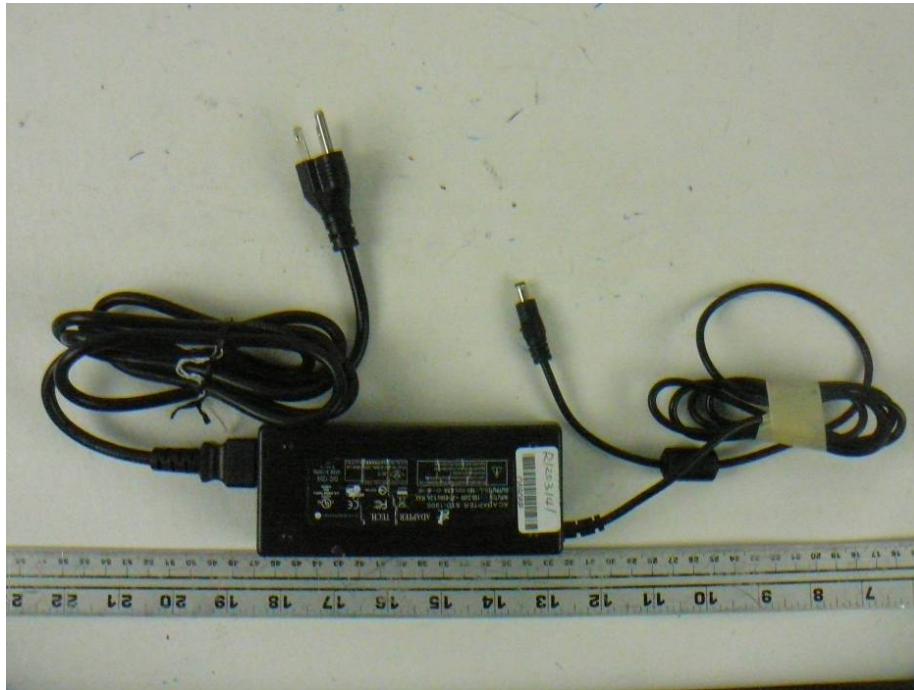

--- END OF REPORT ---



Office of Engineering and Technology

[OET Home Page](#)
[FCC](#) > [FCC E-filing](#) > [EAS](#) > Search

[FCC Site Map](#)

Filing Options

[Grantee Registration](#)
[Modify Grantee Information](#)
[Reply to Grantee Name Change Correspondence](#)
[Test Firm Accrediting Body Login](#)
[Return to 159 / Pay for a Grantee registration](#)

Reports

[Pending Application Status](#)
[Authorization Search](#)
[Grantee Search](#)
[Pending Grantee Search](#)
[TCB Search](#)
[Test Firms](#)
[Test Firm Accrediting Bodies](#)
[Equipment Class/Rule Part List](#)

Miscellaneous

[Get FRN](#)
[Knowledge Database](#)
[Hearing Aid Compatibility Status Reporting](#)
[Measurement Procedures](#)

425 results were found that match the search criteria:

Applicant Name: **surecall**

Displaying records 1 through 10 of 425.

View Form	Display Exhibits	Display Grant	Display Correspondence	Applicant Name	Address	City	State	Country	Zip Code	FCC ID	Application Purpose	Final Action Date	Lower Frequency In MHz	Upper Frequency In MHz
	Detail Summary			Cellphone-Mate Inc. dba SureCall	48346	Fremont	CA	United States	94538	RSNCM5000	Original Equipment	04/30/2012	698.0	716.0
	Detail Summary			Cellphone-Mate Inc. dba SureCall	48346	Fremont	CA	United States	94538	RSNCM5000	Original Equipment	04/30/2012	728.0	746.0
	Detail Summary			Cellphone-Mate Inc. dba SureCall	48346	Fremont	CA	United States	94538	RSNCM5000	Original Equipment	04/30/2012	746.0	757.0
	Detail Summary			Cellphone-Mate Inc. dba SureCall	48346	Fremont	CA	United States	94538	RSNCM5000	Original Equipment	04/30/2012	776.0	787.0
	Detail Summary			Cellphone-Mate Inc. dba SureCall	48346	Fremont	CA	United States	94538	RSNCM5000	Original Equipment	04/30/2012	824.0	849.0
	Detail Summary			Cellphone-Mate Inc. dba SureCall	48346	Fremont	CA	United States	94538	RSNCM5000	Original Equipment	04/30/2012	869.0	894.0
	Detail Summary			Cellphone-Mate Inc. dba SureCall	48346	Fremont	CA	United States	94538	RSNCM5000	Original Equipment	04/30/2012	1710.0	1755.0
	Detail Summary			Cellphone-Mate Inc. dba SureCall	48346	Fremont	CA	United States	94538	RSNCM5000	Original Equipment	04/30/2012	1850.0	1910.0
	Detail Summary			Cellphone-Mate Inc. dba SureCall	48346	Fremont	CA	United States	94538	RSNCM5000	Original Equipment	04/30/2012	1930.0	1990.0
	Detail Summary			Cellphone-Mate Inc. dba SureCall	48346	Fremont	CA	United States	94538	RSNCM5000	Original Equipment	04/30/2012	2110.0	2155.0

[Show Next 10 Rows](#)
[Perform Search Again](#)
Please use the Submit Inquiry link at www.fcc.gov/labhelp to send any comments or suggestions for this site

Federal Communications Commission
445 12th Street, SW
Washington, DC 20554
[More FCC Contact Information...](#)

Phone: 888-CALL-FCC (225-5322)
TTY: 888-TELL-FCC (835-5322)
Fax: 202-418-0232
E-mail: fccinfo@fcc.gov

- [Privacy Policy](#)
- [Web Policies & Notices](#)
- [Customer Service Standards](#)
- [Freedom of Information Act](#)



Office of Engineering and Technology

[FCC](#) > [FCC E-filing](#) > [EAS](#) > List Exhibits Page

[FCC Site Map](#)
[OET Home Page](#)

Filing Options

[Grantee Registration](#)
[Modify Grantee Information](#)
[Reply to Grantee Name
Change Correspondence](#)
[Test Firm Accrediting Body
Login](#)
[Return to 159 / Pay for a
Grantee registration](#)

Reports

[Pending Application Status](#)
[Authorization Search](#)
[Grantee Search](#)
[Pending Grantee Search](#)
[TCB Search](#)
[Test Firms](#)
[Test Firm Accrediting Bodies](#)
[Equipment Class/Rule Part List](#)

OET Exhibits List

8 Matches found for FCC ID RSNCM5000

View Attachment	Exhibit Type	Date Submitted to FCC	Display Type	Date Available
Confidential Request Letter	Cover Letter(s)	04/30/2012	pdf	04/30/2012
External Photos	External Photos	04/30/2012	pdf	04/30/2012
FCC ID Label	ID Label/Location Info	04/30/2012	pdf	04/30/2012
Internal Photos	Internal Photos	04/30/2012	pdf	04/30/2012
RF Exposure Information	RF Exposure Info	04/30/2012	pdf	04/30/2012
Test Report	Test Report	04/30/2012	pdf	04/30/2012
Test Setup Photos	Test Setup Photos	04/30/2012	pdf	04/30/2012
Users Manual Rev	Users Manual	01/24/2015	pdf	04/30/2012

Miscellaneous

[Get FRN](#)
[Knowledge Database](#)
[Hearing Aid Compatibility
Status Reporting](#)
[Measurement Procedures](#)

Please use the Submit Inquiry link at www.fcc.gov/labhelp to send any comments or suggestions for this site

Federal Communications Commission
445 12th Street, SW
Washington, DC 20554
[More FCC Contact Information...](#)

Phone: 888-CALL-FCC (225-5322)
TTY: 888-TELL-FCC (835-5322)
Fax: 202-418-0232
E-mail: fccinfo@fcc.gov

- [Privacy Policy](#)
- [Web Policies & Notices](#)
- [Customer Service Standards](#)
- [Freedom of Information Act](#)

9 FCC §1.1307(B)(1) & §2.1091 - RF Exposure

9.1 Applicable Standard

According to §1.1310 and §2.1091 (Mobile Devices) RF exposure is calculated.

Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

Note: f = frequency in MHz

* = Plane-wave equivalent power density

9.2 MPE Prediction

Predication of MPE limit at a given distance, Equation from OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

9.3 Test Result

Cellular Band UL:

Maximum peak output power at antenna input terminal (dBm):	<u>28.19</u>
Maximum peak output power at antenna input terminal (mW):	<u>659.17</u>
Prediction distance (cm):	<u>35</u>
Prediction frequency (MHz):	<u>836.6</u>
Antenna Gain, typical (dBi):	<u>14</u>
Cable Loss (dB)	<u>3.6</u>
Maximum Antenna Gain+ Cable Loss (numeric):	<u>10.96</u>
Power density at predication frequency and distance (mW/cm ²):	<u>0.4695</u>
MPE limit for uncontrolled exposure at predication frequency (mW/cm ²):	<u>0.5577</u>

Cellular Band DL:

Maximum peak output power at antenna input terminal (dBm):	<u>26.6</u>
Maximum peak output power at antenna input terminal (mW):	<u>457.09</u>
Prediction distance (cm):	<u>35</u>
Prediction frequency (MHz):	<u>881.6</u>
Antenna Gain, typical (dBi):	<u>14</u>
Cable Loss (dB)	<u>3.6</u>
Maximum Antenna Gain+ Cable Loss (numeric):	<u>10.96</u>
Power density at predication frequency and distance (mW/cm ²):	<u>0.3256</u>
MPE limit for uncontrolled exposure at predication frequency (mW/cm ²):	<u>0.5877</u>

PCS Band UL:

Maximum peak output power at antenna input terminal (dBm):	<u>26.38</u>
Maximum peak output power at antenna input terminal (mW):	<u>434.51</u>
Prediction distance (cm):	<u>35</u>
Prediction frequency (MHz):	<u>1880</u>
Antenna Gain, typical (dBi):	<u>14</u>
Cable Loss (dB)	<u>8.0</u>
Maximum Antenna Gain+ Cable Loss (numeric):	<u>3.98</u>
Power density at predication frequency and distance (mW/cm ²):	<u>0.1124</u>
MPE limit for uncontrolled exposure at predication frequency (mW/cm ²):	<u>1.0</u>

PCS Band DL:

Maximum peak output power at antenna input terminal (dBm):	<u>26.89</u>
Maximum peak output power at antenna input terminal (mW):	<u>488.65</u>
Prediction distance (cm):	<u>35</u>
Prediction frequency (MHz):	<u>1960</u>
Antenna Gain, typical (dBi):	<u>14</u>
Cable Loss (dB)	<u>8.0</u>
Maximum Antenna Gain+ Cable Loss (numeric):	<u>3.98</u>
Power density at predication frequency and distance (mW/cm ²):	<u>0.1264</u>
MPE limit for uncontrolled exposure at predication frequency (mW/cm ²):	<u>1.0</u>

Note: To meet 33 dBm (2 watts) EIRP limit in PCS band, the gain of antenna used with this booster must be offset by coaxial cable loss such that the antenna gain less cable loss does not exceed 6 dBi.

Lower LTE Band UL:

Maximum peak output power at antenna input terminal (dBm):	<u>23.85</u>
Maximum peak output power at antenna input terminal (mW):	<u>242.66</u>
Prediction distance (cm):	<u>35</u>
Prediction frequency (MHz):	<u>701</u>
Antenna Gain, typical (dBi):	<u>14</u>
Cable Loss (dB)	<u>3.6</u>
Maximum Antenna Gain+ Cable Loss (numeric):	<u>10.96</u>
Power density at predication frequency and distance (mW/cm ²):	<u>0.1728</u>
MPE limit for uncontrolled exposure at predication frequency (mW/cm ²):	<u>0.4673</u>

Lower LTE Band DL:

Maximum peak output power at antenna input terminal (dBm):	<u>24.19</u>
Maximum peak output power at antenna input terminal (mW):	<u>262.42</u>
Prediction distance (cm):	<u>35</u>
Prediction frequency (MHz):	<u>744</u>
Antenna Gain, typical (dBi):	<u>14</u>
Cable Loss (dB)	<u>3.6</u>
Maximum Antenna Gain+ Cable Loss (numeric):	<u>10.96</u>
Power density at predication frequency and distance (mW/cm ²):	<u>0.1869</u>
MPE limit for uncontrolled exposure at predication frequency (mW/cm ²):	<u>0.4960</u>

Upper LTE Band UL:

Maximum peak output power at antenna input terminal (dBm):	<u>23.96</u>
Maximum peak output power at antenna input terminal (mW):	<u>248.89</u>
Prediction distance (cm):	<u>35</u>
Prediction frequency (MHz):	<u>782</u>
Antenna Gain, typical (dBi):	<u>14</u>
Cable Loss (dB)	<u>3.6</u>
Maximum Antenna Gain+ Cable Loss (numeric):	<u>10.96</u>
Power density at predication frequency and distance (mW/cm ²):	<u>0.1773</u>
MPE limit for uncontrolled exposure at predication frequency (mW/cm ²):	<u>0.5213</u>

Upper LTE Band DL:

Maximum peak output power at antenna input terminal (dBm):	<u>24.32</u>
Maximum peak output power at antenna input terminal (mW):	<u>270.40</u>
Prediction distance (cm):	<u>35</u>
Prediction frequency (MHz):	<u>747</u>
Antenna Gain, typical (dBi):	<u>14</u>
Cable Loss (dB)	<u>3.6</u>
Maximum Antenna Gain+ Cable Loss (numeric):	<u>10.96</u>
Power density at predication frequency and distance (mW/cm ²):	<u>0.1926</u>
MPE limit for uncontrolled exposure at predication frequency (mW/cm ²):	<u>0.4980</u>

AWS Band UL:

Maximum peak output power at antenna input terminal (dBm):	<u>24.53</u>
Maximum peak output power at antenna input terminal (mW):	<u>283.79</u>
Prediction distance (cm):	<u>35</u>
Prediction frequency (MHz):	<u>1732.4</u>
Antenna Gain, typical (dBi):	<u>14</u>
Cable Loss (dB)	<u>9</u>
Maximum Antenna Gain+ Cable Loss (numeric):	<u>3.16</u>
Power density at predication frequency and distance (mW/cm ²):	<u>0.0583</u>
MPE limit for uncontrolled exposure at predication frequency (mW/cm ²):	<u>1.0</u>

AWS Band DL:

Maximum peak output power at antenna input terminal (dBm):	<u>24.49</u>
Maximum peak output power at antenna input terminal (mW):	<u>281.19</u>
Prediction distance (cm):	<u>35</u>
Prediction frequency (MHz):	<u>2112.4</u>
Antenna Gain, typical (dBi):	<u>14</u>
Cable Loss (dB)	<u>9</u>
Maximum Antenna Gain+ Cable Loss (numeric):	<u>3.16</u>
Power density at predication frequency and distance (mW/cm ²):	<u>0.0578</u>
MPE limit for uncontrolled exposure at predication frequency (mW/cm ²):	<u>1.0</u>

Note: To meet 30 dBm (1watts) EIRP limit in AWS band, the gain of antenna used with this booster must be offset by coaxial cable loss such that the antenna gain less cable loss does not exceed 5 dBi.


FCC PART 22H, 24E, & 27
TEST AND MEASUREMENT REPORT

For

Cellphone-Mate, Inc

48820 Kato Rd. Suite 300B
Fremont, CA 94538

FCC ID: RSNCM5000

Report Type: Original Report	Product Type: In-building Amplifier
Test Engineer: <u>Lionel Lara</u> 	
Report Number: <u>R1203141-222427</u>	
Report Date: <u>2012-04-24</u>	
Reviewed By: <u>EMC/RF Lead</u> Victor Zhang 	
Prepared By: (84) Bay Area Compliance Laboratories Corp. 1274 Anvilwood Avenue, Sunnyvale, CA 94089, USA Tel: (408) 732-9162 Fax: (408) 732 9164	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, NIST, or any agency of the Federal Government.

* This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "*" (800-2)

TABLE OF CONTENTS

1	GENERAL INFORMATION	5
1.1	PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	5
1.2	MECHANICAL DESCRIPTION	5
1.3	OBJECTIVE	5
1.4	RELATED SUBMITTAL(S)/GRANT(S).....	5
1.5	TEST METHODOLOGY	5
1.6	MEASUREMENT UNCERTAINTY.....	6
1.7	TEST FACILITY	6
2	SYSTEM TEST CONFIGURATION	7
2.1	JUSTIFICATION	7
2.2	EUT EXERCISE SOFTWARE	7
2.3	EQUIPMENT MODIFICATIONS	7
2.4	EUT INTERNAL CONFIGURATION	7
2.5	LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	7
2.6	POWER SUPPLY AND LINE FILTERS	7
2.7	INTERFACE PORTS AND CABLING	7
3	SUMMARY OF TEST RESULTS.....	8
4	FCC §2.1046, §22.913, §24.232 & §27.50 – RF OUTPUT POWER.....	9
4.1	APPLICABLE STANDARD	9
4.2	TEST PROCEDURE	9
4.3	TEST EQUIPMENT LIST AND DETAILS	9
4.4	TEST ENVIRONMENTAL CONDITIONS	9
4.5	TEST RESULTS	10
5	FCC §2.1049, §22.917, §24.238 & §27.53 - OCCUPIED BANDWIDTH.....	17
5.1	APPLICABLE STANDARD	17
5.2	TEST PROCEDURE	17
5.3	TEST EQUIPMENT LIST AND DETAILS	17
5.4	TEST ENVIRONMENTAL CONDITIONS	17
5.5	TEST RESULTS	18
6	FCC §2.1053, §22.917, §24.238 & §27.53 - SPURIOUS RADIATED EMISSIONS.....	55
6.1	APPLICABLE STANDARD	55
6.2	TEST PROCEDURE	55
6.3	TEST EQUIPMENT LIST AND DETAILS	55
6.4	TEST ENVIRONMENTAL CONDITIONS	56
6.5	TEST RESULTS	56
7	FCC §2.1051, §22.917, §24.238 & §27.53 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	59
7.1	APPLICABLE STANDARD	59
7.2	TEST PROCEDURE	59
7.3	TEST EQUIPMENT LIST AND DETAILS	59
7.4	TEST ENVIRONMENTAL CONDITIONS	59
7.5	TEST RESULTS	60
8	FCC §22.917 & §24.238, & §27.53 – BAND EDGE.....	80
8.1	APPLICABLE STANDARD	80
8.2	TEST PROCEDURE	80
8.3	TEST EQUIPMENT LIST AND DETAILS	80
8.4	TEST ENVIRONMENTAL CONDITIONS	80
8.5	TEST RESULTS	80

9	FCC §1.1307(B)(1) & §2.1091 - RF EXPOSURE	114
9.1	APPLICABLE STANDARD	114
9.2	MPE PREDICTION	114
9.3	TEST RESULT	114
10	EXHIBIT A - FCC ID LABELING REQUIREMENTS	118
10.1	FCC ID LABEL REQUIREMENT	118
10.2	FCC ID LABEL CONTENT	118
10.3	FCC LABEL LOCATION ON EUT	119
11	EXHIBIT B - TEST SETUP PHOTOGRAPHS.....	120
11.1	RADIATED EMISSIONS - FRONT VIEW	120
11.2	RADIATED EMISSIONS - REAR VIEW (BELOW 1 GHz).....	120
11.3	RADIATED EMISSIONS - REAR VIEW (ABOVE 1 GHz).....	121
12	EXHIBIT C- EUT PHOTOS.....	122
12.1	EUT TOP VIEW.....	122
12.2	EUT - BOTTOM VIEW	122
12.3	EUT - PORT VIEW (1).....	123
12.4	EUT - PORT VIEW (2).....	123
12.5	EUT – SIDE VIEW	124
12.6	EUT – PCB TOP VIEW.....	125
12.7	EUT – PCB BOTTOM VIEW	125
12.8	EUT – AC/DC ADAPTER VIEW	126

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	R1203141-222427	Original Report	2012-04-18

1 General Information

1.1 Product Description for Equipment under Test (EUT)

This test and measurement report was prepared on behalf of *Cellphone-Mate, Inc.* and their product *FCC ID: RSNM5000*, model: *CM5000* or the "EUT" as referred to in this report. The EUT is a wireless, mobile and fixed (in-building), five-band bi-directional amplifier for enhancing the range of cell phones. A 50 Ω n-type connector is used for connecting both outside and inside antenna to the amplifier. The uplink frequency bands are: 824-849 MHz, 1850-1910 MHz, 698-716 MHz, 776-787 MHz and 1710-1755 MHz. The downlink frequency bands are 869-894 MHz, 1930-1990 MHz, 728-746 MHz, 746-757 MHz, and 2110-2155 MHz. Modulation types are CDMA/EVDO, GSM, EDGE, WCDMA/HSPA, QPSK, 16QAM and 64QAM. The amplifier is contained in a metal case.

1.2 Mechanical Description

The EUT Approximate measurement is: 355 mm (L) x 279 mm (W) x 63 mm (H). Weight: 7250g.

The test data gathered are from typical production sample, serial number: JSEKMH.

1.3 Objective

This type approval report is prepared on behalf of *Cellphone-Mate, Inc.* in accordance with Part 2, Subpart J, Part 22 Subpart H, Part 24 Subpart E and Part 27 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC rules for RF output power, modulation characteristics, occupied bandwidth, spurious emissions at antenna terminal, field strength of spurious radiation, frequency stability, band edge, and conducted and radiated margin.

1.4 Related Submittal(s)/Grant(s)

No Related Submittals

1.5 Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services

Part 24 Subpart E – PCS

Part 27 - Miscellaneous Wireless Communications Services

Applicable Standards: TIA/EIA603-C, ANSI C63.4-2003.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory, Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

1.6 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR16-4-2:2003, The Treatment of Uncertainty in EMC Measurements, the values ranging from ± 2.0 dB for Conducted Emissions tests and ± 4.0 dB for Radiated Emissions tests are the most accurate estimates pertaining to uncertainty of EMC measurements at BACL Corp.

1.7 Test Facility

The test site used by BACL Corp. to collect radiated and conducted emissions measurement data is located at its facility in Sunnyvale, California, USA.

The test site at BACL Corp. has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997, and Article 8 of the VCCI regulations on December 25, 1997. The test site also complies with the test methods and procedures set forth in CISPR 22:2008 §10.4 for measurements below 1 GHz and §10.6 for measurements above 1 GHz as well as ANSI C63.4-2003, ANSI C63.4-2009, TIA/EIA-603 & CISPR 24:2010.

The Federal Communications Commission and Voluntary Control Council for Interference have the reports on file and they are listed under FCC registration number: 90464 and VCCI Registration No.: R-3729, C-4176, G-469, and T-1206. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL Corp. is a National Institute of Standards and Technology (NIST) accredited laboratory under the National Voluntary Laboratory Accredited Program (Lab Code 200167-0). The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2001670.htm>

2 System Test Configuration

2.1 Justification

The EUT was configured for testing according to TIA/EIA-603-C.

The final qualification test was performed with the EUT operating at normal mode.

2.2 EUT Exercise Software

NA, signal was sent through EUT using a signal generator, device was set to normal operating mode.

2.3 Equipment Modifications

No modifications were made to the EUT.

2.4 EUT Internal Configuration

Manufacturer	Description	Model	Serial Number
Cellphone-Mate, Inc	PCB Board	2Bands Amplifier V1.0	-
Cellphone-Mate, Inc.	PCB Board	3Bands Amplifier V1.0	-
Dongwan Boyang Electronic Inc.	18V 5A Power Supply	STD-1805	-
Cellphone-Mate, Inc.	External Antenna	CM288W	-

2.5 Local Support Equipment List and Details

NA

2.6 Power Supply and Line Filters

Manufacturer	Description	Model	Serial Number
Adapter Tech.	AC Adapter	STD-1805	1205

2.7 Interface Ports and Cabling

Cable Description	Length (m)	From	To
RF cable	<1	Signal Generator	Input/ EUT
RF cable	<1	Output/ EUT	Spectrum Analyzer

3 Summary Of Test Results

FCC Rules	Description of Tests	Results
§2.1046, §22.913, §24.232, §27.50	RF Output Power	Compliant
§2.1047	Modulation Characteristics	N/A
§2.1049, §22.917, §24.238, §27.53	Occupied Bandwidth	Compliant
§2.1053, §22.917, §24.238, §27.53	Spurious Radiated Emissions	Compliant
§2.1051, §22.917, §24.238, §27.53	Spurious Emissions at Antenna Terminals	Compliant
§22.917, §24.238, §27.53	Band Edge	Compliant
§2.1055	Frequency Stability	N/A
§2.1091	RF Exposure	Compliant

Note: NA, the unit is amplifier only device.

4 FCC §2.1046, §22.913, §24.232 & §27.50 – RF Output Power

4.1 Applicable Standard

According to FCC §22.913 (a), the maximum effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts.

According to FCC §24.232 , Mobile/portable stations are limited to 2 watts EIRP peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

According to FCC §27.50, the maximum effective radiated power (ERP) of fixed and base station must not exceed 1000 Watts.

4.2 Test Procedure

Conducted:

The RF output of the transmitter was connected to the signal generator and the spectrum analyzer through sufficient attenuation.

4.3 Test Equipment List and Details

Manufacturers	Descriptions	Models	Serial Numbers	Calibration Dates
Agilent	Spectrum Analyzer	E4440A	US45303156	2010-08-09 ¹
Agilent	Signal Generator	E4438C	MY45091309	2011-04-28

Note 1: Based on a two year calibration cycle.

Statement of Traceability: *BACL Corp.* attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

4.4 Test Environmental Conditions

Temperature:	21 °C
Relative Humidity:	57 %
ATM Pressure:	101.4kPa

The testing was performed by Lionel Lara on 2012-03-28 in the RF Site.

4.5 Test Results

Maximum Output Power – Modulated Signal

GSM/GPRS

Mode		Channel	Frequency (MHz)	Input Power (dBm)	Output Power (dBm)
GSM/GPRS	850 MHz Uplink	Low	824.2	-51	25.66
		Middle	836.6	-54	26.5
		High	848.8	-50	24.31
	850 MHz Downlink	Low	869.2	-55	24.4
		Middle	881.6	-57	24.84
		High	893.8	-54	24.63
	1900 MHz Uplink	Low	1850.2	-47	25.68
		Middle	1880.0	-48	26.38
		High	1909.8	-43	23.36
	1900 MHz Downlink	Low	1930.2	-49	23.4
		Middle	1960.0	-53	26.04
		High	1989.8	-55	23.82

EDGE

Mode		Channel	Frequency (MHz)	Input Power (dBm)	Output Power (dBm)
EDGE	850 MHz Uplink	Low	824.2	-52	27.05
		Middle	836.6	-55	28.19
		High	848.8	-52	25.42
	850 MHz Downlink	Low	869.2	-56	26.1
		Middle	881.6	-58	26.6
		High	893.8	-55	26.05
	1900 MHz Uplink	Low	1850.2	-50	25.71
		Middle	1880.0	-51	26.31
		High	1909.8	-46	23.34
	1900 MHz Downlink	Low	1930.2	-50	24.9
		Middle	1960.0	-54	26.89
		High	1989.8	-56	25.62

CDMA/EVDO

Mode		Channel	Frequency (MHz)	Input Power (dBm)	Output Power (dBm)
CDMA/EVDO	850 MHz Uplink	Low	824.80	-50	25.94
		Middle	836.52	-53	26.04
		High	848.20	-51	23.36
	850 MHz Downlink	Low	869.80	-56	23.19
		Middle	881.52	-58	23.69
		High	893.20	-56	23.52
	1900 MHz Uplink	Low	1850.8	-48	24.93
		Middle	1880.0	-48	25.8
		High	1909.2	-45	22.2
	1900 MHz Downlink	Low	1930.8	-52	21.81
		Middle	1960.0	-54	24.91
		High	1989.2	-55	23.4

WCDMA/HSPA

Mode		Channel	Frequency (MHz)	Input Power (dBm)	Output Power (dBm)
WCDMA/HSPA	850 MHz Uplink	Low	826.4	-50	26.01
		Middle	836.4	-53	26.04
		High	846.6	-51	23.58
	850 MHz Downlink	Low	871.4	-56	23.08
		Middle	881.4	-58	23.77
		High	891.6	-59	22.89
	1900 MHz Uplink	Low	1852.4	-49	25.29
		Middle	1880.0	-49	25.33
		High	1907.6	-46	23.31
	1900 MHz Downlink	Low	1932.4	-56	21.69
		Middle	1960.0	-54	24.93
		High	1987.6	-53	24.6

Lower LTE Band – Downlink

Mode	Modulation	Frequency (MHz)	Input Power (dBm)	Output Power (dBm)
Downlink 728-746 MHz	QPSK (1.4 MHz)	729	-62	13.27
	QPSK (1.4 MHz)	737	-68	16.27
	QPSK (1.4 MHz)	745	-59	24.1
	16QAM (1.4 MHz)	729	-62	13.29
	16QAM (1.4 MHz)	737	-67	17.34
	16QAM (1.4 MHz)	745	-59	24.11
	64QAM (1.4 MHz)	729	-62	13.29
	64QAM (1.4 MHz)	737	-67	17.26
	64QAM (1.4 MHz)	745	-59	24.07
	QPSK (3 MHz)	730	-62	14.69
	QPSK (3 MHz)	737	-67	17.28
	QPSK (3 MHz)	744	-59	24.19
	16QAM (3 MHz)	730	-63	13.62
	16QAM (3 MHz)	737	-67	17.3
	16QAM (3 MHz)	744	-59	24.18
	64QAM (3 MHz)	730	-63	13.62
	64QAM (3 MHz)	737	-67	17.29
	64QAM (3 MHz)	744	-59	24.18
	QPSK (5 MHz)	731	-62	15.95
	QPSK (5 MHz)	737	-66	18.17
	QPSK (5 MHz)	743	-59	24.16
	16QAM (5 MHz)	731	-63	14.85
	16QAM (5 MHz)	737	-67	17.14
	16QAM (5 MHz)	743	-59	24.16
	64QAM (5 MHz)	731	-63	14.85
	64QAM (5 MHz)	737	-67	17.17
	64QAM (5 MHz)	743	-60	23.69
	QPSK (10 MHz)	733	-65	16.11
	QPSK (10 MHz)	741	-65	19.25
	16QAM (10 MHz)	733	-66	15.1
	16QAM (10 MHz)	741	-65	19.24
	64QAM (10 MHz)	733	-66	15.09
	64QAM (10 MHz)	741	-65	19.24

Lower LTE Band – Uplink

Mode	Modulation	Frequency (MHz)	Input Power (dBm)	Output Power (dBm)
Uplink 698-716 MHz	QPSK (1.4 MHz)	699	-54	22.76
	QPSK (1.4 MHz)	709	-53	22.65
	QPSK (1.4 MHz)	715	-53	21.21
	16QAM (1.4 MHz)	699	-55	21.83
	16QAM (1.4 MHz)	709	-53	22.5
	16QAM (1.4 MHz)	715	-53	21.22
	64QAM (1.4 MHz)	699	-55	21.86
	64QAM (1.4 MHz)	709	-53	22.48
	64QAM (1.4 MHz)	715	-53	21.13
	QPSK (3 MHz)	700	-54	22.71
	QPSK (3 MHz)	709	-53	22.84
	QPSK (3 MHz)	714	-53	22.78
	16QAM (3 MHz)	700	-54	22.62
	16QAM (3 MHz)	709	-53	22.64
	16QAM (3 MHz)	714	-54	21.88
	64QAM (3 MHz)	700	-54	22.65
	64QAM (3 MHz)	709	-53	22.62
	64QAM (3 MHz)	714	-54	21.84
	QPSK (5 MHz)	701	-53	23.85
	QPSK (5 MHz)	709	-53	22.96
	QPSK (5 MHz)	713	-53	23.29
	16QAM (5 MHz)	701	-54	23
	16QAM (5 MHz)	709	-53	22.82
	16QAM (5 MHz)	713	-53	23.04
	64QAM (5 MHz)	701	-54	22.98
	64QAM (5 MHz)	709	-53	22.79
	64QAM (5 MHz)	713	-54	22.23
	QPSK (10 MHz)	703	-54	23.35
	QPSK (10 MHz)	711	-54	22.23
	16QAM (10 MHz)	703	-54	23.2
	16QAM (10 MHz)	711	-54	22.15
	64QAM (10 MHz)	703	-54	23.14
	64QAM (10 MHz)	711	-54	22.12

Upper LTE Band – Downlink

Mode	Modulation	Frequency (MHz)	Input Power (dBm)	Output Power (dBm)
Downlink 746-757 MHz	QPSK (1.4 MHz)	747	-59	24
	QPSK (1.4 MHz)	752	-58	23.11
	QPSK (1.4 MHz)	756	-58	20.36
	16QAM (1.4 MHz)	747	-58	24.32
	16QAM (1.4 MHz)	752	-58	23.1
	16QAM (1.4 MHz)	756	-58	20.37
	64QAM (1.4 MHz)	747	-59	23.99
	64QAM (1.4 MHz)	752	-58	23.1
	64QAM (1.4 MHz)	756	-58	20.37
	QPSK (3 MHz)	748	-58	24.08
	QPSK (3 MHz)	752	-58	23.12
	QPSK (3 MHz)	755	-59	21.16
	16QAM (3 MHz)	748	-58	24.09
	16QAM (3 MHz)	752	-58	23.11
	16QAM (3 MHz)	755	-58	22.12
	64QAM (3 MHz)	748	-59	23.83
	64QAM (3 MHz)	752	-58	23.09
	64QAM (3 MHz)	755	-58	22.13
	QPSK (5 MHz)	749	-59	23.62
	QPSK (5 MHz)	754	-57	23.09
	16QAM (5 MHz)	749	-59	23.62
	16QAM (5 MHz)	754	-57	23.1
	64QAM (5 MHz)	749	-59	23.63
	64QAM (5 MHz)	754	-57	23.09
	QPSK (10 MHz)	752	-62	20.77
	16QAM (10 MHz)	752	-63	19.71
	64QAM (10 MHz)	752	-62	20.79

Upper LTE Band – Uplink

Mode	Modulation	Frequency (MHz)	Input Power (dBm)	Output Power (dBm)
Uplink 776-787 MHz	QPSK (1.4 MHz)	777	-54	22.22
	QPSK (1.4 MHz)	782	-53	23.96
	QPSK (1.4 MHz)	786	-55	21.69
	16QAM (1.4 MHz)	777	-53	22.5
	16QAM (1.4 MHz)	782	-53	23.73
	16QAM (1.4 MHz)	786	-55	21.4
	64QAM (1.4 MHz)	777	-53	22.34
	64QAM (1.4 MHz)	782	-54	23.01
	64QAM (1.4 MHz)	786	-55	21.31
	QPSK (3 MHz)	778	-52	23.41
	QPSK (3 MHz)	782	-53	23.67
	QPSK (3 MHz)	785	-54	22.31
	16QAM (3 MHz)	778	-53	22.68
	16QAM (3 MHz)	782	-53	23.48
	16QAM (3 MHz)	785	-54	22.14
	64QAM (3 MHz)	778	-53	22.58
	64QAM (3 MHz)	782	-53	23.38
	64QAM (3 MHz)	785	-54	22.05
	QPSK (5 MHz)	779	-53	23.08
	QPSK (5 MHz)	784	-53	23.04
	16QAM (5 MHz)	779	-52	23.43
	16QAM (5 MHz)	784	-53	22.87
	64QAM (5 MHz)	779	-52	23.37
	64QAM (5 MHz)	784	-53	22.83
	QPSK (10 MHz)	782	-52	23.59
	16QAM (10 MHz)	782	-52	23.42
	64QAM (10 MHz)	782	-52	23.4

AWS Band

Mode		Channel	Frequency (MHz)	Input Power (dBm)	Output Power (dBm)
WCDMA/HSPA	1710-1755 MHz Uplink	Low	1712.4	-51	23.9
		Middle	1732.4	-52	24.53
		High	1752.6	-49	23.41
	2110-2155 MHz Downlink	Low	2112.4	-57	24.49
		Middle	2132.4	-57	24.24
		High	2152.6	-59	22.49

5 FCC §2.1049, §22.917, §24.238 & §27.53 - Occupied Bandwidth

5.1 Applicable Standard

Requirements: FCC §2.1049, §22.917, §24.238 and §27.53.

5.2 Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set to at least 1% of the BW and the 26 dB & 99% bandwidth was recorded.

5.3 Test Equipment List and Details

Manufacturers	Descriptions	Models	Serial Numbers	Calibration Dates
Agilent	Spectrum Analyzer	E4440A	US45303156	2010-08-09 ¹
Agilent	Signal Generator	E4438C	MY45091309	2011-04-28

Note 1: Based on a two year calibration cycle.

Statement of Traceability: *BACL Corp.* attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

5.4 Test Environmental Conditions

Temperature:	21 °C
Relative Humidity:	54 %
ATM Pressure:	101.4kPa

The testing was performed by Lionel Lara on 2012-04-03 in the RF Site.

5.5 Test Results

Mode		Channel	Frequency (MHz)	Emission Bandwidth Input (kHz)	Emission Bandwidth Output (kHz)
GSM	850 MHz Uplink	Middle	836.6	243.95	244.63
	850 MHz Downlink	Middle	881.6	242.79	245.44
	1900 MHz Uplink	Middle	1880.0	245.00	244.07
	1900 MHz Downlink	Middle	1960.0	243.98	245.45

Mode		Channel	Frequency (MHz)	Emission Bandwidth Input (kHz)	Emission Bandwidth Output (kHz)
EDGE	850 MHz Uplink	Middle	836.6	245.36	248.21
	850 MHz Downlink	Middle	881.6	246.42	248.00
	1900 MHz Uplink	Middle	1880.0	245.59	249.04
	1900 MHz Downlink	Middle	1960.0	245.93	254.50

Mode		Channel	Frequency (MHz)	Emission Bandwidth Input (MHz)	Emission Bandwidth Output (MHz)
CDMA	850 MHz Uplink	Middle	836.52	1.2582	1.2639
	850 MHz Downlink	Middle	881.52	1.2658	1.2647
	1900 MHz Uplink	Middle	1880.0	1.2548	1.2683
	1900 MHz Downlink	Middle	1960.0	1.2585	1.2775

Mode		Channel	Frequency (MHz)	Emission Bandwidth Input (MHz)	Emission Bandwidth Output (MHz)
WCDMA	850 MHz Uplink	Middle	836.4	4.1600	4.1407
	850 MHz Downlink	Middle	881.4	4.1887	4.1755
	1900 MHz Uplink	Middle	1880.0	4.1553	4.1868
	1900 MHz Downlink	Middle	1960.0	4.1759	4.1991

Lower LTE Band – Downlink

Mode	Modulation	Frequency (MHz)	Emission Bandwidth Input (MHz)	Emission Bandwidth Output (MHz)
Downlink 728-746 MHz	QPSK (1.4 MHz)	737	1.1003	1.0985
	16QAM (1.4 MHz)	737	1.1014	1.0991
	64QAM (1.4 MHz)	737	1.0986	1.0986
	QPSK (3 MHz)	737	2.7011	2.6938
	16QAM (3 MHz)	737	2.7016	2.7044
	64QAM (3 MHz)	737	2.7046	2.6966
	QPSK (5 MHz)	737	4.4984	4.4771
	16QAM (5 MHz)	737	4.4946	4.4772
	64QAM (5 MHz)	737	4.4916	4.4783
	QPSK (10 MHz)	733	8.9640	8.8377
	16QAM (10 MHz)	733	8.9707	8.8439
	64QAM (10 MHz)	733	8.9627	8.8280

Lower LTE Band – Uplink

Mode	Modulation	Frequency (MHz)	Emission Bandwidth Input (MHz)	Emission Bandwidth Output (MHz)
Uplink 698-716 MHz	QPSK (1.4 MHz)	709	1.0795	1.0812
	16QAM (1.4 MHz)	709	1.0780	1.0822
	64QAM (1.4 MHz)	709	1.0774	1.0836
	QPSK (3 MHz)	709	2.6904	2.6944
	16QAM (3 MHz)	709	2.6903	2.6913
	64QAM (3 MHz)	709	2.6897	2.6857
	QPSK (5 MHz)	709	4.4704	4.4850
	16QAM (5 MHz)	709	4.4694	4.4830
	64QAM (5 MHz)	709	4.4713	4.4851
	QPSK (10 MHz)	703	8.9428	8.9306
	16QAM (10 MHz)	703	8.9403	8.9526
	64QAM (10 MHz)	703	8.9443	8.9296

Upper LTE Band – Downlink

Mode	Modulation	Frequency (MHz)	Emission Bandwidth Input (MHz)	Emission Bandwidth Output (MHz)
Downlink 746-757 MHz	QPSK (1.4 MHz)	752	1.1000	1.1034
	16QAM (1.4 MHz)	752	1.0956	1.1022
	64QAM (1.4 MHz)	752	1.0969	1.1023
	QPSK (3 MHz)	752	2.7008	2.7056
	16QAM (3 MHz)	752	2.7110	2.7047
	64QAM (3 MHz)	752	2.7016	2.7029
	QPSK (5 MHz)	749	4.4966	4.4904
	16QAM (5 MHz)	749	4.4984	4.4948
	64QAM (5 MHz)	749	4.4939	4.4910
	QPSK (10 MHz)	752	8.9728	8.8649
	16QAM (10 MHz)	752	8.9633	8.8754
	64QAM (10 MHz)	752	8.9622	8.8522

Upper LTE Band – Uplink

Mode	Modulation	Frequency (MHz)	Emission Bandwidth Input (MHz)	Emission Bandwidth Output (MHz)
Uplink 776-787 MHz	QPSK (1.4 MHz)	782	1.0744	1.0836
	16QAM (1.4 MHz)	782	1.0785	1.0816
	64QAM (1.4 MHz)	782	1.0784	1.0824
	QPSK (3 MHz)	782	2.6903	2.6895
	16QAM (3 MHz)	782	2.6867	2.6896
	64QAM (3 MHz)	782	2.6863	2.6841
	QPSK (5 MHz)	779	4.4714	4.4686
	16QAM (5 MHz)	779	4.4729	4.4772
	64QAM (5 MHz)	779	4.4772	4.4741
	QPSK (10 MHz)	782	8.9362	8.9228
	16QAM (10 MHz)	782	8.9557	8.9395
	64QAM (10 MHz)	782	8.9420	8.9370

AWS Band

Mode		Channel	Frequency (MHz)	Emission Bandwidth Input (MHz)	Emission Bandwidth Output (MHz)
WCDMA	1710-1755 MHz Uplink	Middle	1732.4	4.1640	4.1702
	2110-2155 MHz Downlink	Middle	2132.4	4.1955	4.1808

Please refer to the following plots.


GSM/GPRS (Middle Channel)

Output




Input

Output

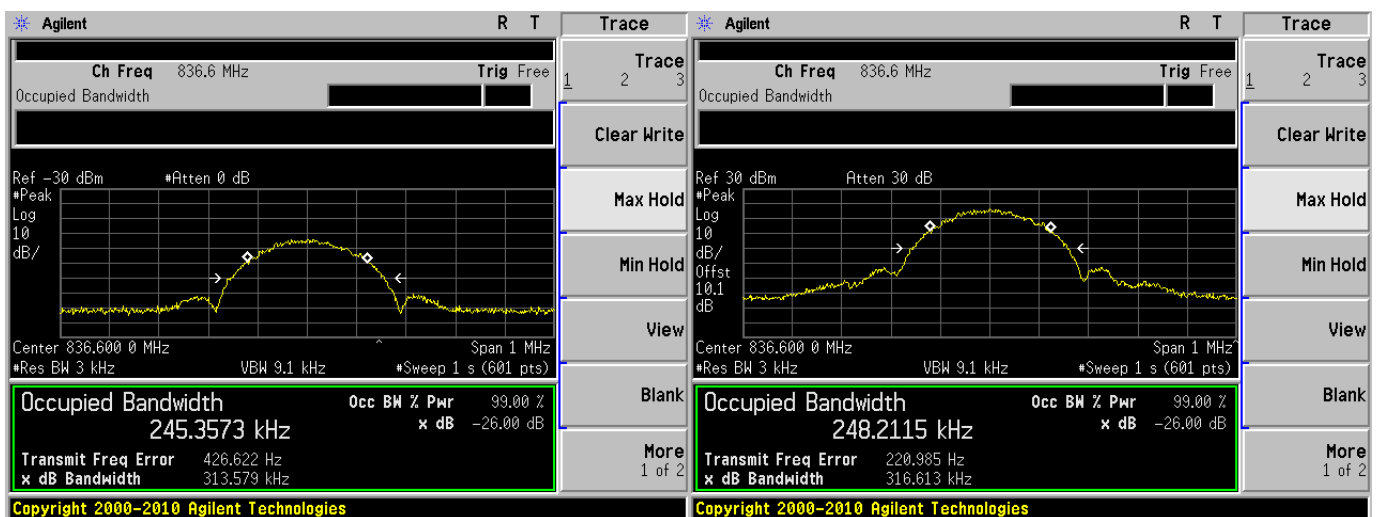


CDMA/EVDO (Middle Channel)

Input

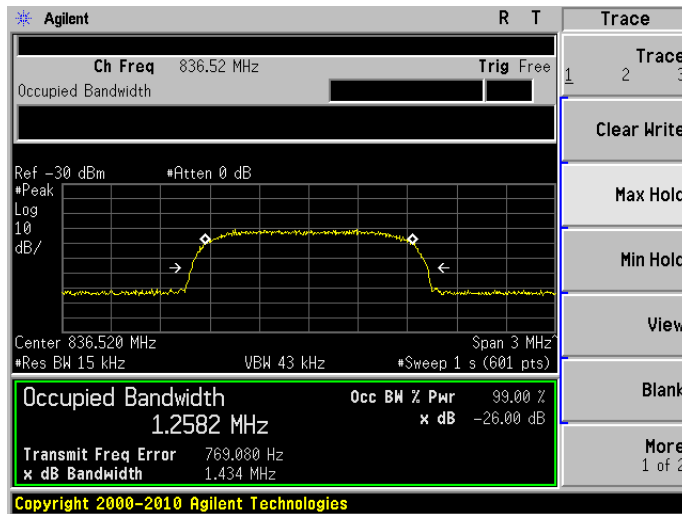


Output

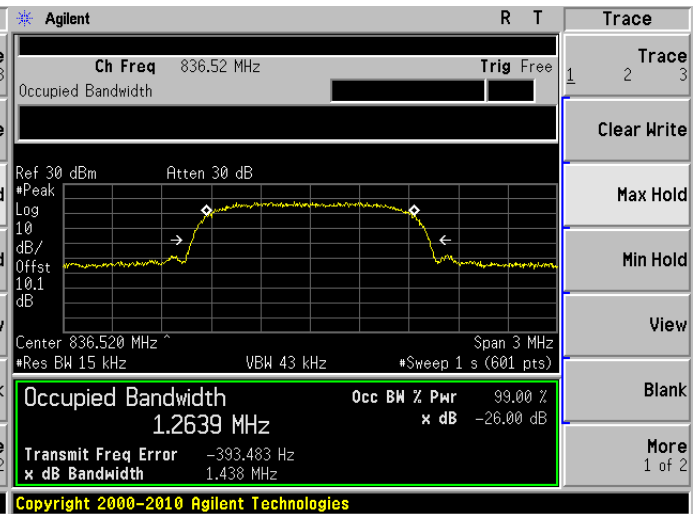


WCDMA/HSPA (Middle Channel)

Input

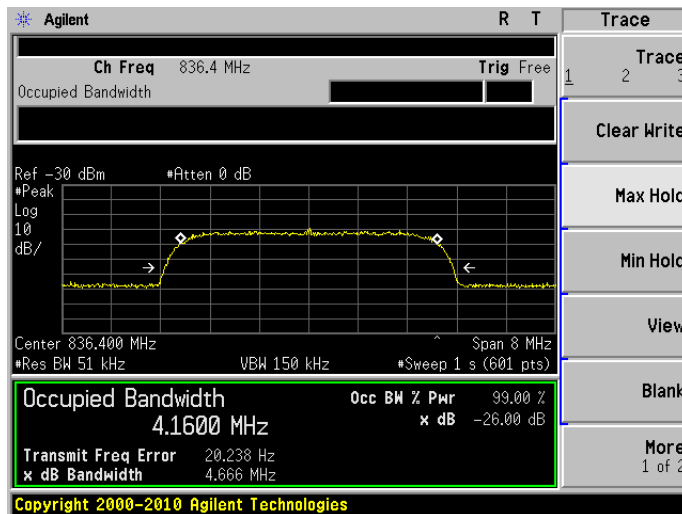

Output

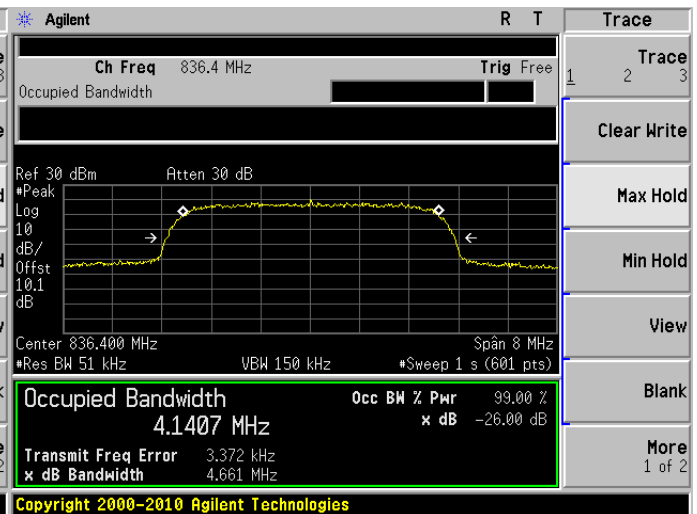


Cell Band, Downlink:

GSM/GPRS (Middle Channel)

Input


Output

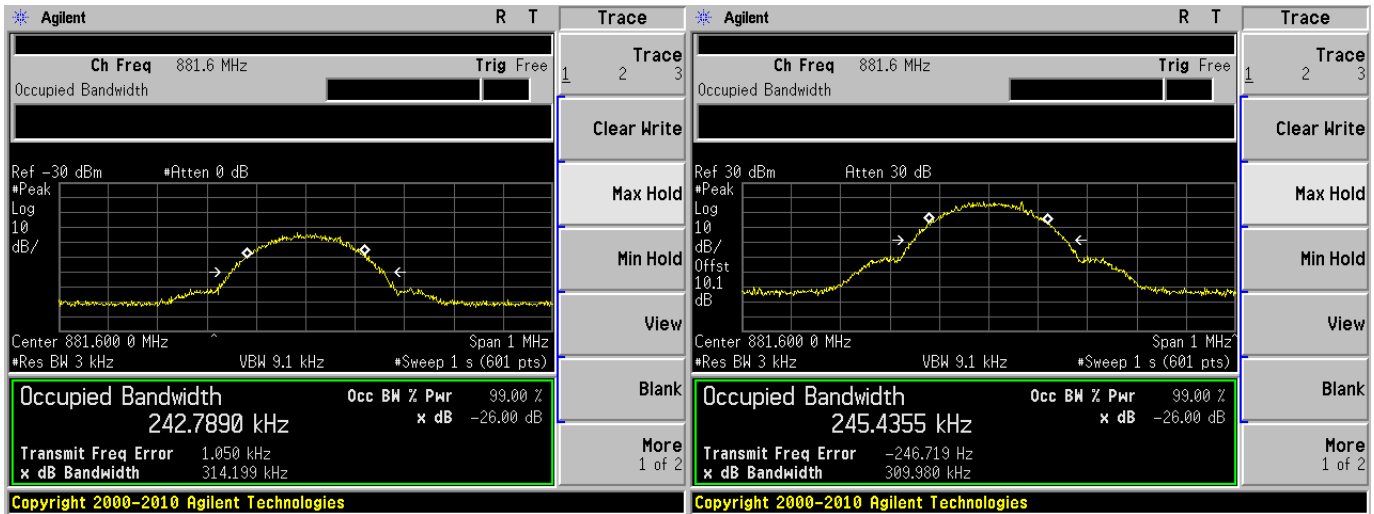

EDGE (Middle Channel)


Input

Output

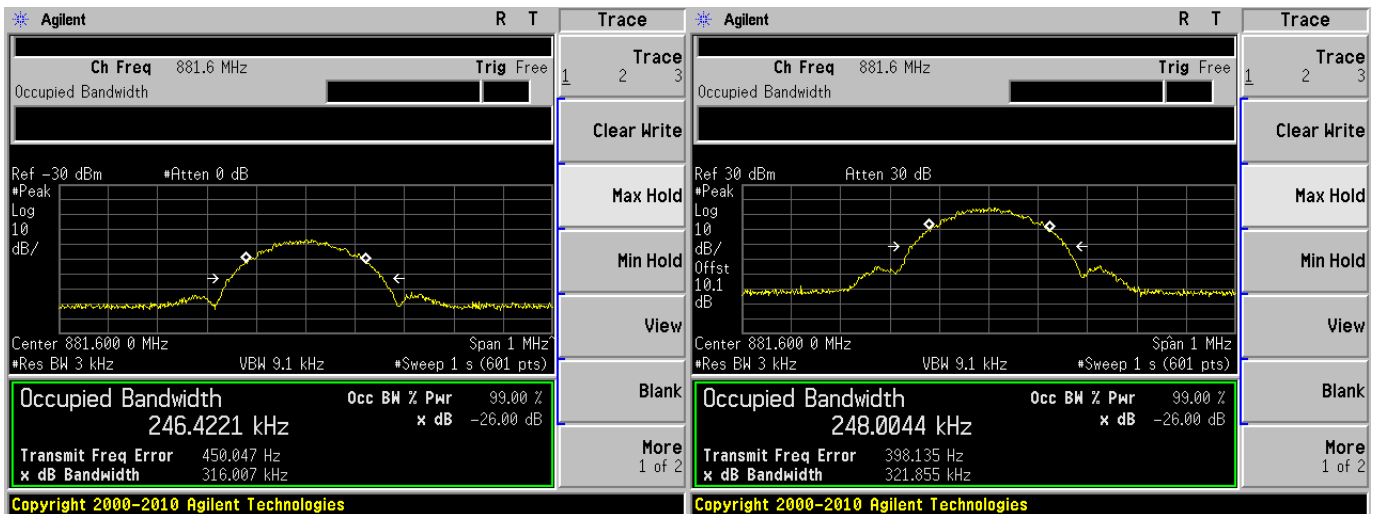


CDMA/EVDO (Middle Channel)

Input

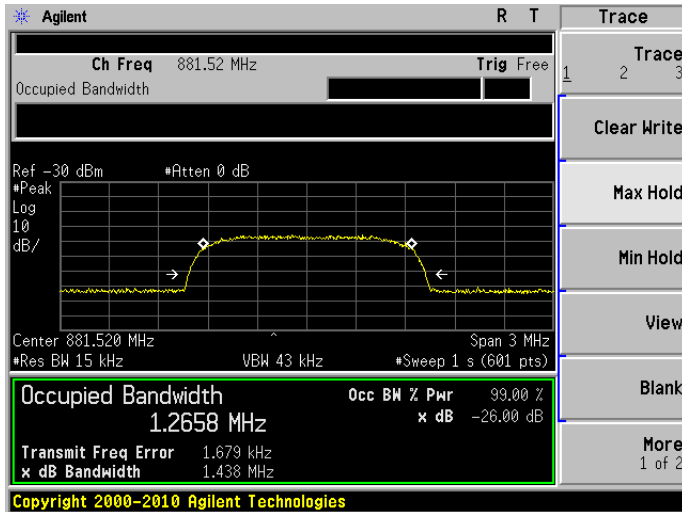


Output

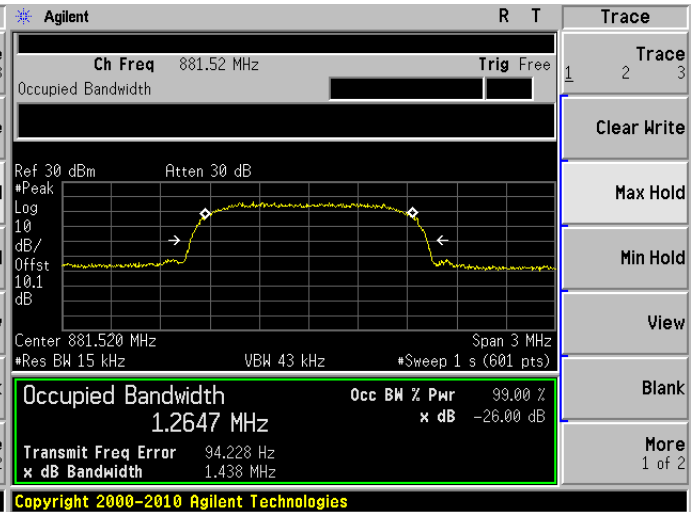


WCDMA/HSPA (Middle Channel)

Input

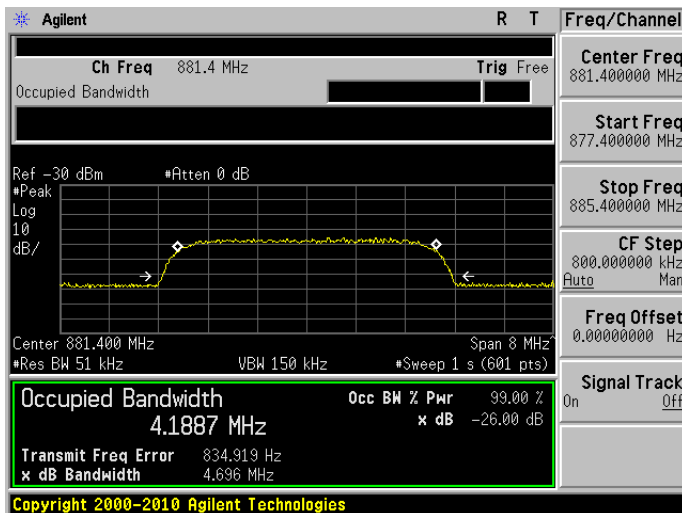

Output

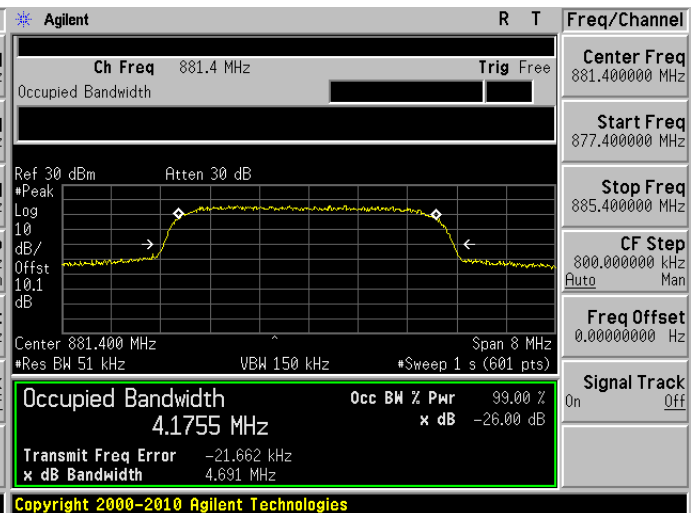

PCS Band, Uplink:

GSM/GPRS (Middle Channel)

Input


Output



EDGE (Middle Channel)


Input

Output

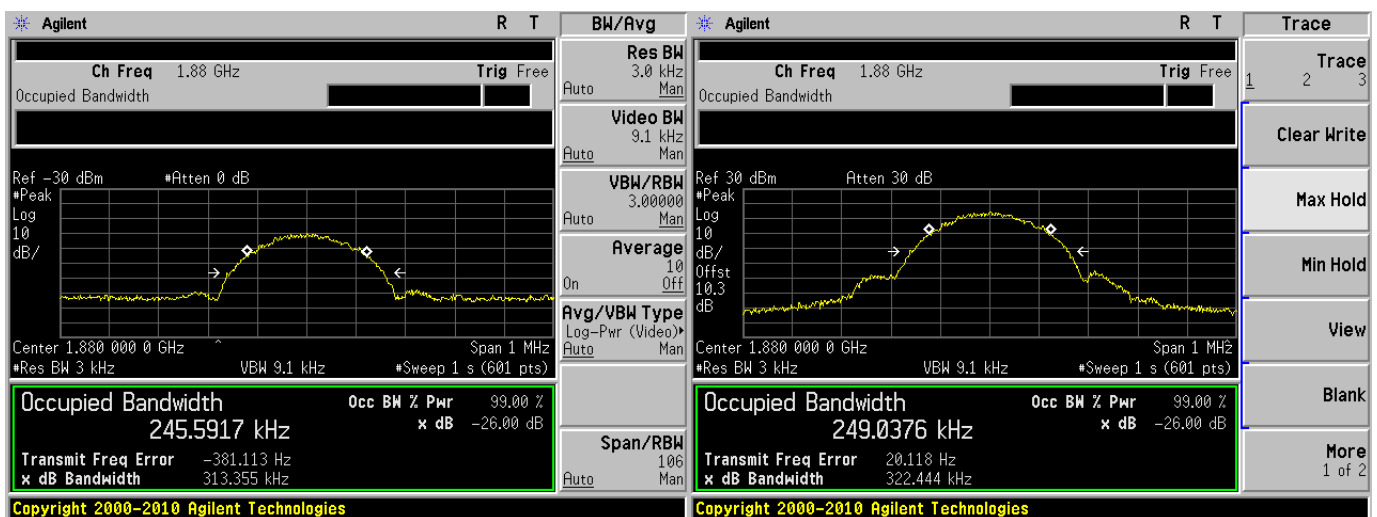


CDMA/EVDO (Middle Channel)

Input

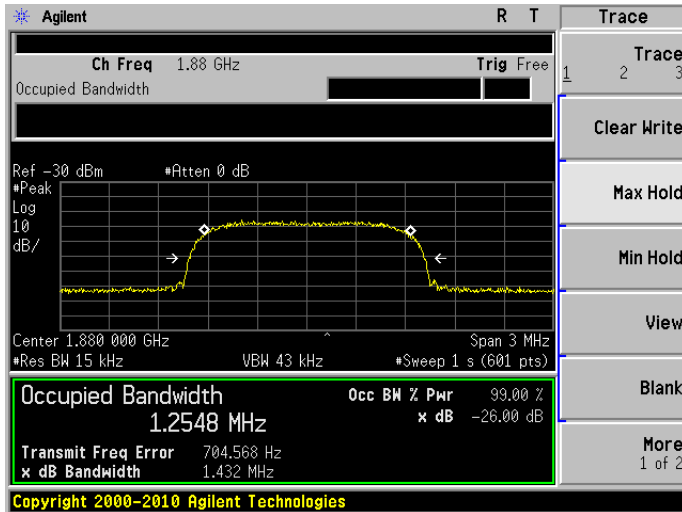


Output

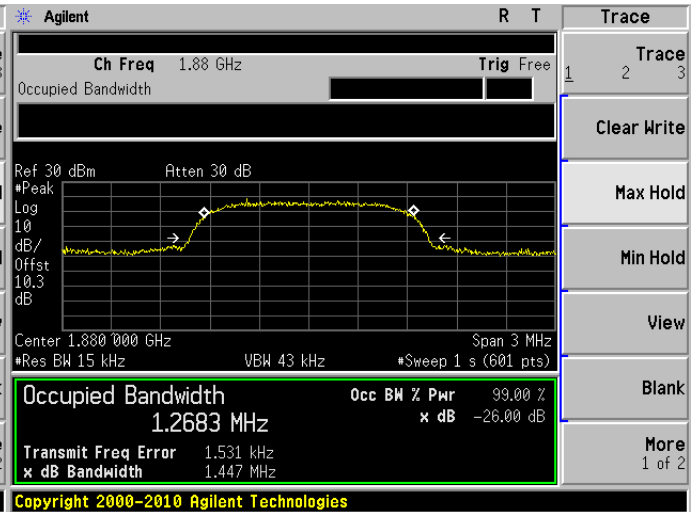


WCDMA/HSPA (Middle Channel)

Input

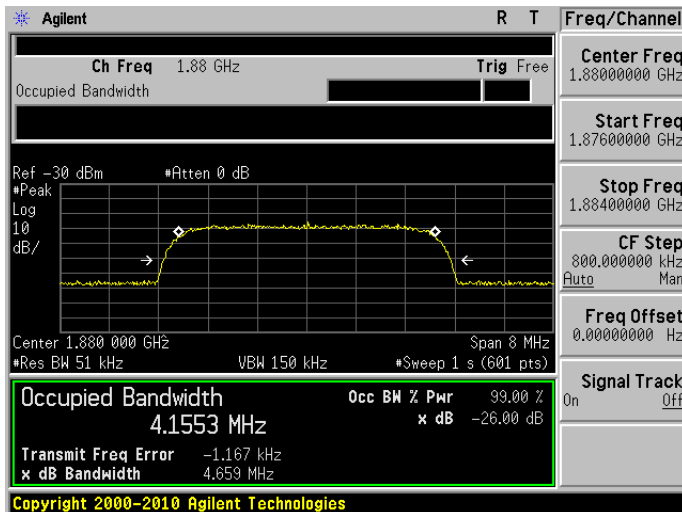

Output

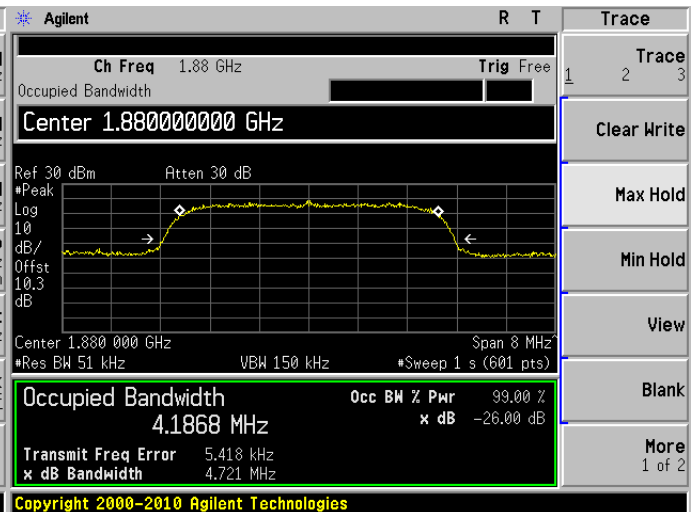

PCS Band, Downlink:

GSM/GPRS (Middle Channel)

Input

Output



EDGE (Middle Channel)


Input

Output




CDMA/EVDO (Middle Channel)

Input

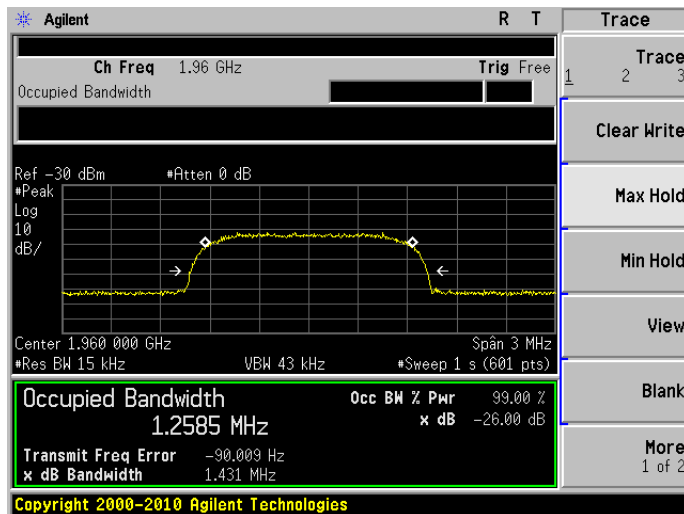


Output

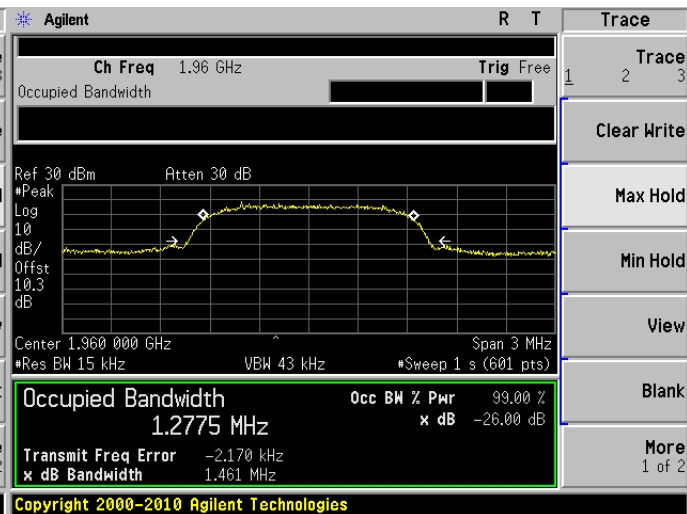


WCDMA/HSPA (Middle Channel)

Input

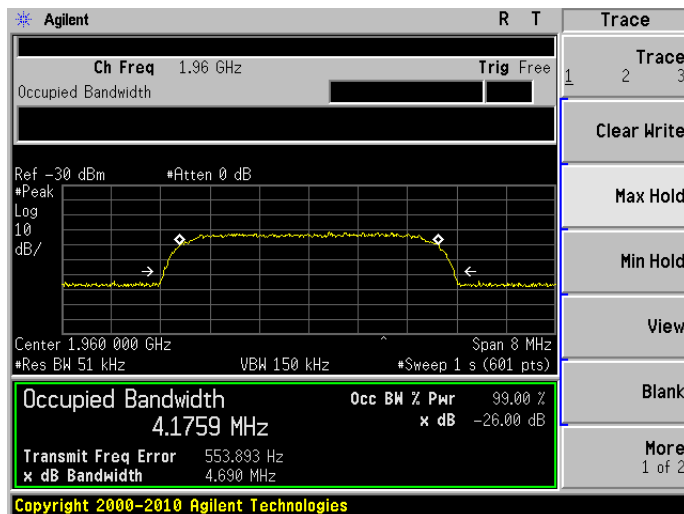

Output

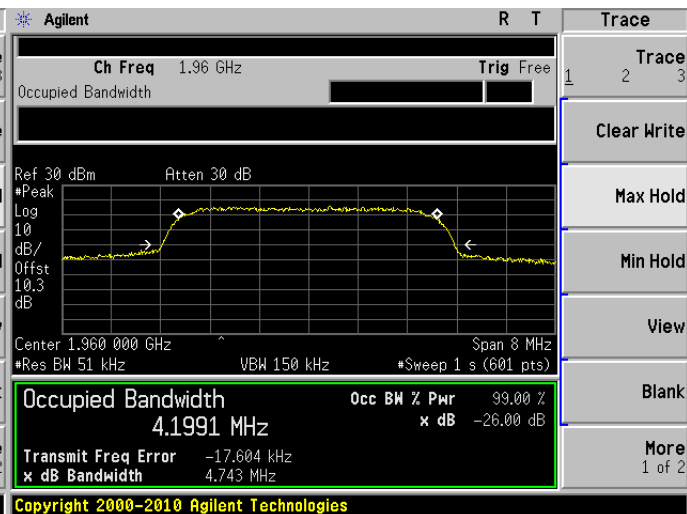


Lower LTE Band; DL: 728-746 MHz

QPSK (1.4 MHz), (Middle Channel)

Input

Output

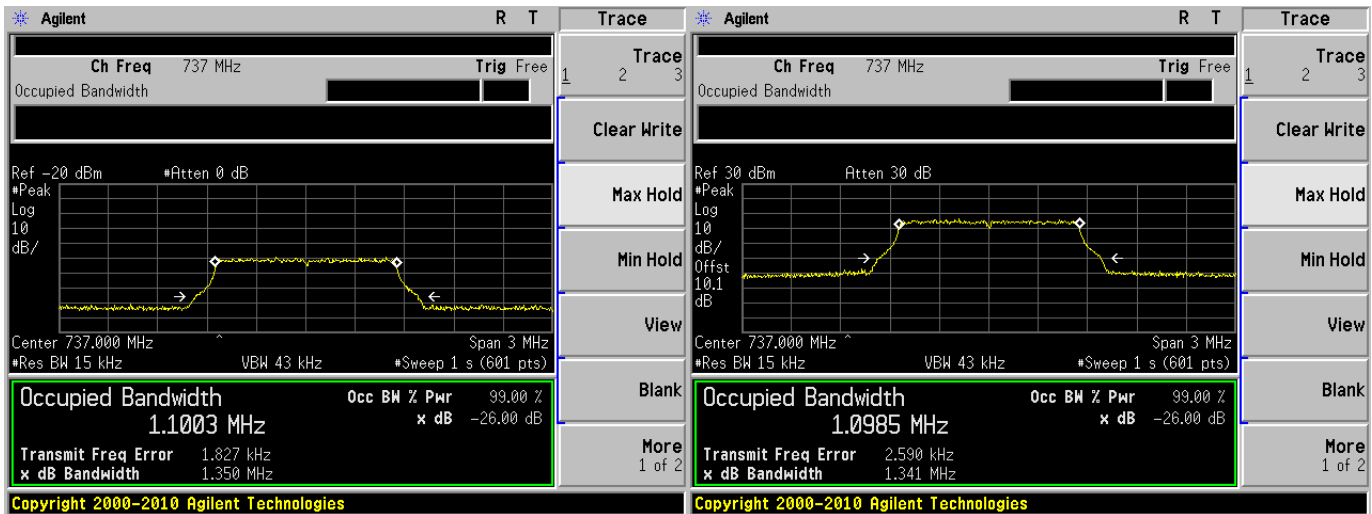

16QAM (1.4 MHz), (Middle Channel)


Input

Output




64QAM (1.4 MHz), (Middle Channel)

Input

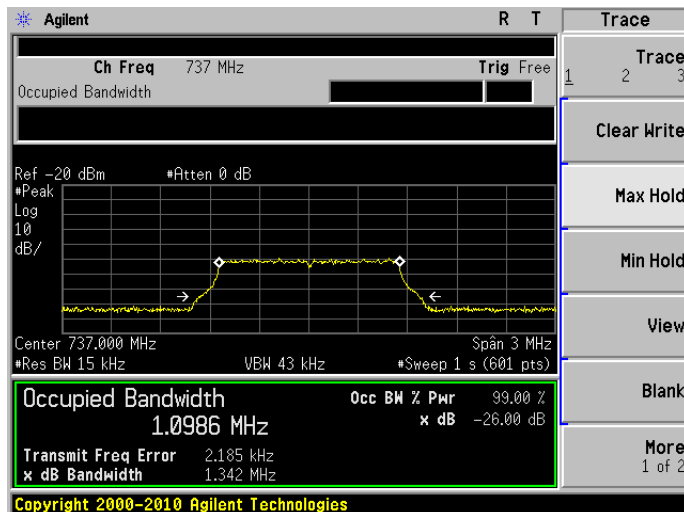


Output

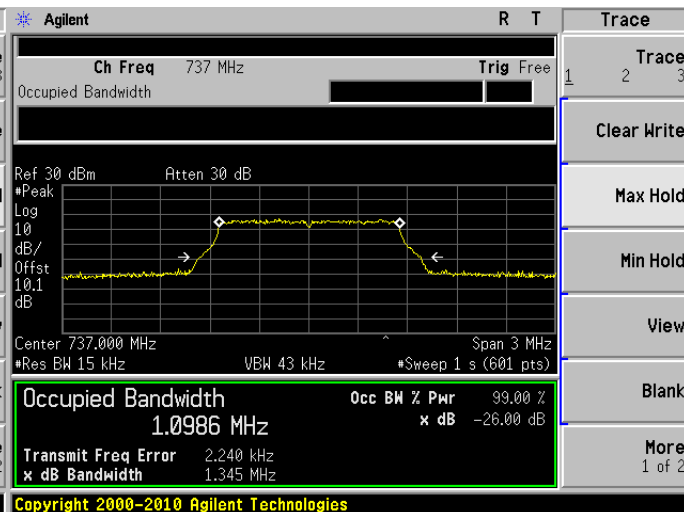


QPSK (3 MHz), (Middle Channel)

Input

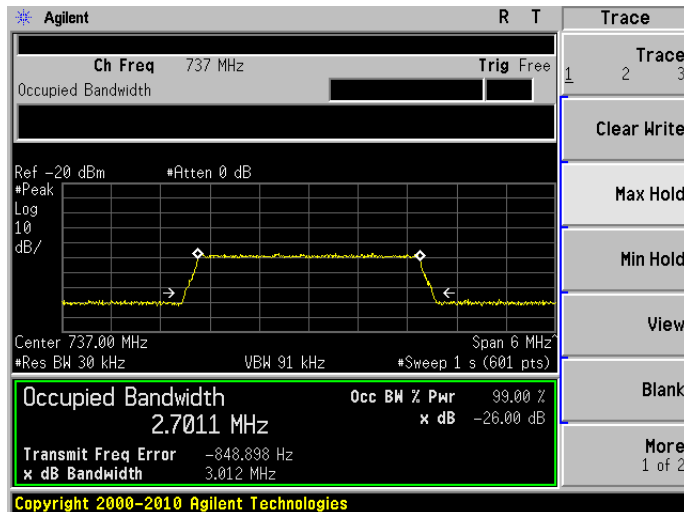


Output

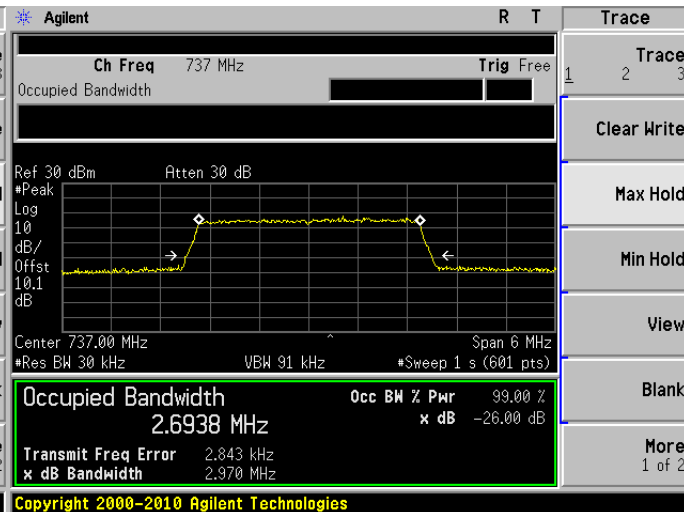

16QAM (3 MHz), (Middle Channel)

Input

Output

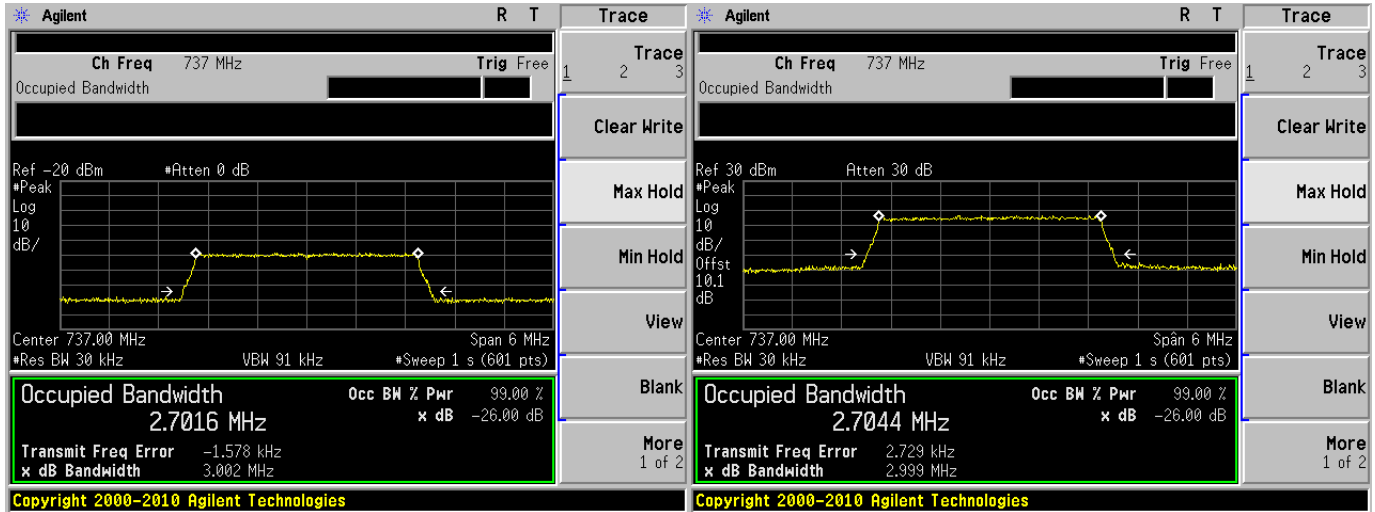

64QAM (3 MHz), (Middle Channel)

Input

Output




Output



64QAM (5 MHz), (Middle Channel)

Input

Output

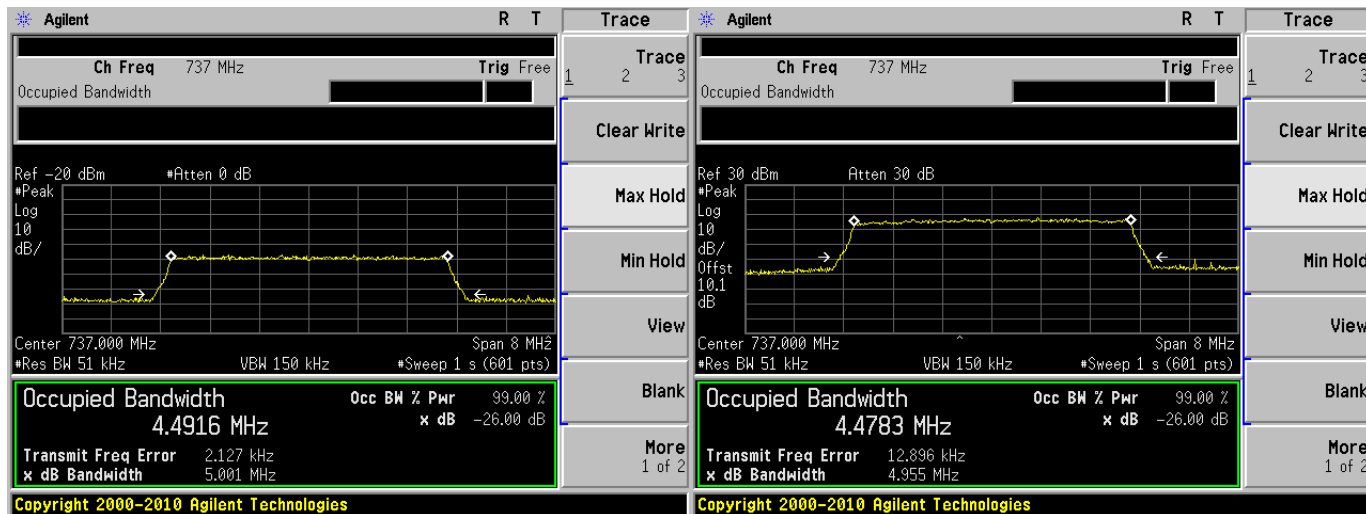

QPSK (10 MHz), (Low Channel)

Input


Output



16QAM (10 MHz), (Low Channel)

Input

Output

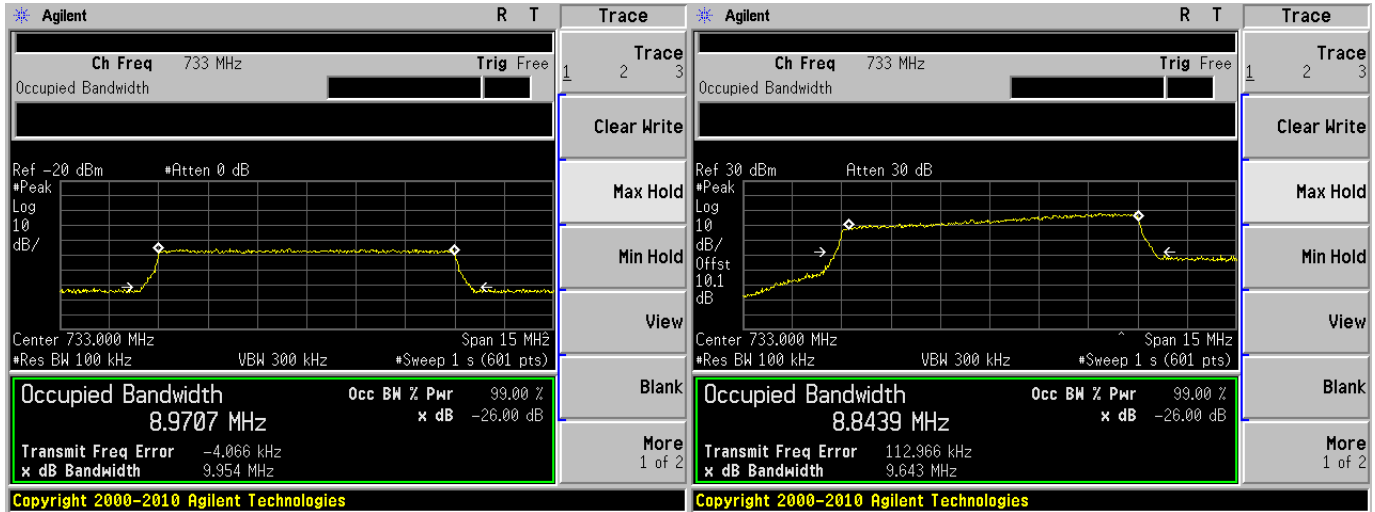

64QAM (10 MHz), (Low Channel)

Input

Output



Lower LTE Band; UL: 698-716 MHz

QPSK (1.4 MHz), (Middle Channel)


Input

Output

**16QAM (1.4 MHz), (Middle Channel)**

Input

Output

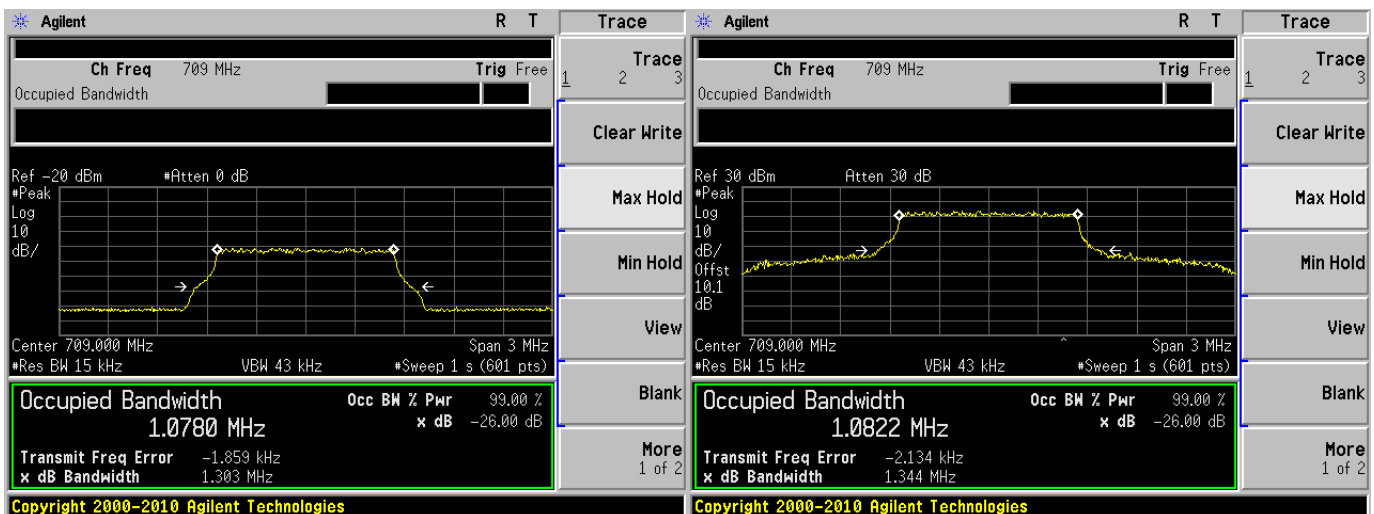

Output



Output



16QAM (3 MHz), (Middle Channel)

Input

Output



64QAM (3 MHz), (Middle Channel)


Input

Output





QPSK (5 MHz), (Middle Channel)

Input

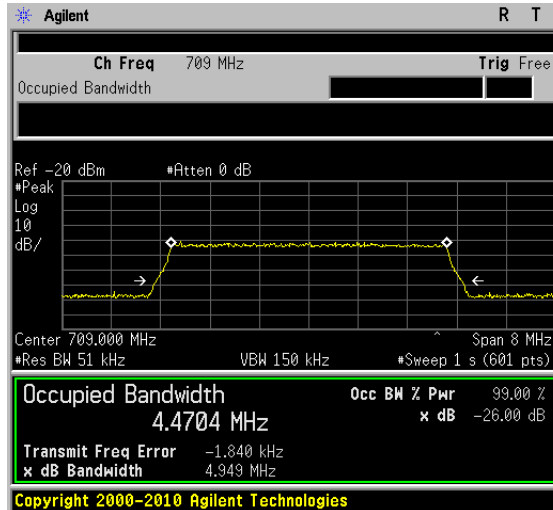


Output

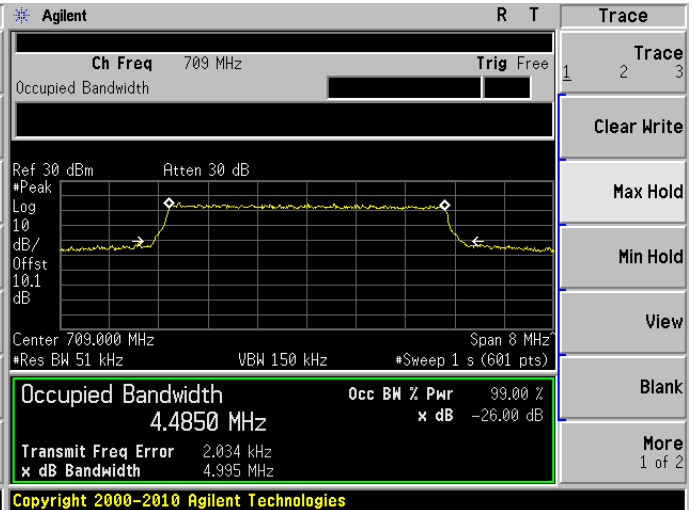
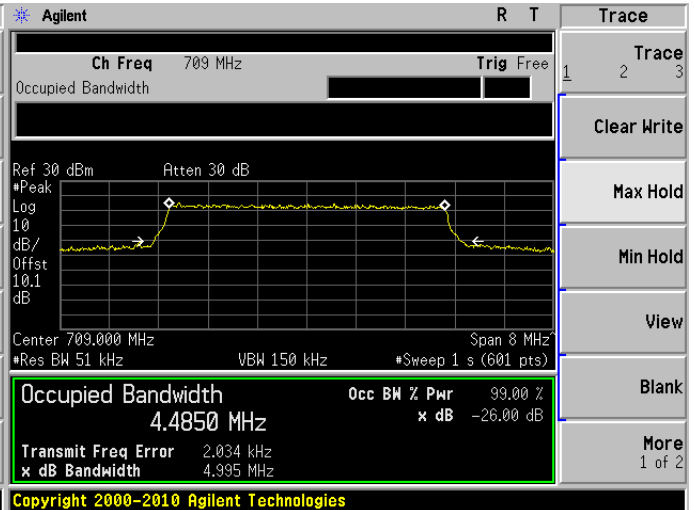


16QAM (5 MHz), (Middle Channel)

Input

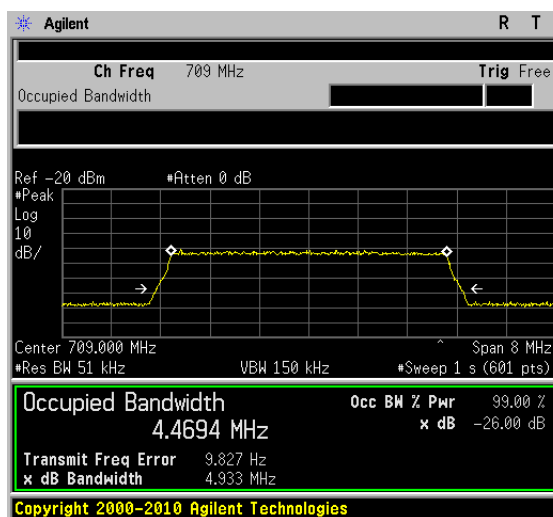


Output

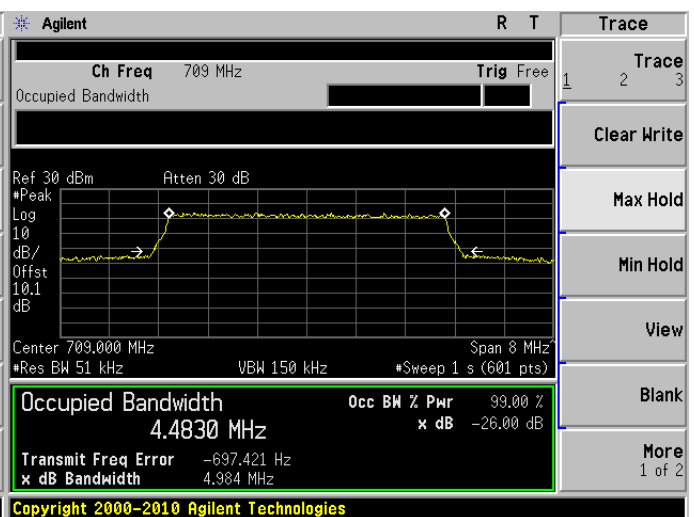
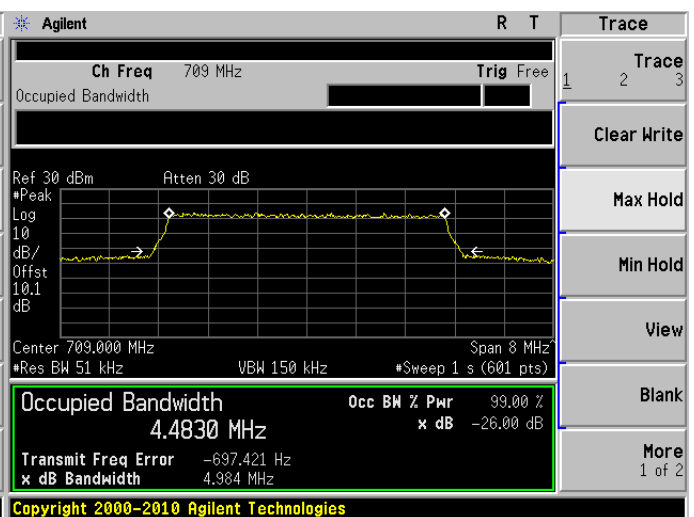


64QAM (5 MHz), (Middle Channel)

Input

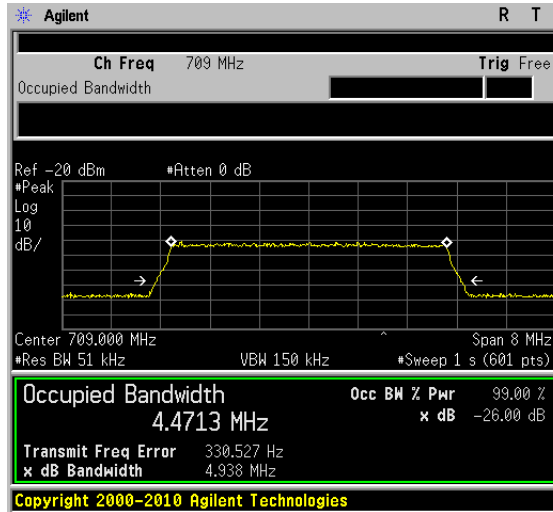


Output


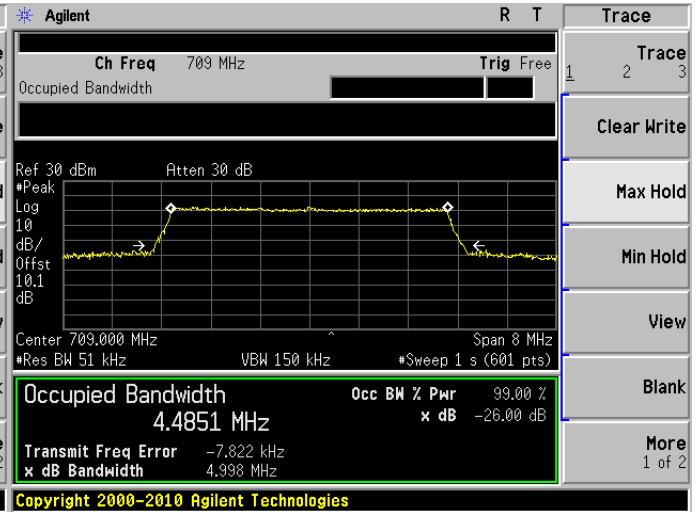


QPSK (10 MHz), (Low Channel)

Input

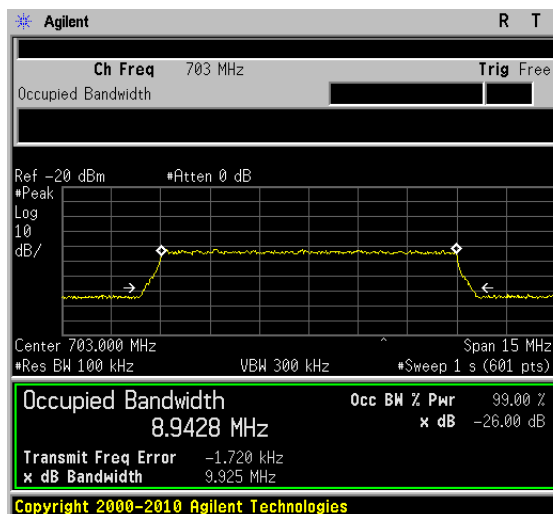


Output


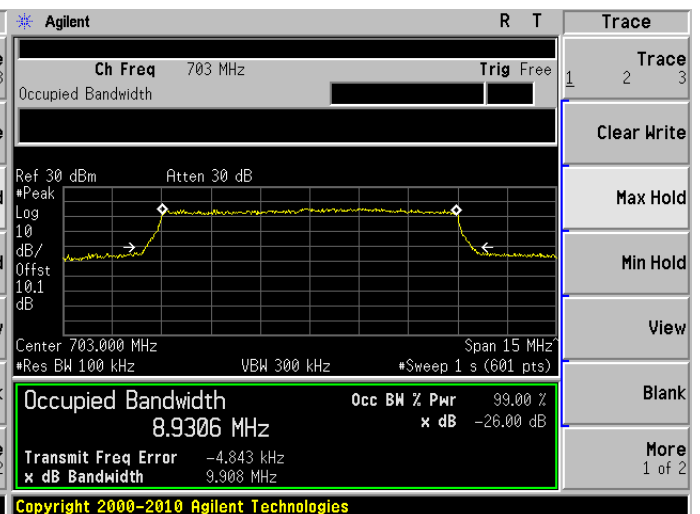


16QAM (10 MHz), (Low Channel)

Input

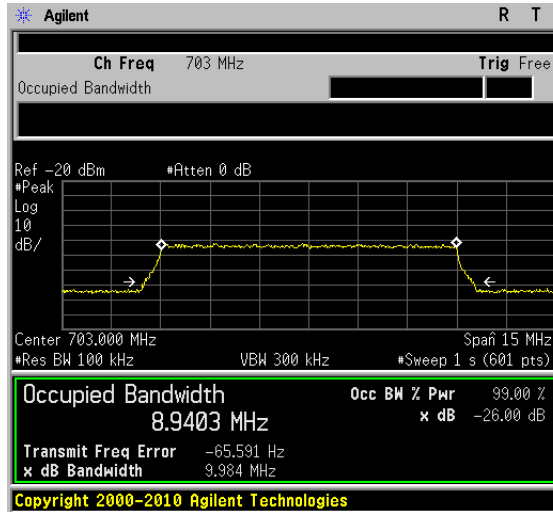


Output

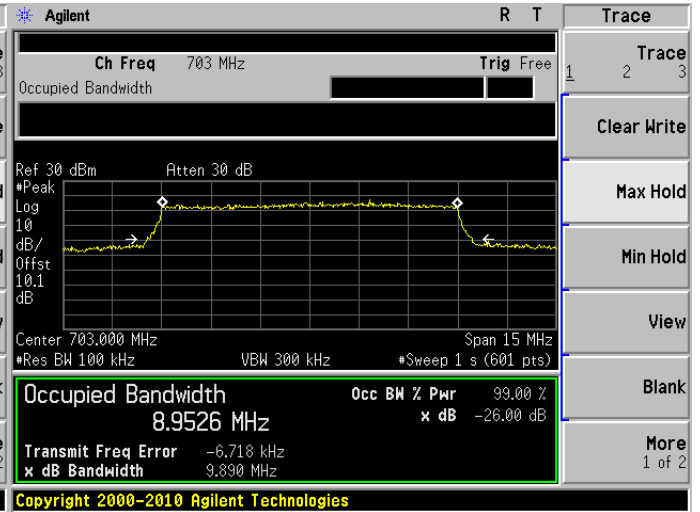
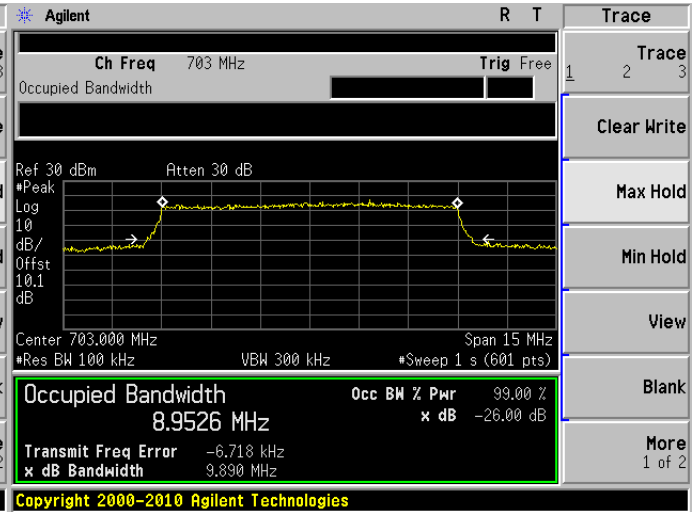


64QAM (10 MHz), (Low Channel)

Input

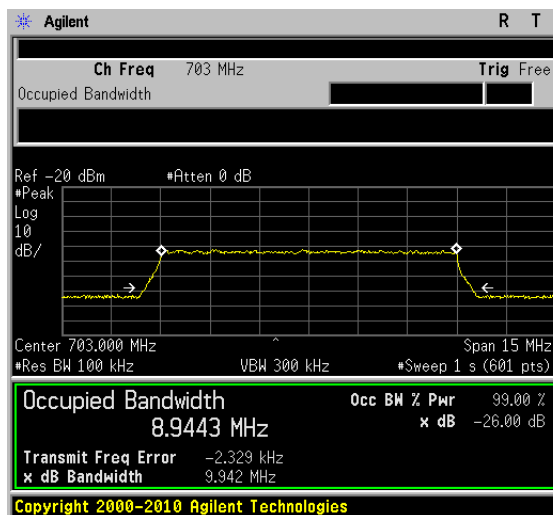

Output

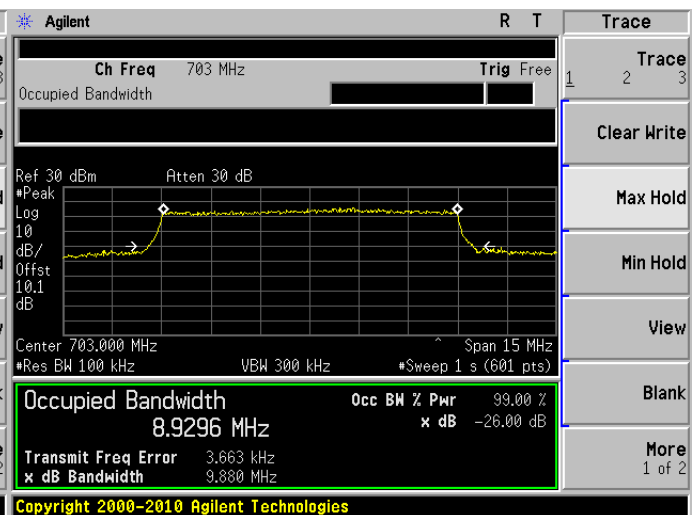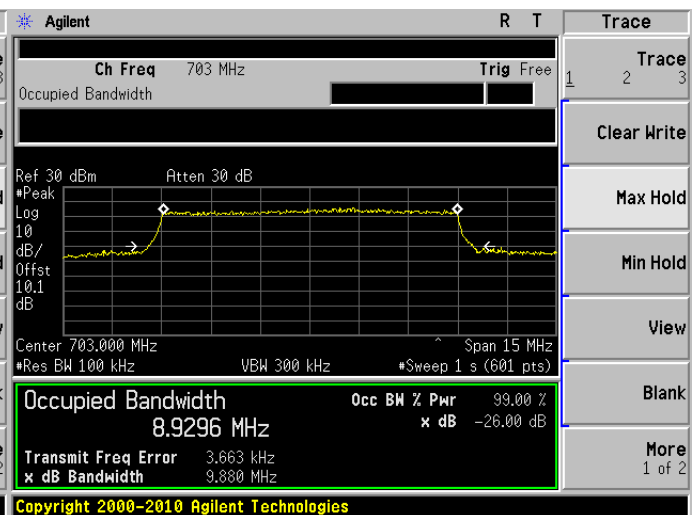


Upper LTE Band; DL: 746-757 MHz

QPSK (1.4 MHz), (Middle Channel)

Input


Output

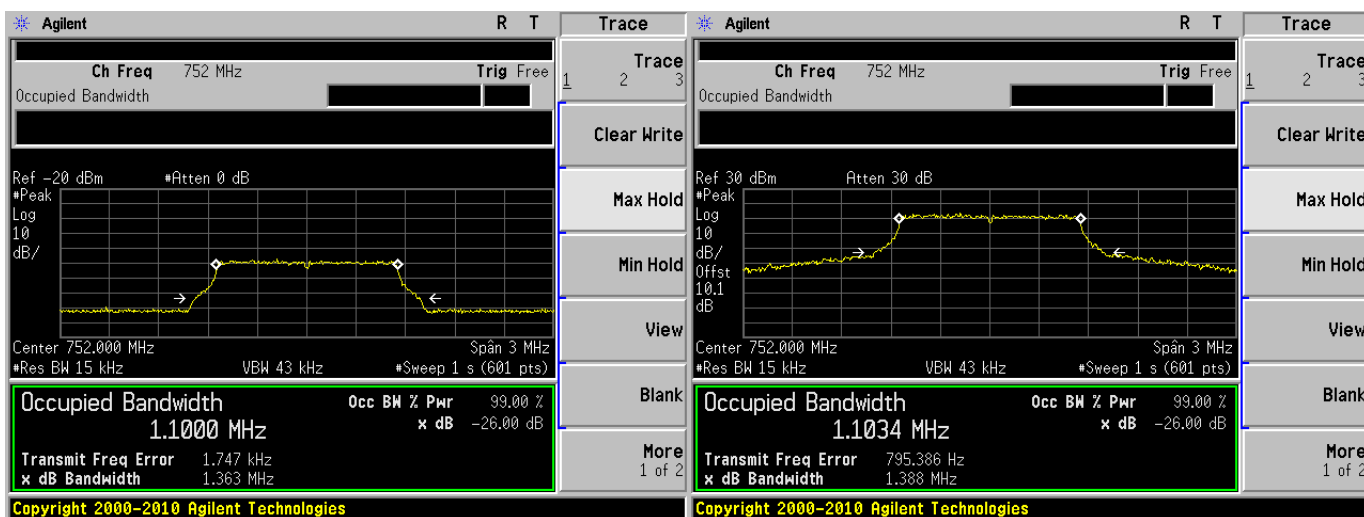

16QAM (1.4 MHz), (Middle Channel)

Input

Output

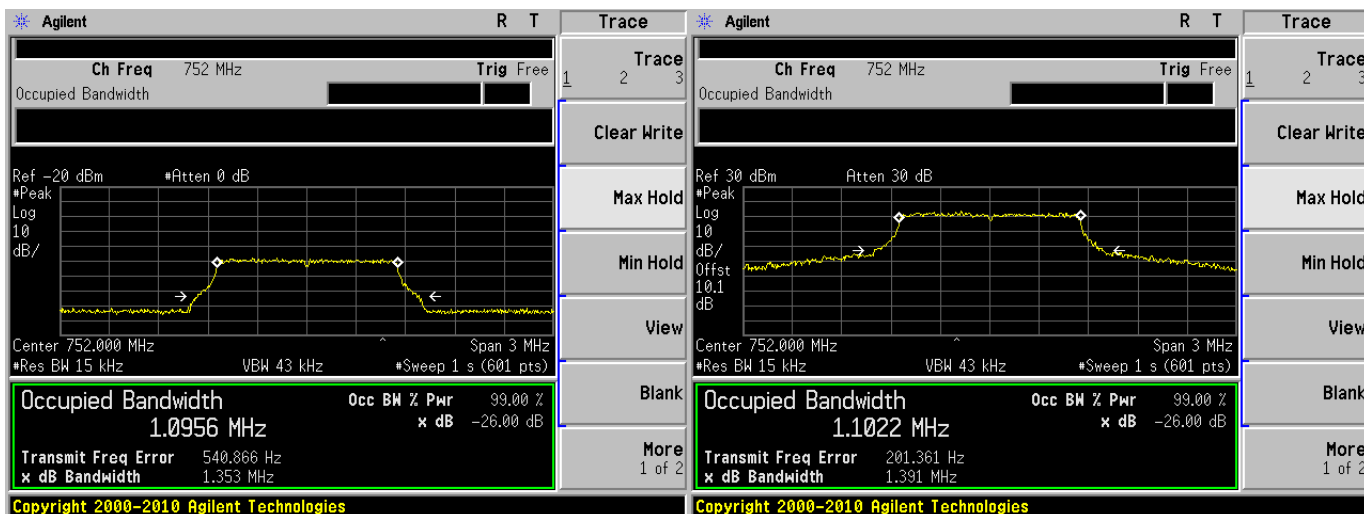

64QAM (1.4 MHz), (Middle Channel)

Input


Output



QPSK (3 MHz), (Middle Channel)


Input

Output

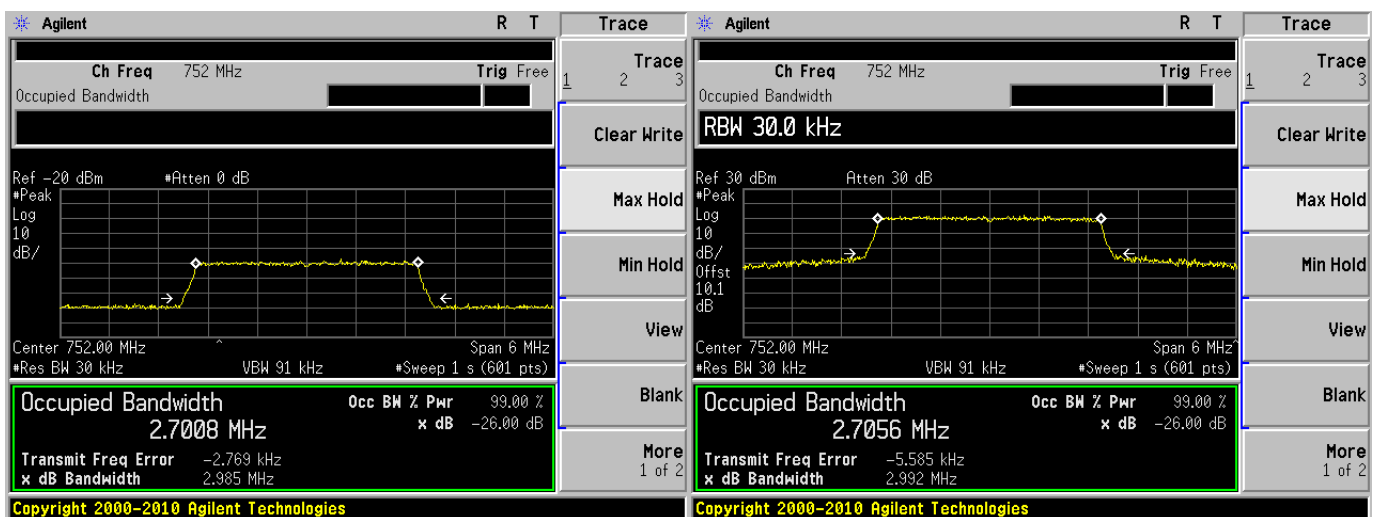


16QAM (3 MHz), (Middle Channel)

Input

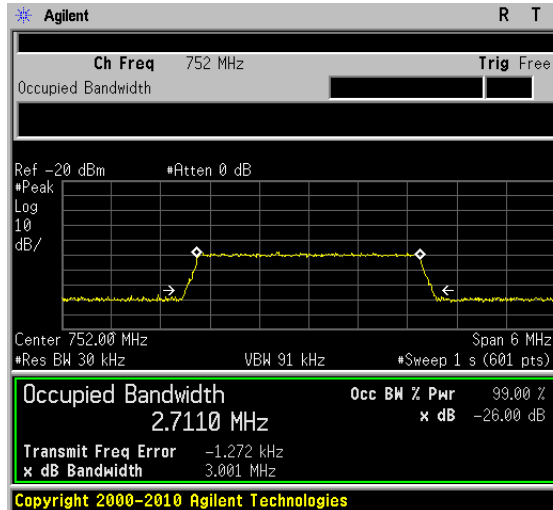


Output

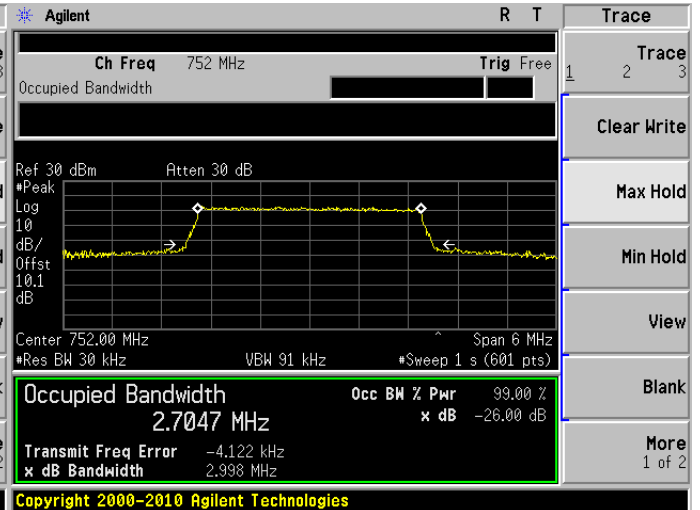


64QAM (3 MHz), (Middle Channel)

Input

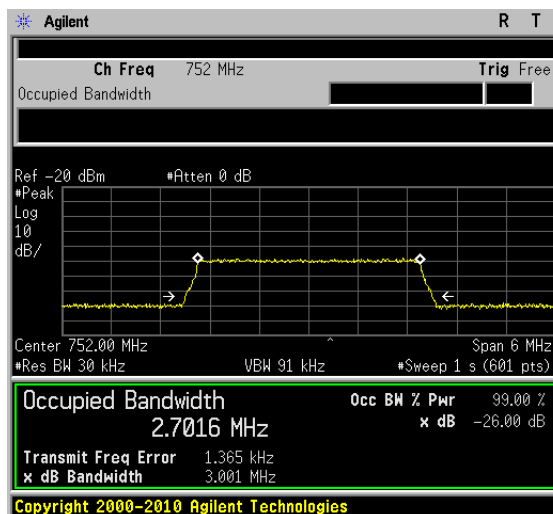


Output

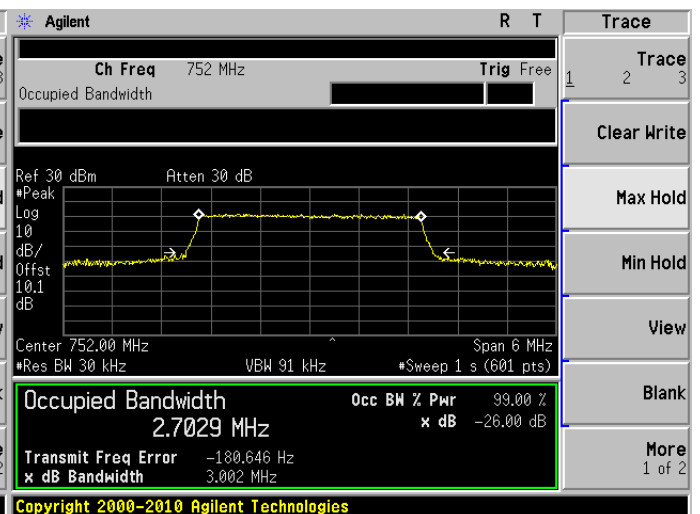


QPSK (5 MHz), (Low Channel)

Input

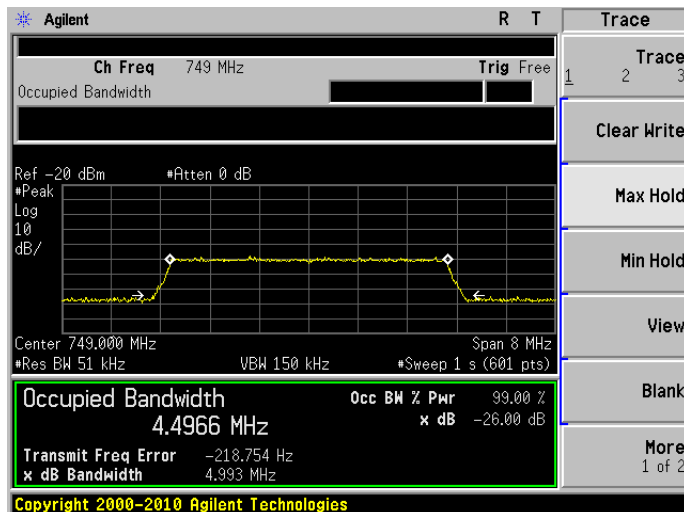


Output

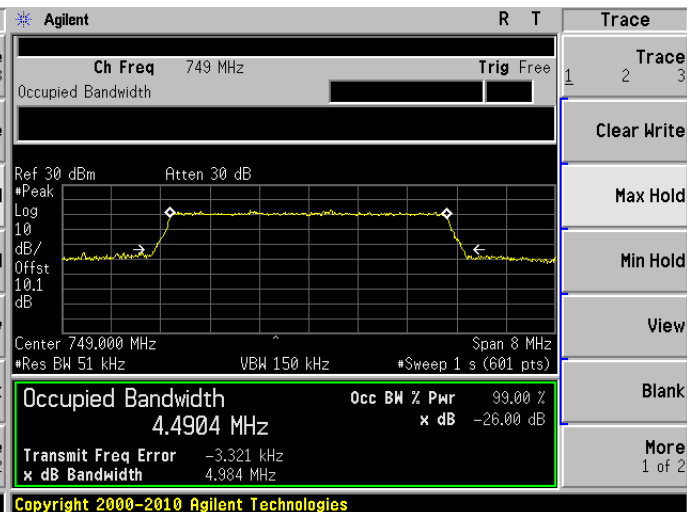


16QAM (5 MHz), (Low Channel)

Input

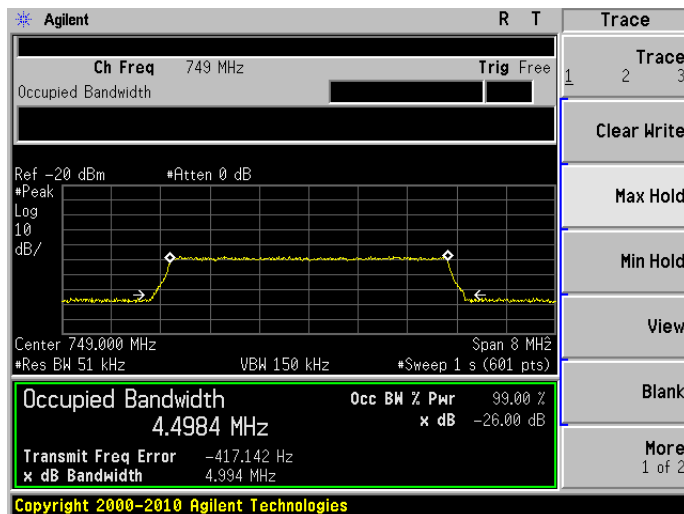


Output

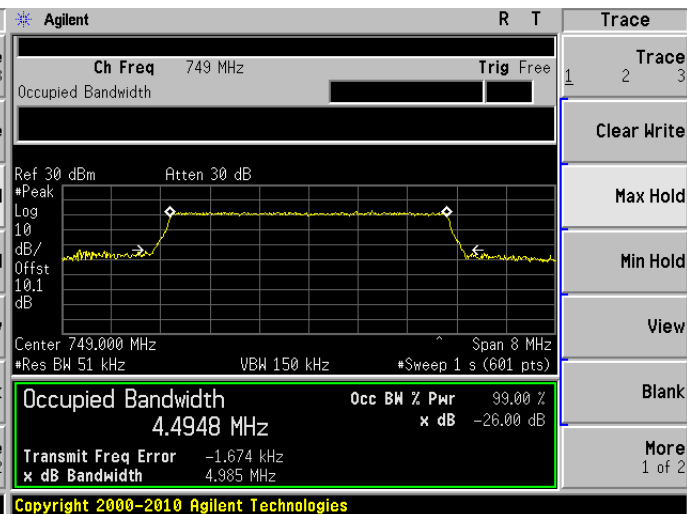


64QAM (5 MHz), (Low Channel)

Input

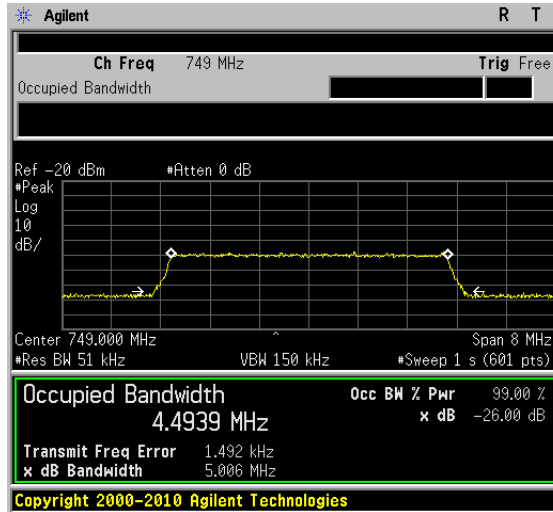


Output

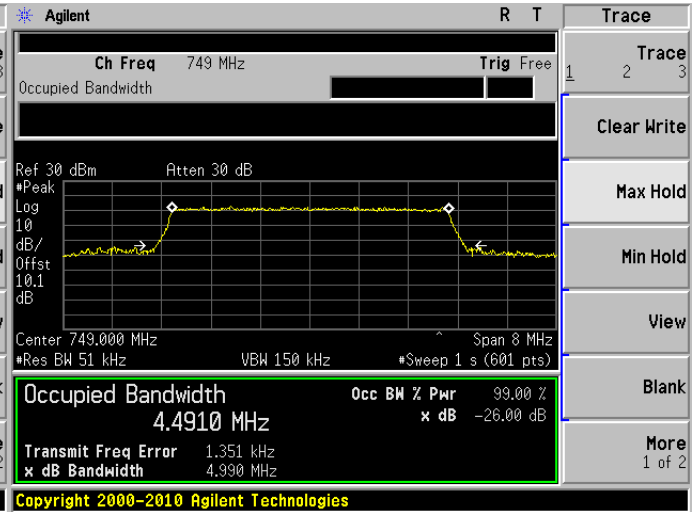


QPSK (10 MHz), (Middle Channel)

Input

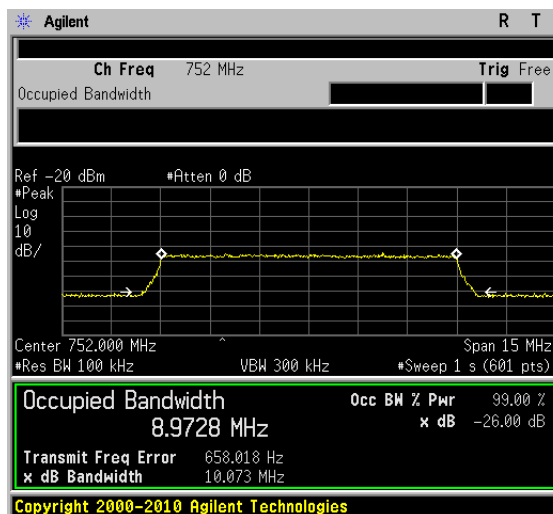


Output

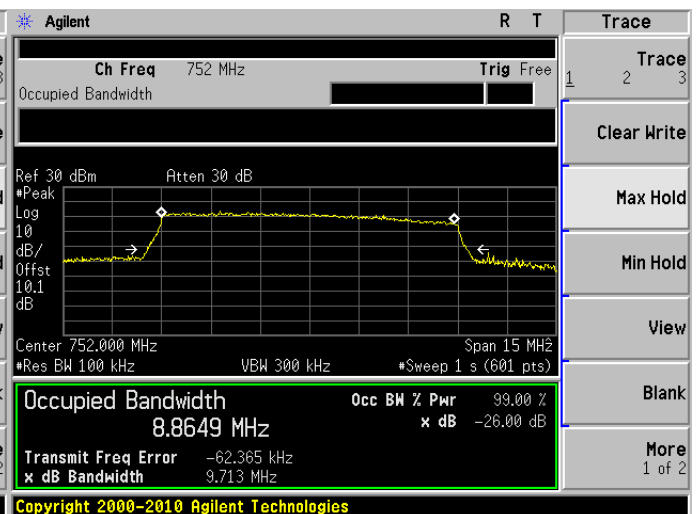


16QAM (10 MHz), (Middle Channel)

Input

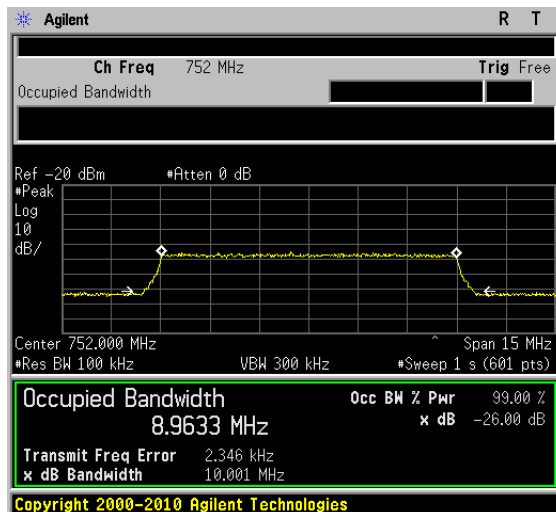


Output

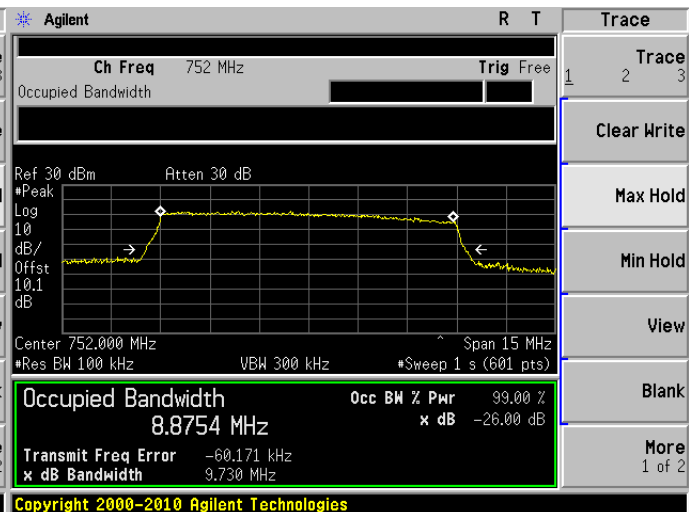


64QAM (10 MHz), (Middle Channel)

Input

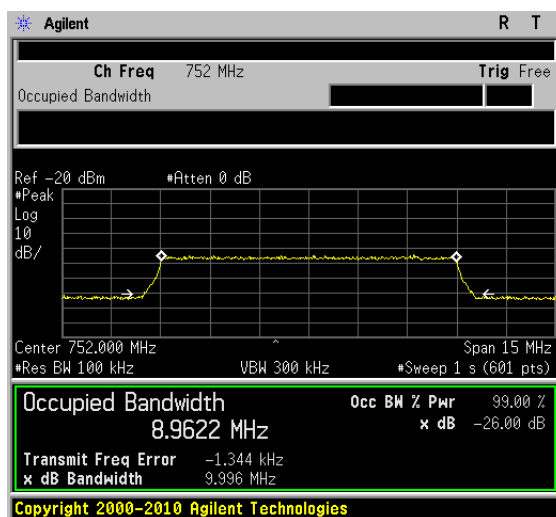

Output

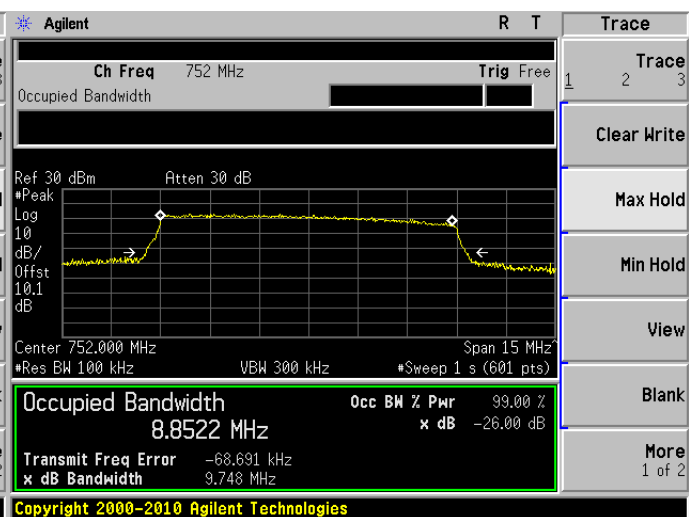

Upper LTE Band; UL: 776-787 MHz

QPSK (1.4 MHz), (Middle Channel)

Input


Output



16QAM (1.4 MHz), (Middle Channel)


Input

Output

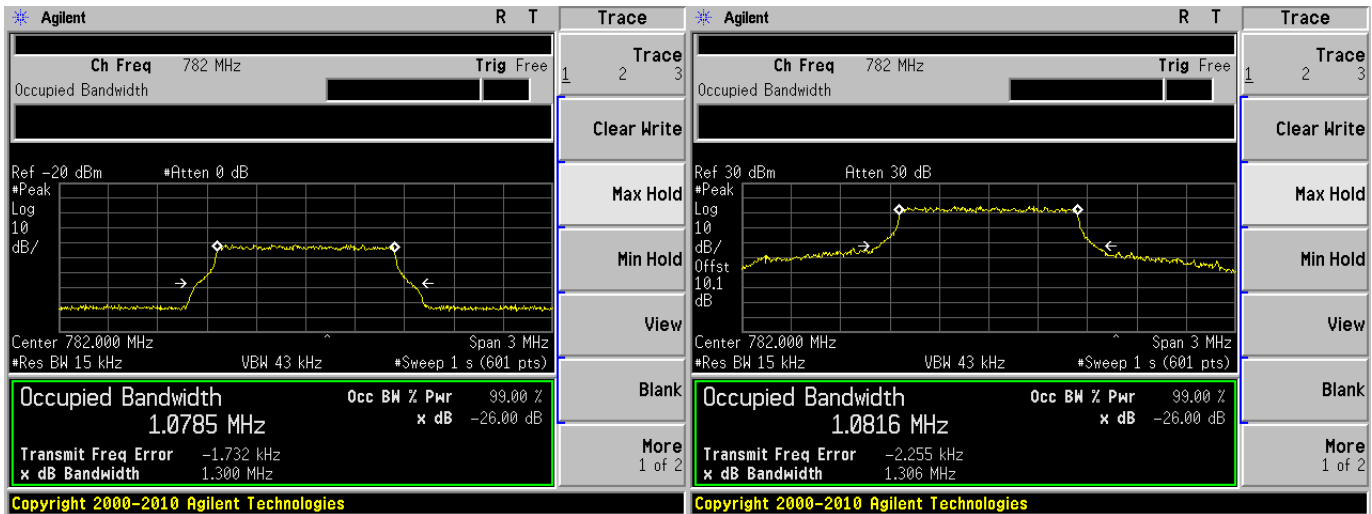


64QAM (1.4 MHz), (Middle Channel)

Input

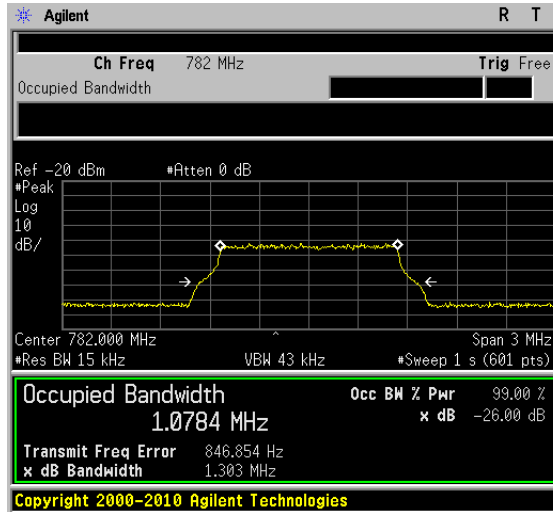


Output

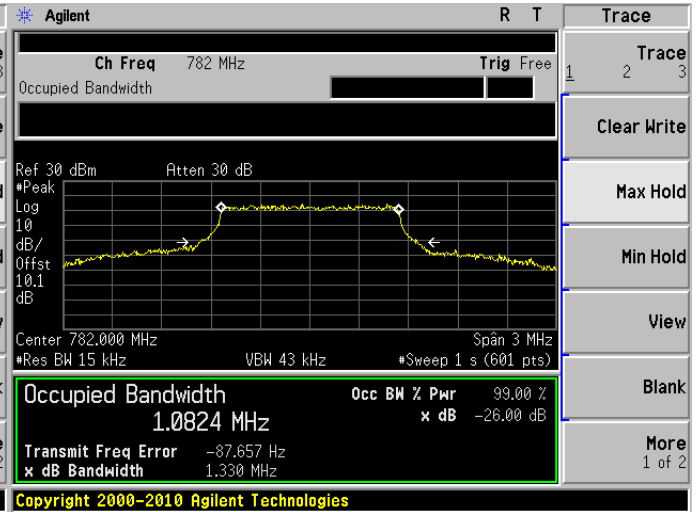


QPSK (3 MHz), (Middle Channel)

Input

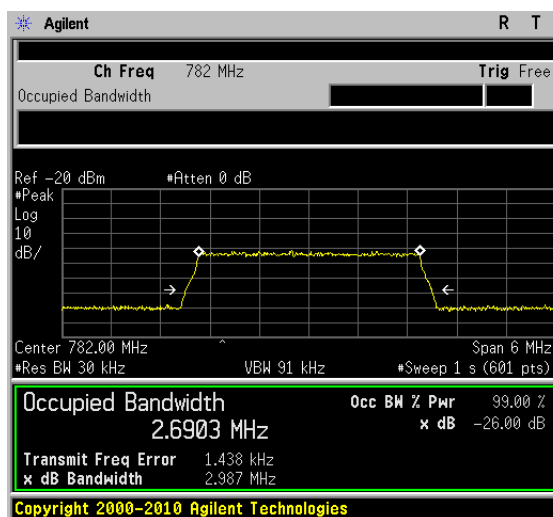


Output

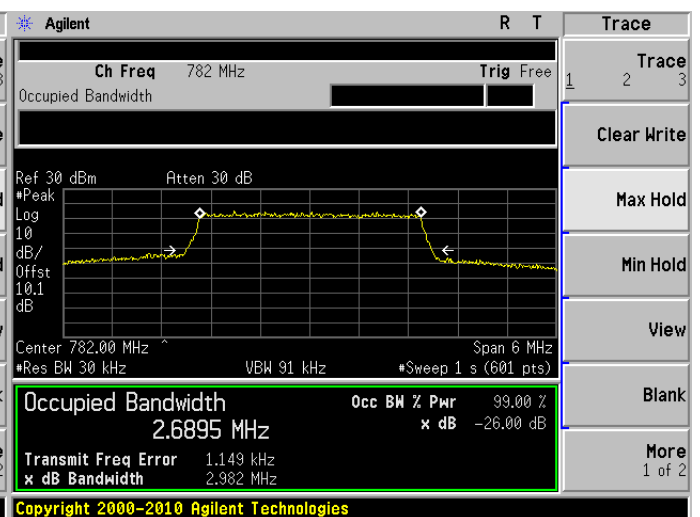


16QAM (3 MHz), (Middle Channel)

Input

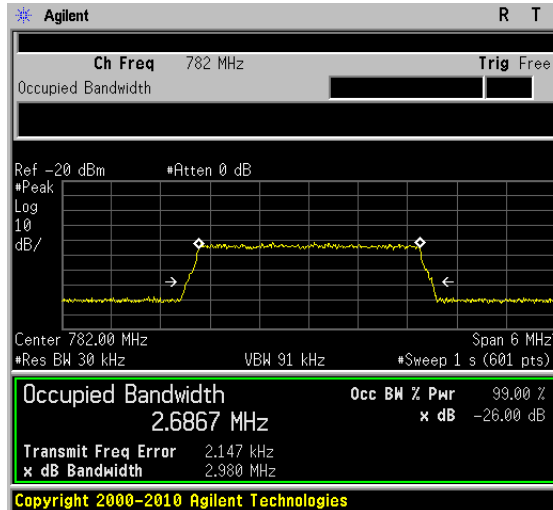


Output

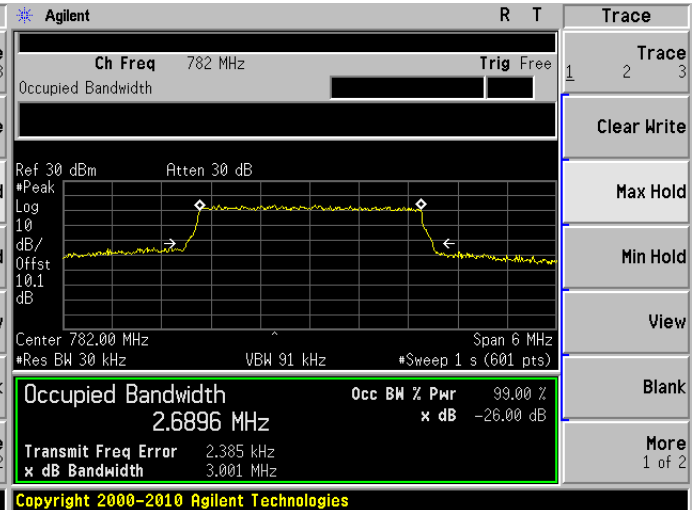


64QAM (3 MHz), (Middle Channel)

Input

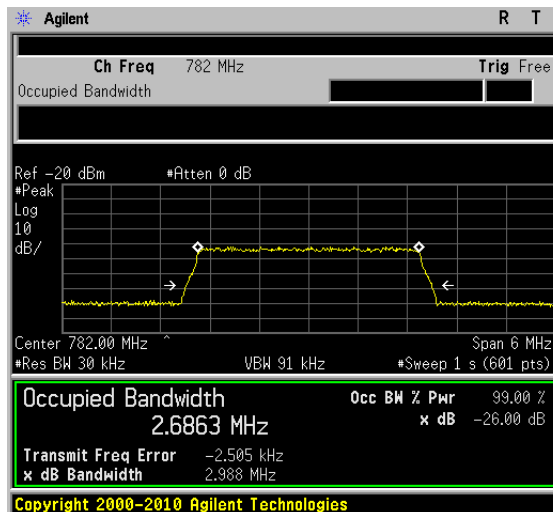


Output

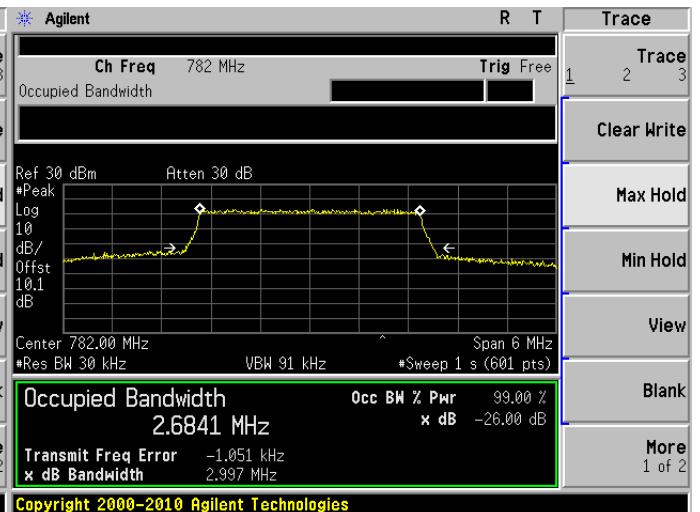


QPSK (5 MHz), (Low Channel)

Input

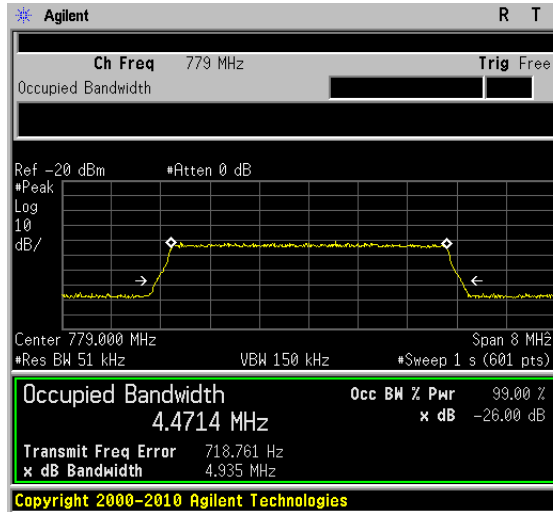


Output

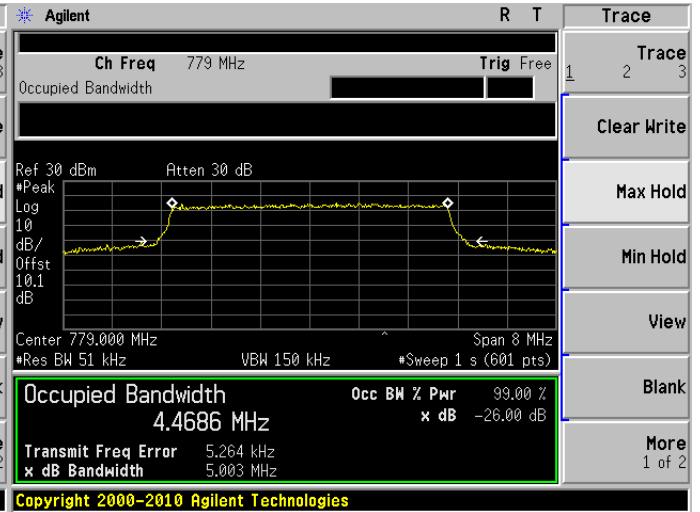


16QAM (5 MHz), (Low Channel)

Input

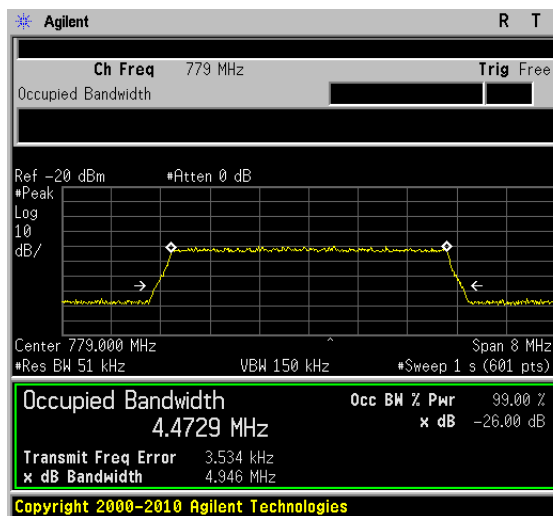


Output

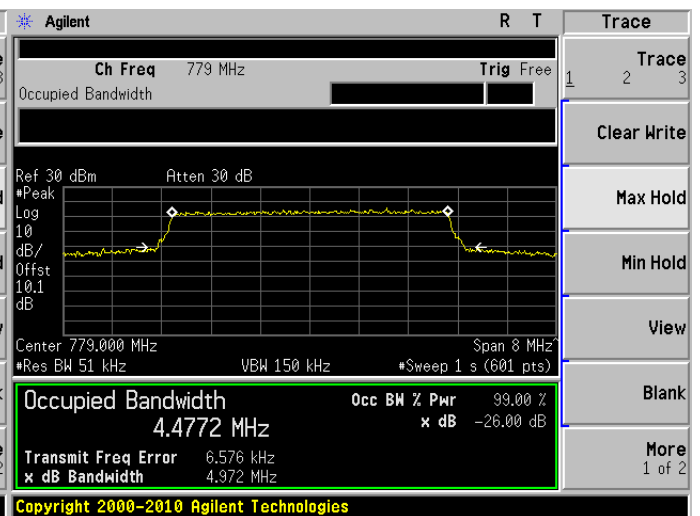


64QAM (5 MHz), (Low Channel)

Input

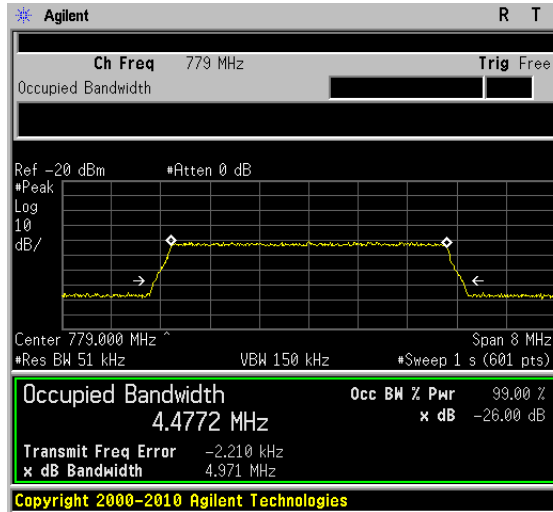


Output

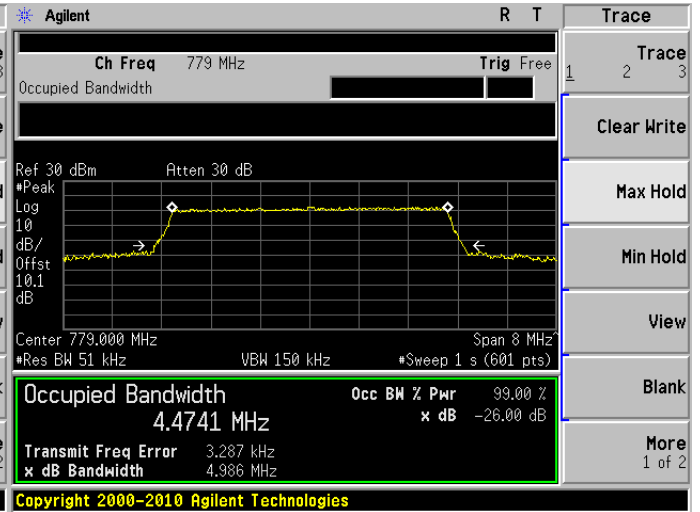


QPSK (10 MHz), (Middle Channel)

Input

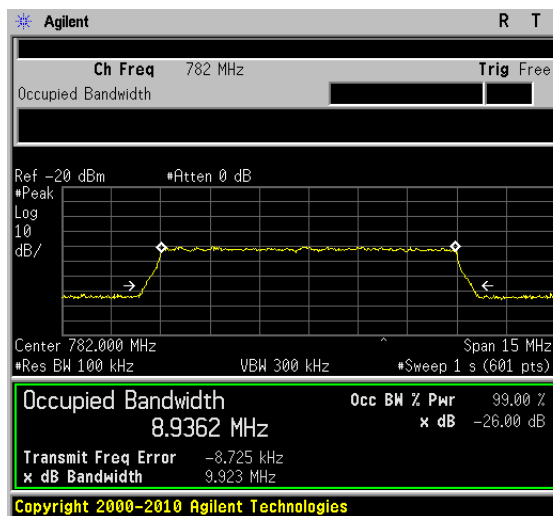

Output

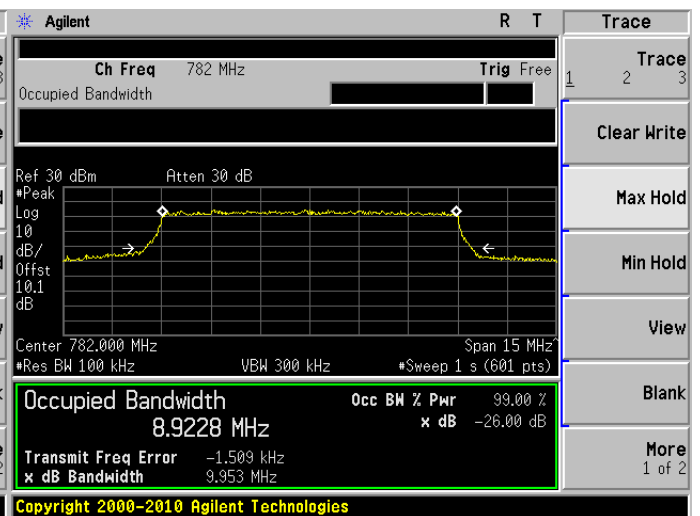

Output




AWS Band, Uplink:

WCDMA/HSPA (Middle Channel)

Input

Output

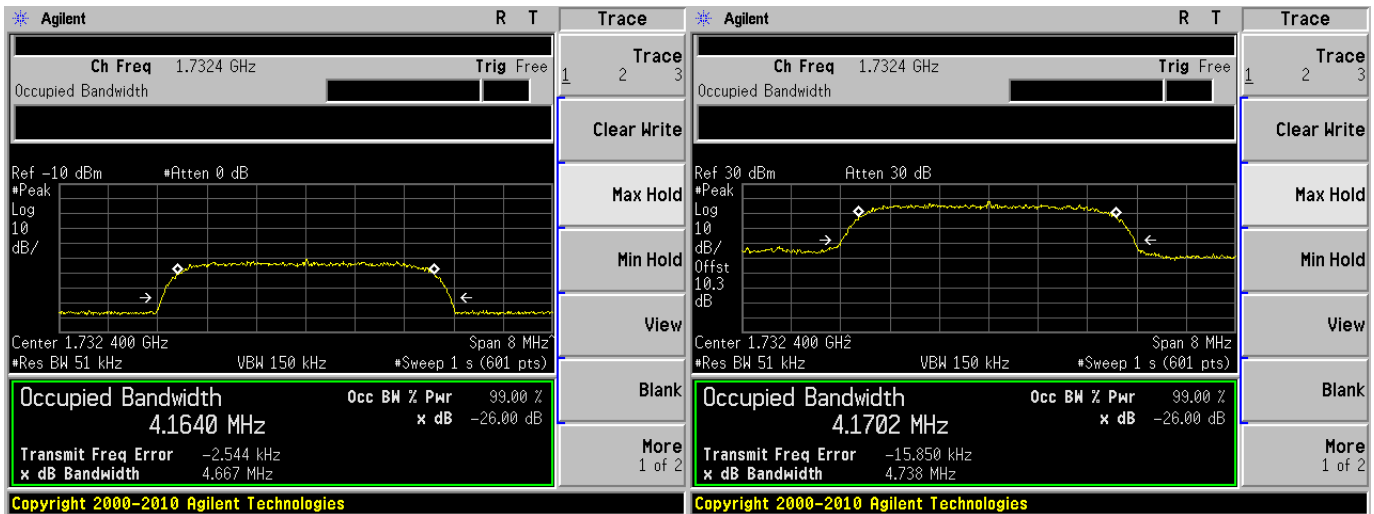**AWS Band, Downlink:**

WCDMA/HSPA (Middle Channel)

Input

Output



6 FCC §2.1053, §22.917, §24.238 & §27.53 - Spurious Radiated Emissions

6.1 Applicable Standard

According to FCC §22.917, §24.238 and §27.53, the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

6.2 Test Procedure

The transmitter was placed on the turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \log(\text{TX Power in Watts}/0.001)$ – the absolute level

Spurious attenuation limit in dB = $43 + 10 \log_{10}(\text{power out in Watts})$

6.3 Test Equipment List and Details

Manufacturers	Descriptions	Models	Serial Numbers	Calibration Dates
Agilent	Spectrum Analyzer	E4440A	US45303156	2010-08-09 ¹
Sunol Science Corp	System Controller	SC99V	122303-1	N/R
Sunol Science Corp	Combination Antenna	JB3	A020106-2	2011-08-10
Hewlett Packard	Pre amplifier	8447D	2944A06639	2011-06-09
Eaton	Horn antenna	96001	Mar-07	2011-10-03
A.H. Systems	Horn antenna	SAS-200/571	261	2012-01-18
Mini-Circuits	Pre Amplifier	ZVA-183-S	667400960	2011-05-08
HP	Signal Generator	8648C	3426A00417	2011-08-18

Note 1: Based on a two year calibration cycle.

Statement of Traceability: *BACL Corp.* attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

6.4 Test Environmental Conditions

Temperature:	20-21 °C
Relative Humidity:	47-49 %
ATM Pressure:	101.4-101.6kPa

The testing was performed by Lionel Lara from 2012-04-09 to 2012-04-10 in 5 Meter Chamber 3.

6.5 Test Results

Cell Band:

Uplink (Input frequency = 836.6 MHz)

Indicated		Azimuth (degree)	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Gain Correction (dB)	Cable Loss (dB)	Absolute Level (dBm)		
337.5	46.99	218	162	H	337.5	-60.1	0	0.6	-60.7	-13	-47.7
337.5	41.37	112	150	V	337.5	-65.72	0	0.6	-66.32	-13	-53.32
6578	45.08	253	235	H	6578	-46.5	11.83	2.32	-36.99	-13	-23.99
6578	51.12	218	162	V	6578	-40.46	11.79	2.32	-30.99	-13	-17.99

Downlink (Input frequency = 881.6 MHz)

Indicated		Azimuth (degree)	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Gain Correction (dB)	Cable Loss (dB)	Absolute Level (dBm)		
340.85	45.88	104	150	H	340.85	-61.21	0	0.6	-61.81	-13	-48.81
340.85	39.96	285	175	V	340.85	-67.13	0	0.6	-67.73	-13	-54.73
6579	44.82	68	207	H	6579	-46.76	11.83	2.32	-37.25	-13	-24.25
6579	50.8	43	156	V	6579	-40.78	11.79	2.32	-31.31	-13	-18.31

PCS Band:

Uplink (Input frequency = 1880 MHz)

Indicated		Azimuth (degree)	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Gain Correction (dB)	Cable Loss (dB)	Absolute Level (dBm)		
337.2	46.78	220	161	H	337.2	-60.31	0	0.6	-60.91	-13	-47.91
337.2	41.63	112	148	V	337.2	-65.46	0	0.6	-66.06	-13	-53.06
6577	46.32	240	233	H	6577	-45.26	11.83	2.32	-35.75	-13	-22.75
6577	51.36	220	188	V	6577	-40.22	11.79	2.32	-30.75	-13	-17.75

Downlink (Input frequency = 1960 MHz)

Indicated		Azimuth (degree)	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Gain Correction (dB)	Cable Loss (dB)	Absolute Level (dBm)		
340.69	45.72	105	150	H	340.69	-61.37	0	0.6	-61.97	-13	-48.97
340.69	39.65	286	174	V	340.69	-67.44	0	0.6	-68.04	-13	-55.04
6577	44.75	81	217	H	6577	-46.83	11.83	2.32	-37.32	-13	-24.32
6577	50.35	45	150	V	6577	-41.23	11.79	2.32	-31.76	-13	-18.76

Lower LTE Band:

Uplink (Input frequency = 699 MHz)

Indicated		Azimuth (degree)	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Gain Correction (dB)	Cable Loss (dB)	Absolute Level (dBm)		
336.4	46.23	221	161	H	336.4	-60.86	0	0.6	-61.46	-13	-48.46
336.4	40.99	114	151	V	336.4	-66.1	0	0.6	-66.7	-13	-53.7
6577	44.89	253	229	H	6577	-46.69	11.83	2.32	-37.18	-13	-24.18
6577	50.5	211	167	V	6577	-41.08	11.79	2.32	-31.61	-13	-18.61

Downlink (Input frequency = 745 MHz)

Indicated		Azimuth (degree)	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Gain Correction (dB)	Cable Loss (dB)	Absolute Level (dBm)		
340.1	45.79	104	150	H	340.1	-61.3	0	0.6	-61.9	-13	-48.9
340.1	39.52	285	174	V	340.1	-67.57	0	0.6	-68.17	-13	-55.17
6578	44.62	82	226	H	6578	-46.96	11.83	2.32	-37.45	-13	-24.45
6578	50.64	49	150	V	6578	-40.94	11.79	2.32	-31.47	-13	-18.47

Upper LTE Band:

Uplink (Input frequency = 782 MHz)

Indicated		Azimuth (degree)	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Gain Correction (dB)	Cable Loss (dB)	Absolute Level (dBm)		
338.8	46.28	218	159	H	338.8	-60.81	0	0.6	-61.41	-13	-48.41
338.8	40.87	110	154	V	338.8	-66.22	0	0.6	-66.82	-13	-53.82
6578	45.05	253	230	H	6578	-46.53	11.83	2.32	-37.02	-13	-24.02
6578	51.57	218	168	V	6578	-40.01	11.79	2.32	-30.54	-13	-17.54

Downlink (Input frequency = 747 MHz)

Indicated		Azimuth (degree)	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Gain Correction (dB)	Cable Loss (dB)	Absolute Level (dBm)		
340.77	45.24	108	152	H	340.77	-61.85	0	0.6	-62.45	-13	-49.45
340.77	39.8	282	175	V	340.77	-67.29	0	0.6	-67.89	-13	-54.89
6577	43.4	81	224	H	6577	-48.18	11.83	2.32	-38.67	-13	-25.67
6577	49.63	40	150	V	6577	-41.95	11.79	2.32	-32.48	-13	-19.48

AWS Band:

Uplink (Input frequency = 1732.4 MHz)

Indicated		Azimuth (degree)	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Gain Correction (dB)	Cable Loss (dB)	Absolute Level (dBm)		
336.8	46.03	218	161	H	336.8	-61.06	0	0.6	-61.66	-13	-48.66
336.8	40.52	112	150	V	336.8	-66.57	0	0.6	-67.17	-13	-54.17
6578	46.39	232	240	H	6578	-45.19	11.83	2.32	-35.68	-13	-22.68
6578	51.57	221	175	V	6578	-40.01	11.79	2.32	-30.54	-13	-17.54

Downlink (Input frequency = 2112.4 MHz)

Indicated		Azimuth (degree)	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Gain Correction (dB)	Cable Loss (dB)	Absolute Level (dBm)		
341.85	45.12	104	148	H	341.85	-61.97	0	0.6	-62.57	-13	-49.57
341.85	39.79	288	178	V	341.85	-67.3	0	0.6	-67.9	-13	-54.9
6580	45.16	83	218	H	6580	-46.42	11.83	2.32	-36.91	-13	-23.91
6580	51.11	48	150	V	6580	-40.47	11.79	2.32	-31	-13	-18

7 FCC §2.1051, §22.917, §24.238 & §27.53 - Spurious Emissions At Antenna Terminals

7.1 Applicable Standard

According to FCC §22.917, §24.238 and §27.53 the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

7.2 Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

7.3 Test Equipment List and Details

Manufacturers	Descriptions	Models	Serial Numbers	Calibration Dates
Agilent	Spectrum Analyzer	E4440A	US45303156	2010-08-09 ¹
Agilent	Signal Generator	E4438C	MY45091309	2011-04-28

Note 1:Based on a two year calibration cycle.

Statement of Traceability: *BACL Corp.* attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

7.4 Test Environmental Conditions

Temperature:	21 °C
Relative Humidity:	46 %
ATM Pressure:	101.3kPa

The testing was performed by Lionel Lara on 2012-04-06 in the RF Site.


7.5 Test Results

Please refer to the following plots.

Cellular Band Uplink, Middle Channel: 836.6 MHz:

Plot 1: 30 MHz to 1 GHz


Plot 2: Above 1 GHz

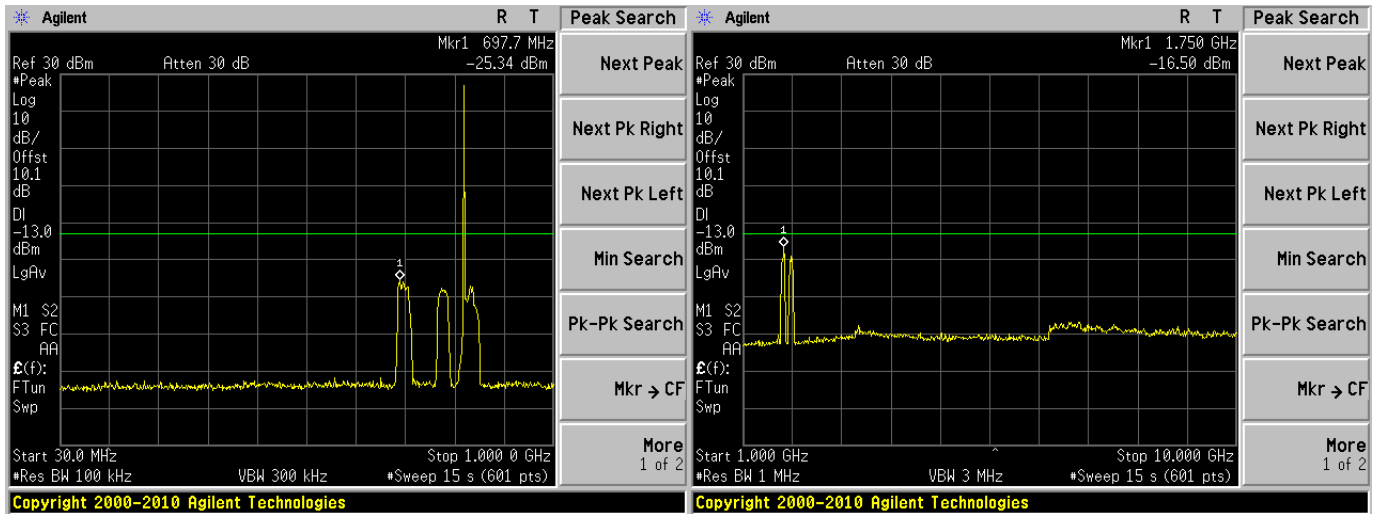

Cellular Band Downlink, Middle Channel: 881.6 MHz:


Plot 1: 30 MHz to 1 GHz

Plot 2: Above 1 GHz

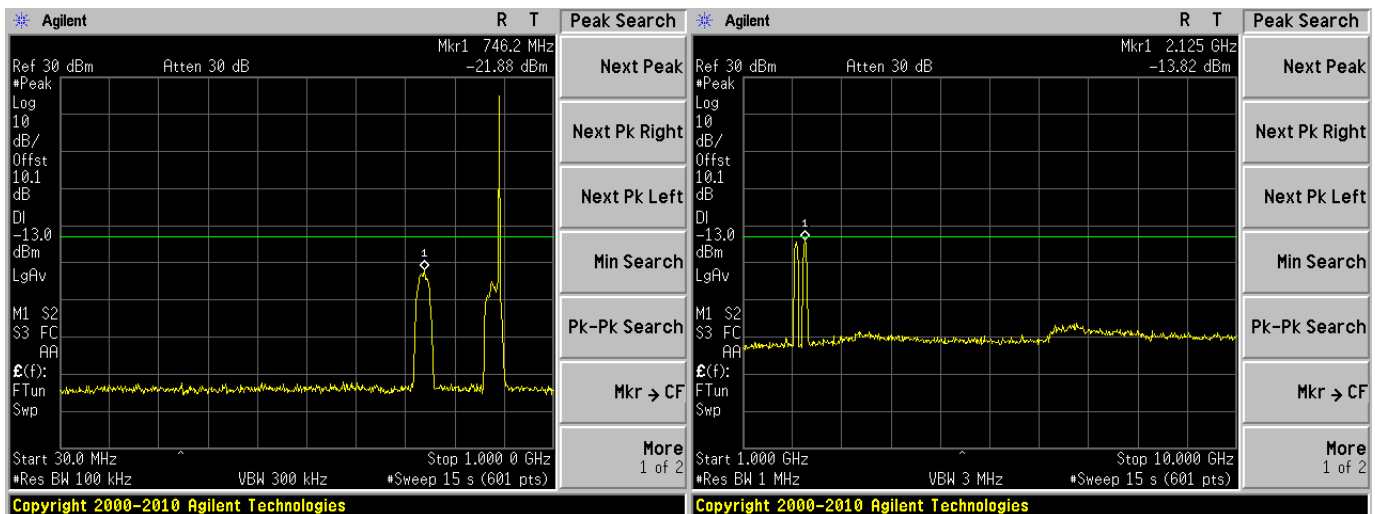


PCS Band Uplink, Middle Channel: 1880 MHz:


Plot 1: 30 MHz to 1 GHz

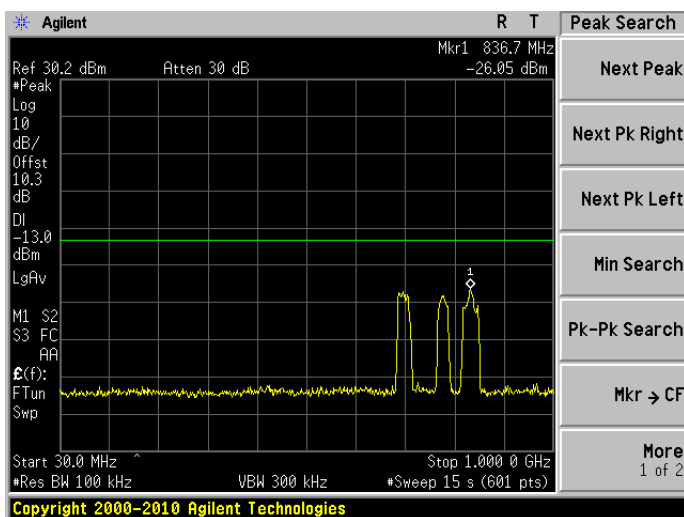


Plot 2: Above 1 GHz

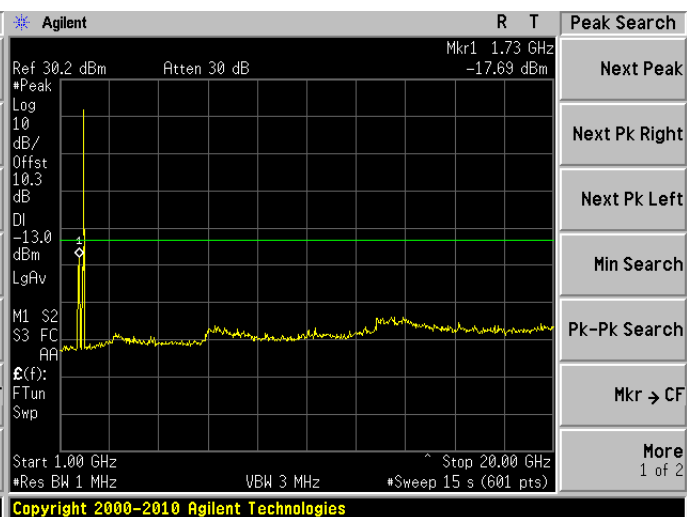**PCS Band Downlink, Middle Channel: 1960 MHz:**

Plot 1: 30 MHz to 1 GHz

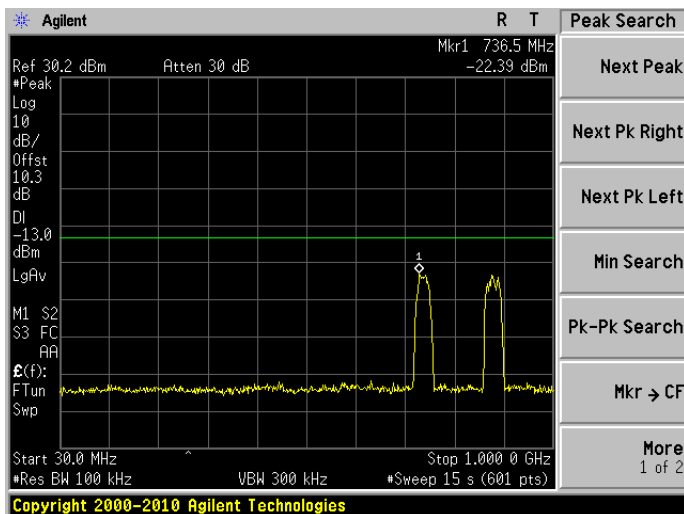


Plot 2: Above 1 GHz

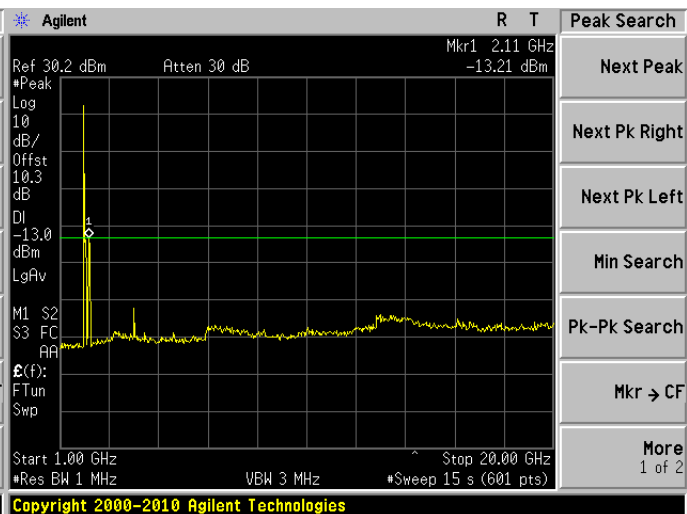


Lower LTE Band Uplink, Middle Channel: 709 MHz:


Plot 1: 30 MHz to 1 GHz

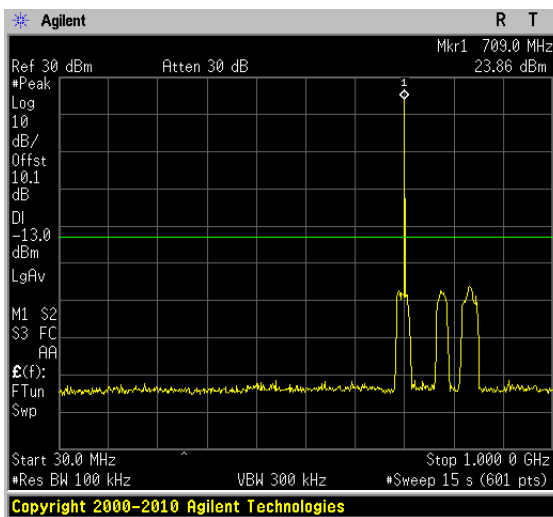


Plot 2: Above 1 GHz

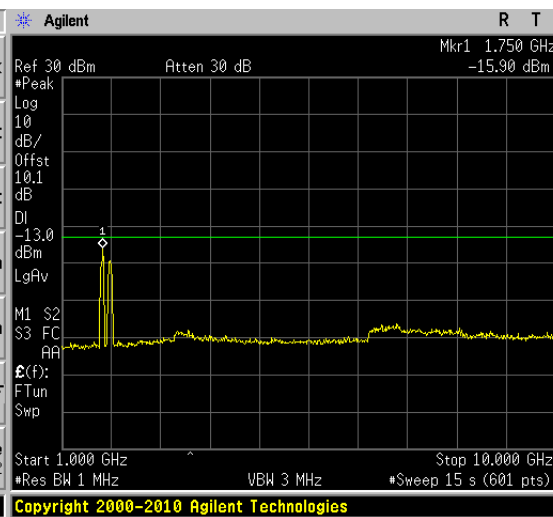**Lower LTE Band Downlink, Middle Channel: 737 MHz:**

Plot 1: 30 MHz to 1 GHz

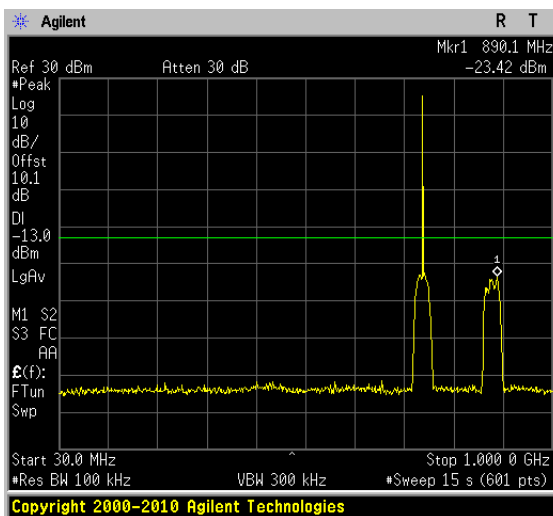


Plot 2: Above 1 GHz

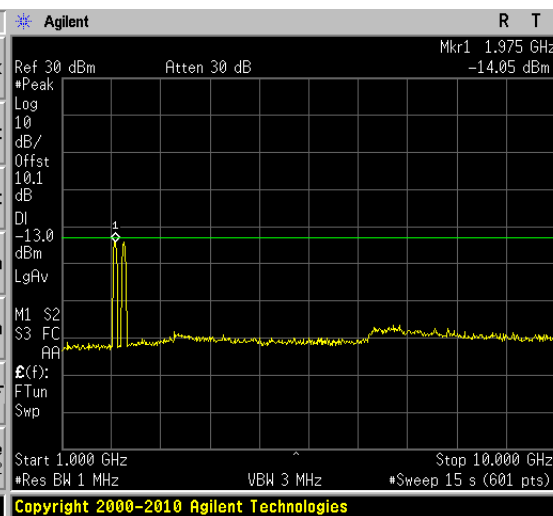


Upper LTE Band Uplink, Middle Channel: 782 MHz:


Plot 1: 30 MHz to 1 GHz

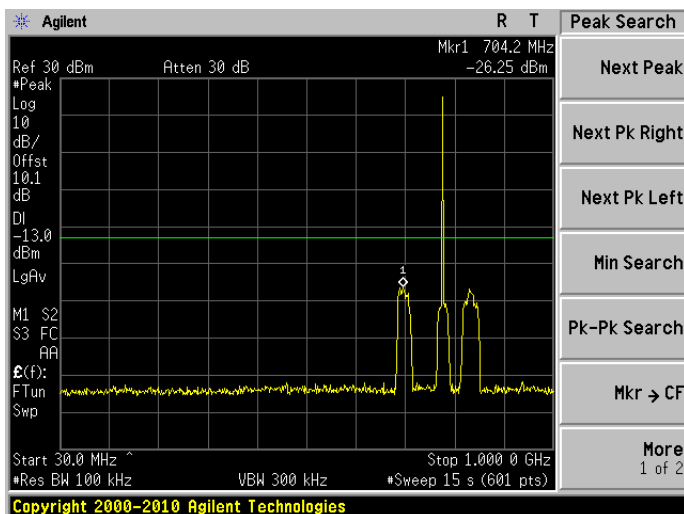


Plot 2: Above 1 GHz

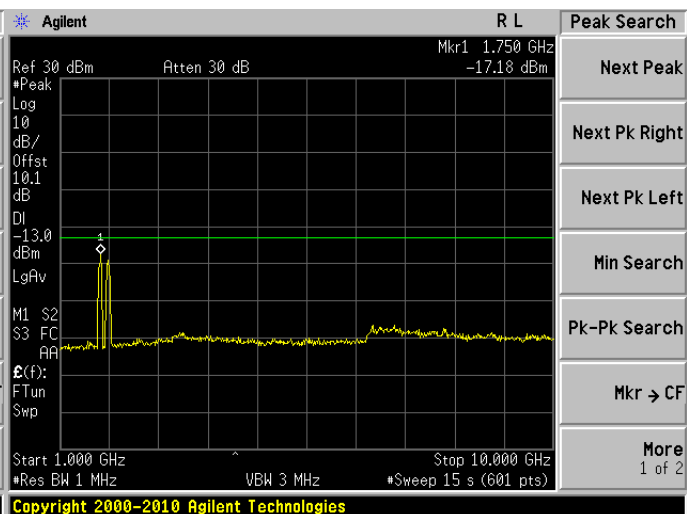**Upper LTE Band Downlink, Middle Channel: 752 MHz:**

Plot 1: 30 MHz to 1 GHz

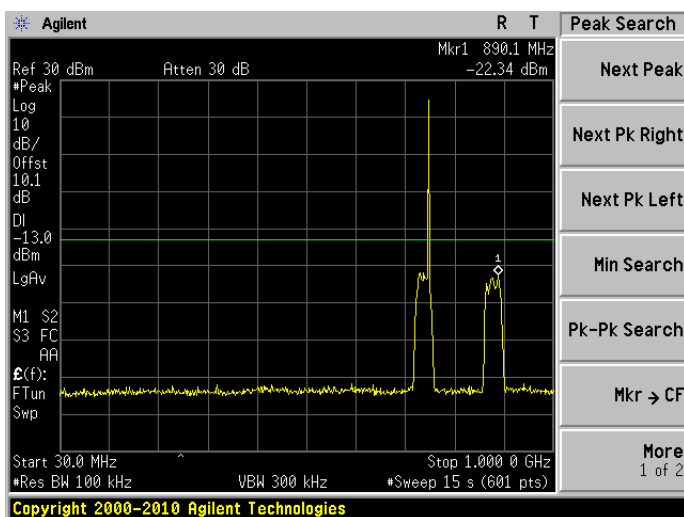


Plot 2: Above 1 GHz

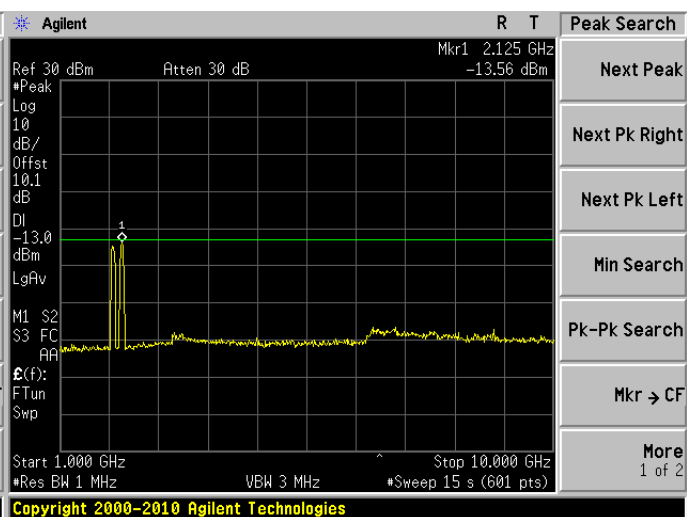


AWS Band Uplink, Middle Channel: 1732.4 MHz:


Plot 1: 30 MHz to 1 GHz

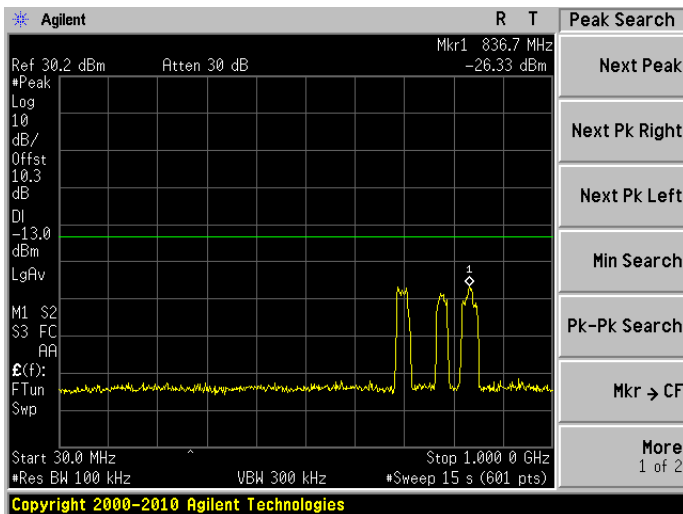


Plot 2: Above 1 GHz

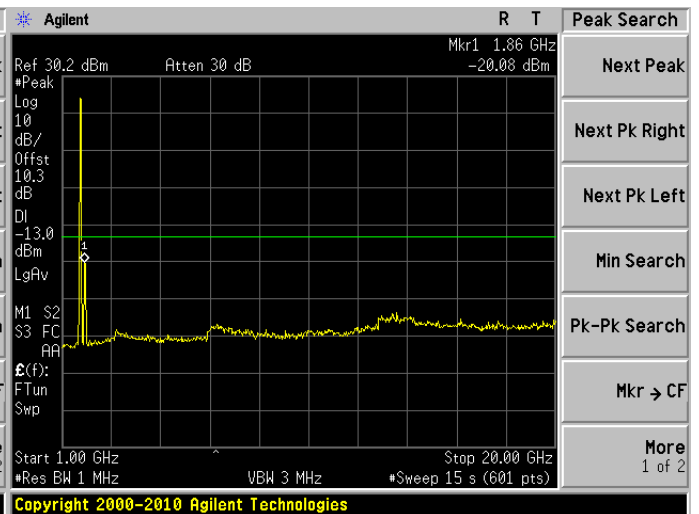**AWS LTE Band Downlink, Middle Channel: 2132.4 MHz:**

Plot 1: 30 MHz to 1 GHz

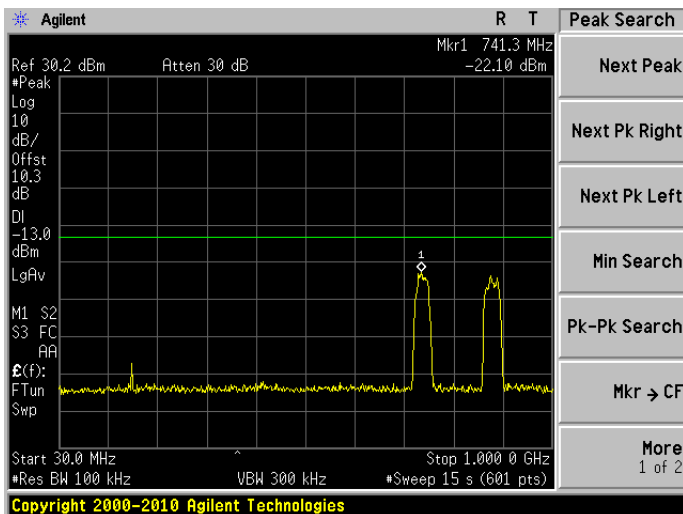


Plot 2: Above 1 GHz

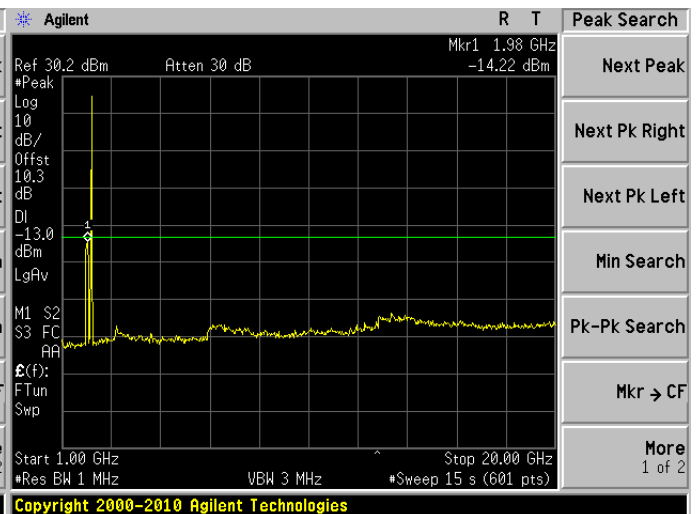


Inter-modulation

Cellular Band Uplink:


Low Channel, Input

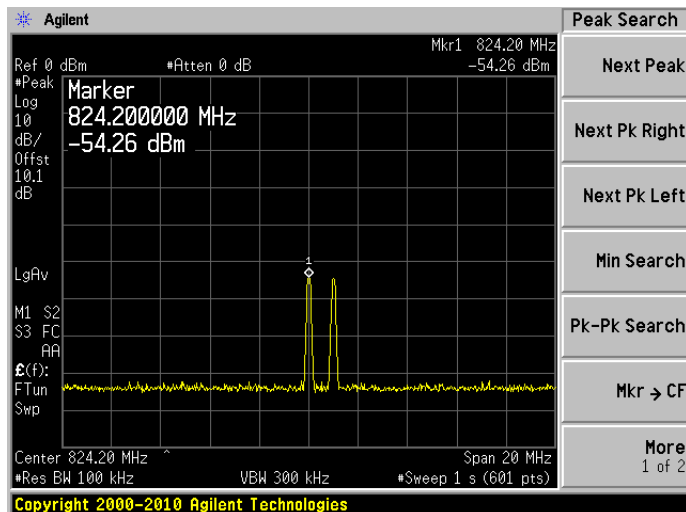


Low Channel, Output:

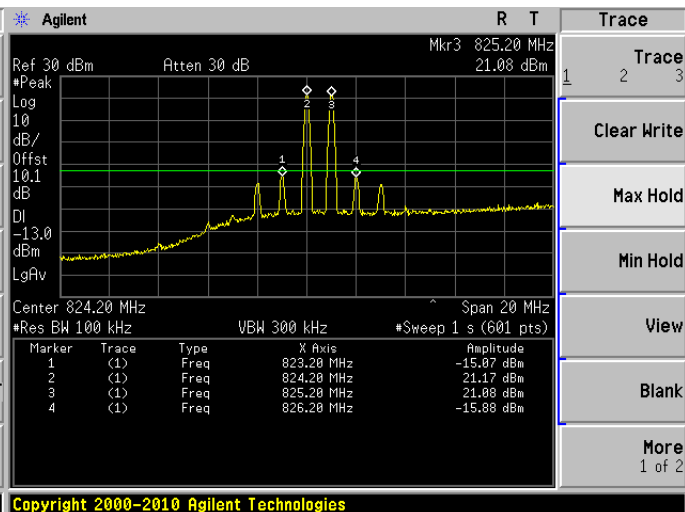


Middle Channel, Input

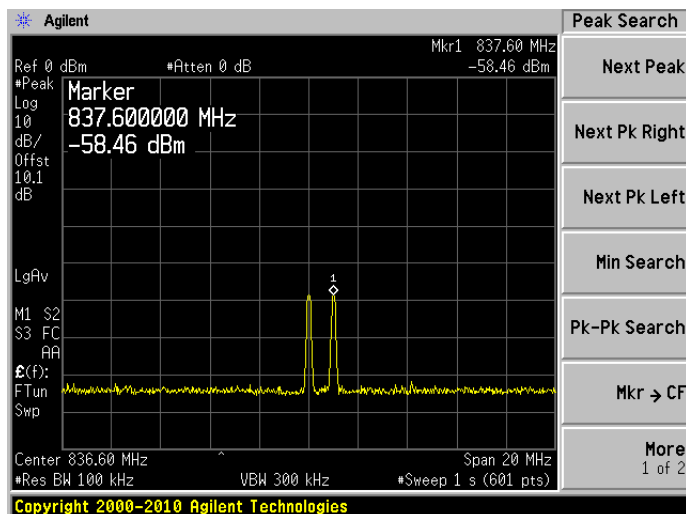


Middle Channel, Output

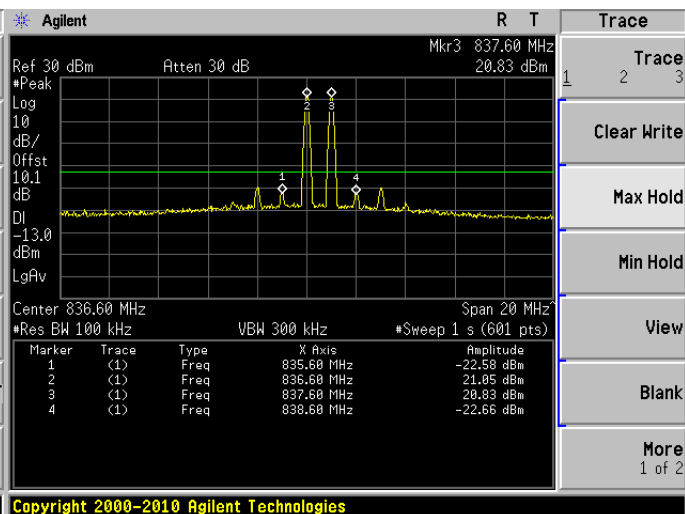

High Channel, Input

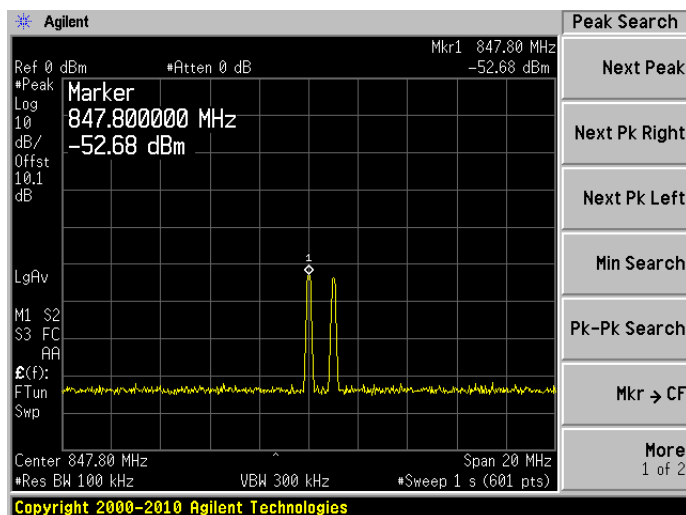


High Channel, Output

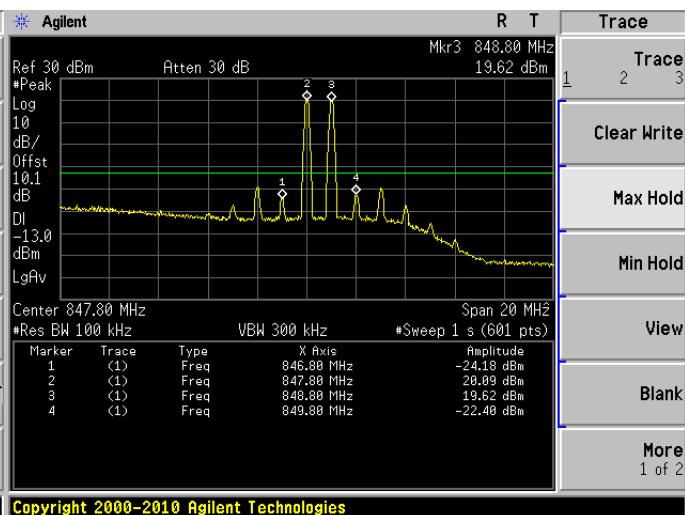


Cellular Band Downlink:


Low Channel, Input

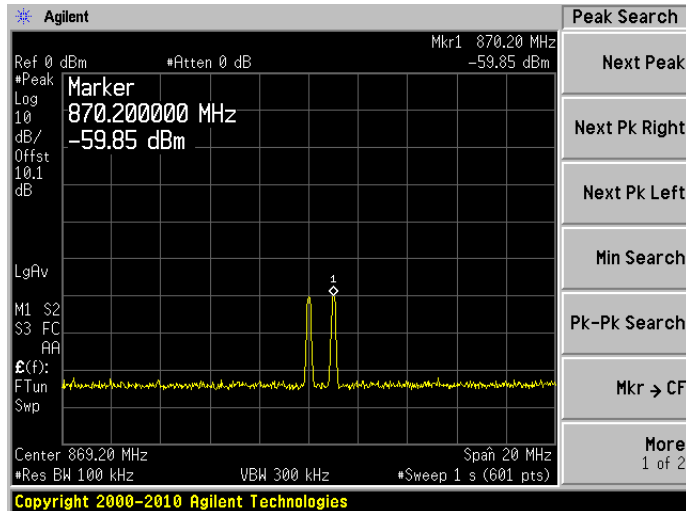


Low Channel, Output

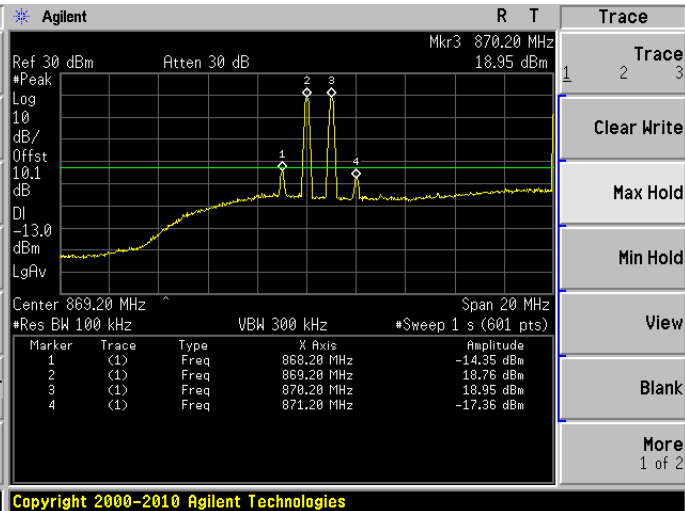


Middle Channel, Input

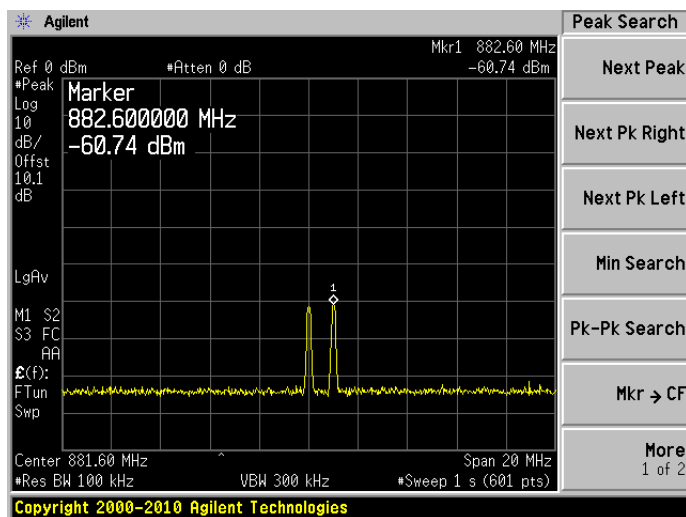


Middle Channel, Output

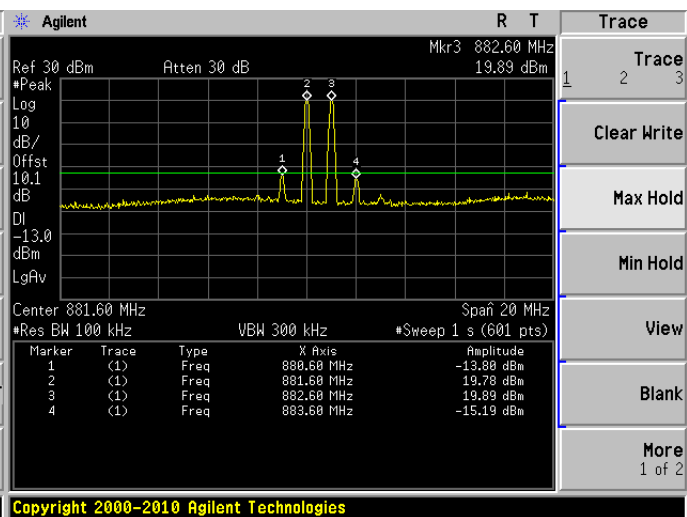

High Channel, Input

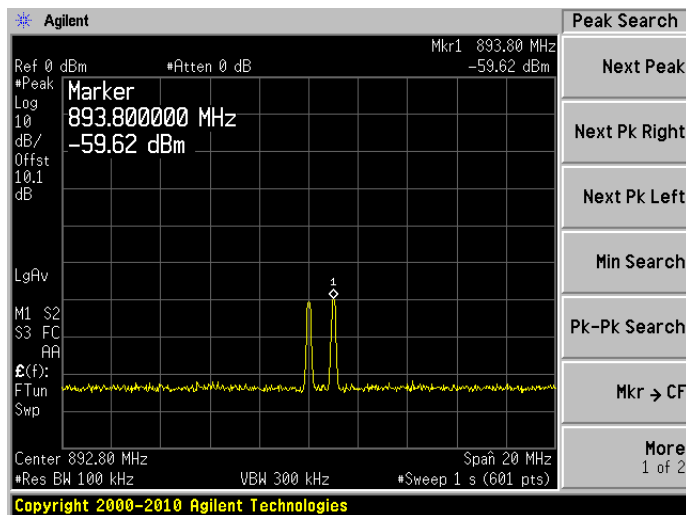


High Channel, Output

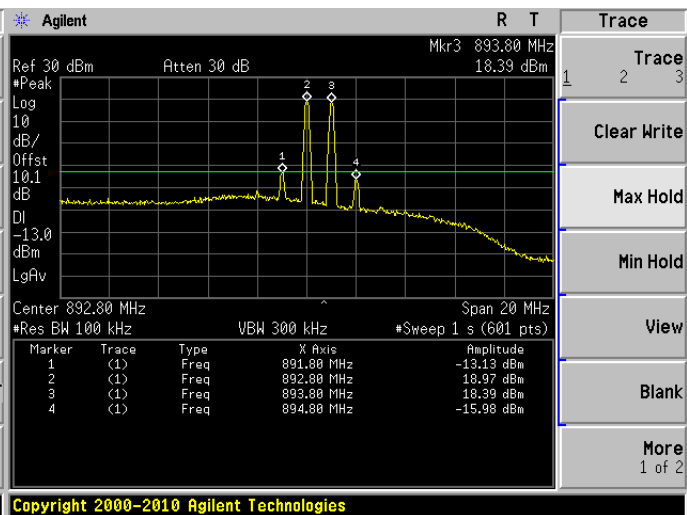


PCS Band Uplink:


Low Channel, Input

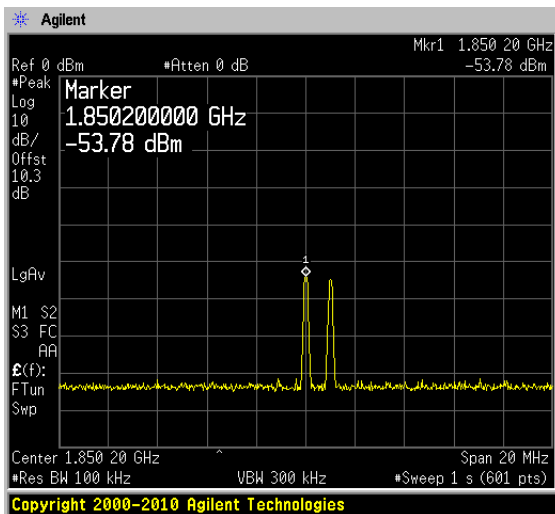


Low Channel, Output

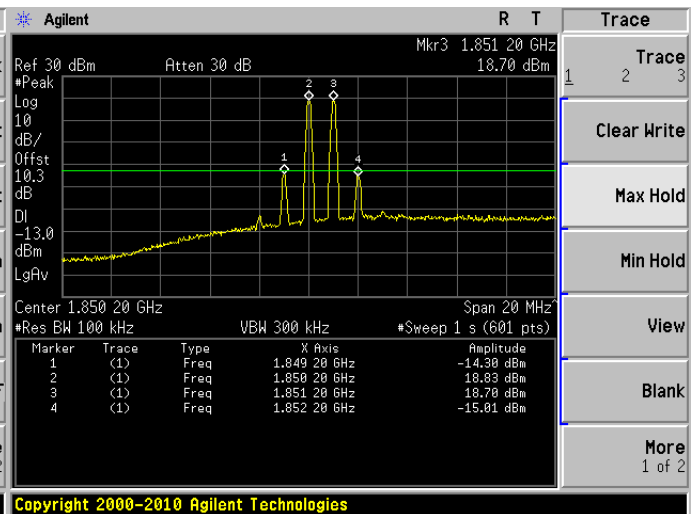

Middle Channel, Input

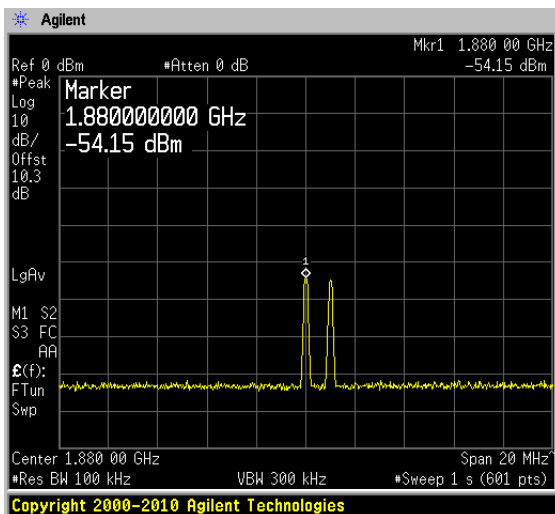


Middle Channel, Output

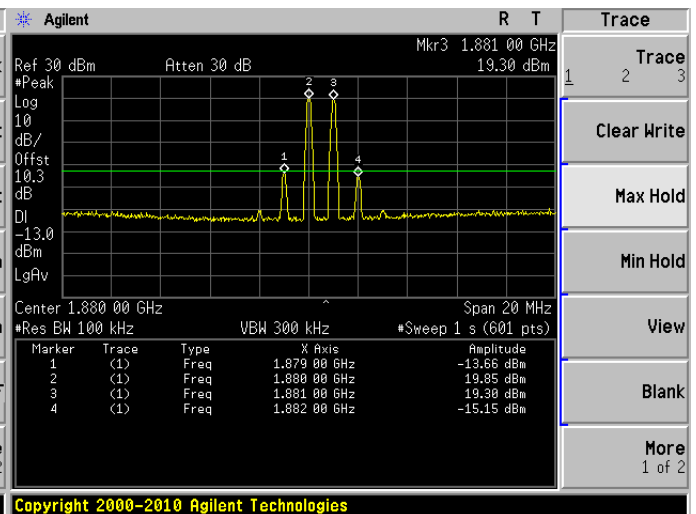

High Channel, Input


High Channel, Output

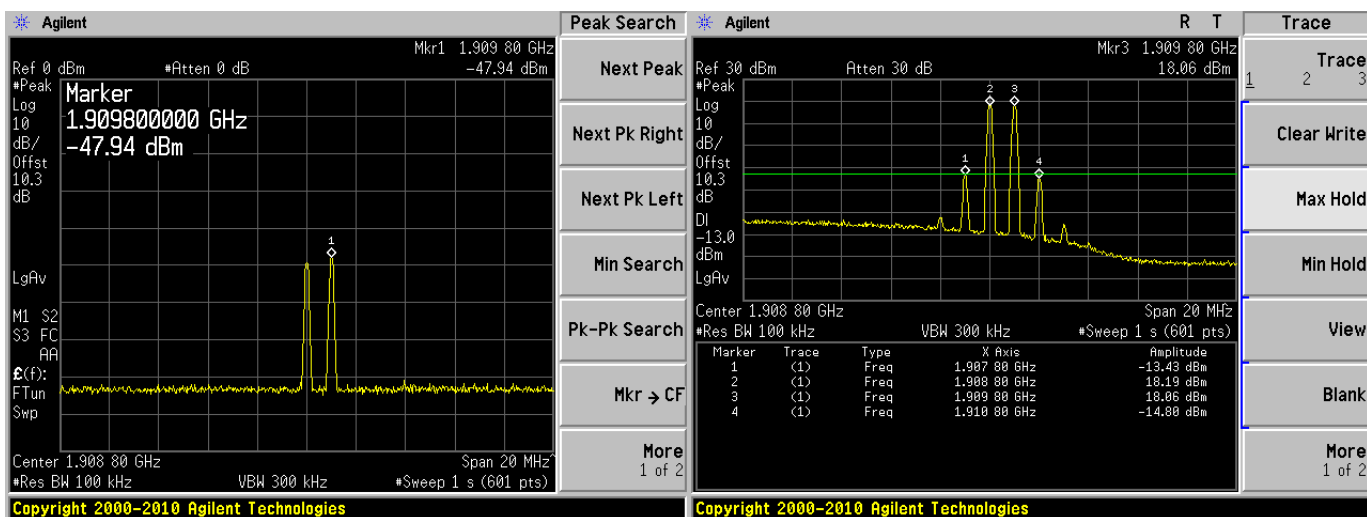


PCS Band Downlink:

Low Channel, Input

Low Channel, Output

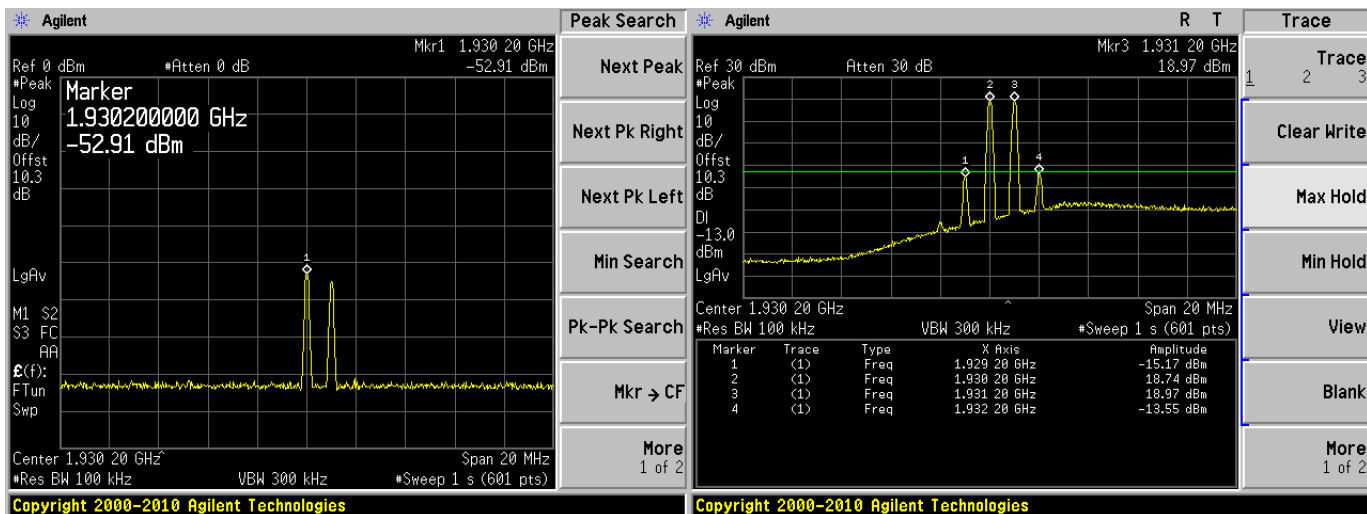

Middle Channel, Input

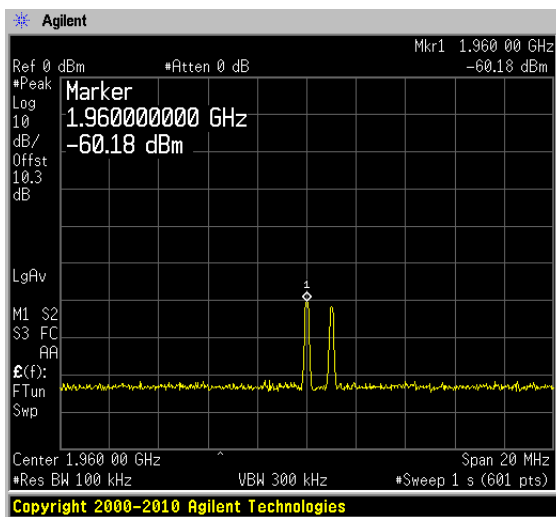

Peak Search

Next Peak

Next Pk Right

Next Pk Left


Min Search

Pk-Pk Search


Mkr → CF

More
1 of 2

Middle Channel, Output

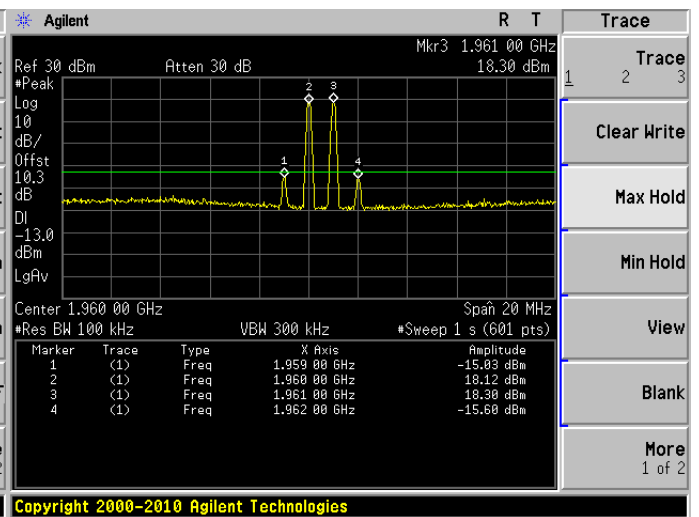

High Channel, Input

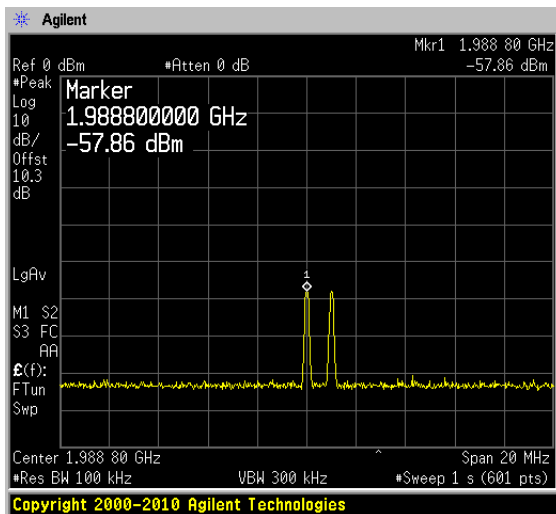

Peak Search

Next Peak

Next Pk Right

Next Pk Left


Min Search

Pk-Pk Search

Mkr → CF

More
1 of 2


High Channel, Output

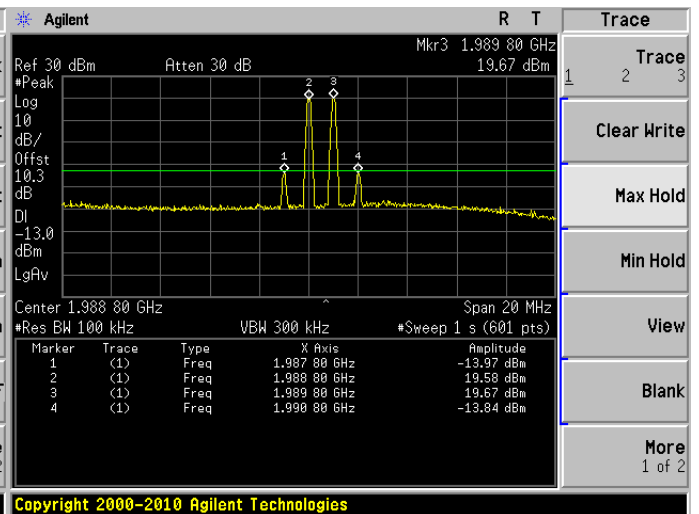

Lower LTE Band Uplink:


Low Channel, Input

Low Channel, Output

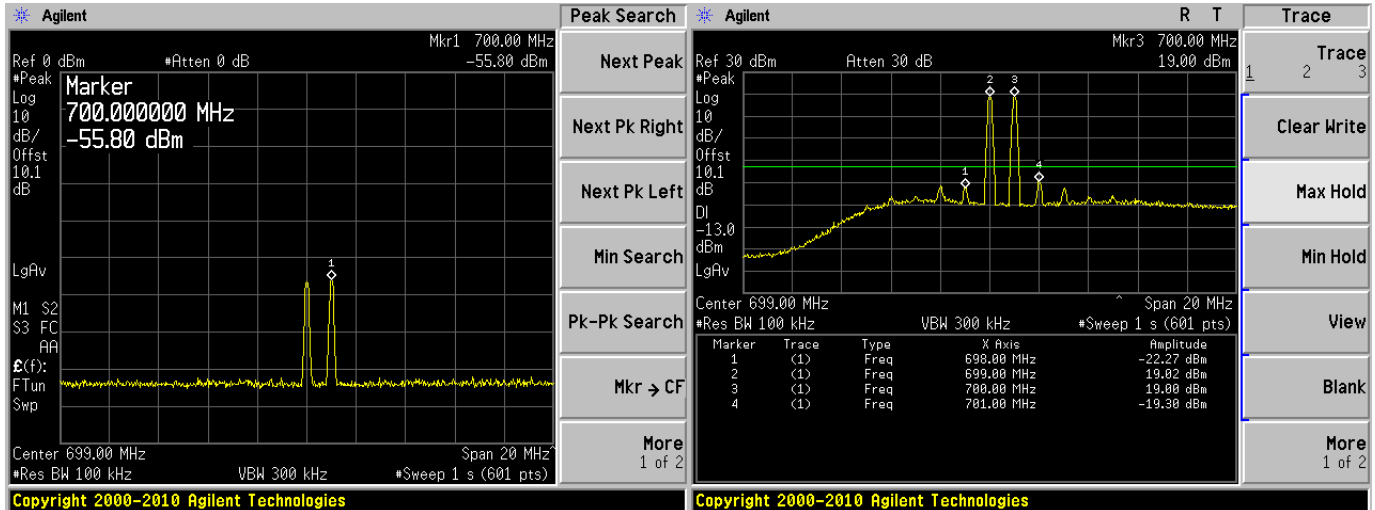


Middle Channel, Input


Middle Channel, Output

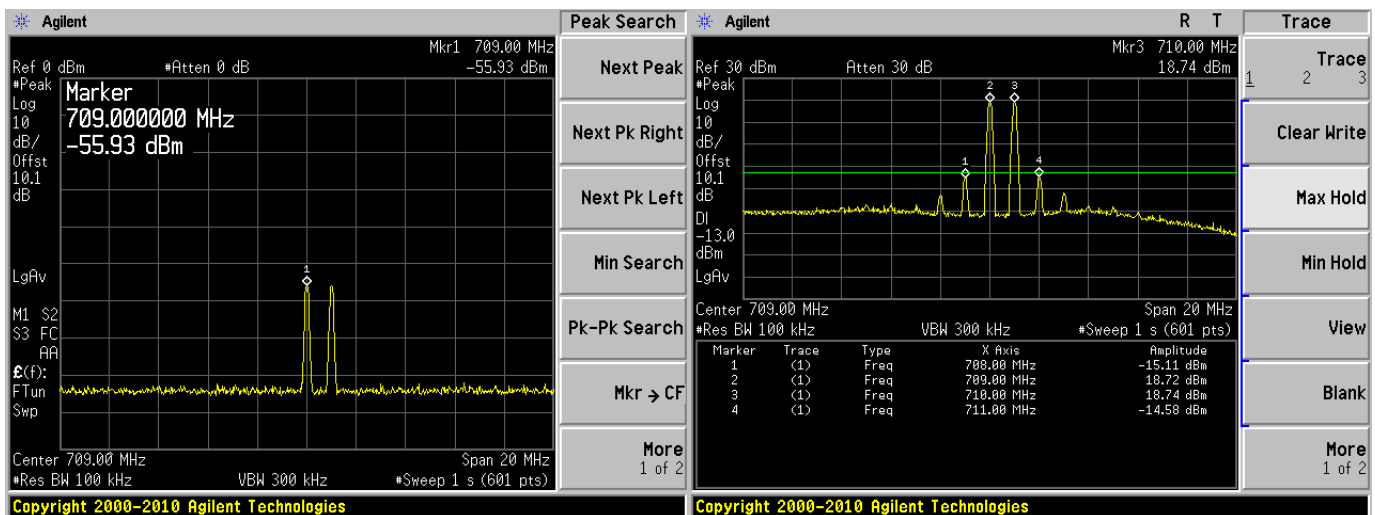

High Channel, Input

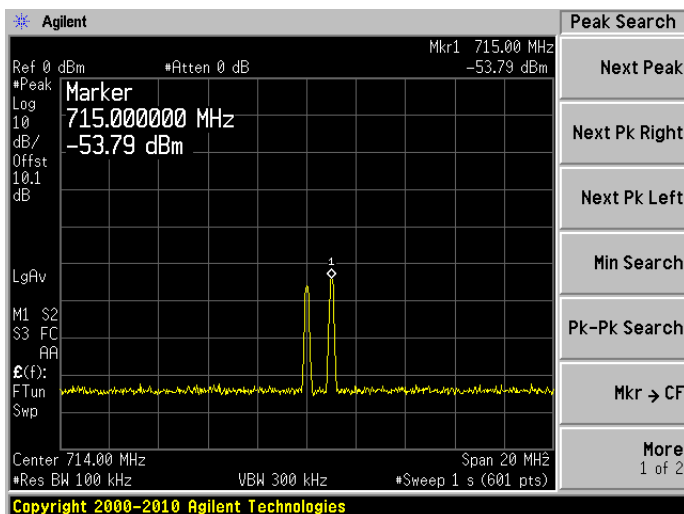


High Channel, Output

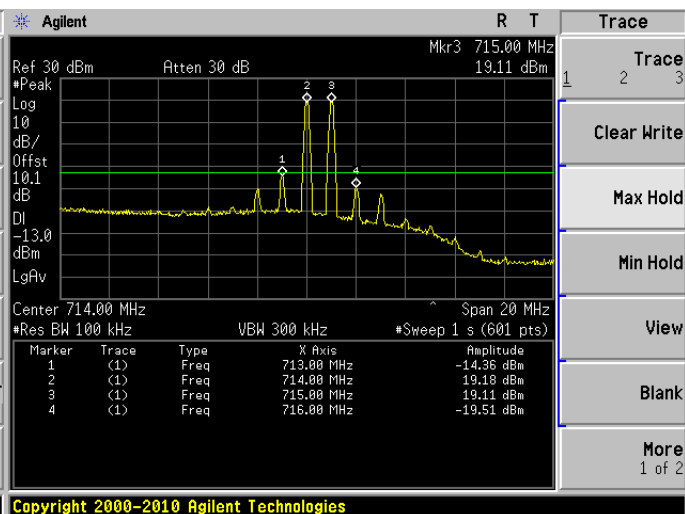


Lower LTE Band Downlink:


Low Channel, Input

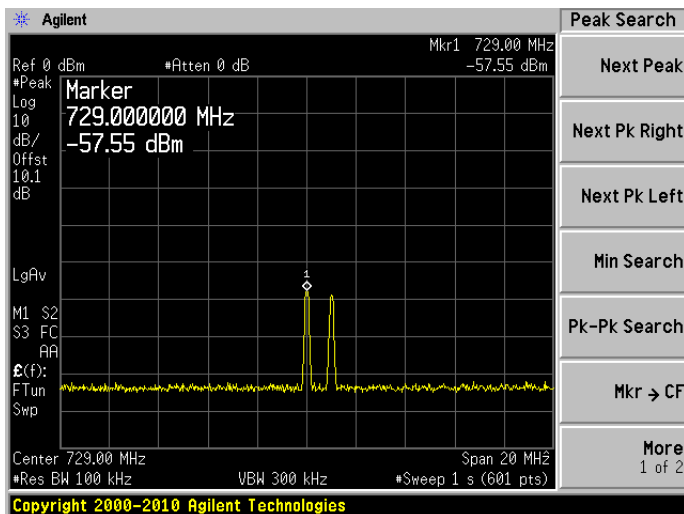


Low Channel, Output

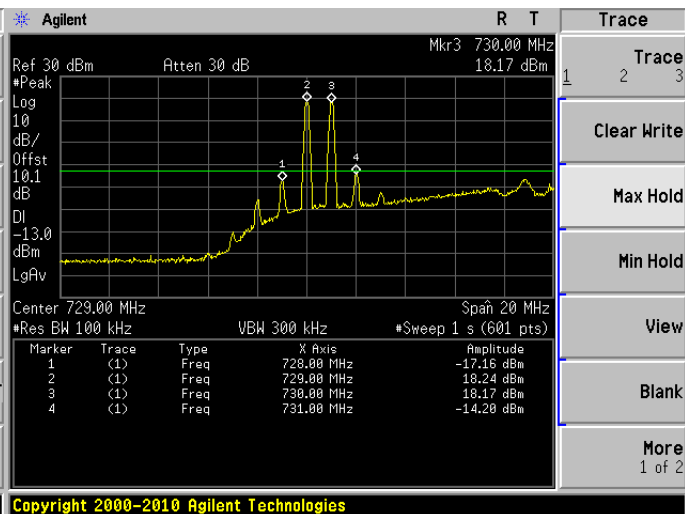


Middle Channel, Input

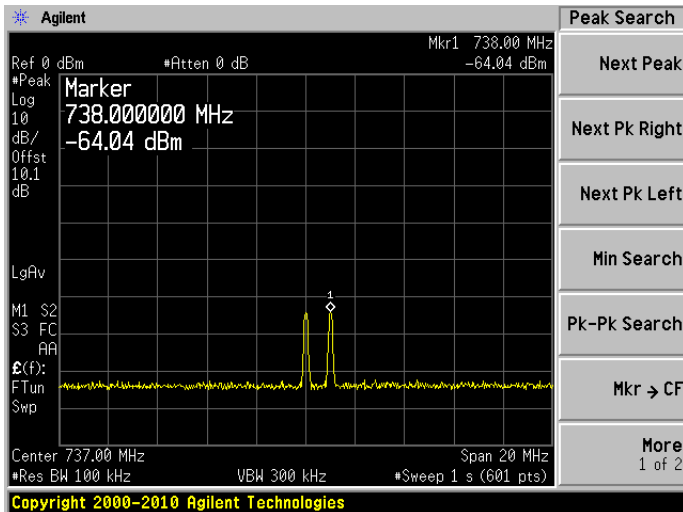


Middle Channel, Output

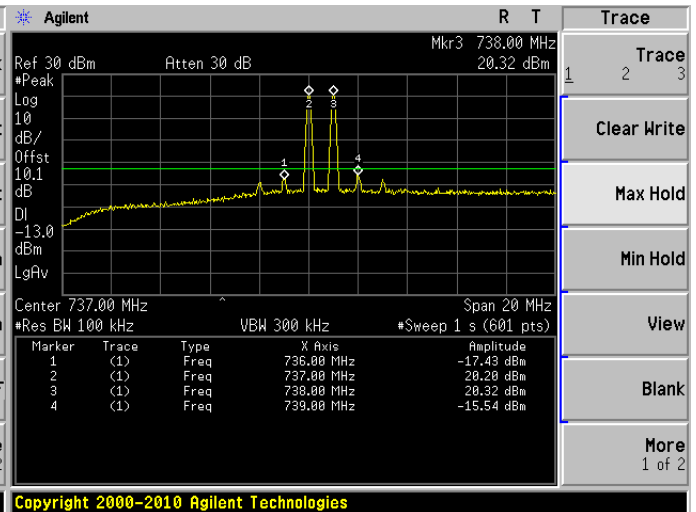

High Channel, Input

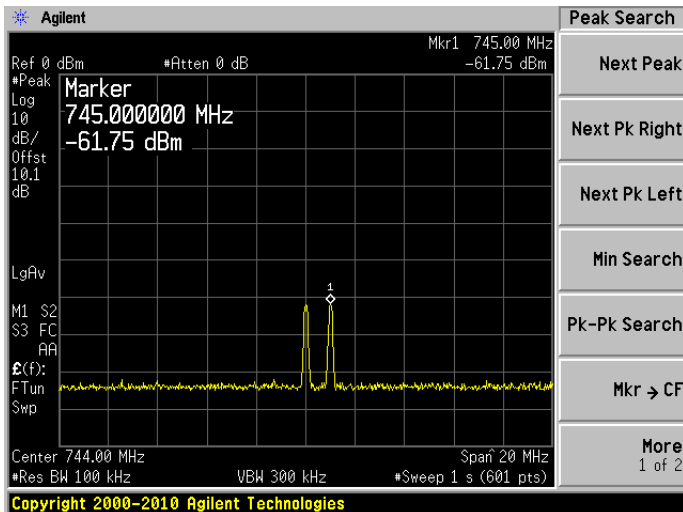


High Channel, Output

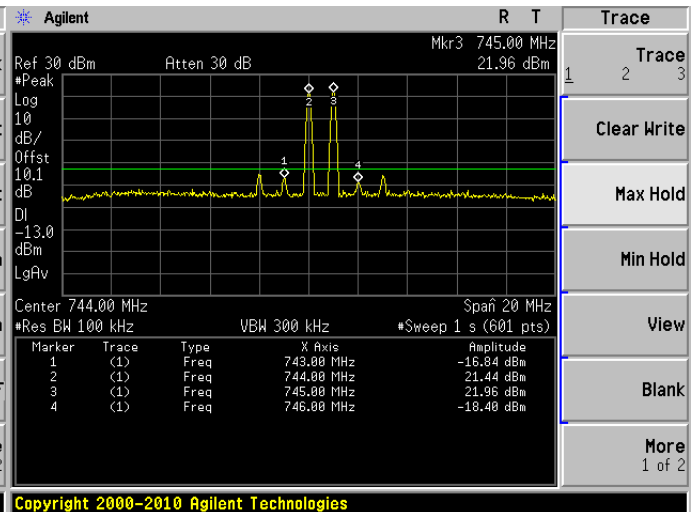


Upper LTE Band Uplink:


Low Channel, Input

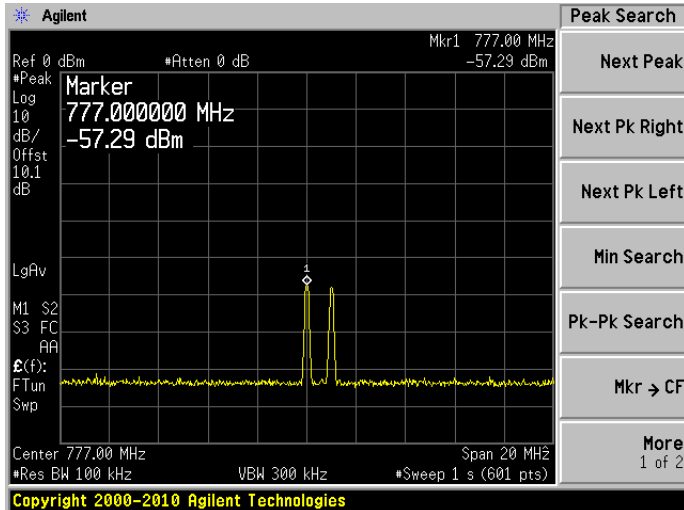


Low Channel, Output

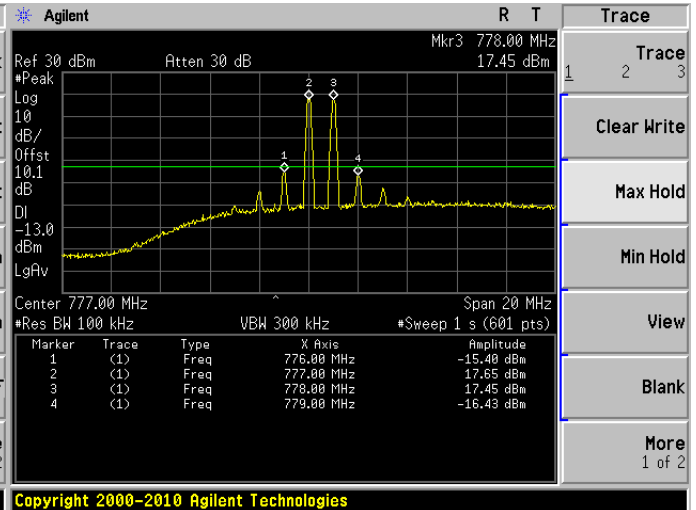


Middle Channel, Input

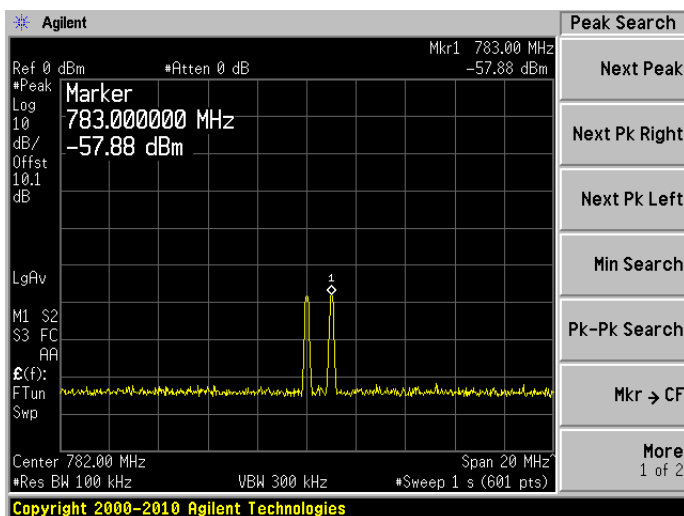


Middle Channel, Output

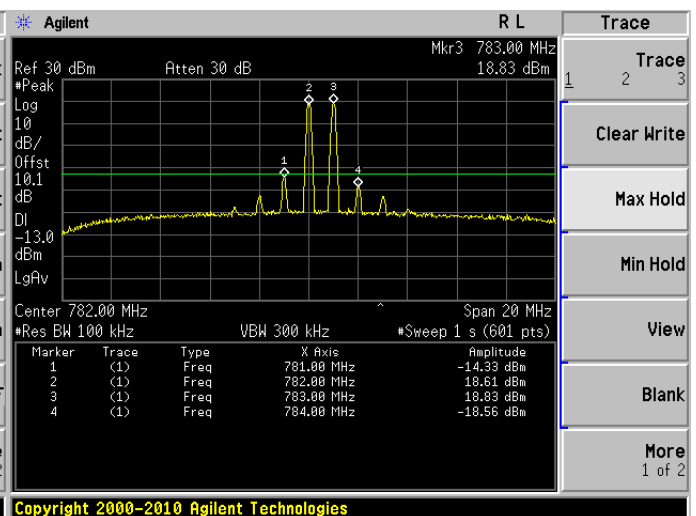

High Channel, Input

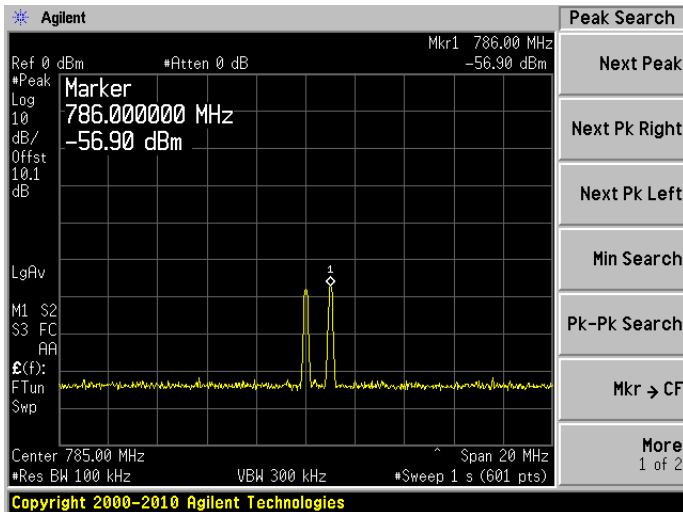


High Channel, Output

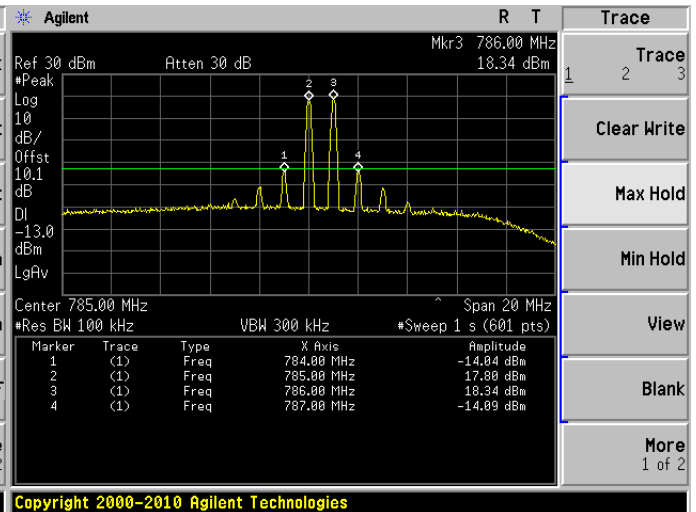


Upper LTE Band Downlink:


Low Channel, Input

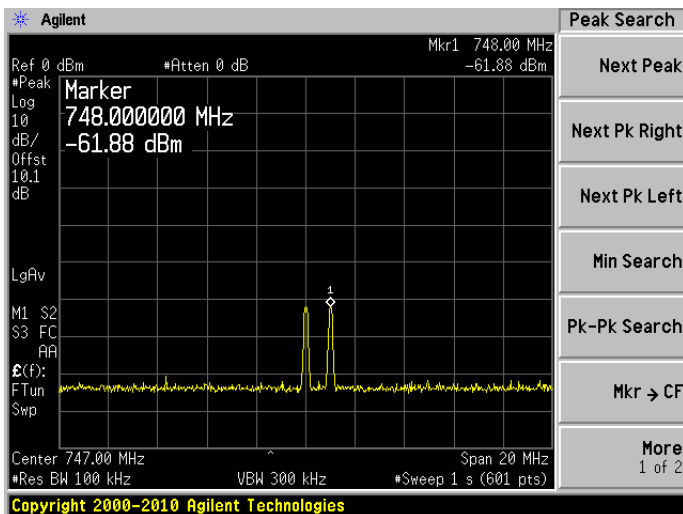


Low Channel, Output

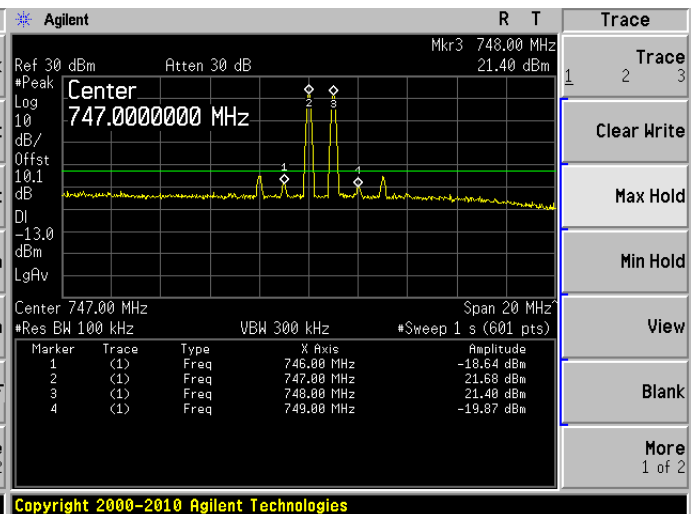


Middle Channel, Input

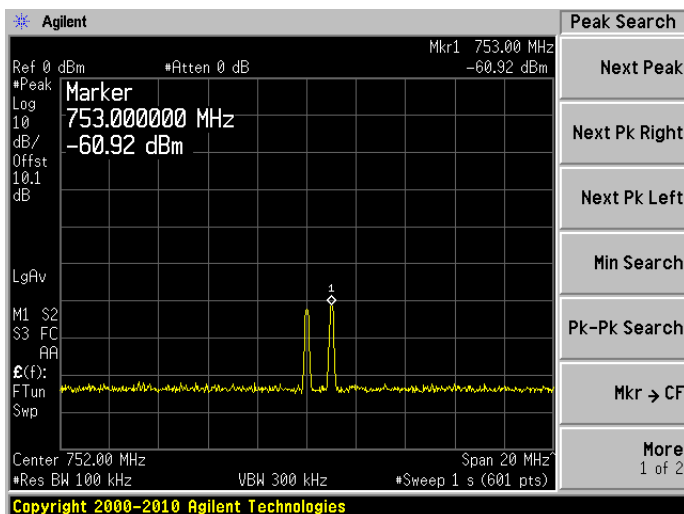


Middle Channel, Output

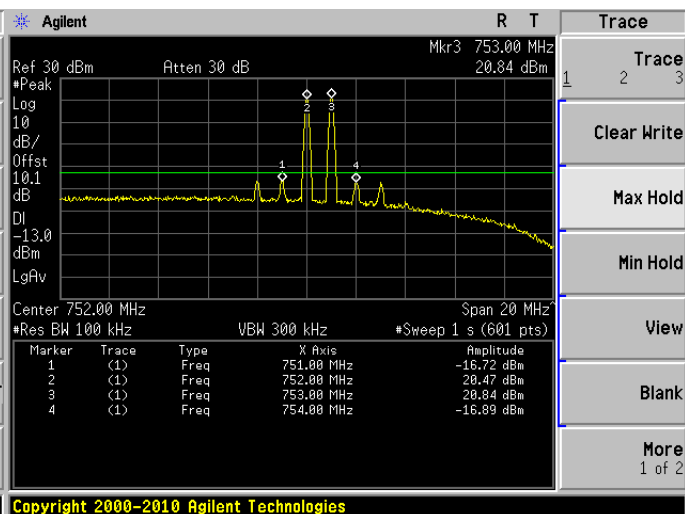

High Channel, Input

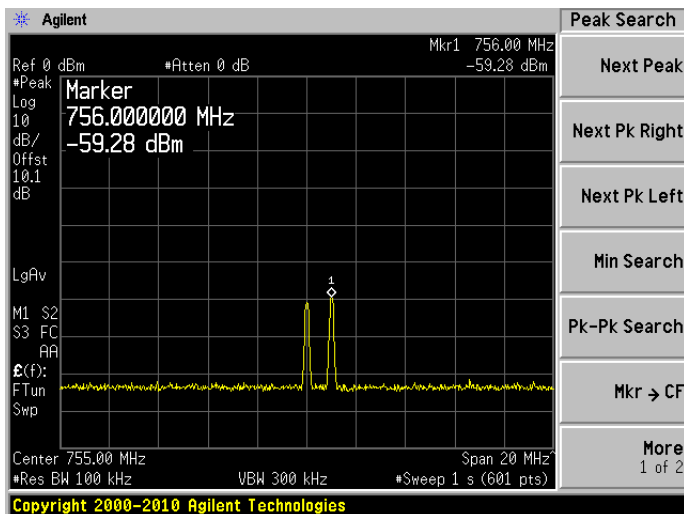


High Channel, Output

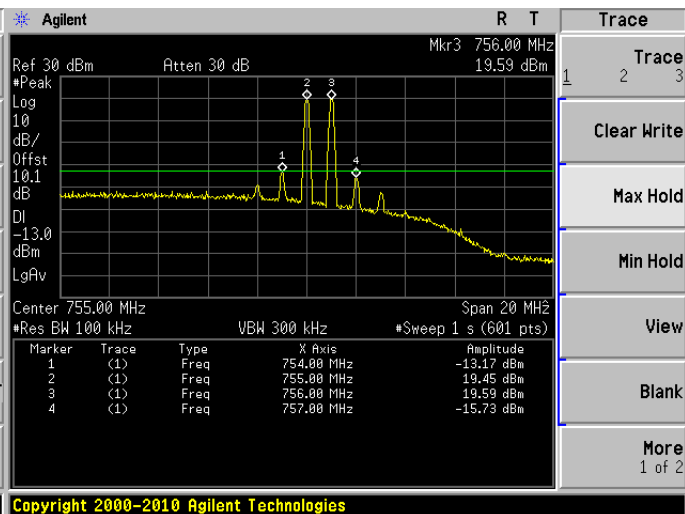

AWS Band Uplink:


Low Channel, Input

Low Channel, Output

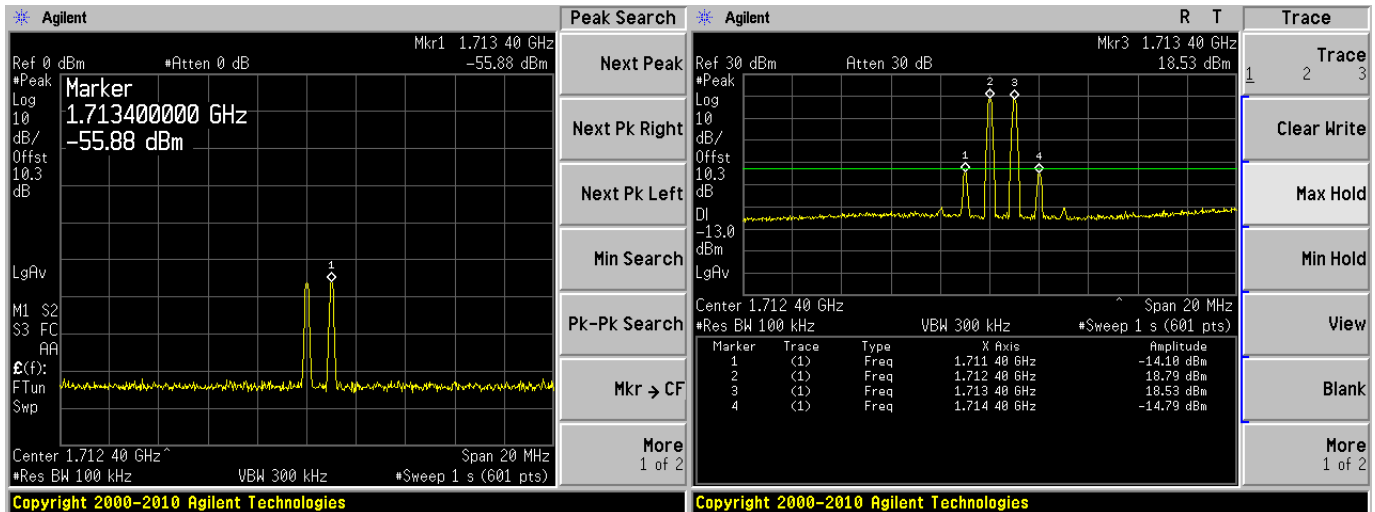


Middle Channel, Input


Middle Channel, Output

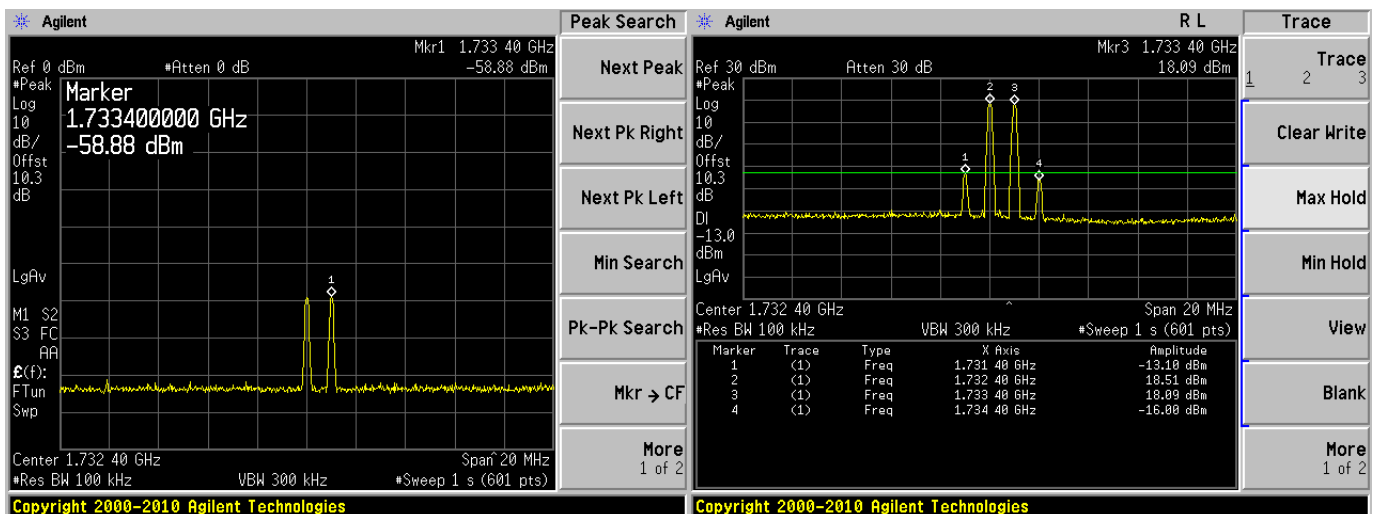

High Channel, Input

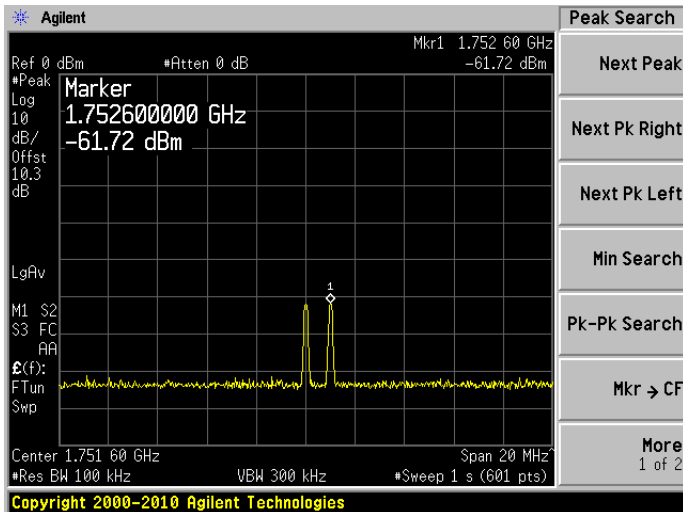


High Channel, Output

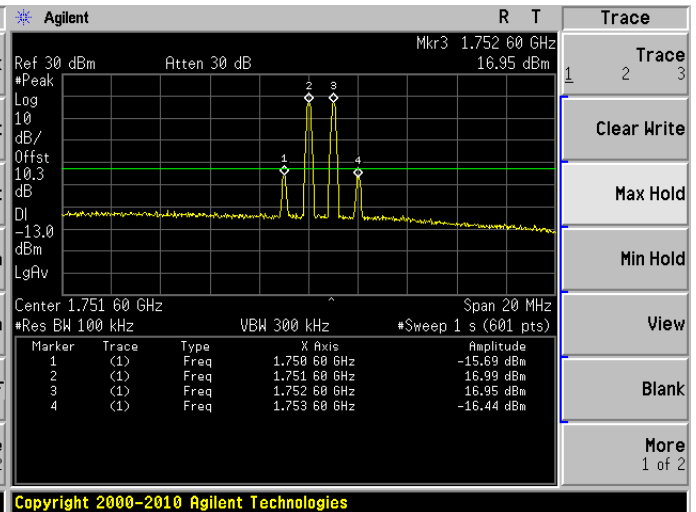


AWS Band Downlink:


Low Channel, Input

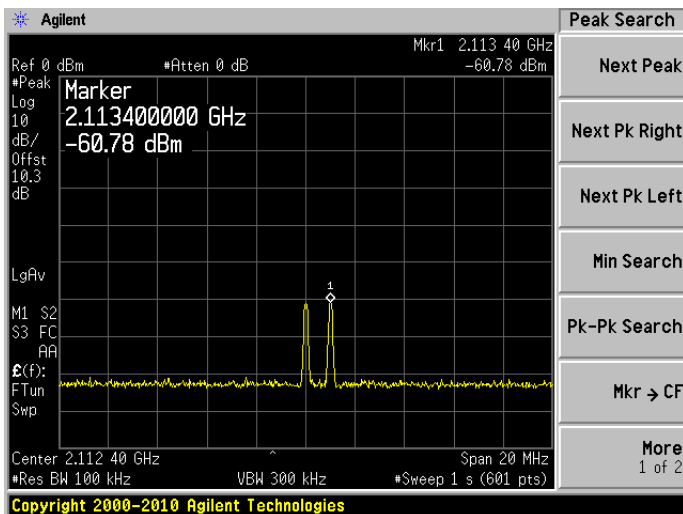


Low Channel, Output

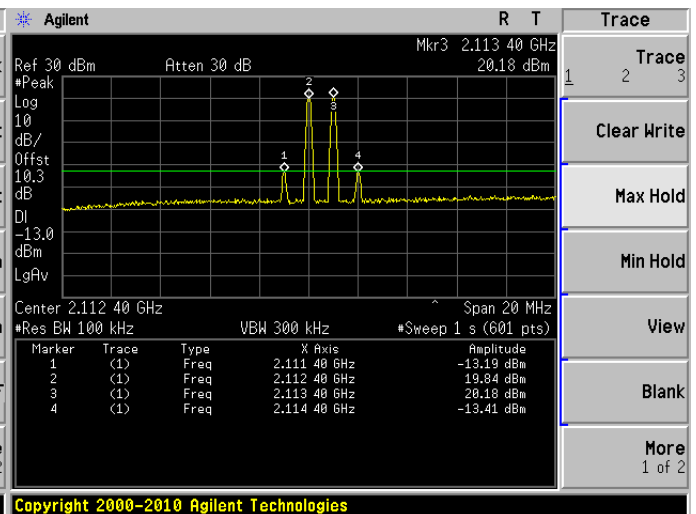


Middle Channel, Input

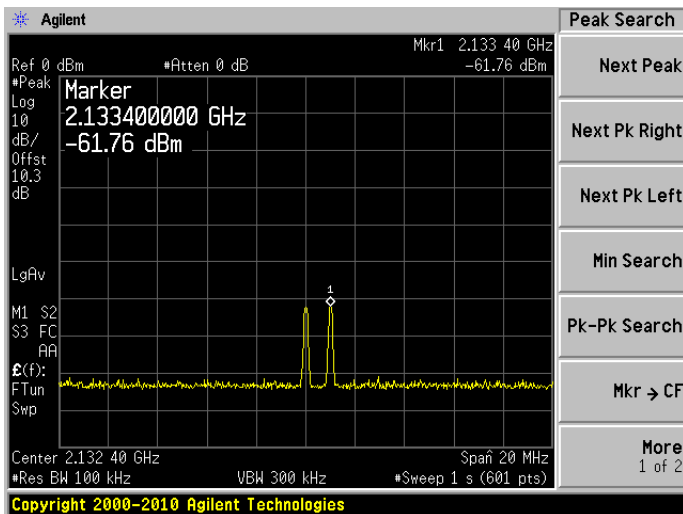


Middle Channel, Output

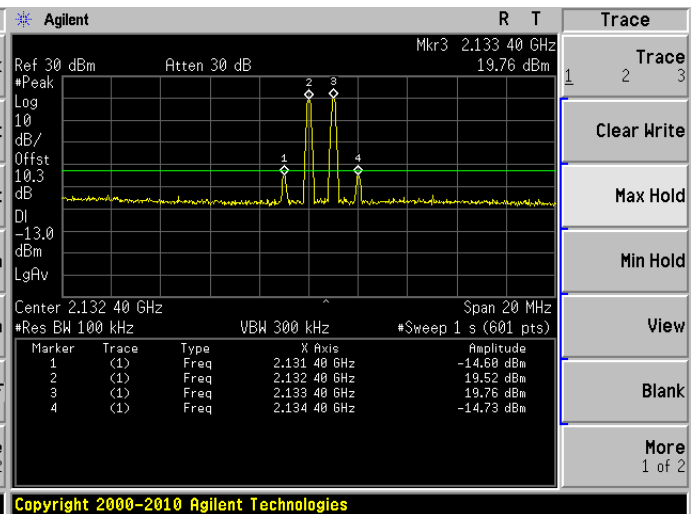

High Channel, Input

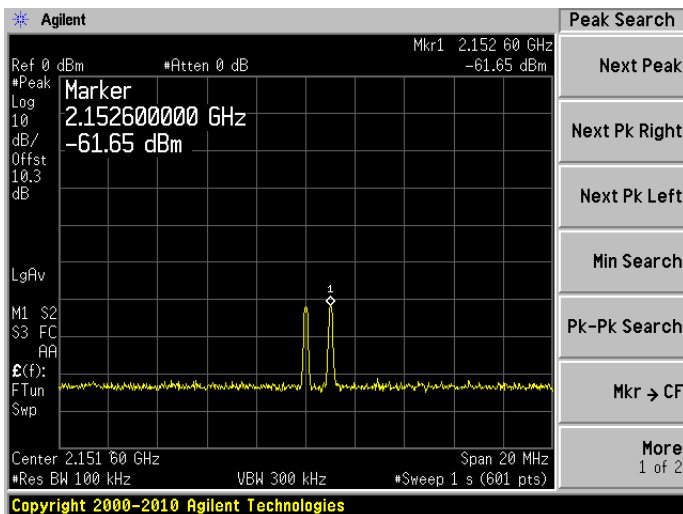

High Channel, Output

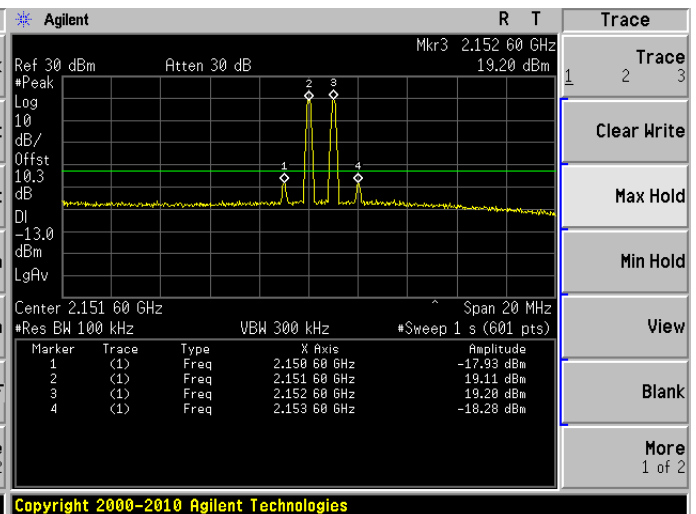

8 FCC §22.917 & §24.238, & §27.53 – Band Edge

8.1 Applicable Standard

According to FCC §22.917, §24.238, and §27.53, the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

8.2 Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.

8.3 Test Equipment List and Details

Manufacturers	Descriptions	Models	Serial Numbers	Calibration Dates
Agilent	Spectrum Analyzer	E4440A	US45303156	2010-08-09 ¹
Agilent	Signal Generator	E4438C	MY45091309	2011-04-28

Note 1: Based on a two year calibration cycle.

Statement of Traceability: *BACL Corp.* attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

8.4 Test Environmental Conditions

Temperature:	20 °C
Relative Humidity:	48 %
ATM Pressure:	101.2kPa


The testing was performed by Lionel Lara on 2012-04-06 in the RF Site.

8.5 Test Results


Please refer to the following plots.

Cell Band Uplink:


GSM - Low Channel

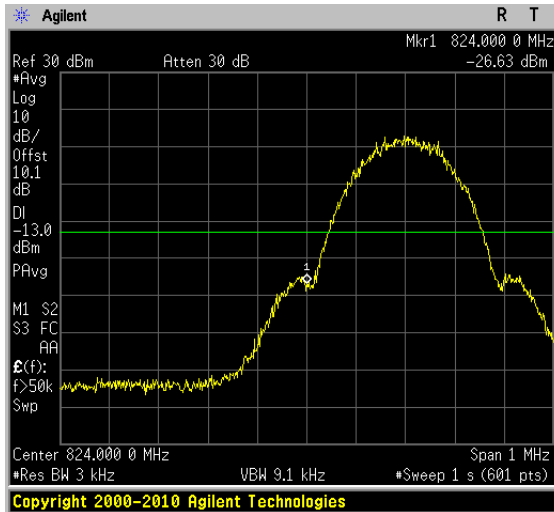


GSM - High Channel

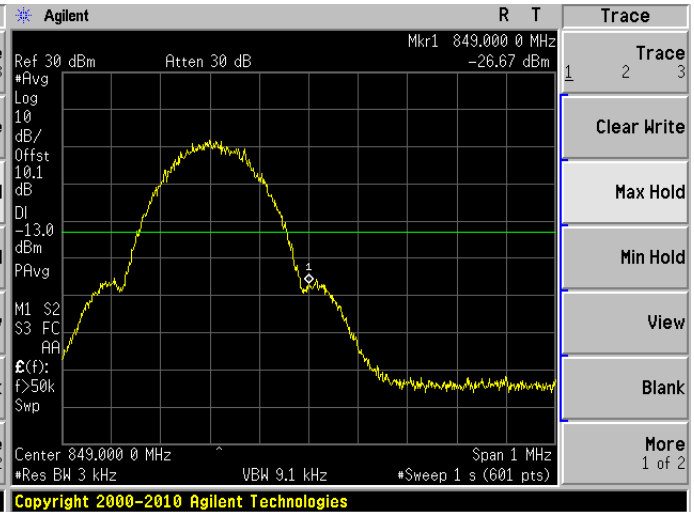


EDGE - Low Channel

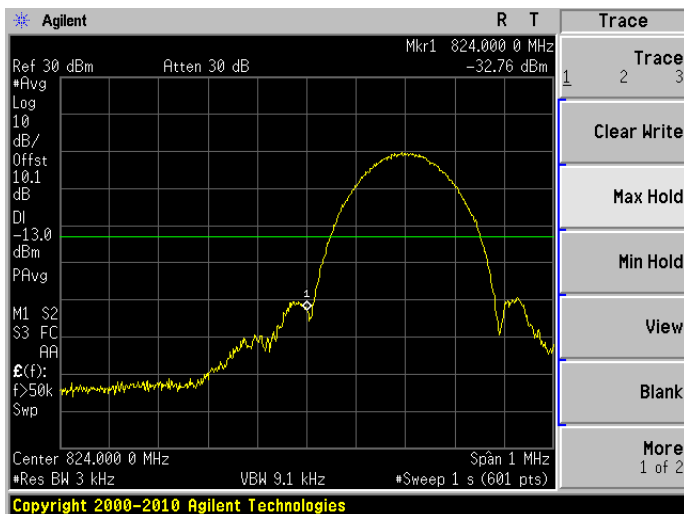


EDGE - High Channel

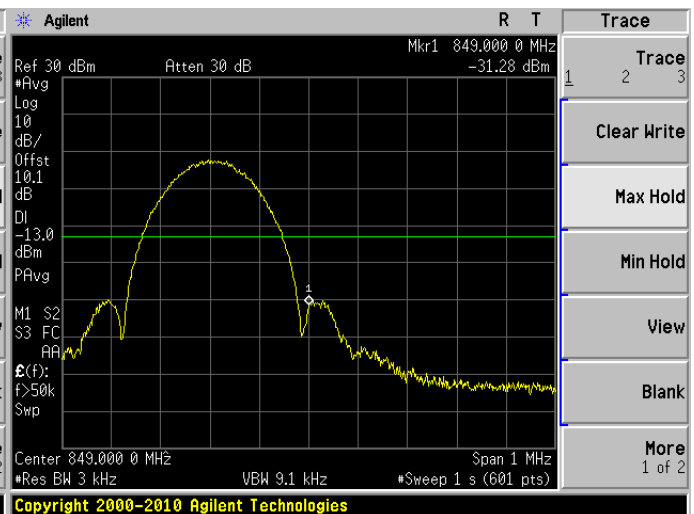


CDMA - Low Channel

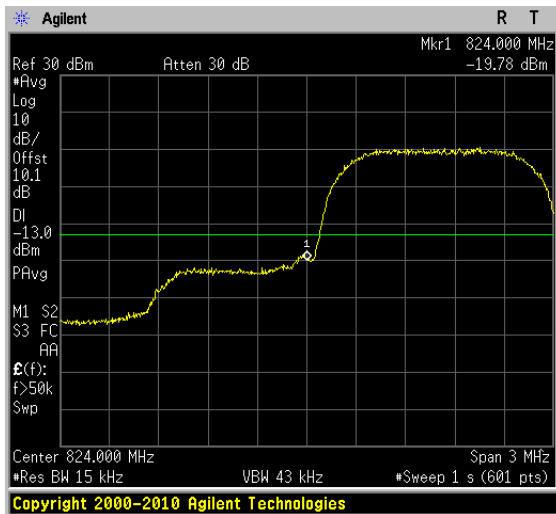


CDMA - High Channel

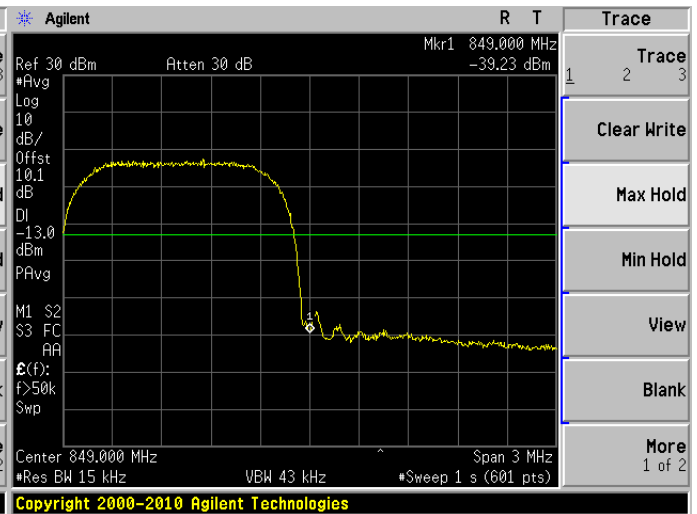

WCDMA - Low Channel

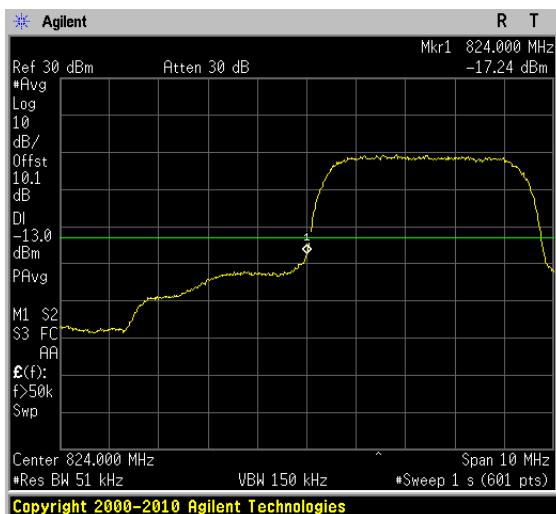


WCDMA - High Channel

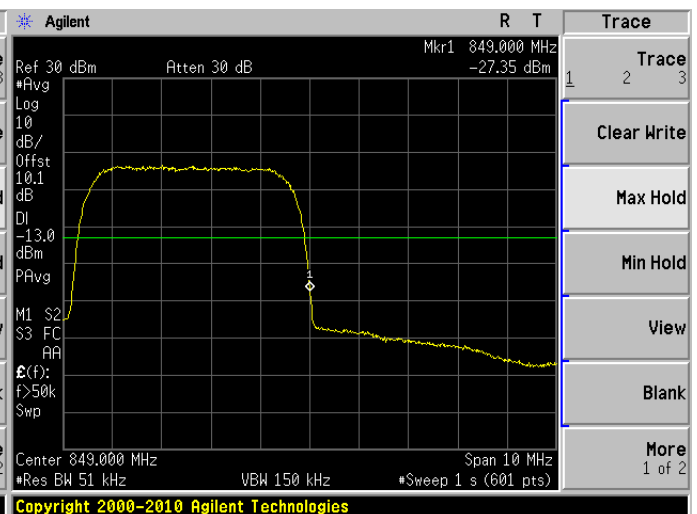


Cell Band Downlink:


GSM - Low Channel

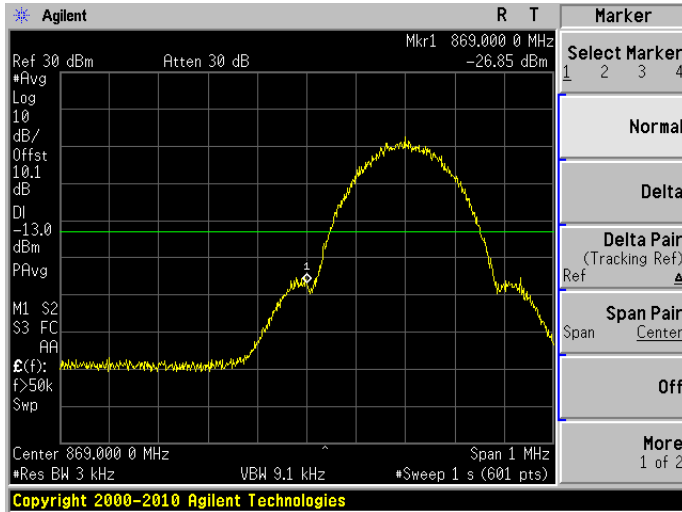


GSM - High Channel

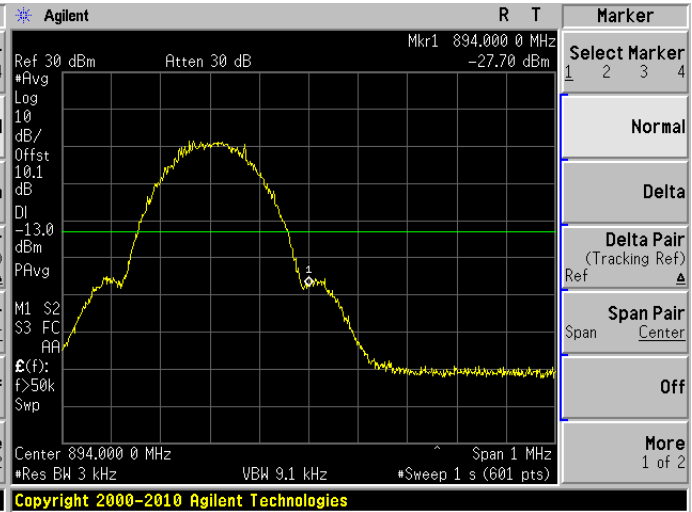


EDGE - Low Channel

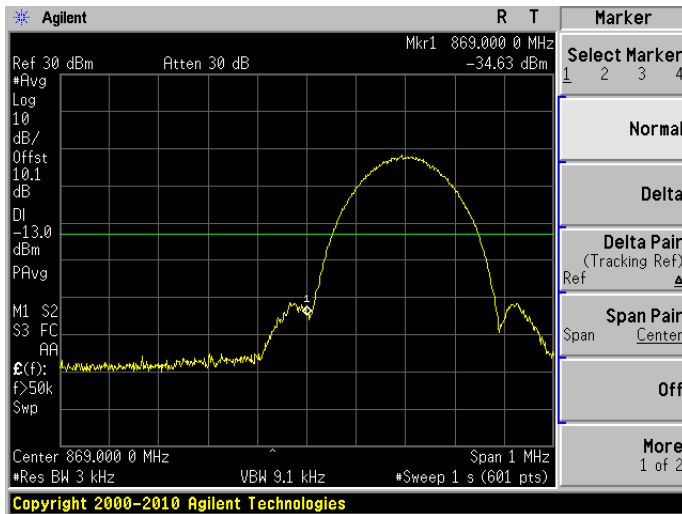


EDGE - High Channel

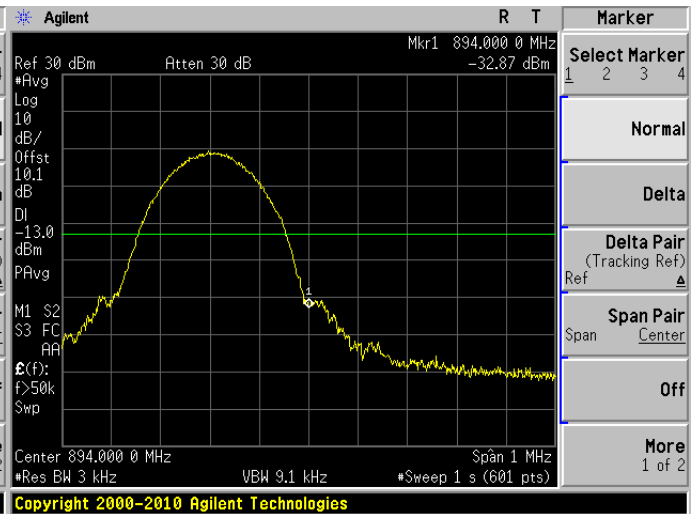


CDMA - Low Channel

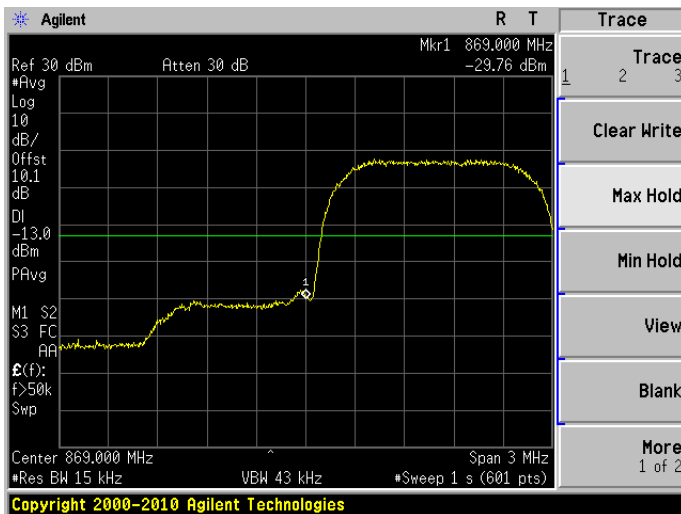


CDMA - High Channel

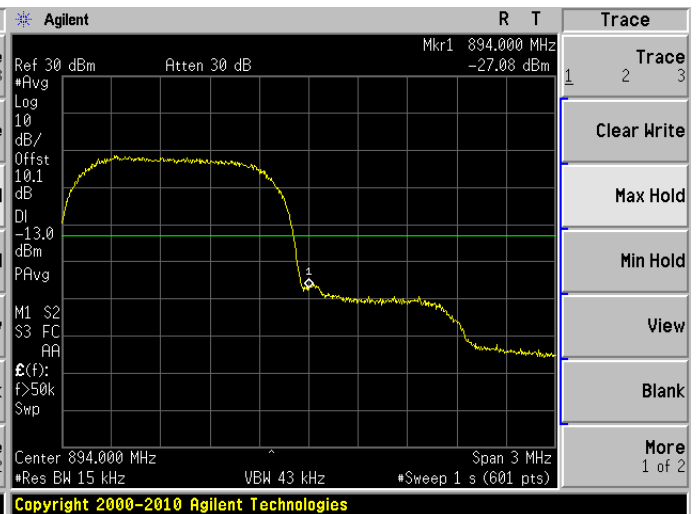

WCDMA - Low Channel

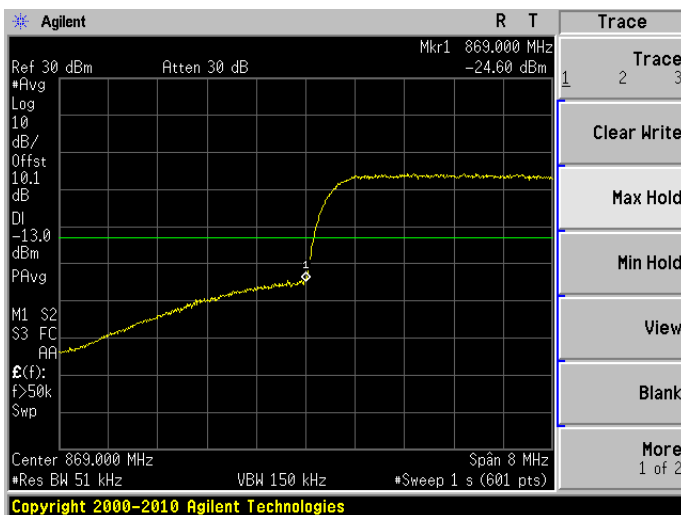


WCDMA - High Channel

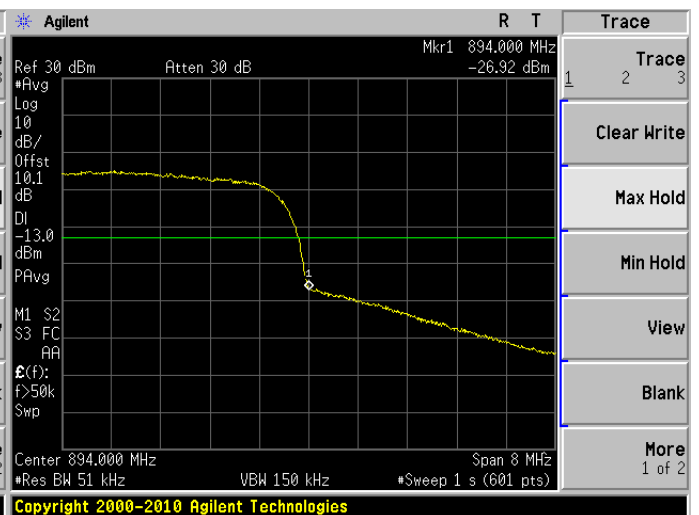


PCS Band Uplink:


GSM - Low Channel

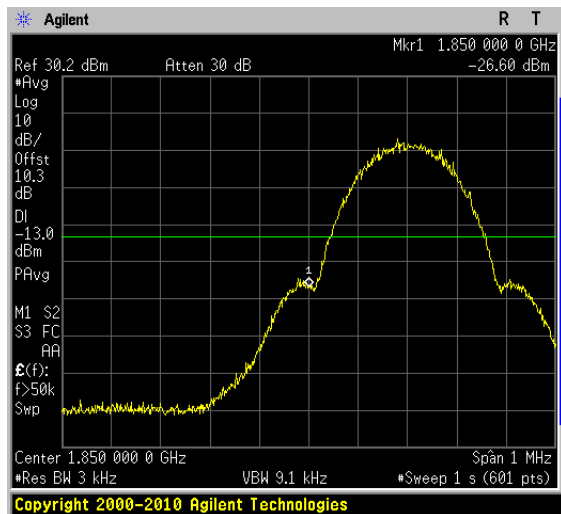


GSM - High Channel

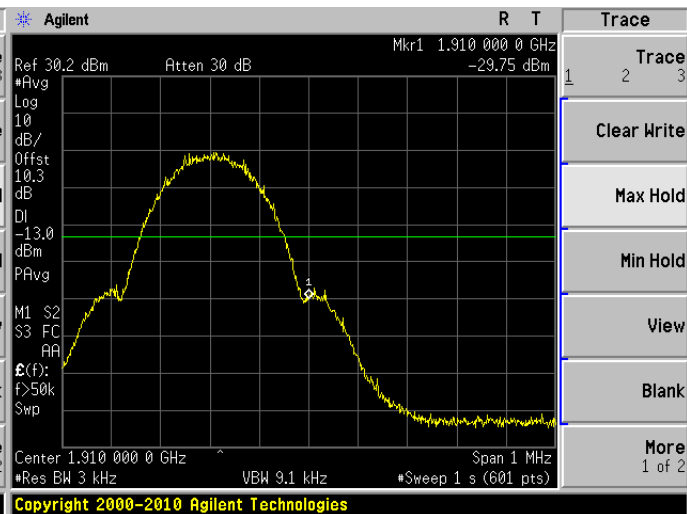


EDGE - Low Channel

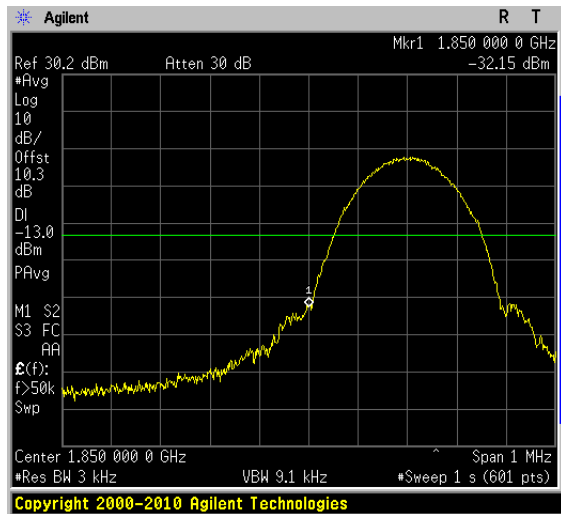


EDGE - High Channel

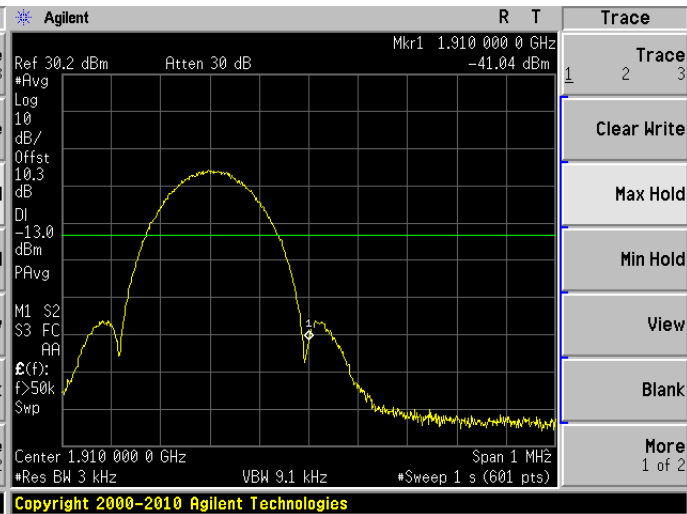


CDMA - Low Channel

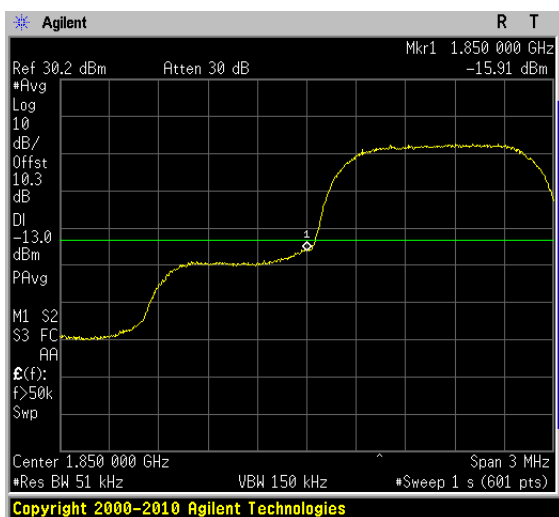


CDMA - High Channel

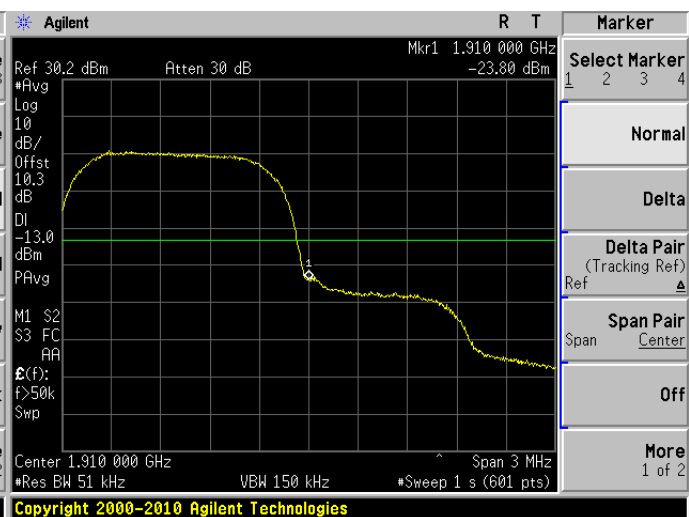

WCDMA - Low Channel

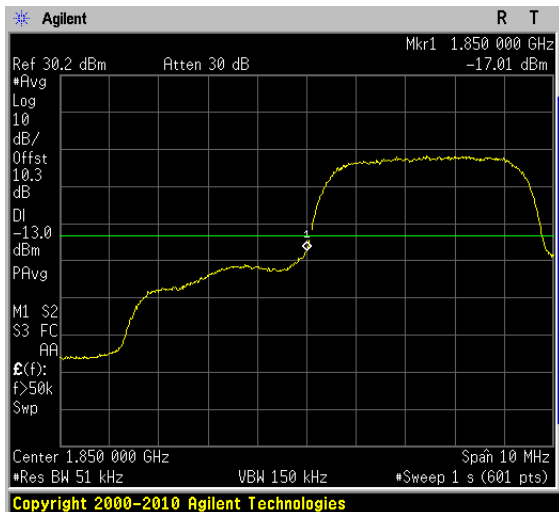


WCDMA - High Channel

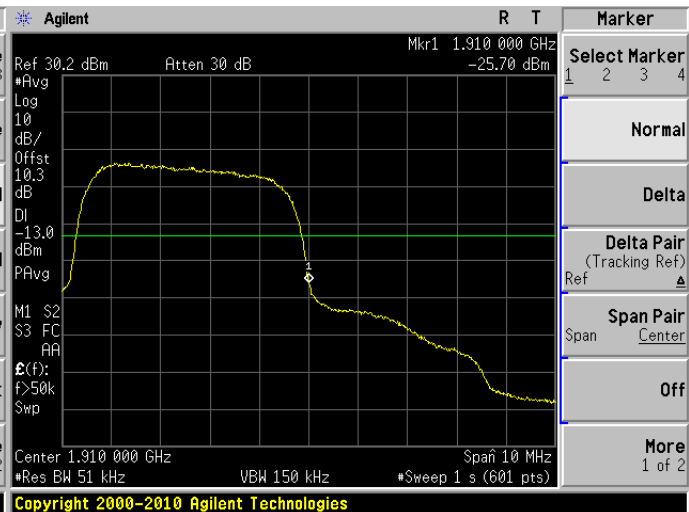


PCS Band Downlink:


GSM - Low Channel

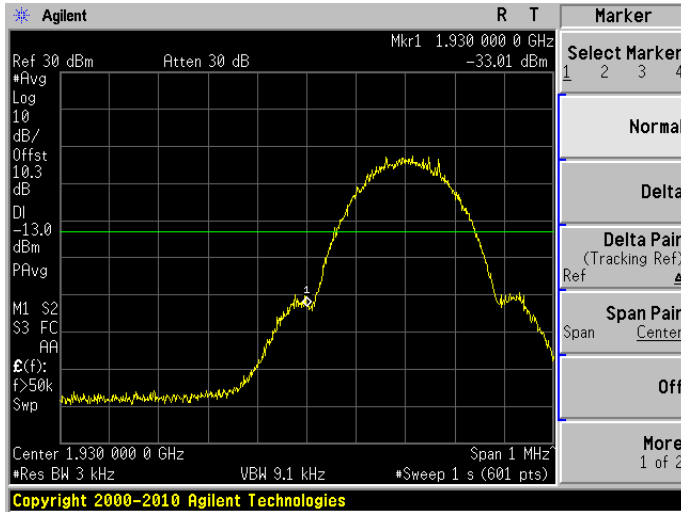


GSM - High Channel

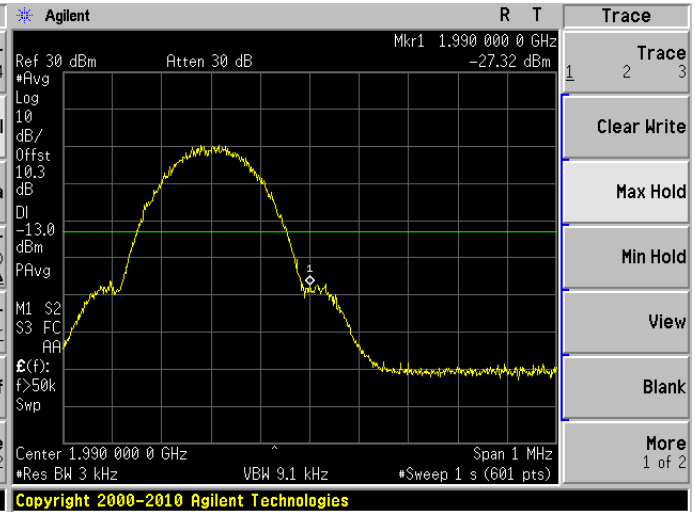


EDGE - Low Channel

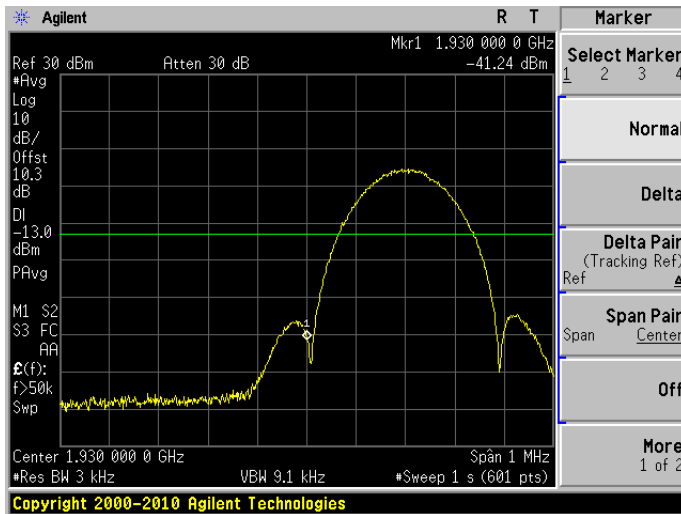


EDGE - High Channel

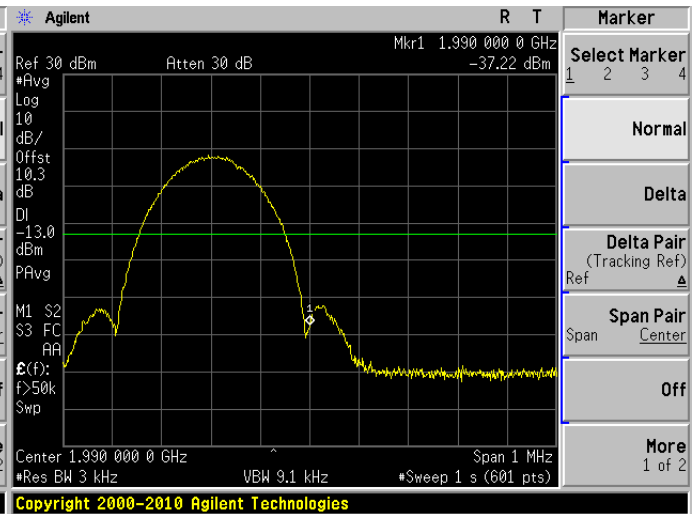


CDMA - Low Channel

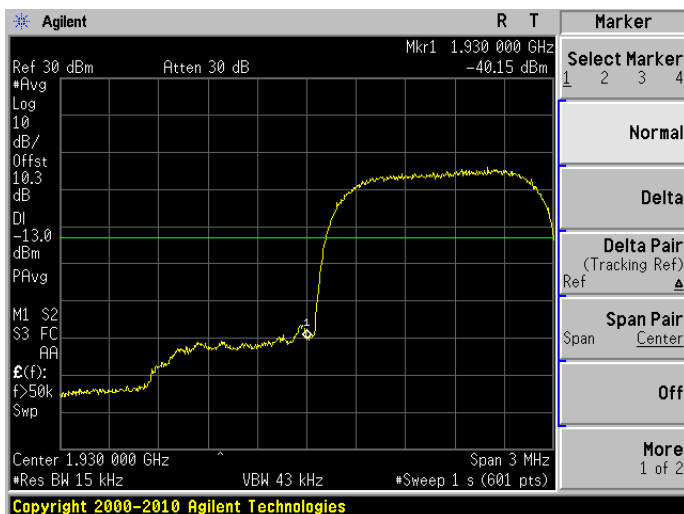


CDMA - High Channel

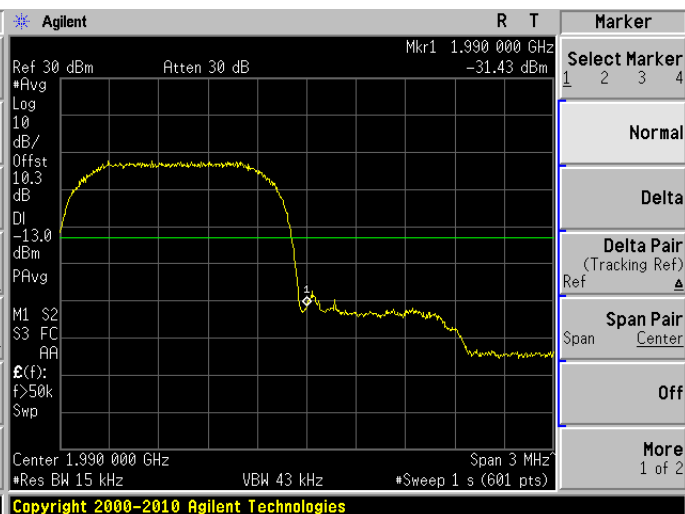

WCDMA - Low Channel

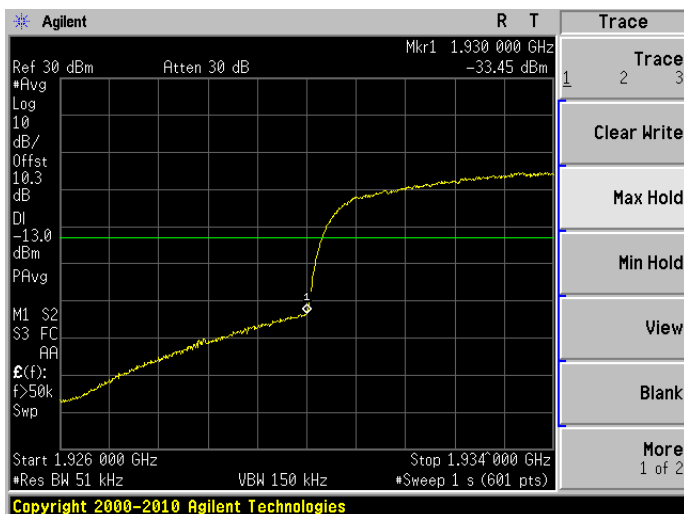


WCDMA - High Channel

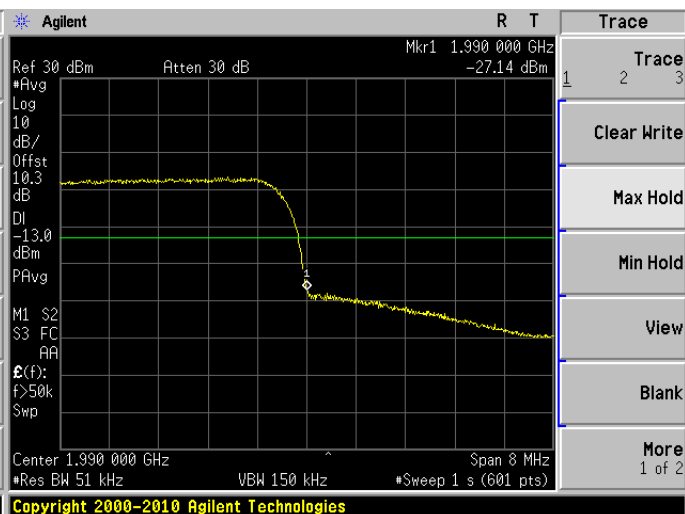


Lower LTE Band Uplink:


QPSK (1.4 MHz) - Low Channel

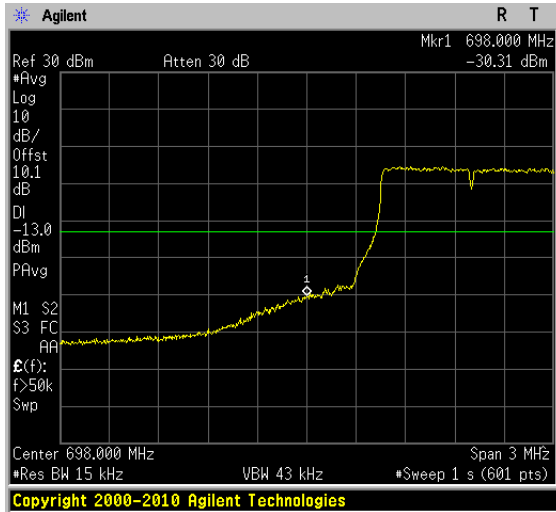


QPSK (1.4 MHz) - High Channel

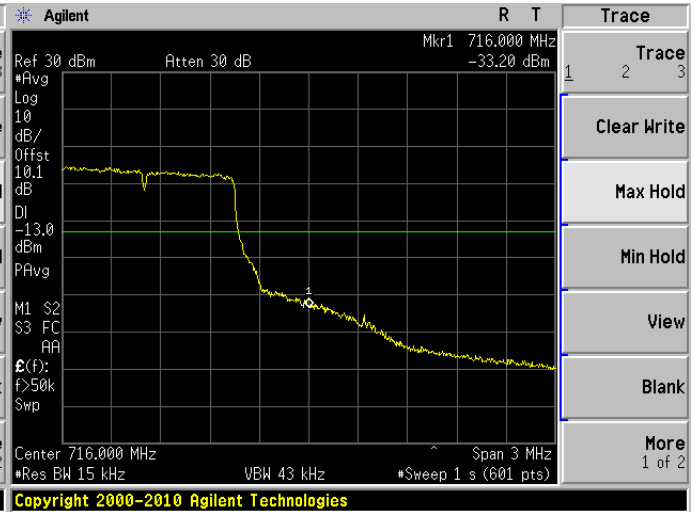


16QAM (1.4 MHz) - Low Channel

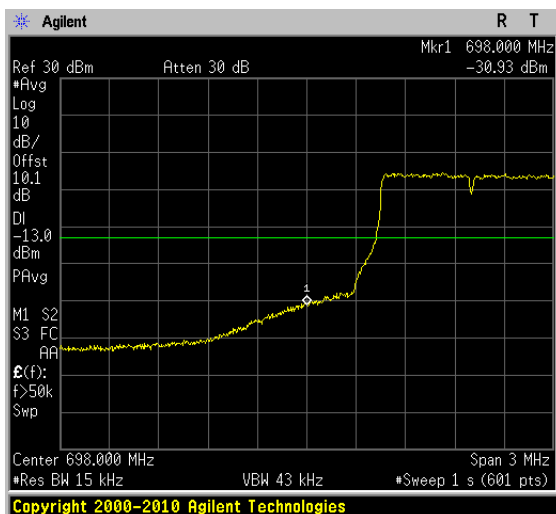


16QAM (1.4 MHz) - High Channel

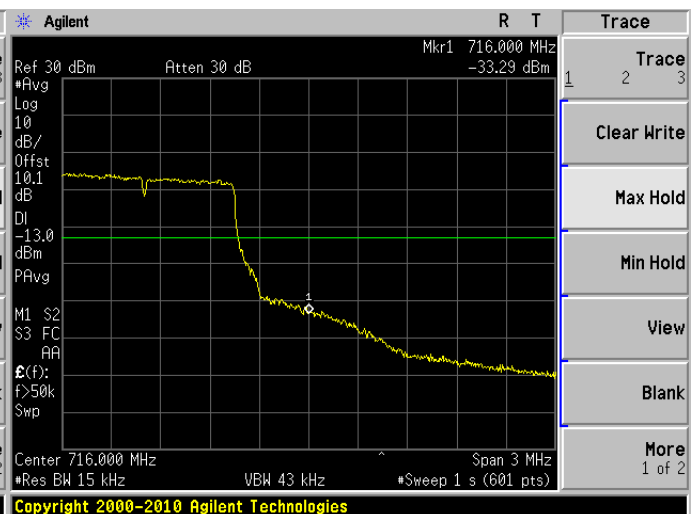


64QAM (1.4 MHz) - Low Channel

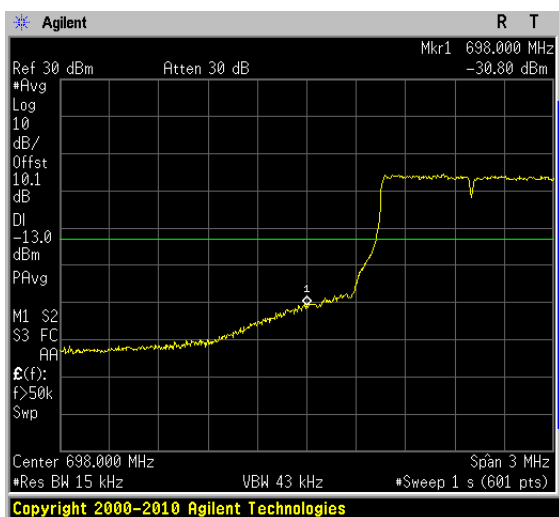


64QAM (1.4 MHz) - High Channel

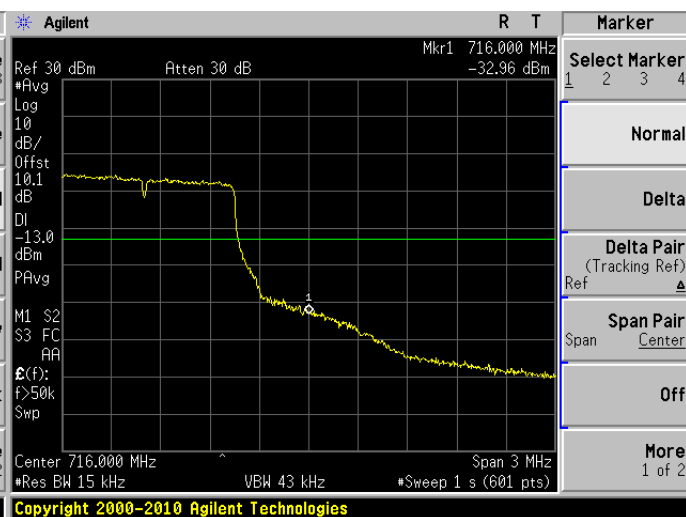


QPSK (3 MHz) - Low Channel

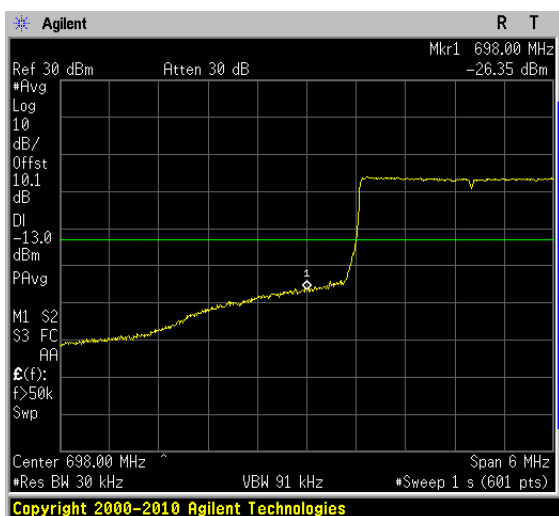


QPSK (3 MHz) - High Channel

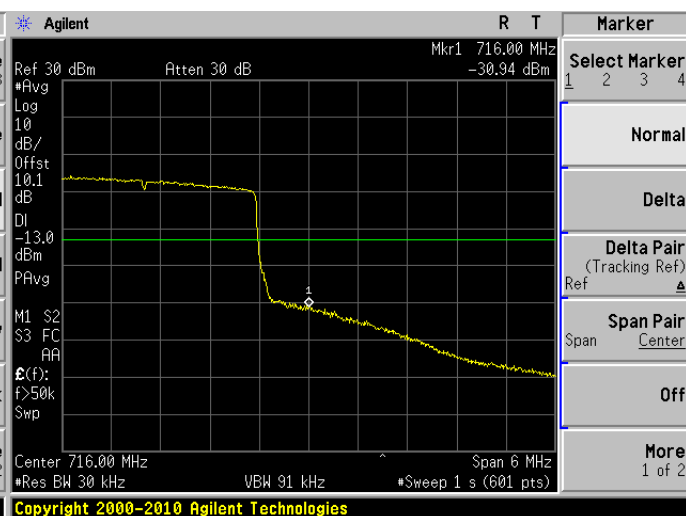


16QAM (3 MHz) - Low Channel

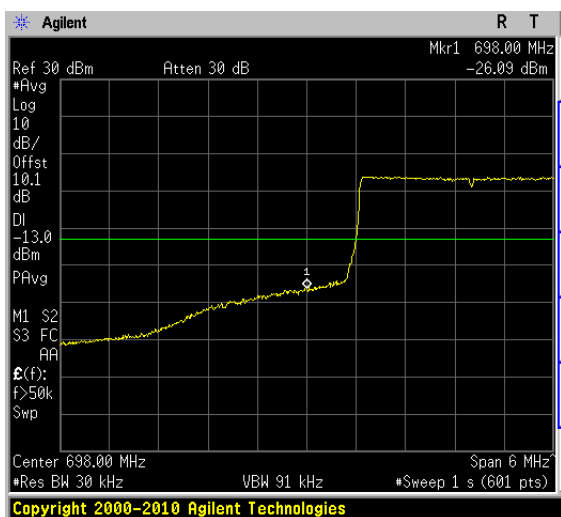


16QAM (3 MHz) - High Channel

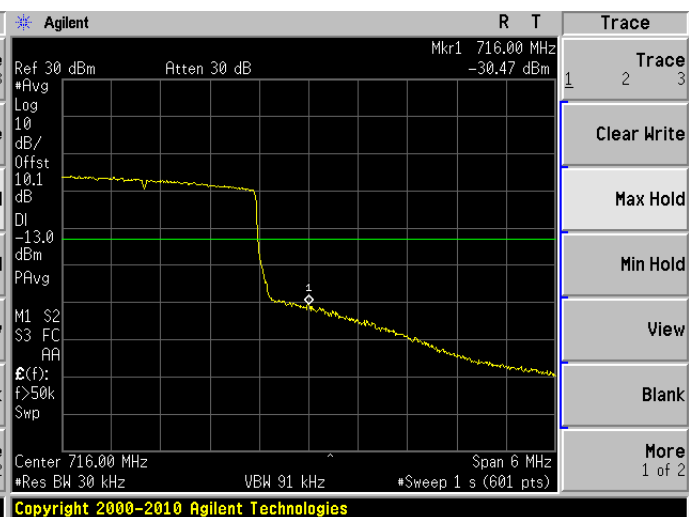


64QAM (3 MHz) - Low Channel

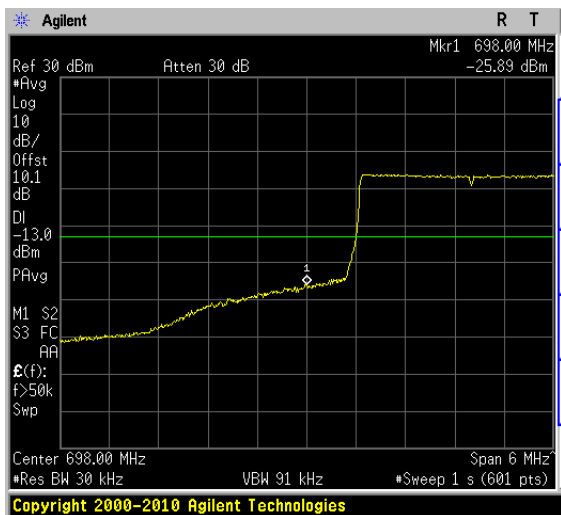


64QAM (3 MHz) - High Channel

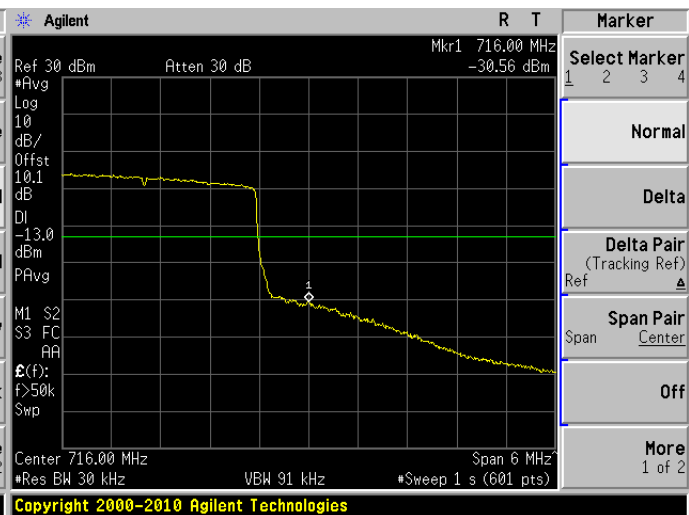


QPSK (5 MHz) - Low Channel

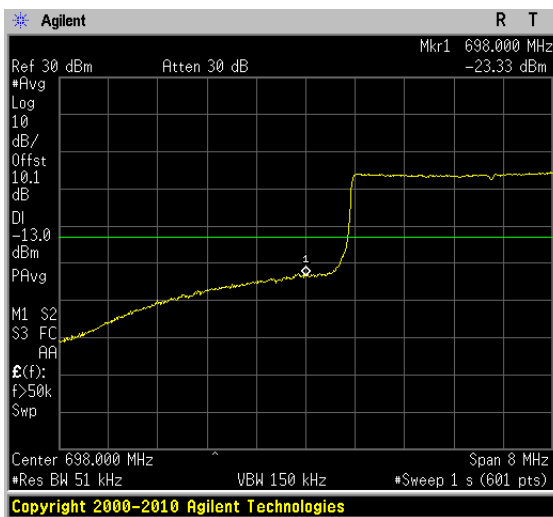


QPSK (5 MHz) - High Channel

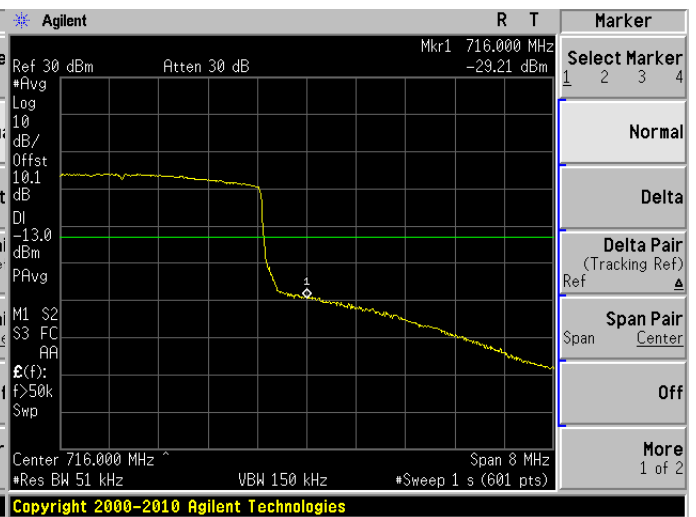


16QAM (5 MHz) - Low Channel

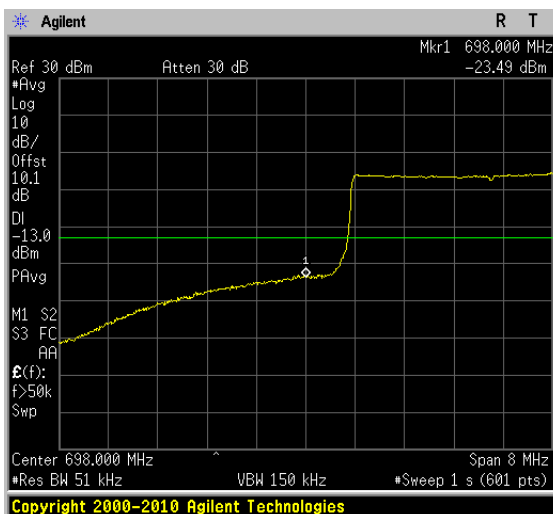


16QAM (5 MHz) - High Channel

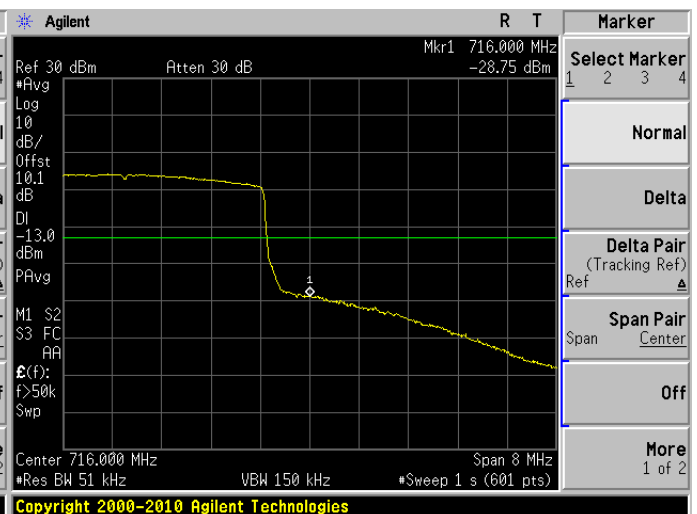


64QAM (5 MHz) - Low Channel

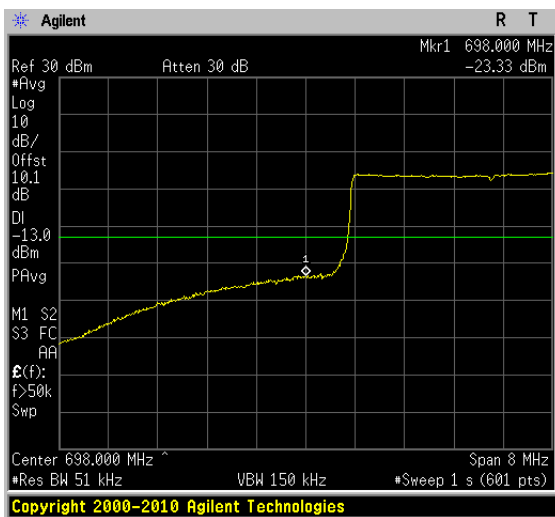


64QAM (5 MHz) - High Channel

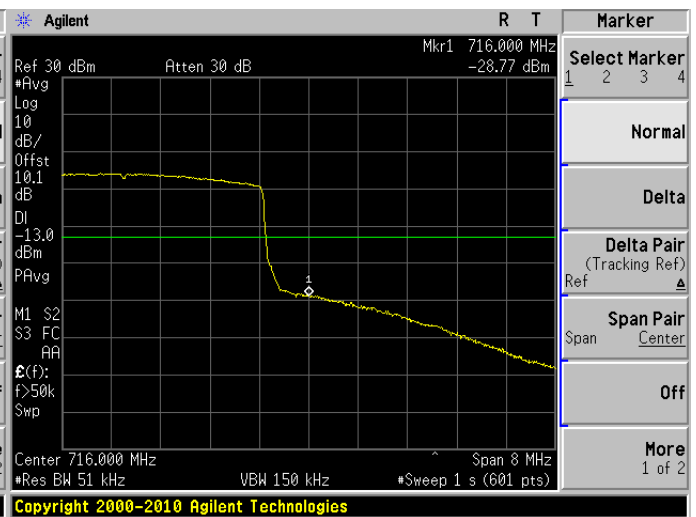


QPSK (10 MHz) - Low Channel

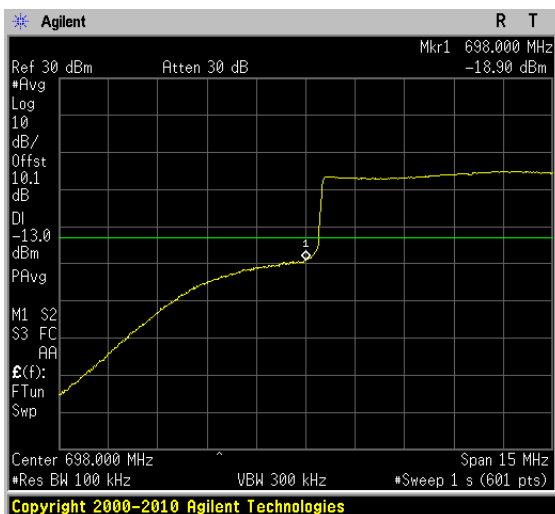


QPSK (10 MHz) - High Channel

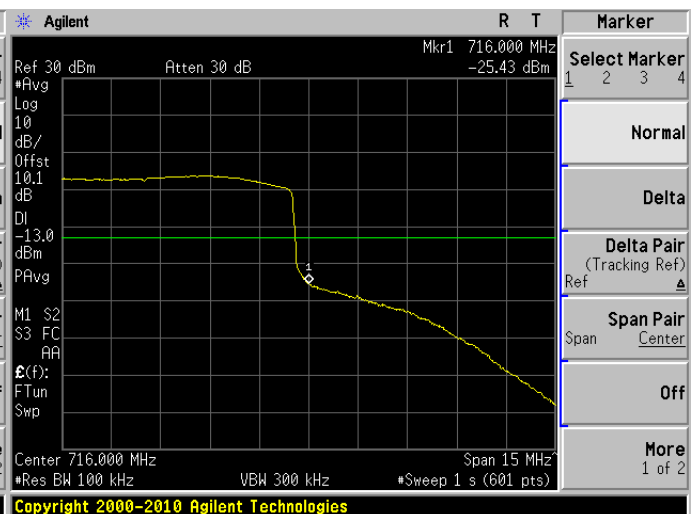


16QAM (10 MHz) - Low Channel

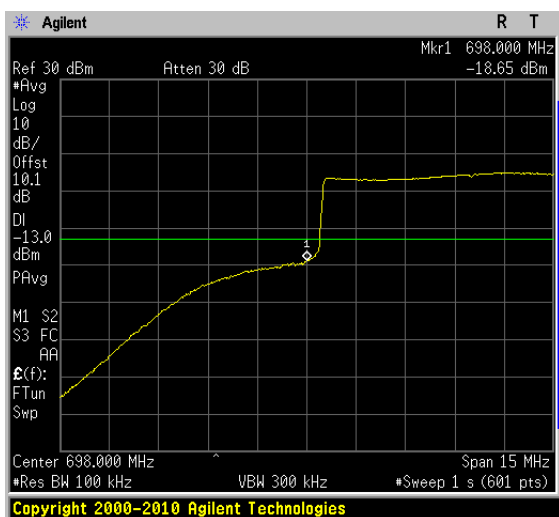


16QAM (10 MHz) - High Channel

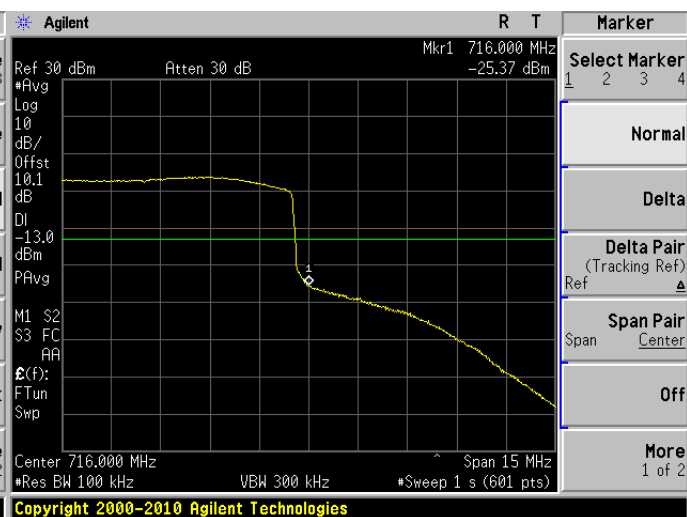

64QAM (10 MHz) - Low Channel

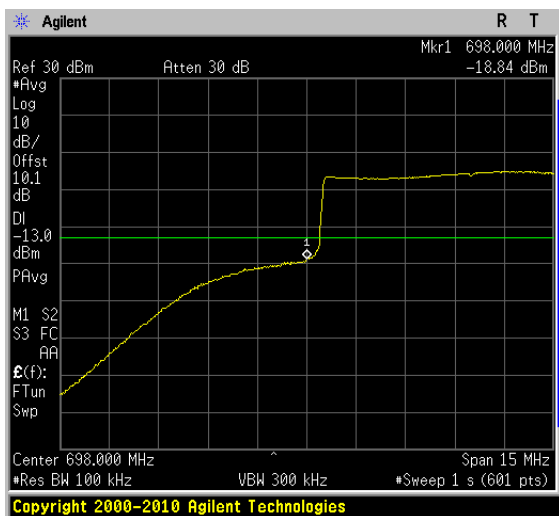


64QAM (10 MHz) - High Channel

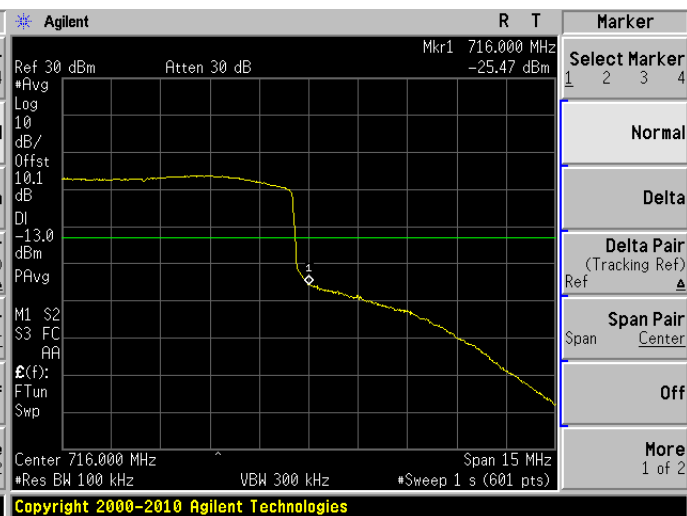


Lower LTE Band Downlink:


QPSK (1.4 MHz) - Low Channel

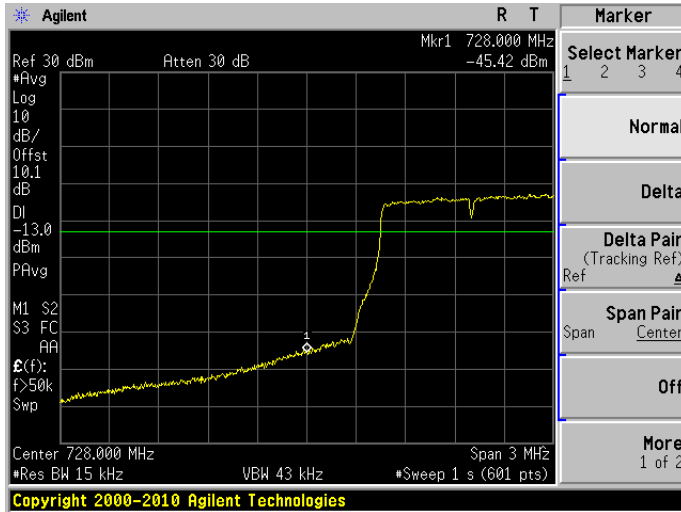


QPSK (1.4 MHz) - High Channel

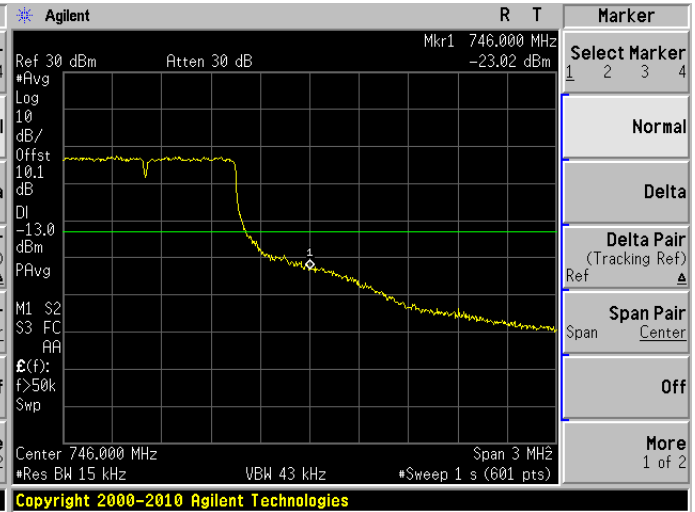


16QAM (1.4 MHz) - Low Channel

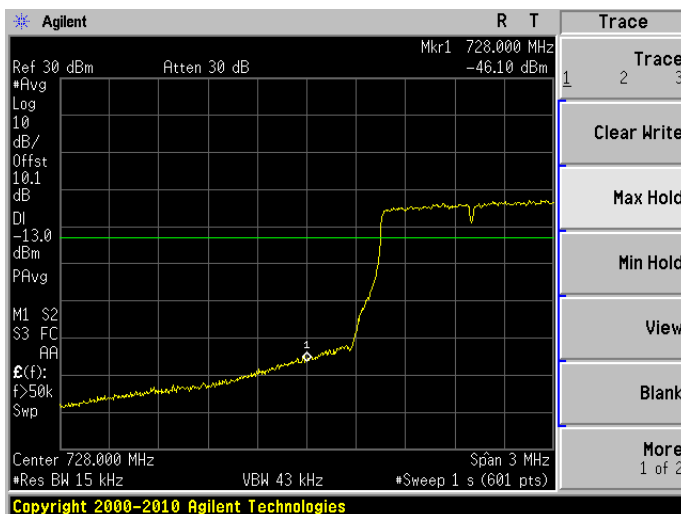


16QAM (1.4 MHz) - High Channel

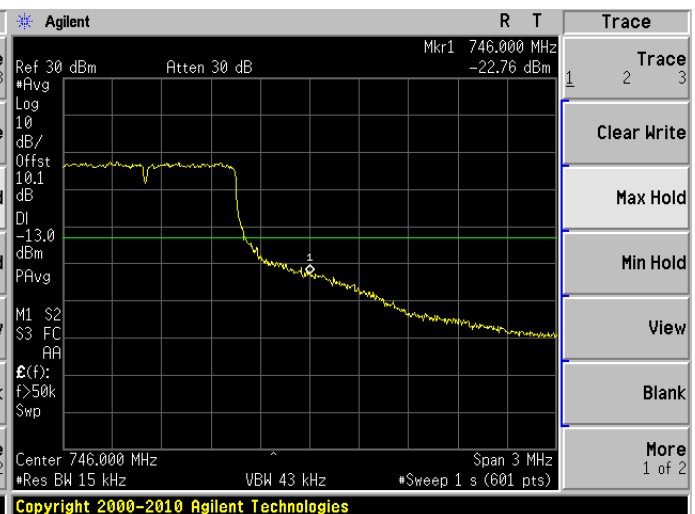


64QAM (1.4 MHz) - Low Channel

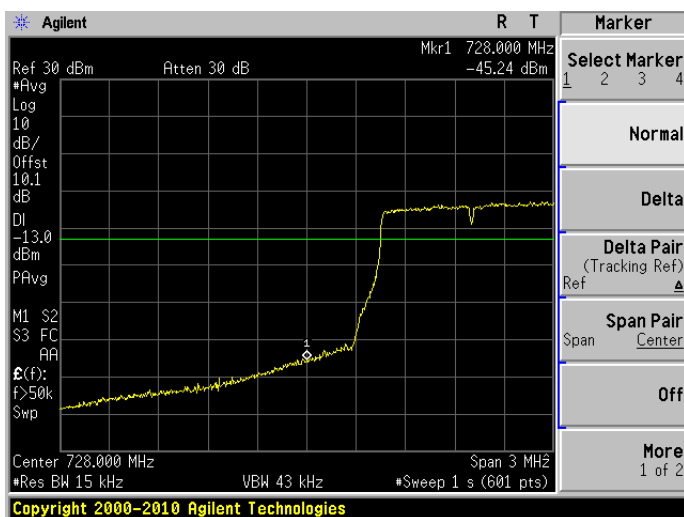


64QAM (1.4 MHz) - High Channel

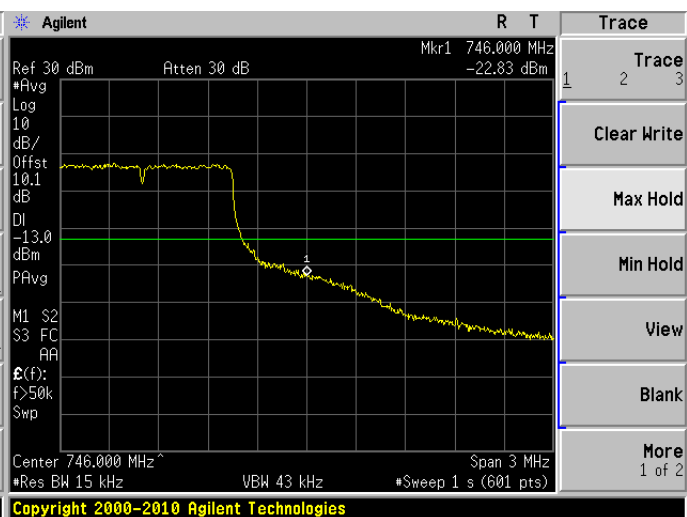


QPSK (3 MHz) - Low Channel

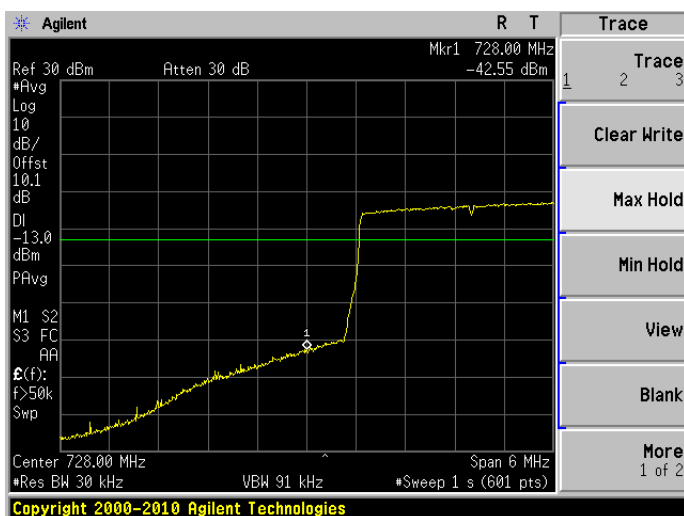


QPSK (3 MHz) - High Channel

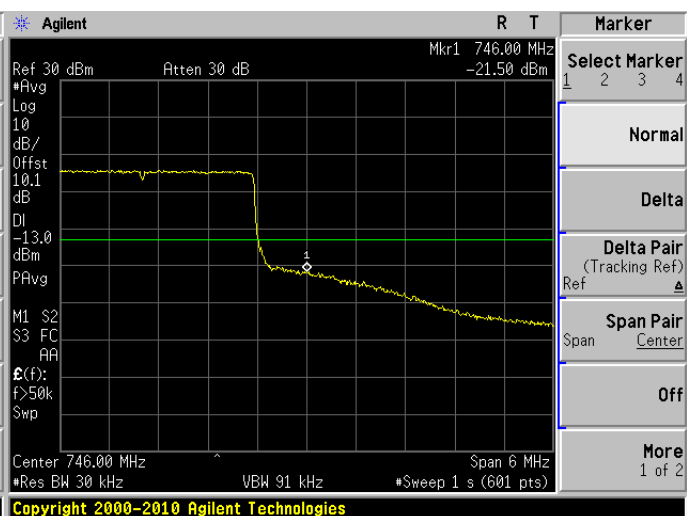


16QAM (3 MHz) - Low Channel

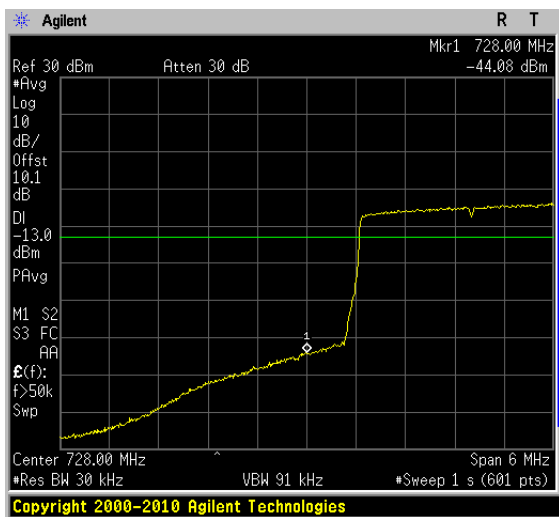


16QAM (3 MHz) - High Channel

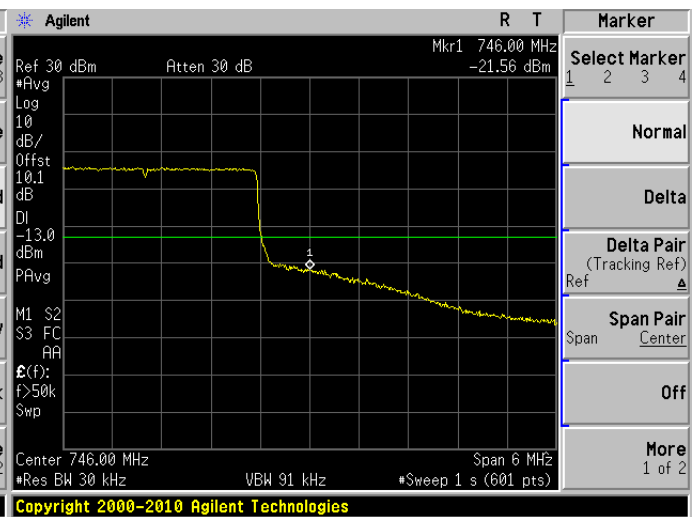


64QAM (3 MHz) - Low Channel

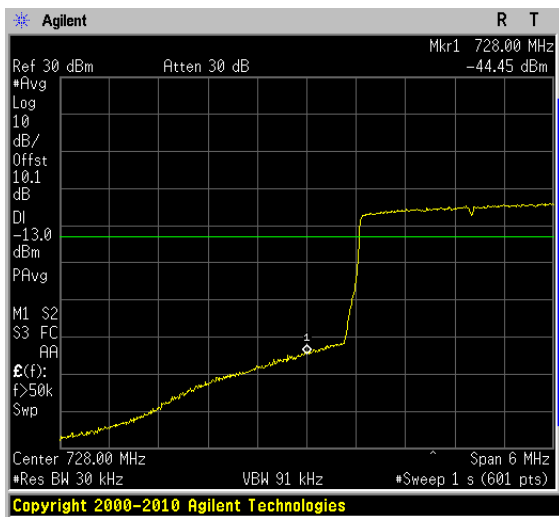


64QAM (3 MHz) - High Channel

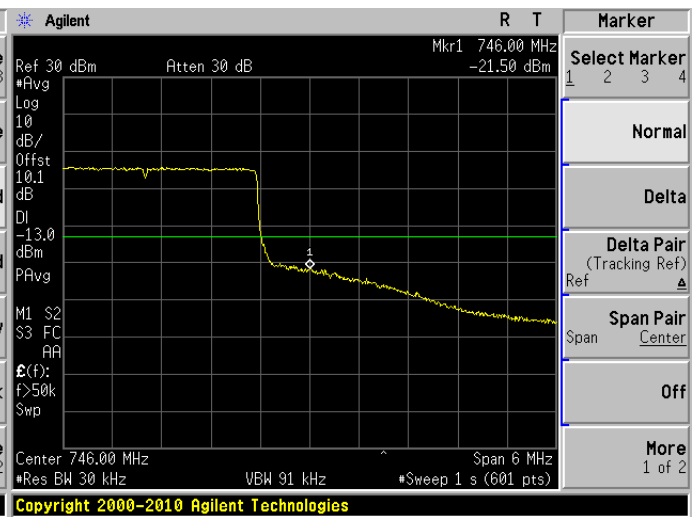


QPSK (5 MHz) - Low Channel

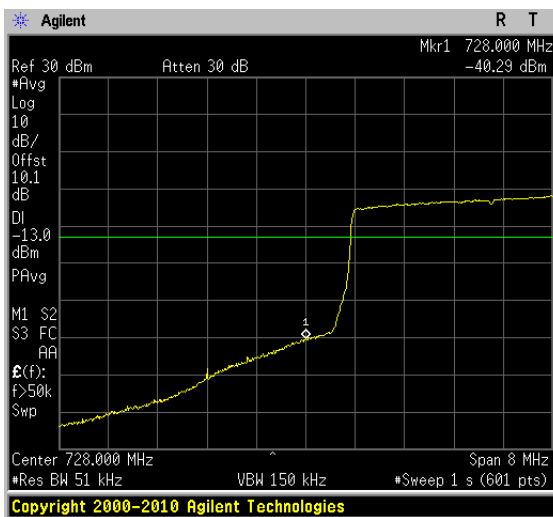


QPSK (5 MHz) - High Channel

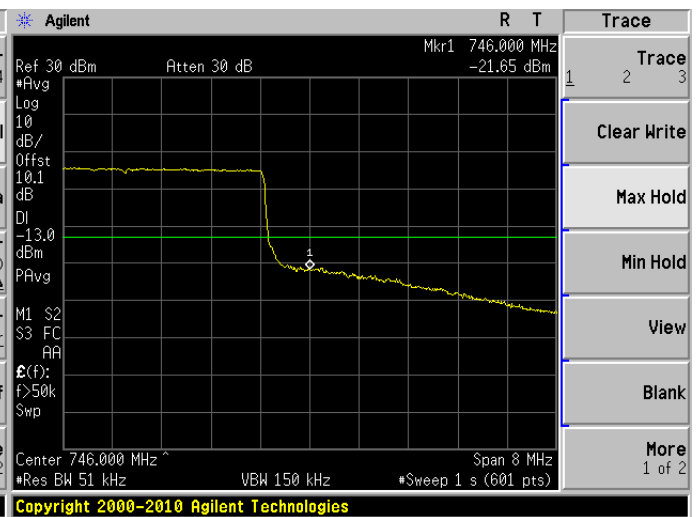


16QAM (5 MHz) - Low Channel

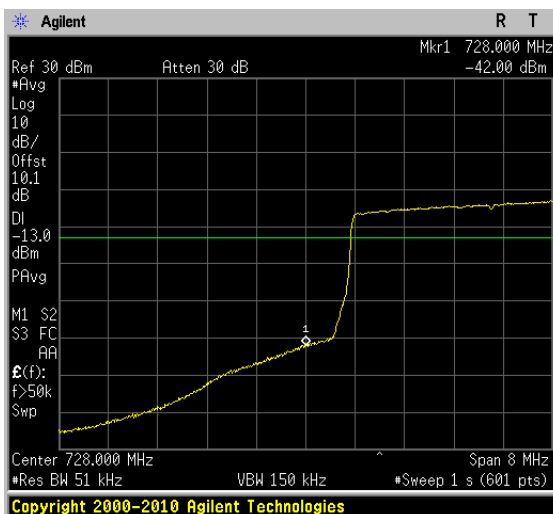


16QAM (5 MHz) - High Channel

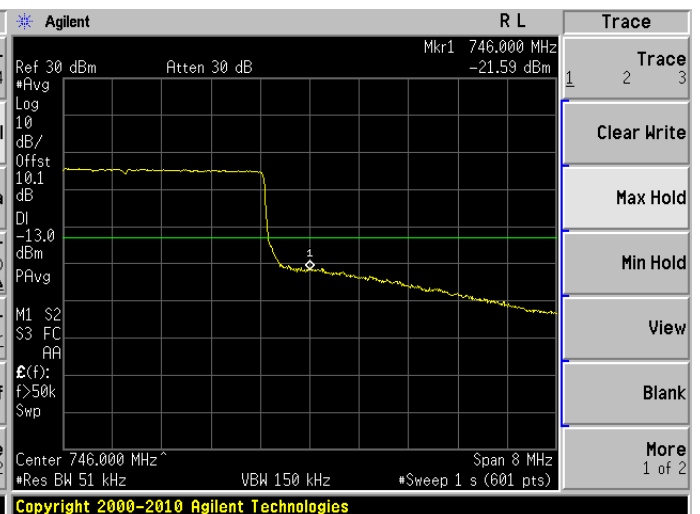


64QAM (5 MHz) - Low Channel

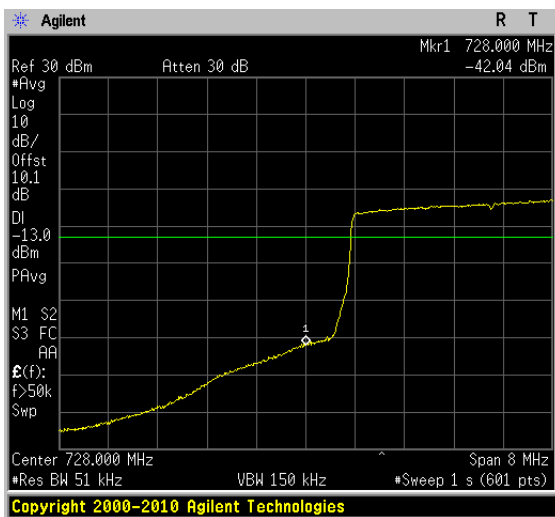


64QAM (5 MHz) - High Channel

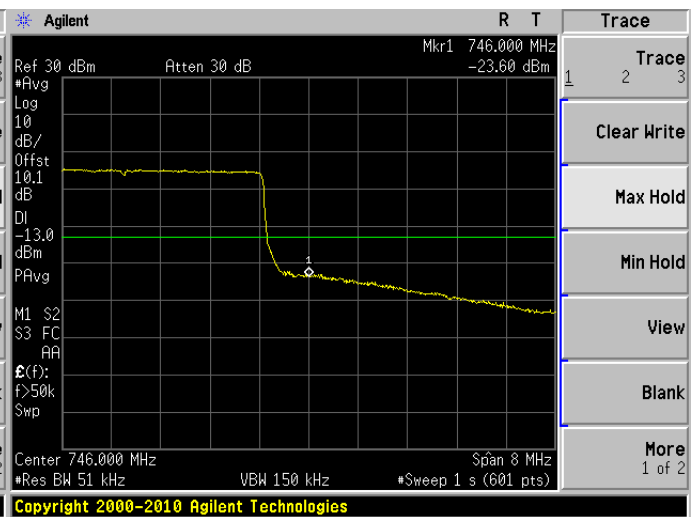


QPSK (10 MHz) - Low Channel

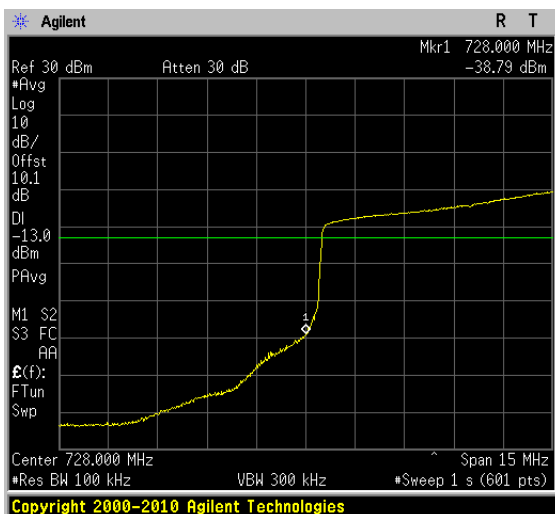


QPSK (10 MHz) - High Channel

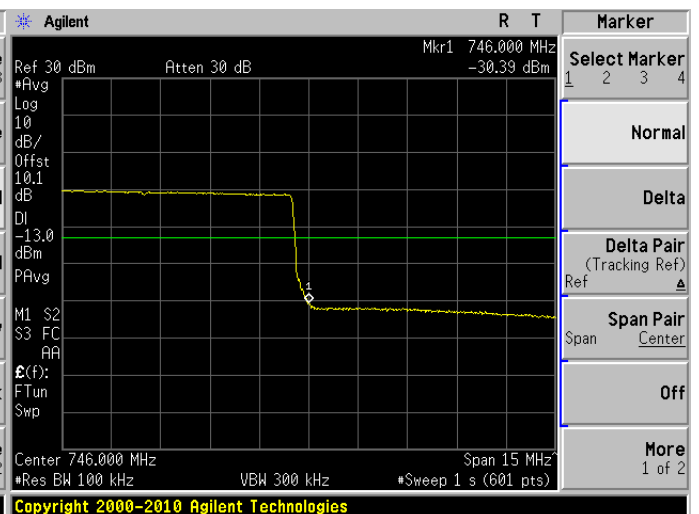


16QAM (10 MHz) - Low Channel

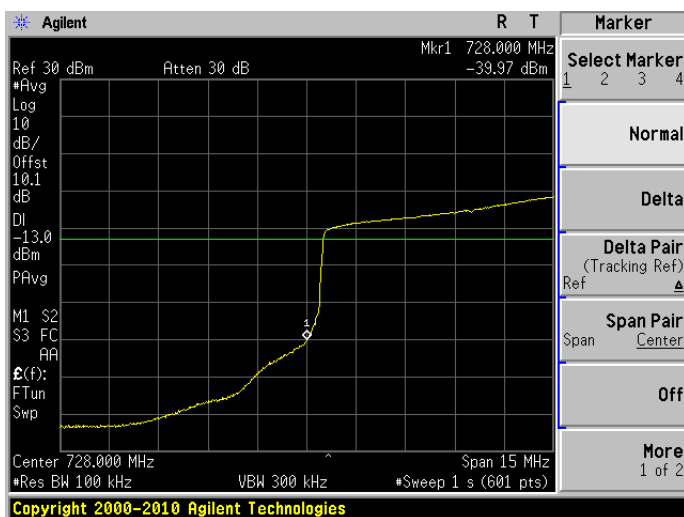


16QAM (10 MHz) - High Channel

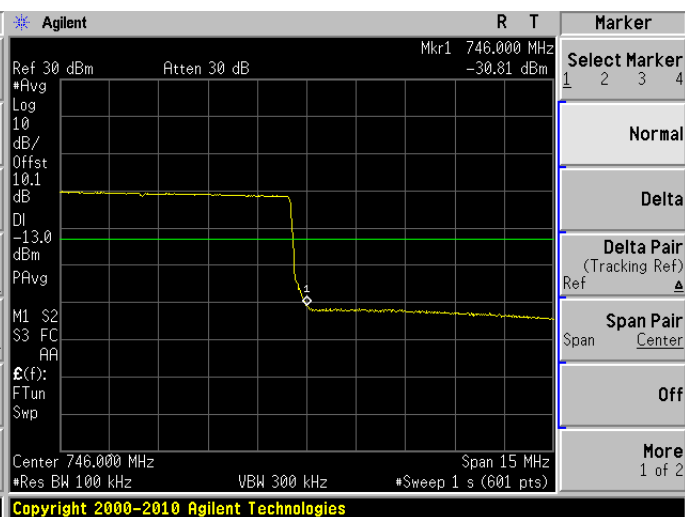

64QAM (10 MHz) - Low Channel

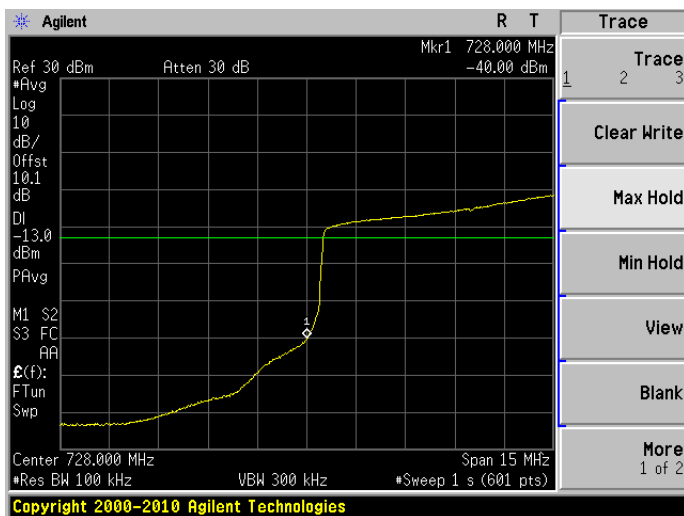


64QAM (10 MHz) - High Channel

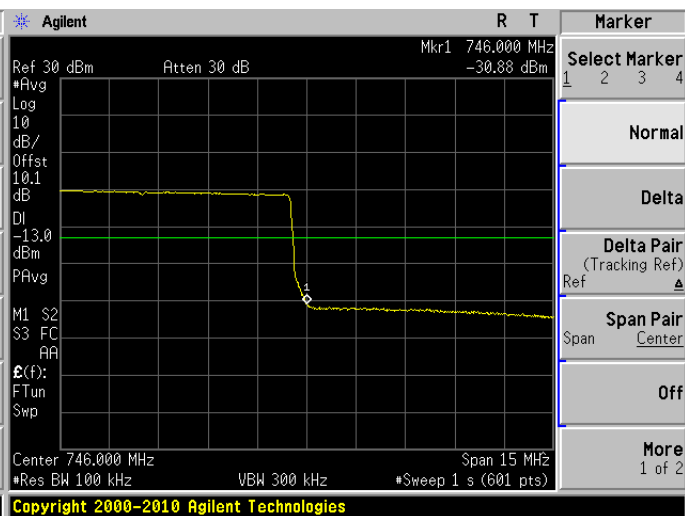


Upper LTE Band Uplink:


QPSK (1.4 MHz) - Low Channel

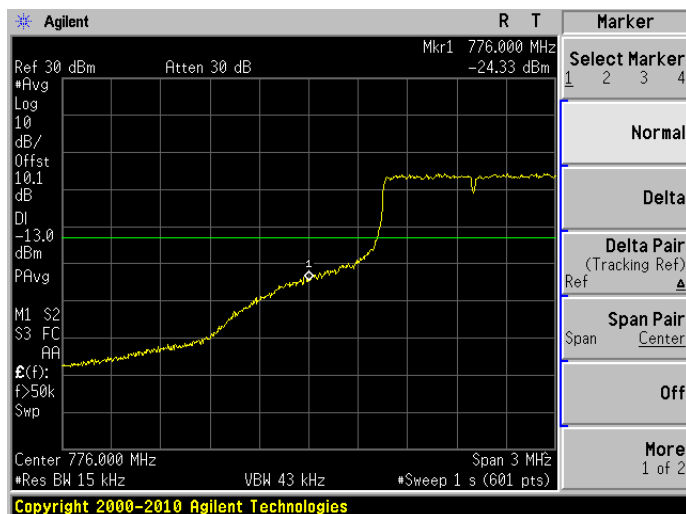


QPSK (1.4 MHz) - High Channel

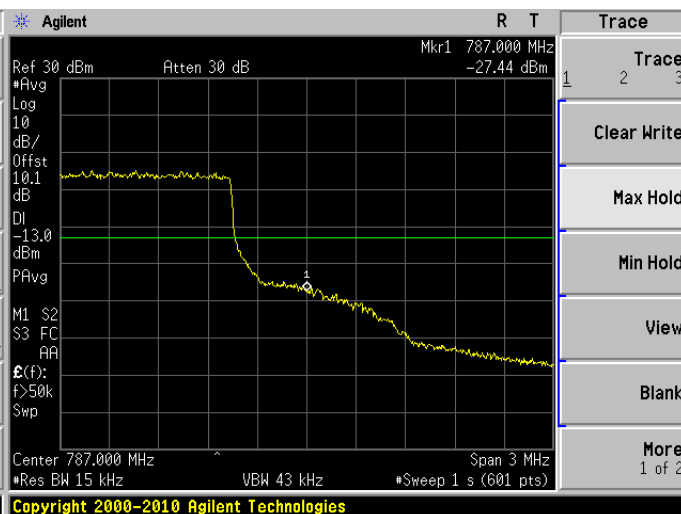


16QAM (1.4 MHz) - Low Channel

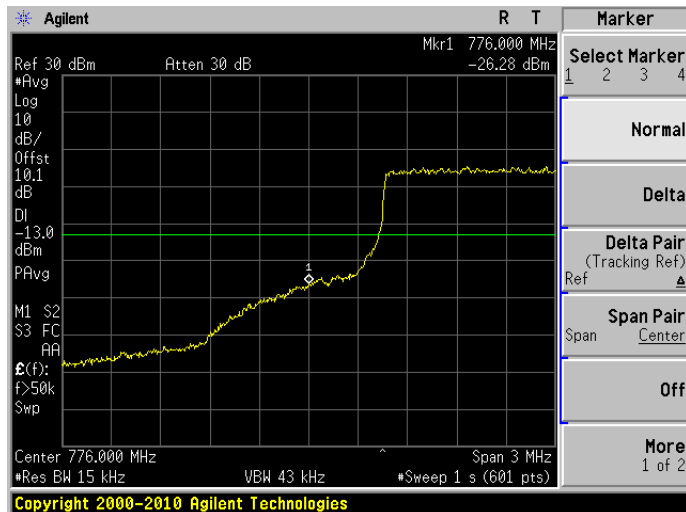


16QAM (1.4 MHz) - High Channel

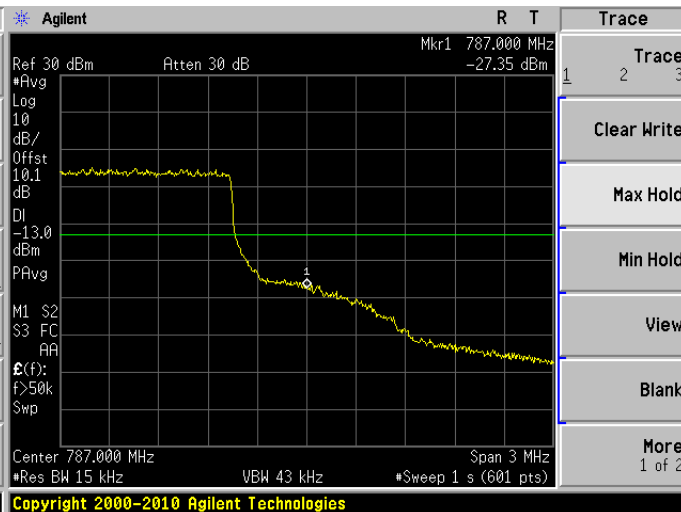


64QAM (1.4 MHz) - Low Channel

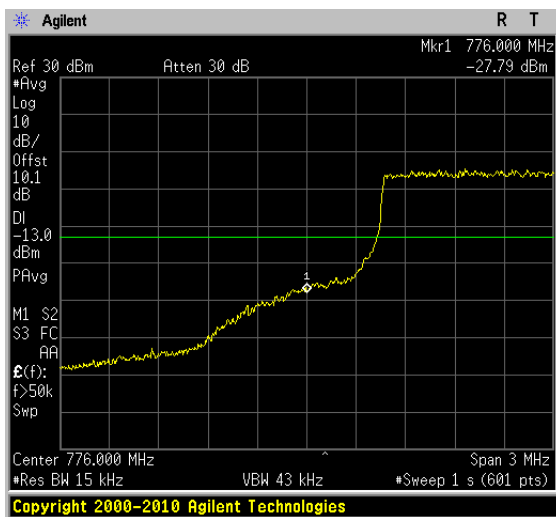


64QAM (1.4 MHz) - High Channel

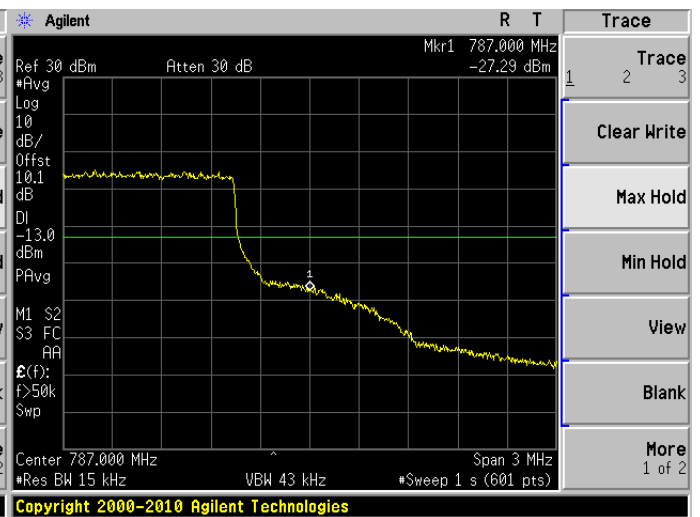


QPSK (3 MHz) - Low Channel

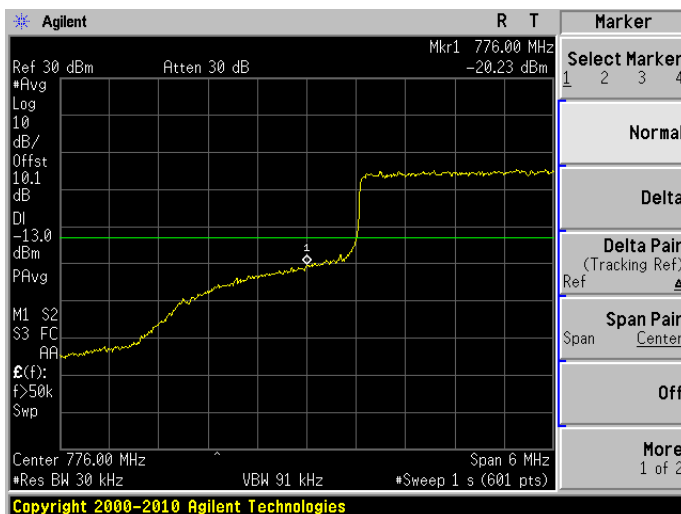


QPSK (3 MHz) - High Channel

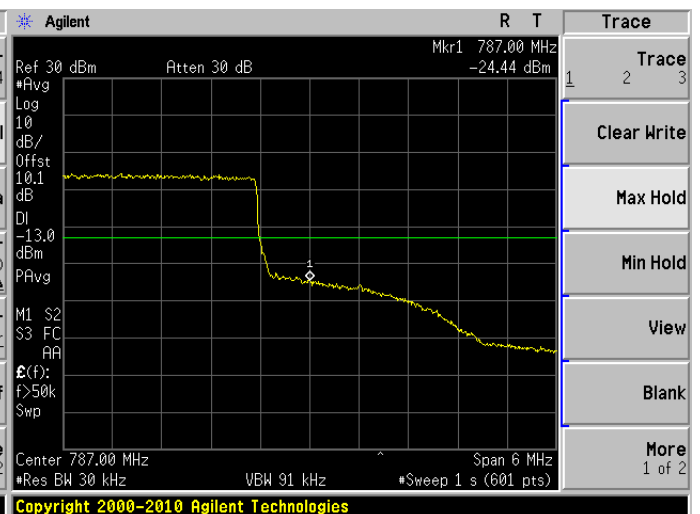


16QAM (3 MHz) - Low Channel

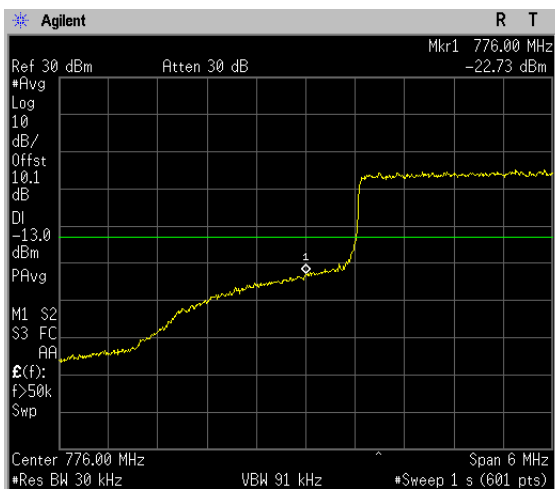


16QAM (3 MHz) - High Channel

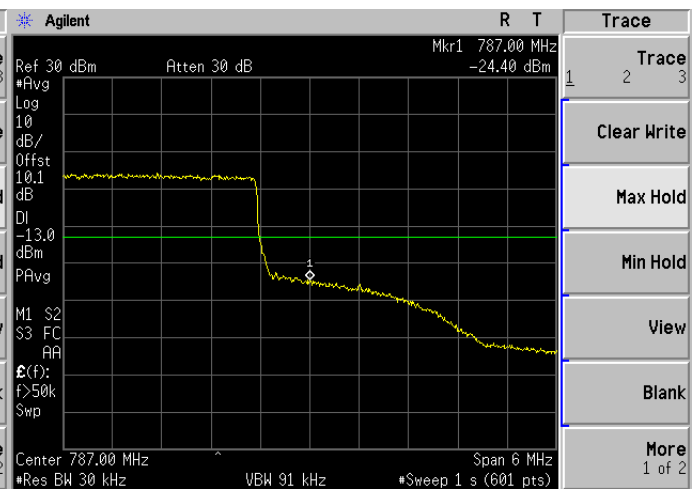


64QAM (3 MHz) - Low Channel

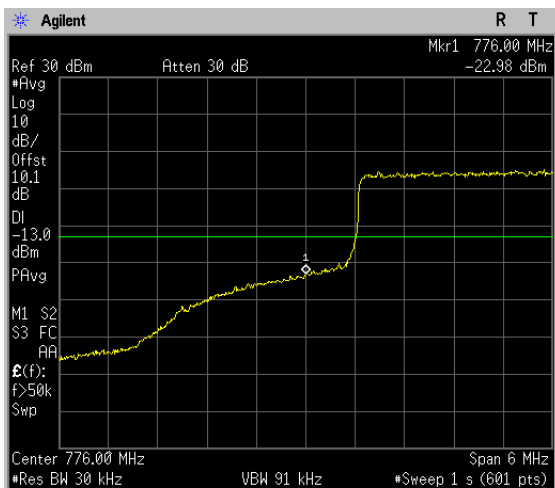


64QAM (3 MHz) - High Channel

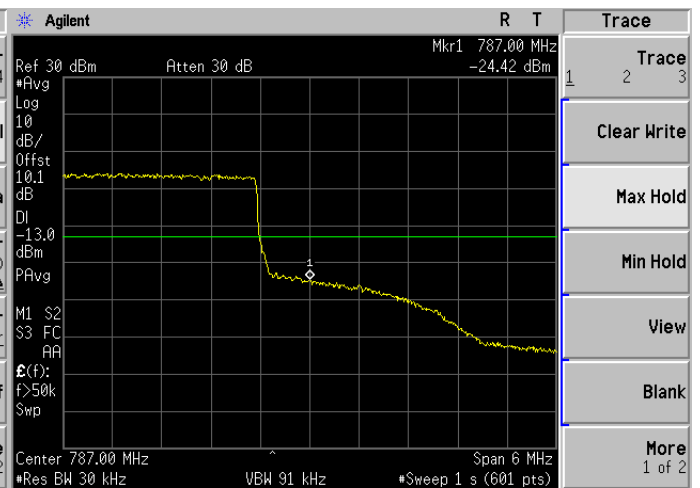


QPSK (5 MHz) - Low Channel

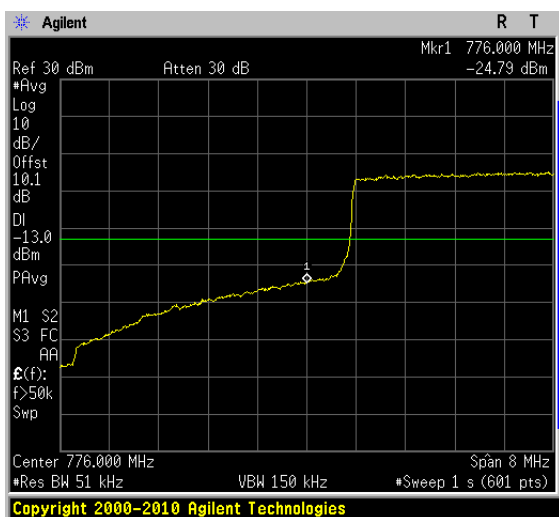


QPSK (5 MHz) - High Channel

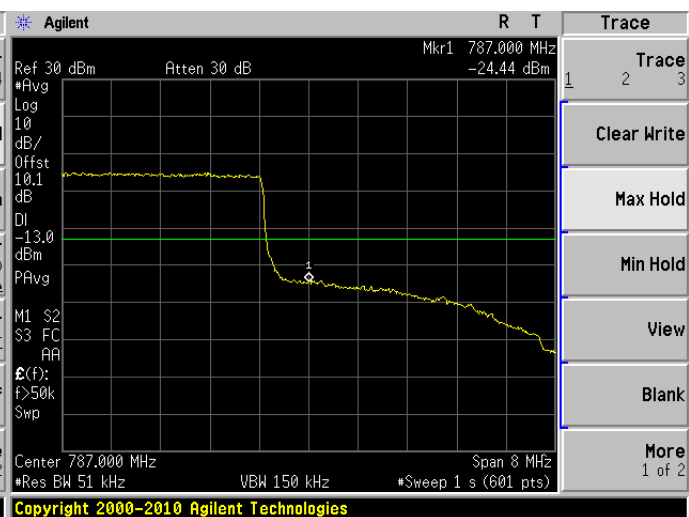


16QAM (5 MHz) - Low Channel

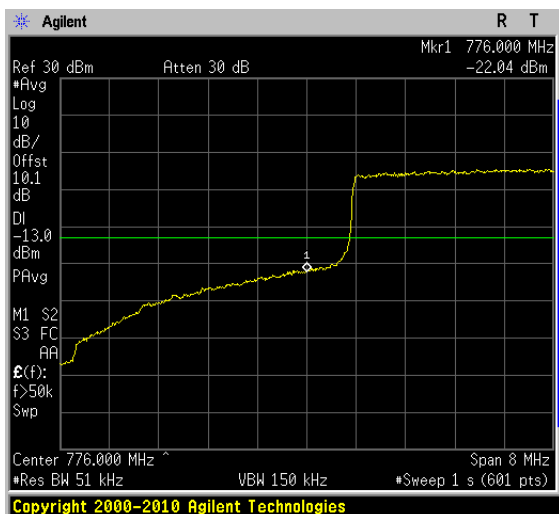


16QAM (5 MHz) - High Channel

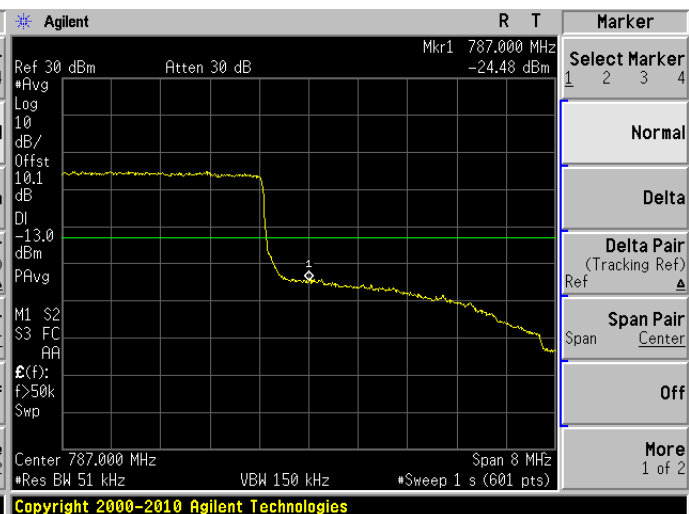


64QAM (5 MHz) - Low Channel

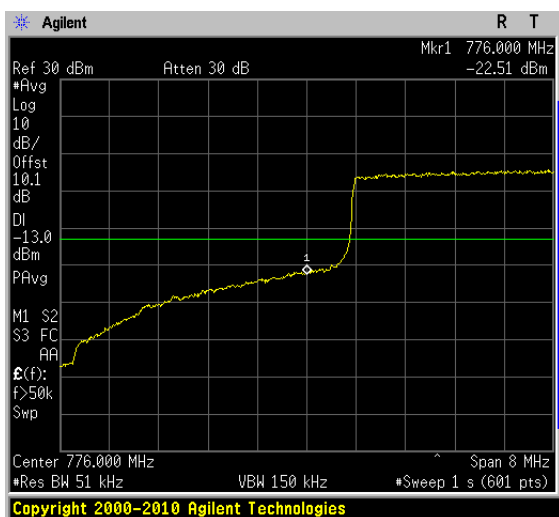


64QAM (5 MHz) - High Channel

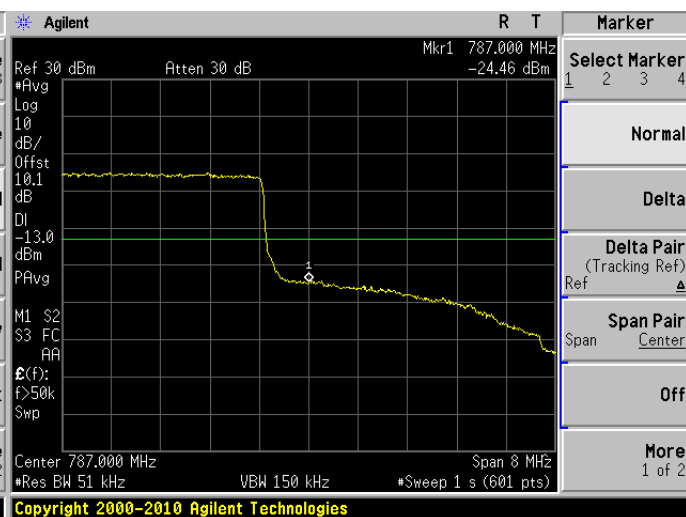


QPSK (10 MHz) - Low Channel

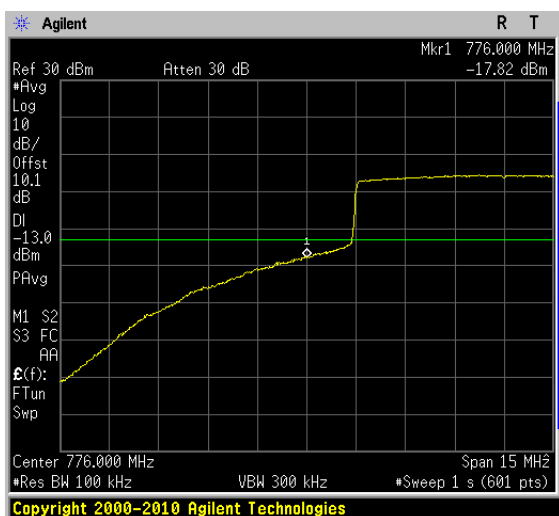


QPSK (10 MHz) - High Channel

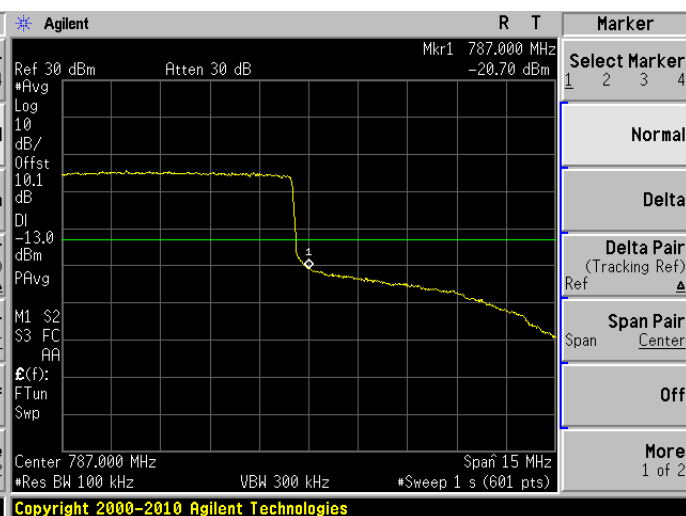

16QAM (10 MHz) - Low Channel

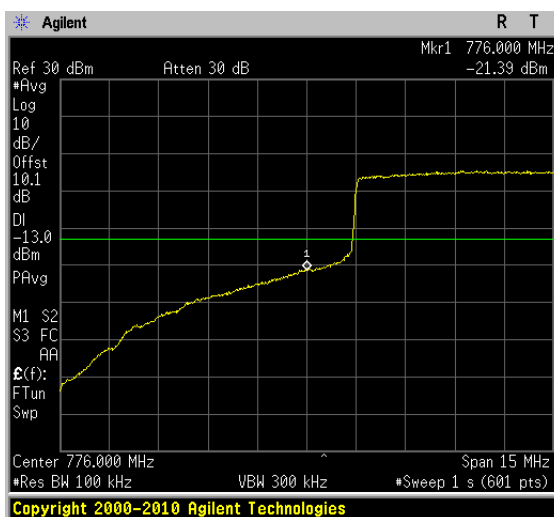


16QAM (10 MHz) - High Channel

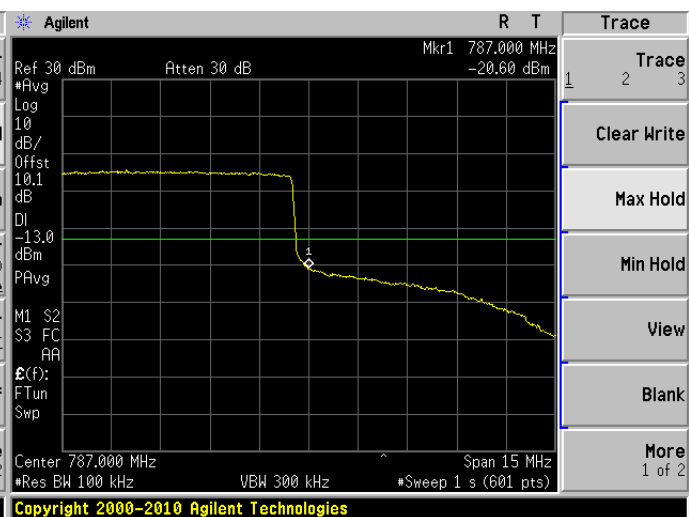

64QAM (10 MHz) - Low Channel




64QAM (10 MHz) - High Channel

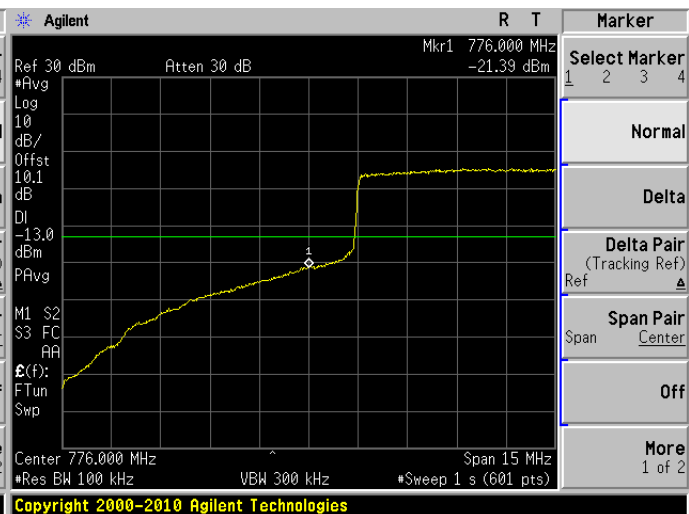


Upper LTE Band Downlink:


QPSK (1.4 MHz) - Low Channel

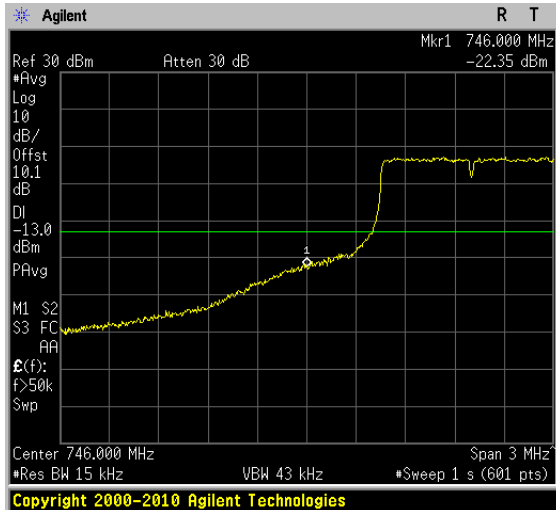


QPSK (1.4 MHz) - High Channel

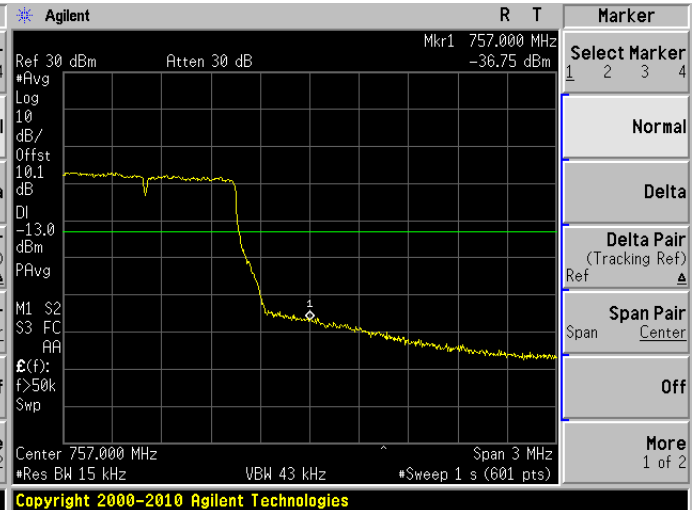


16QAM (1.4 MHz) - Low Channel

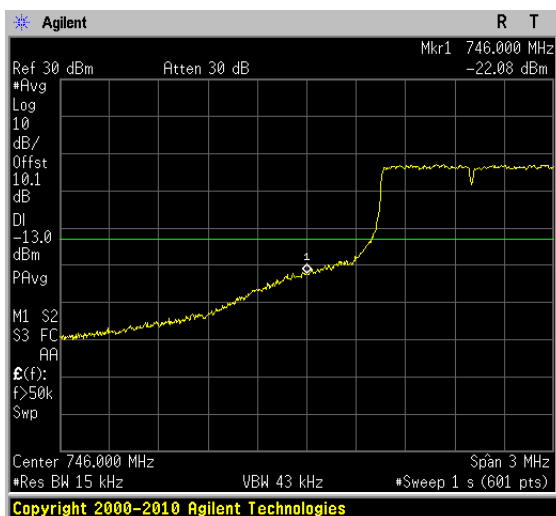


16QAM (1.4 MHz) - High Channel

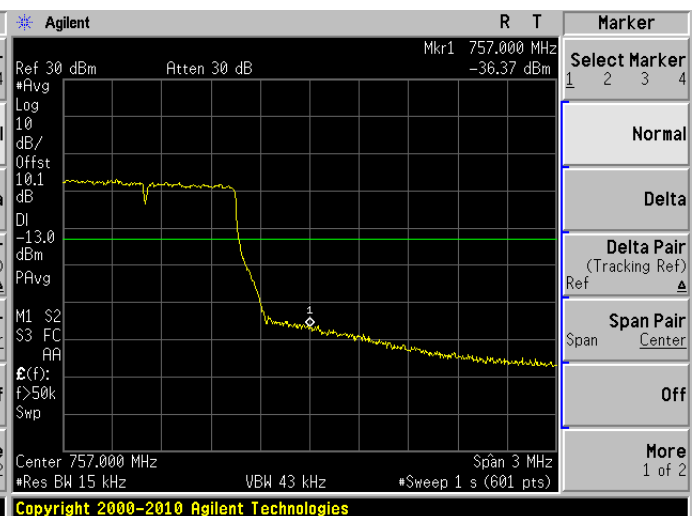


64QAM (1.4 MHz) - Low Channel

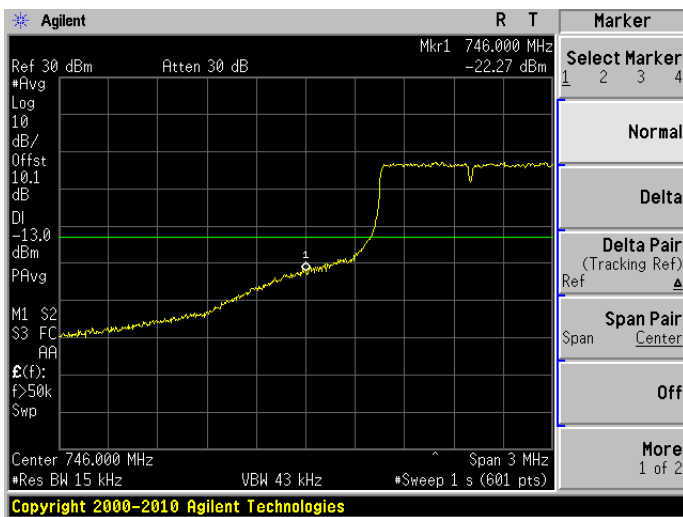


64QAM (1.4 MHz) - High Channel

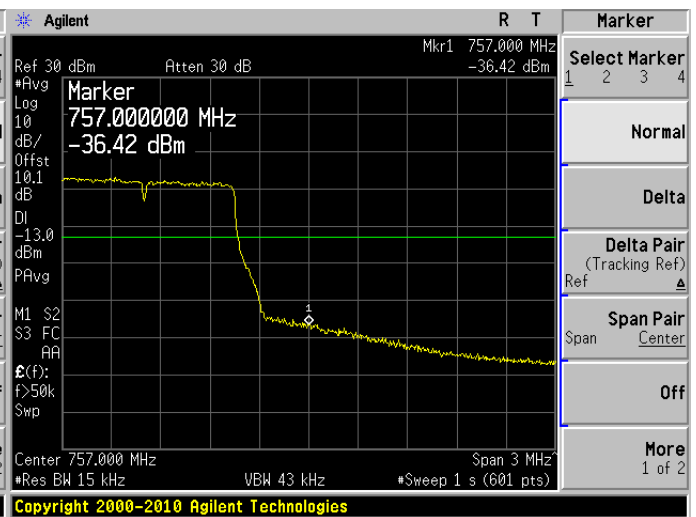


QPSK (3 MHz) - Low Channel

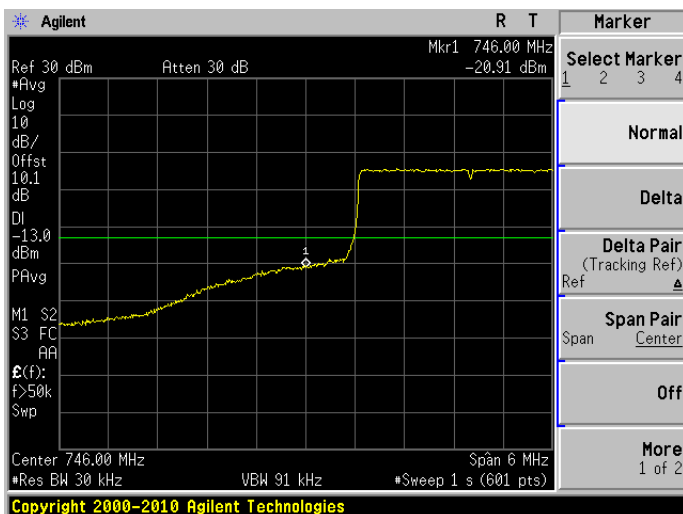


QPSK (3 MHz) - High Channel

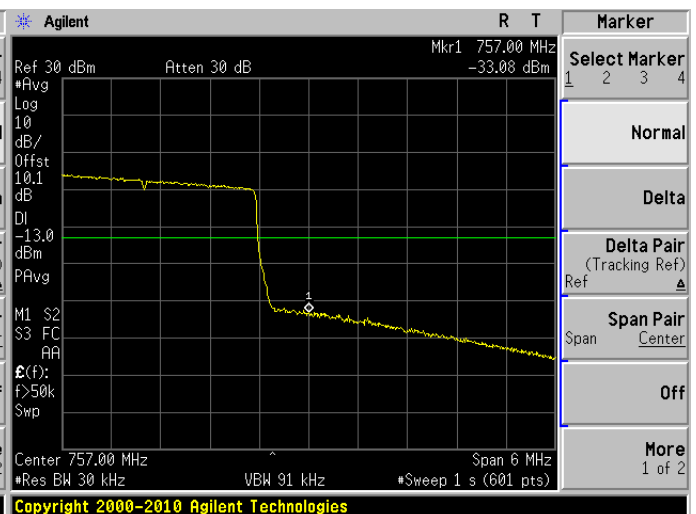


16QAM (3 MHz) - Low Channel

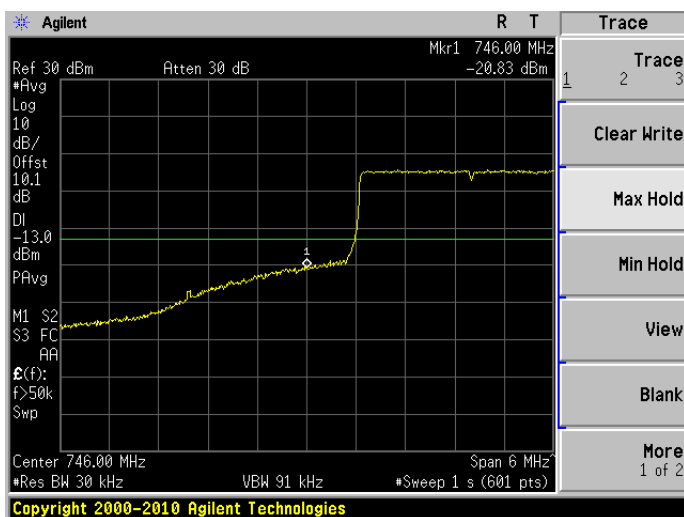


16QAM (3 MHz) - High Channel

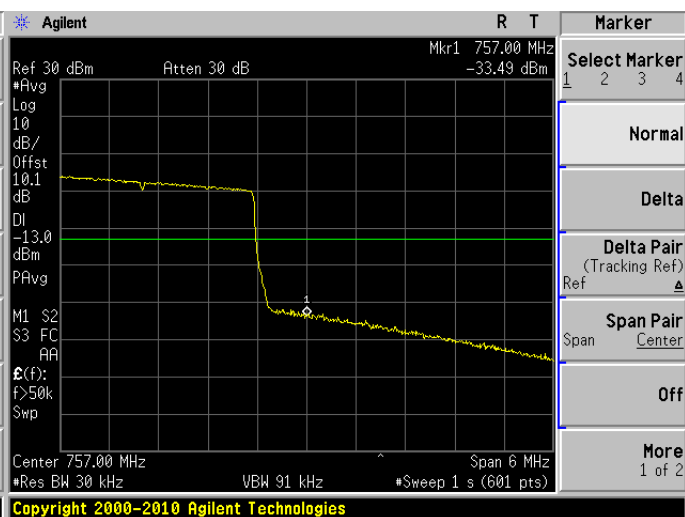


64QAM (3 MHz) - Low Channel

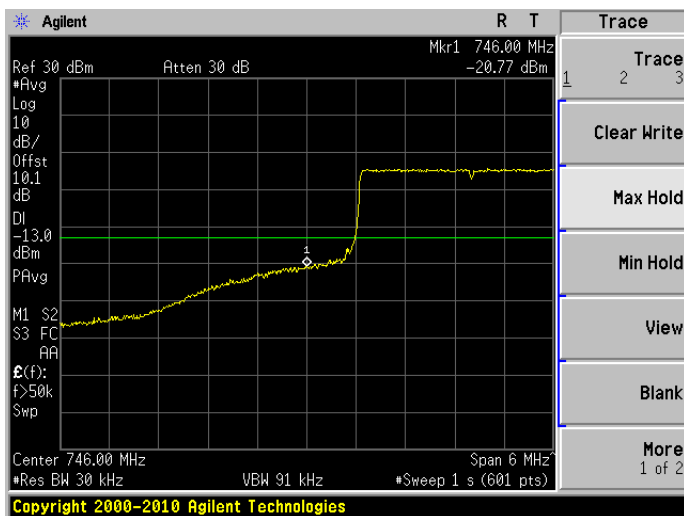


64QAM (3 MHz) - High Channel

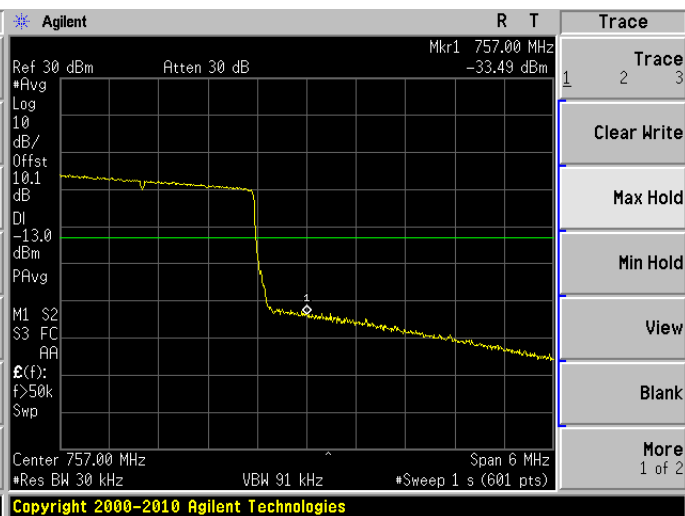


QPSK (5 MHz) - Low Channel

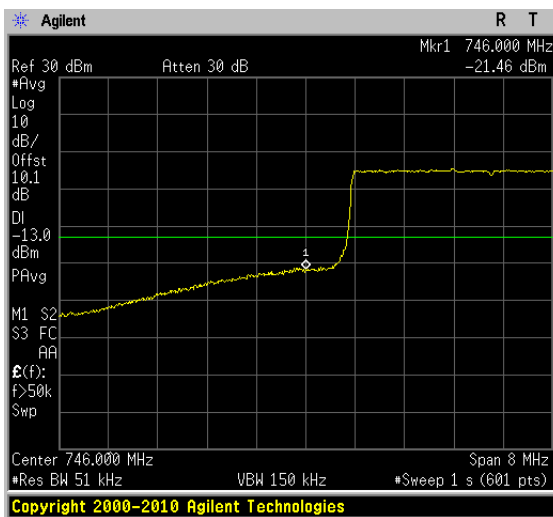


QPSK (5 MHz) - High Channel

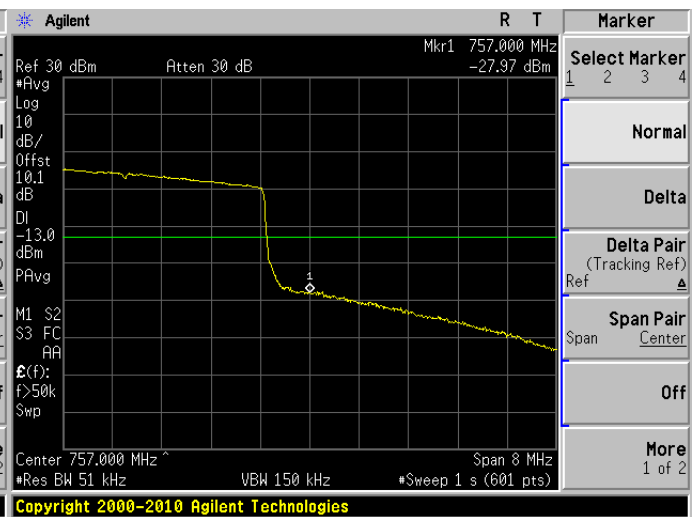


16QAM (5 MHz) - Low Channel

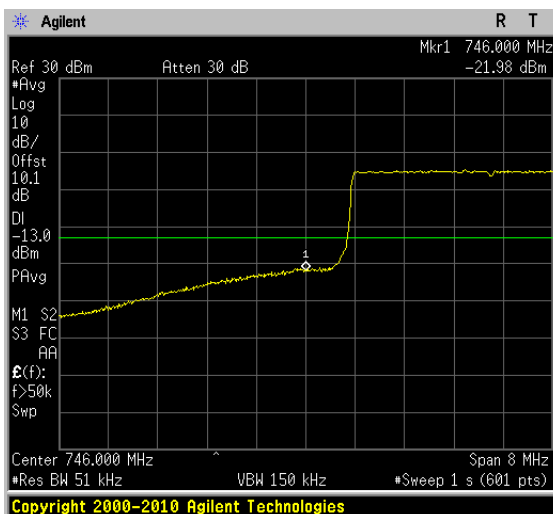


16QAM (5 MHz) - High Channel

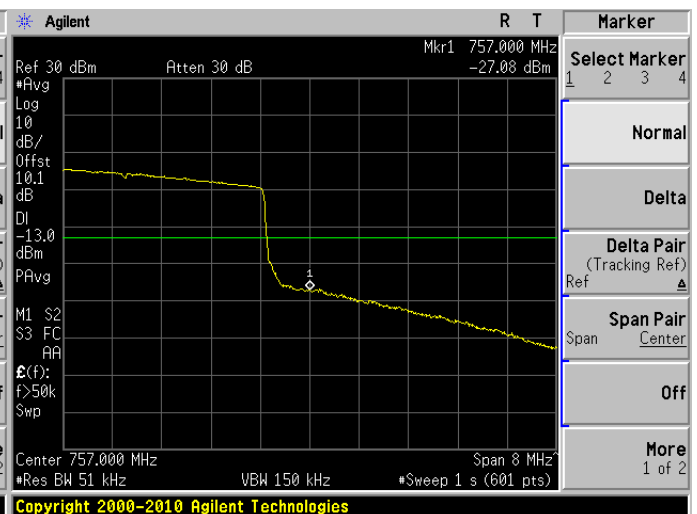


64QAM (5 MHz) - Low Channel

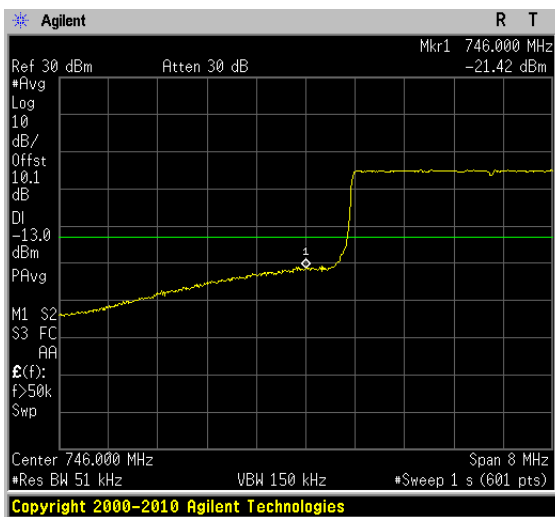


64QAM (5 MHz) - High Channel

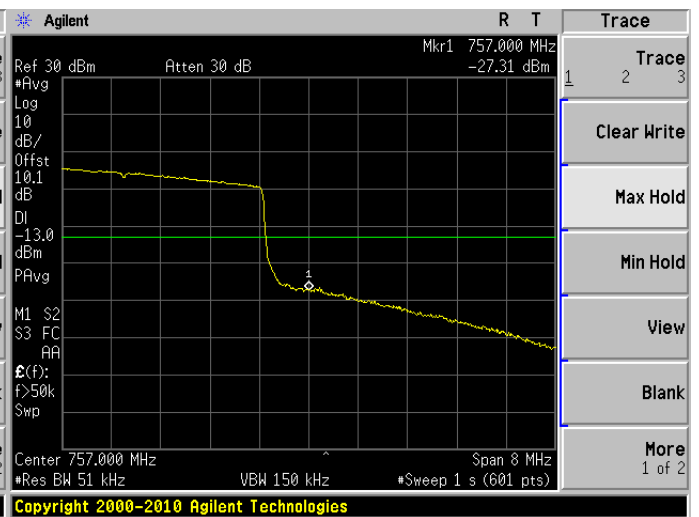


QPSK (10 MHz) - Low Channel

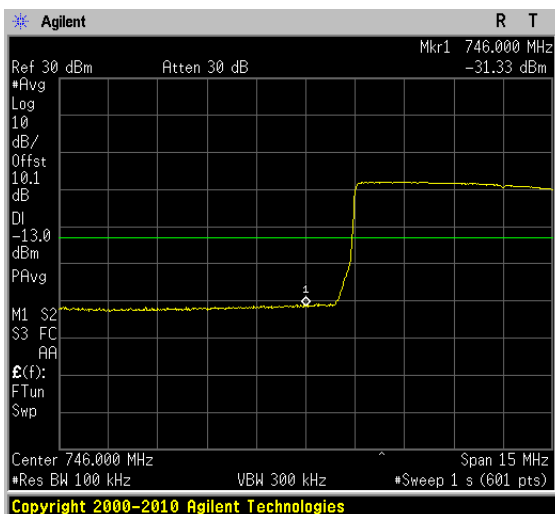


QPSK (10 MHz) - High Channel

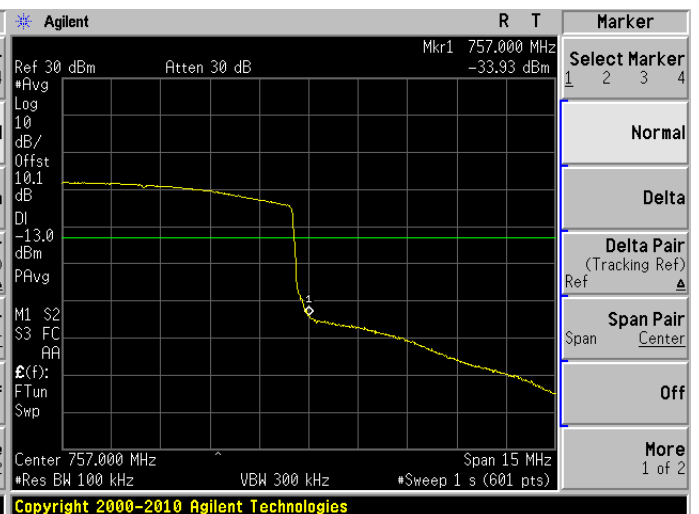


16QAM (10 MHz) - Low Channel

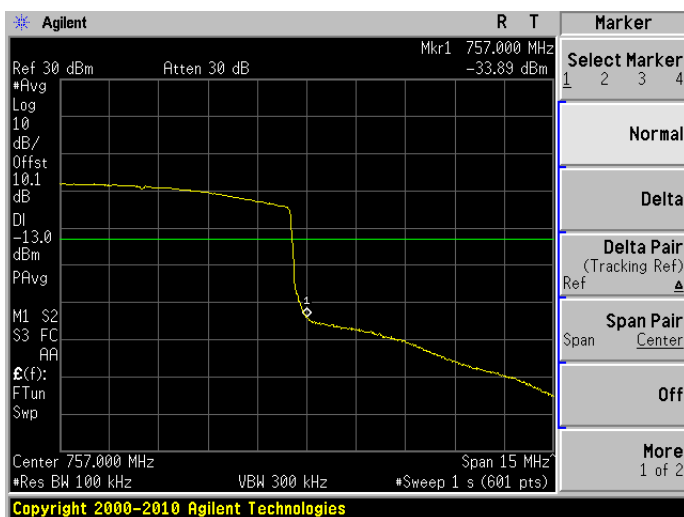


16QAM (10 MHz) - High Channel

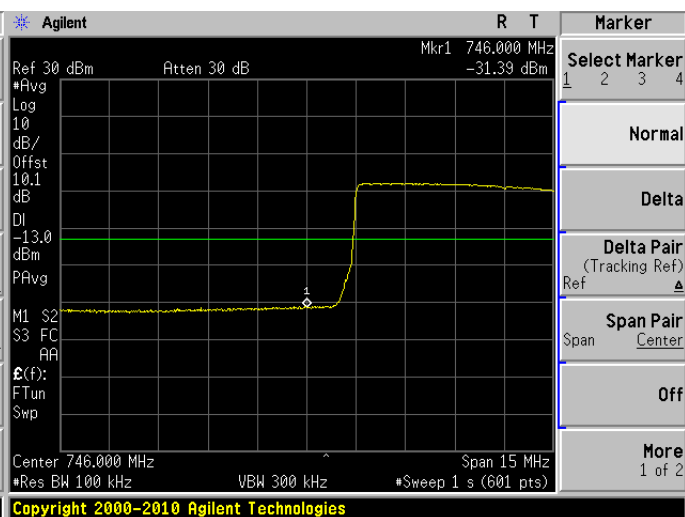

64QAM (10 MHz) - Low Channel

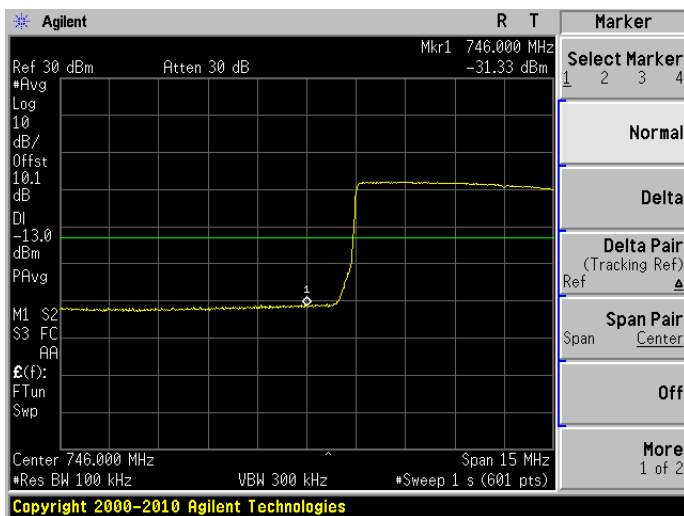


64QAM (10 MHz) - High Channel

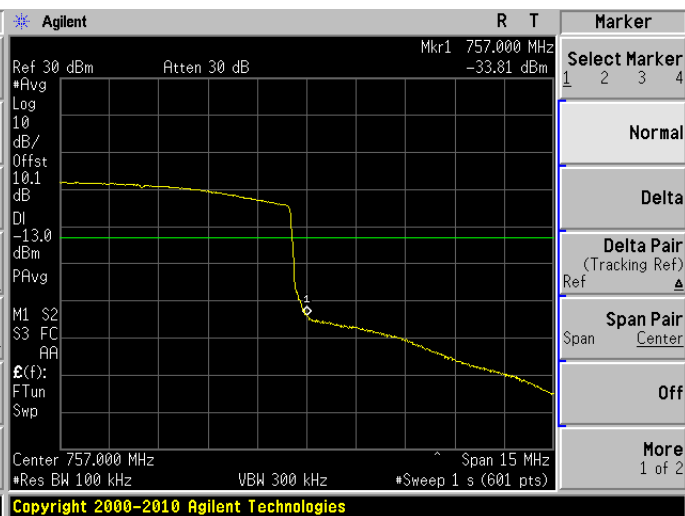


AWS Band Uplink:

WCDMA – Low Channel

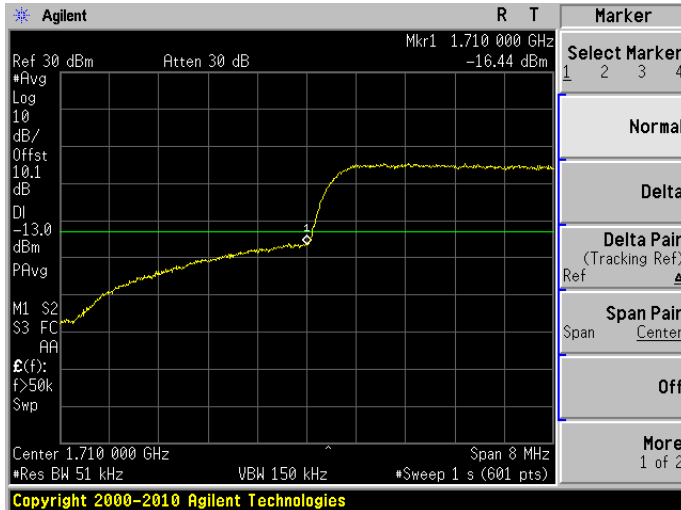


WCDMA – High Channel

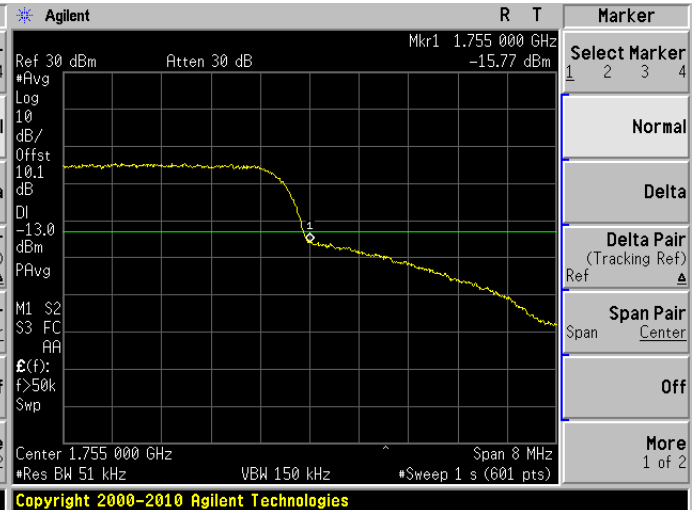


AWS Band Downlink:

WCDMA – Low Channel

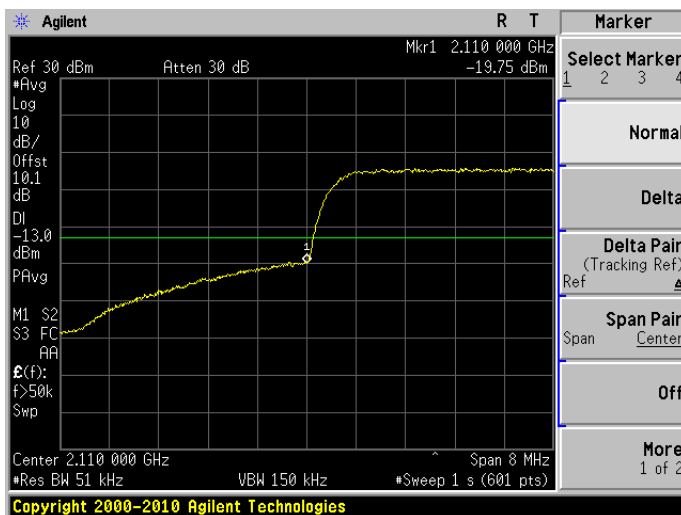

WCDMA – High Channel

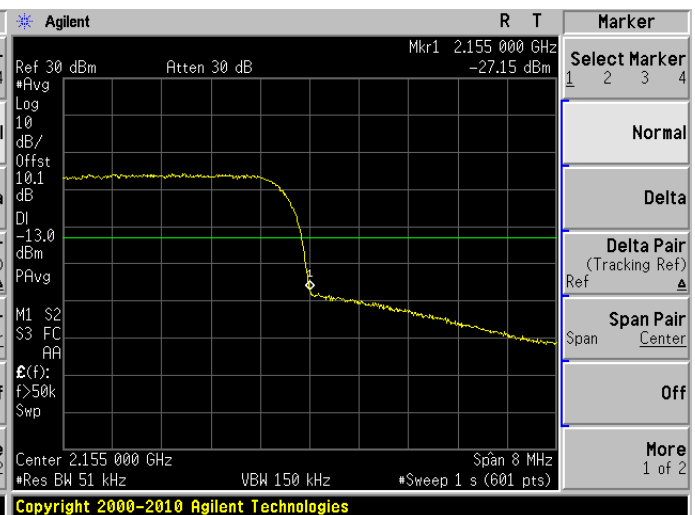


11 Exhibit B - Test Setup Photographs

11.1 Radiated Emissions - Front View



11.2 Radiated Emissions - Rear View (Below 1 GHz)

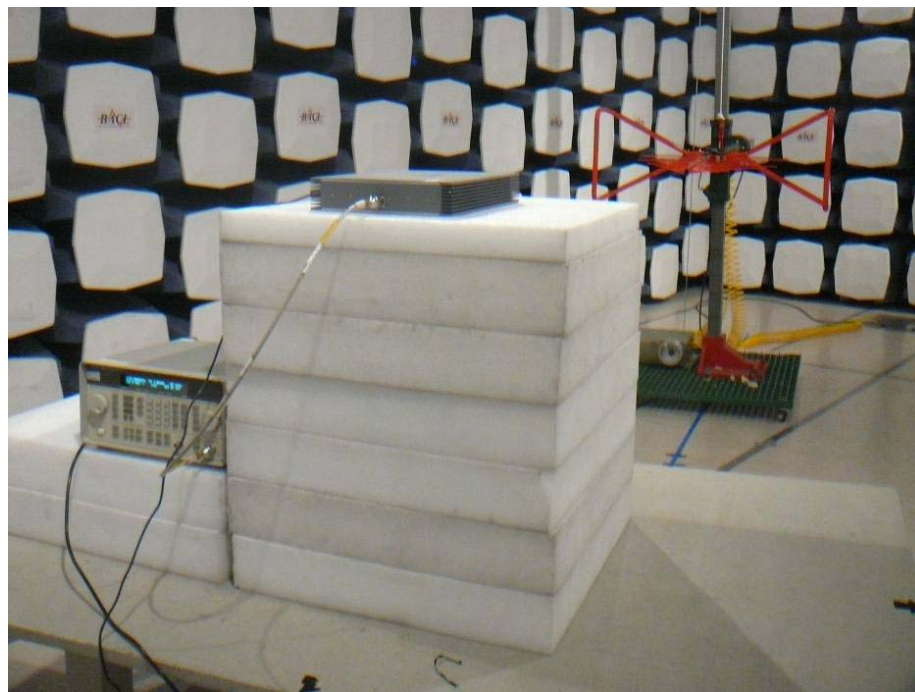

11.3 Radiated Emissions - Rear View (Above 1 GHz)

