



US008657696B1

(12) **United States Patent**
Gurley

(10) **Patent No.:** **US 8,657,696 B1**
(45) **Date of Patent:** **Feb. 25, 2014**

(54) **TRAMPOLINE ARENA**

(56)

References Cited

(76) Inventor: **Marcus E. Gurley**, Lake Mary, FL (US)

U.S. PATENT DOCUMENTS

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 171 days.

5,624,122	A *	4/1997	Winkelhorn	473/471
5,941,798	A *	8/1999	Coan et al.	482/27
6,261,207	B1 *	7/2001	Publicover et al.	482/27
7,494,445	B1 *	2/2009	Chen	482/27
7,708,667	B2 *	5/2010	Alexander	482/27
7,883,446	B2 *	2/2011	Lovley, II	482/27
8,128,534	B2 *	3/2012	Crawford	482/27

(21) Appl. No.: **13/164,356**

* cited by examiner

(22) Filed: **Jun. 20, 2011**

Primary Examiner — Kien Nguyen

(74) *Attorney, Agent, or Firm* — Allen, Dyer, Doppelt, Milbrath & Gilchrist, P.A.

Related U.S. Application Data

(60) Provisional application No. 61/356,108, filed on Jun. 18, 2010.

(51) **Int. Cl.**
A63C 19/02 (2006.01)
A63B 5/11 (2006.01)

(52) **U.S. Cl.**
USPC **472/92**; 472/94; 482/27


(58) **Field of Classification Search**
USPC 472/92–94; 482/23, 27, 29–31
See application file for complete search history.


(57)





ABSTRACT




A trampoline arena includes a framework assembly having a plurality of frame elements defining an outwardly sloping outer wall, and a deck, a plurality of voids being defined between the framework elements. The arena also includes a plurality of trampolines connected to the frame elements along peripheries thereof and extending across the plurality of voids to further define the outwardly sloping outer wall and deck, and a padding assembly including a plurality of pads overlying the frame elements and the peripheries of the trampolines.



22 Claims, 6 Drawing Sheets




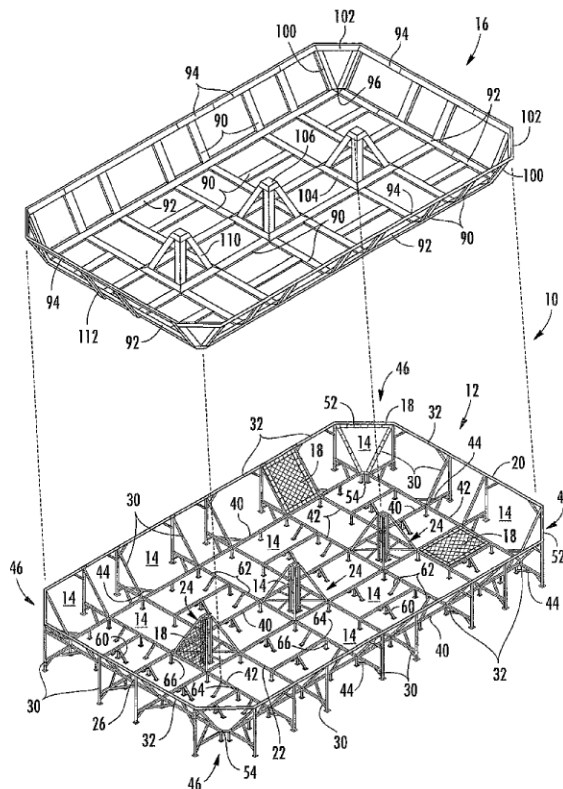





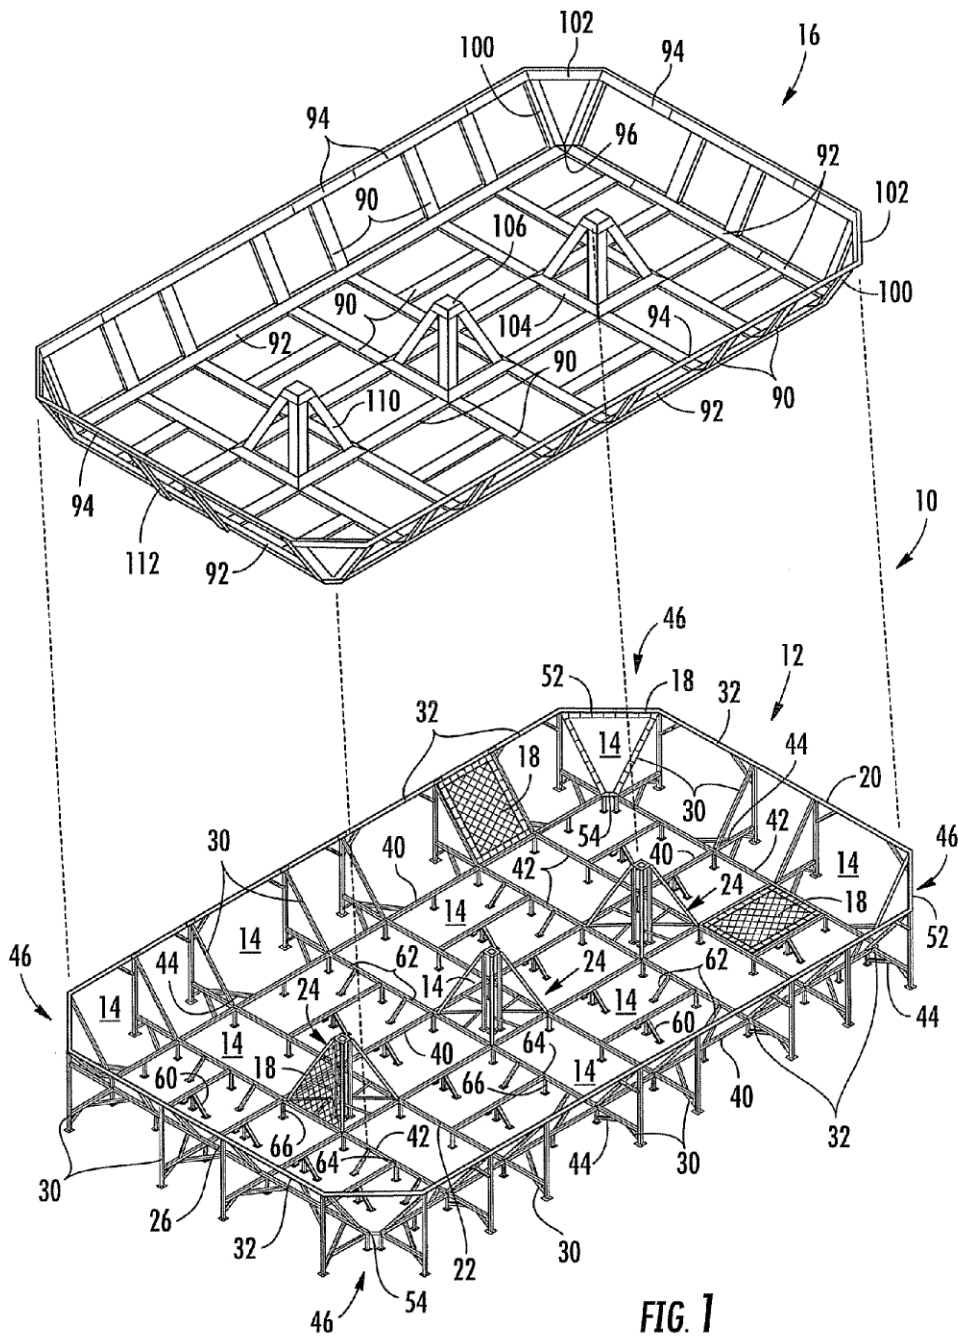


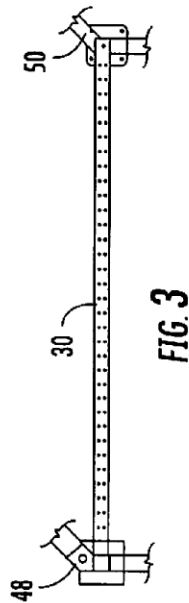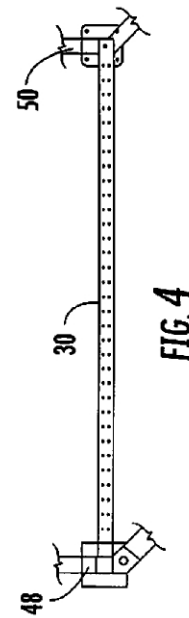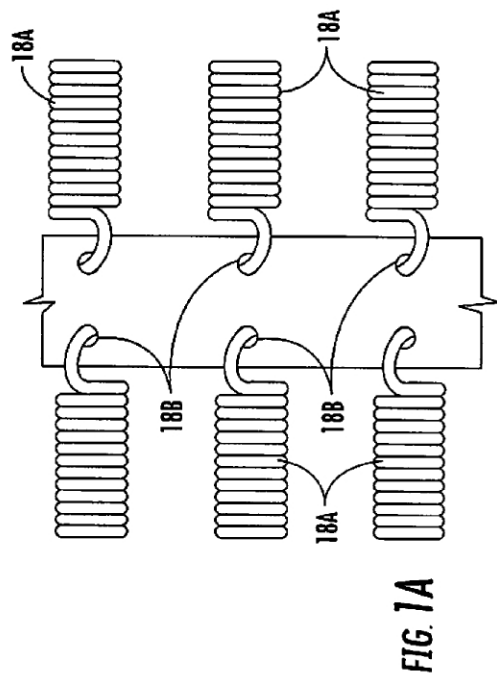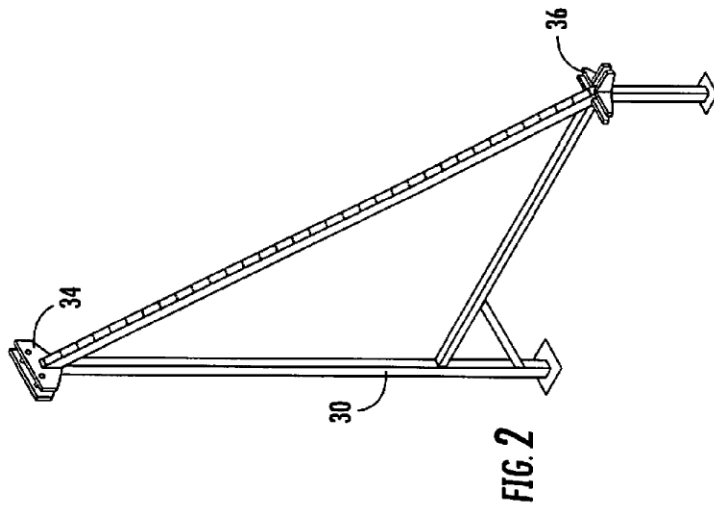

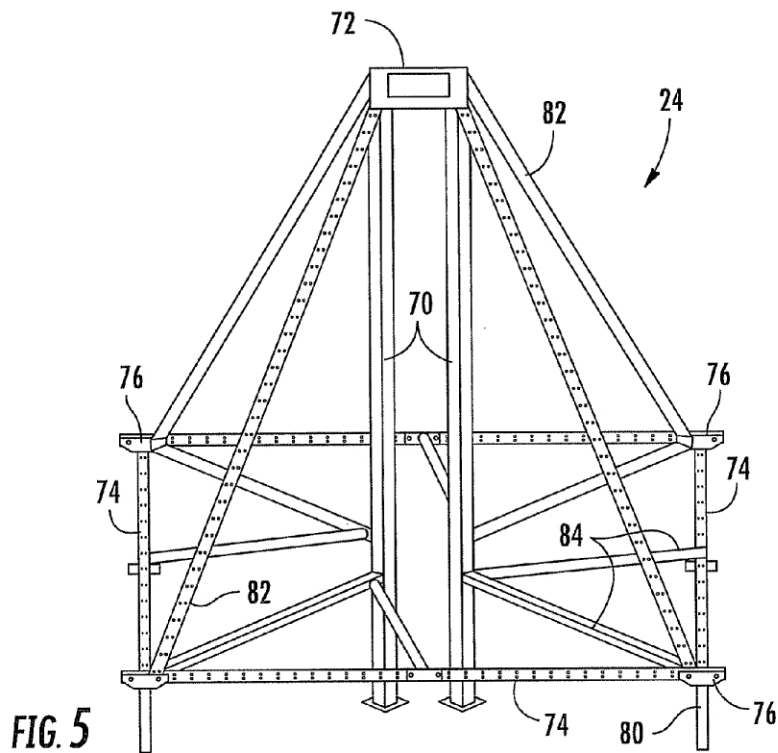

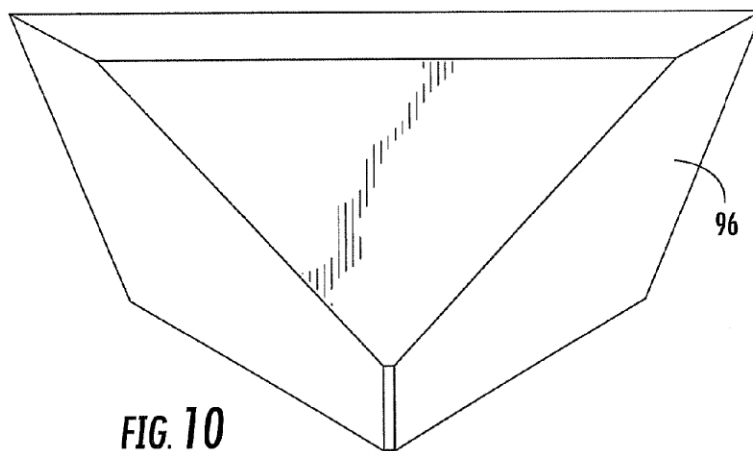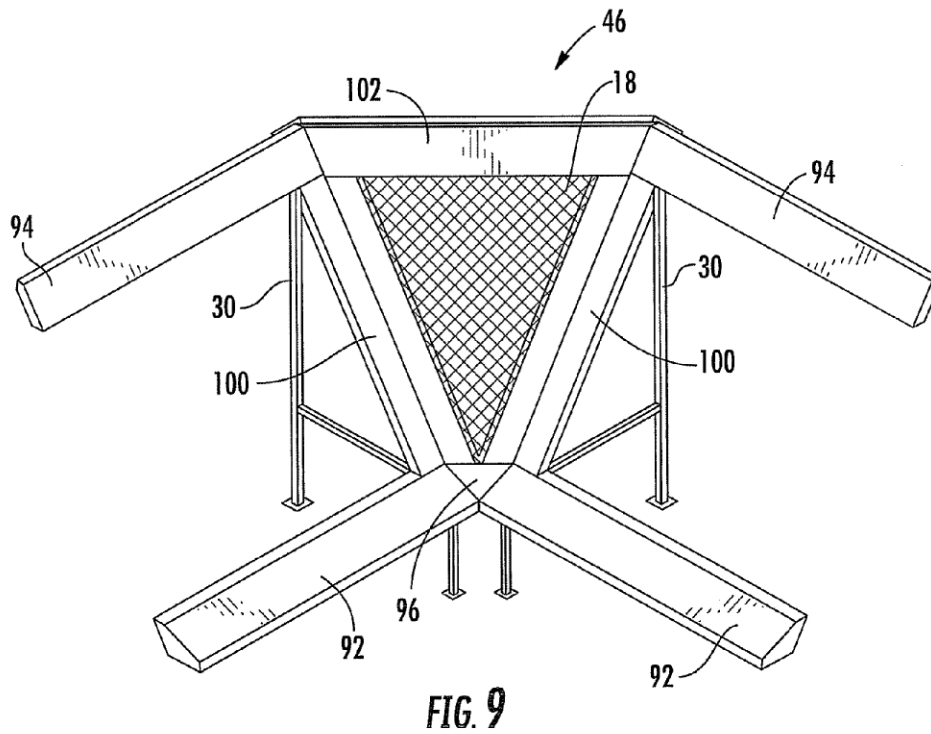

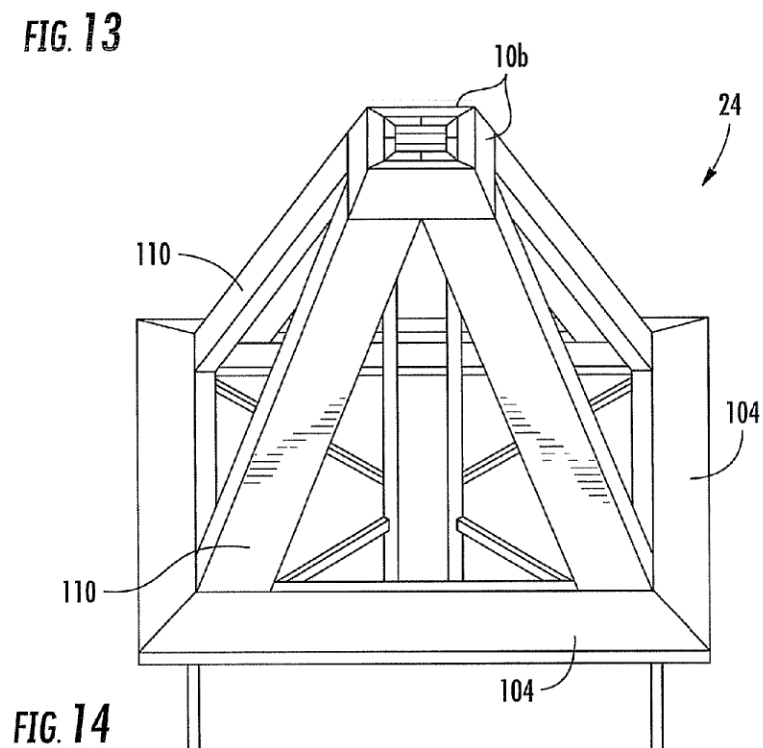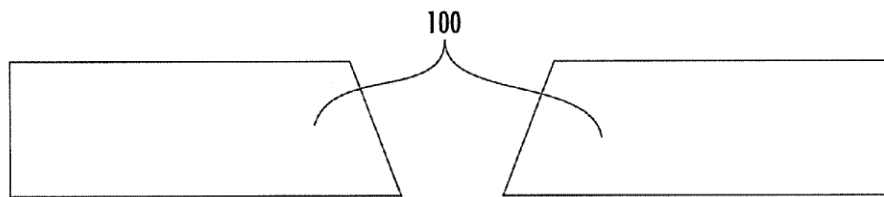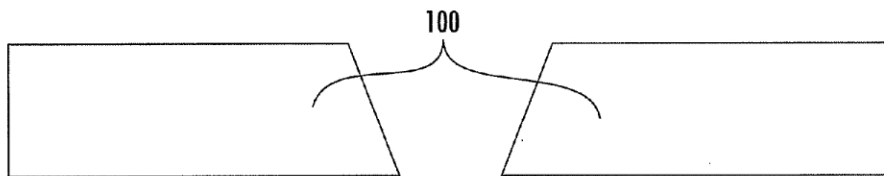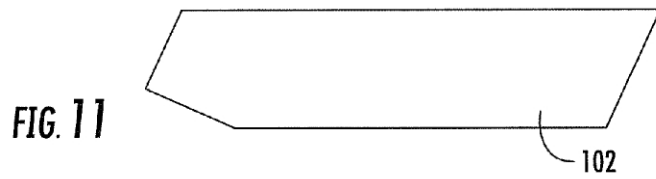

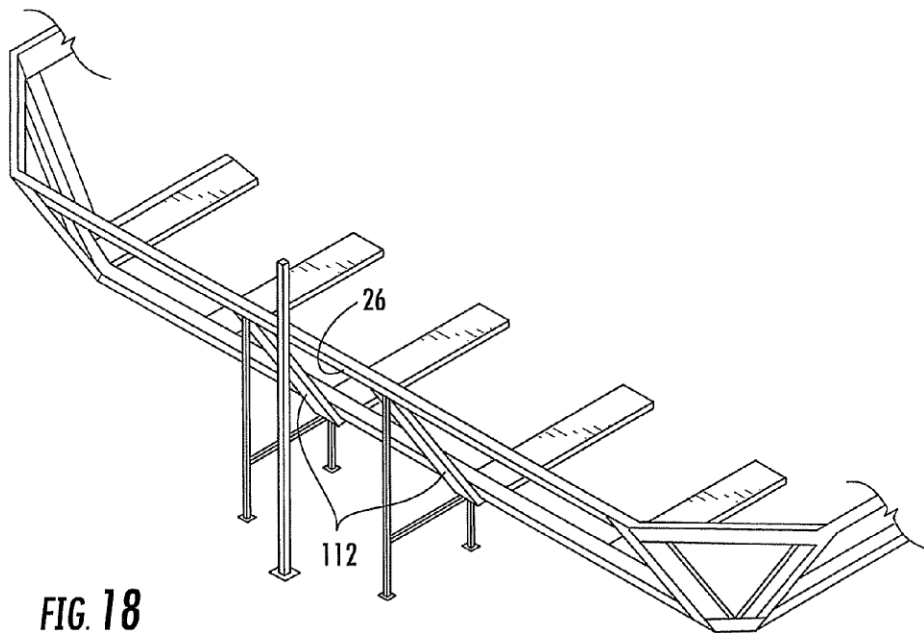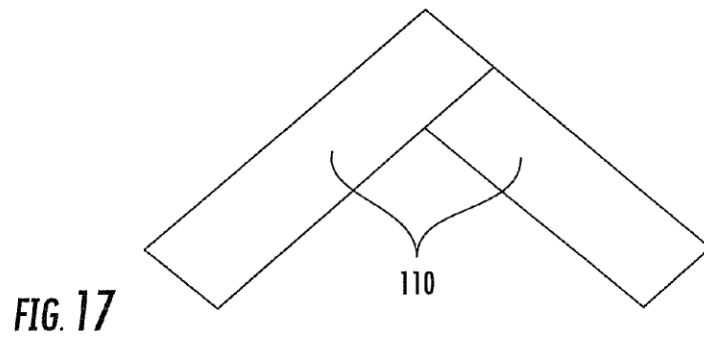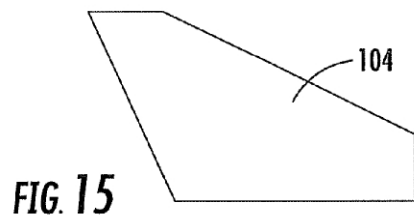

1

TRAMPOLINE ARENA**CROSS-REFERENCE TO RELATED APPLICATION**

This application claims the benefit of U.S. Provisional Application Ser. No. 61/356,108, filed on Jun. 18, 2010, the contents of which are herein incorporated by reference in their entirety.

FIELD OF THE INVENTION

The present invention relates to trampolines, and more particularly, to arenas formed from a plurality of trampolines.

BACKGROUND OF THE INVENTION

Trampolines have long been recognized as a source of fun and exercise for young and old, alike. However, trampolines, and particularly large trampolines, have also been viewed as a considerable safety risk. As a result, trampolines have been underutilized in group and commercial recreation applications.

SUMMARY OF THE INVENTION

In view of the foregoing, it is an object of the present invention to provide an improved trampoline arena. According to an embodiment of the present invention, a trampoline arena includes a framework assembly having a plurality of frame elements defining an outwardly sloping outer wall, and a plurality of voids being defined between the framework elements. The arena also includes a plurality of trampolines connected to the frame elements along peripheries thereof and extending across the plurality of voids to further define the outwardly sloping outer wall and deck, and a padding assembly including a plurality of pads overlying the frame elements and the peripheries of the trampolines.

According to an aspect of the present invention, the plurality of frame elements further define a plurality of pyramids extending upwardly from the deck and plurality of pyramids, and the plurality of trampolines connected to the frame elements along the peripheries thereof and extending across the plurality of voids also further define the plurality of pyramids.

These and other objects, aspects and advantages of the present invention will be better appreciated in view of the drawings and following detailed description of preferred embodiments.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a partially exploded view of a trampoline arena, including a framework assembly, a padding assembly and a plurality of trampolines, according to an embodiment of the present invention;

FIG. 1A is detail view of a representative connection between springs of the trampolines of FIG. 1 with elements of the framework assembly;

FIG. 2 is a perspective view of a side frame of the frame assembly of FIG. 1;

FIGS. 3 and 4 are top views of side frames of the frame assembly of FIG. 1, adjacent to opposite sides of a corner thereof;

FIG. 5 is a perspective view of frame elements defining a pyramid of the arena of FIG. 1;

FIG. 6 is a side profile view of a flat pad of the pad assembly of FIG. 1;

2

FIG. 7 is a side profile view of a side base pad of the pad assembly of FIG. 1;

FIG. 8 is a side profile view of a side top pad of the pad assembly of FIG. 1;

FIG. 9 is a perspective view of a corner of the arena of FIG. 1, including pad assembly components;

FIG. 10 is a perspective view of a triangular base pad of the pad assembly components of FIG. 9;

FIG. 11 is a side profile view of a corner top pad of the pad assembly components of FIG. 9;

FIGS. 12 and 13 are side profile views of two-piece corner pads of the pad assembly components of FIG. 9;

FIG. 14 is a perspective view of a pyramid of the arena of FIG. 1, including pad assembly components;

FIG. 15 is a side profile view of a pyramid base pad of the pad assembly components of FIG. 14;

FIG. 16 is a side profile view of a pyramid top pad of the pad assembly components of FIG. 14;

FIG. 17 is a side profile view of a two-piece pyramid side pad of the pad assembly components of FIG. 14; and

FIG. 18 is a perspective view of an access opening of the arena of FIG. 1, including pad assembly components.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

According to an embodiment of the present invention, referring to FIG. 1, a trampoline arena 10 includes a framework assembly 12 supporting a plurality of trampolines 18 (only a portion of the trampolines 18 are shown to more clearly depict the framework assembly 12) across voids 14 thereof, and a padding assembly 16 overlying the framework assembly 10 and peripheries of the trampolines 18. Referring to FIG. 1A, the trampolines 18 preferably connect to the framework assembly 12 via hooks at the end of trampoline springs 18A inserted into respective eyes 18B on members the framework. Connection points are advantageously close enough to eliminate the risk of appendages slipping between adjacent springs. The padding assembly 16 attaches to the framework assembly 12 via a plurality of hook and loop fasteners, or other fasteners.

Referring again to FIG. 1, the framework assembly 16 defines an outwardly sloping outer wall 20, a deck 22 and a plurality of pyramids 24 extending upwardly from the deck 22. An access opening 26 is formed through at least one side of the wall 20 by not placing a trampoline from the corresponding void 14. Advantageously, the framework assembly is adapted to bear the stresses of arena 10 usage while being completely free standing. However, if desired, the framework assembly 16 can be anchored at one or more points to structural members of a building in which the arena 10 is located.

Referring also to FIG. 2, sides of the wall 20 are supported by a plurality of substantially parallel, spaced apart, side frames 30. Each side frame 30 includes first and second spaced apart side frame vertical members 30A, 30B and a side frame angled member 30C extending between the tops of the vertical members 30A, 30B. Upper frame members 32 connect to brackets 34 at the top of each side frame 30, tying the side frames 30 together and forming a top margin of the wall 20. Brackets 36 tie a knee of each side frame 30 into longitudinal and transverse frame elements 40, 42 of the deck 22. Bracing 44 extends between midpoints of the side frames and the frame elements 40, 42 to add further rigidity and strength.

Referring to FIGS. 1, 3 and 4, at corners 46 of the wall 20, adjacent side frames 30 are arranged substantially perpendicular and upper and lower corner brackets 48, 50 are angled to tie into diagonal upper and lower corner members 52, 54.

The design of corners 46 more evenly distributes stresses throughout the corner than a unitary member underlying the corner would, and increases available void space for trampolines at the corners 46.

Referring again to FIG. 1, the deck 22 is formed by the longitudinal and transverse frame elements 40, 42. Midpoints of the longitudinal frame elements 40 are supported by tripods 60 and midpoints of the transverse frame elements 42 are supported by angled legs 62. Deck brackets 64 and corresponding additional support legs 66 are located where longitudinal and transverse frame elements 40, 42 meet away from the outer wall 20 or pyramids 24.

Referring also to FIG. 5, the pyramids 24 are interspersed throughout the deck 22, and offer additional visual interest and more gaming options to the arena 10. The pyramids 24 can also be arranged and used to help route existing building structures, such as pillars, through the arena 10, while protecting users therefrom. Alternately, the pyramids 24 could be omitted.

Each pyramid 24 includes four central vertical members 70 connected by a common top member 72, and four perimeter horizontal members 74 connected by a plurality of brackets 76 that also tie into the longitudinal and transverse frame elements 40, 42 of the deck 22. The perimeter horizontal members 74 are supported by perimeter legs 80 extending from the brackets 76. Additionally, a diagonal member 82 extends from each corner of the top member 72 to a corresponding one of the brackets 76. Dual bracing 84 connected to each vertical member 70 extends to respective corners and midpoints of the horizontal members 74.

Referring again to FIG. 1, the padding assembly 16 covers the framework assembly 12 cushioning any contact therewith, and inhibiting entanglement in trampoline springs. The padding assembly 16 is preferably formed from a plurality of foam pads sheathed in vinyl. The particular padding material can be chosen based on needs and preferences for a given application. However, a higher density foam, permitting a lower profile pad, is generally advantageous. Also, where pads abut a trampoline 14, the edges of the pad are preferably tapered or chamfered toward the trampoline 14. This arrangement reduces the likelihood of tripping over the edge of a pad while using the arena 10.

Referring to FIG. 6, the side frames 40 forming sides of the wall 20 and most of the longitudinal and transverse members 40, 42 of the deck 22 are covered by generally flat pads 90. Referring to FIG. 7, longitudinal and transverse members 40, 42 forming an outside edge of the deck 22 are covered by side base pads 92 having a wedge-shaped profile with angularly offset flat edges to allow a smooth transition between the flat pads 90 on the deck 22 and the wall 20. Referring to FIG. 8, the upper frame members 32 are covered by side top pads 94.

Referring to FIGS. 9-13, at the corners 46, a triangular base pad 96 is arranged between opposite ends of adjacent base pads 92, covering the lower corner member 54. The side frames 40 in the corners 46 are covered by two-piece corner pads 100 extending upwardly from the junction of the base pads 92, 96. The upper corner member 52 is covered by a corner top pad 102, similar to the side top pads 94, but mitered at respective ends thereof to closely fit between the ends of adjacent side top pads 94.

Referring to FIGS. 14-17, the pyramids 24 have pyramid base pads 104 similar to the side base pads 92, but mitered to closely fit at respective ends thereof. Likewise, the pyramids have pyramid top pads 106 similar to the side top pads 94, but again mitered to fit closely at ends thereof. Two-piece pyramid side pads 110 extend between the base pads 104 and top pads 106 covering the diagonal members 82.

Referring to FIG. 18, adjacent the opening 26, additional vertical padding 112 is included to offer extra protection for users entering and exiting the arena 10.

It will be appreciated from the foregoing, that aspects of the present invention provide an improved trampoline arena that can be freestanding, in which stresses from the use of the trampolines are very evenly distributed throughout the framework assembly, even in corners thereof. Moreover, the padding assembly closely conforms to the framework assembly, offering excellent protection while minimizing the likelihood of tripping.

The foregoing embodiment is provided for illustrative and exemplary purposes, the present invention is not necessarily limited thereto. Those skilled in the art will appreciate that various modifications, as well adaptations for particular circumstances, will fall within the scope of the invention as herein shown and described and of the claims appended hereto.

What is claimed is:

1. A trampoline arena comprising:

a framework assembly including a plurality of frame elements defining an outwardly sloping outer wall, and a deck, a plurality of voids being defined between the framework elements;

a plurality of trampolines connected to the frame elements along peripheries thereof and extending across the plurality of voids to further define the outwardly sloping outer wall and deck; and

a padding assembly including a plurality of pads overlying the frame elements and the peripheries of the trampolines;

wherein the plurality of frame elements further define a plurality of pyramids extending upwardly from the deck, the plurality of trampolines connecting to the frame elements along the peripheries thereof and extending across the plurality of voids to further define the plurality of pyramids.

2. The arena of claim 1, wherein the sloping outer wall substantially surrounds the deck.

3. The arena of claim 1, wherein an additional void defined between the frame elements defining the outer wall, and no trampoline extends across this additional void such that an access opening for the trampoline arena is formed.

4. The arena of claim 1, wherein the plurality of trampolines are connected to eyes defined in the frame elements surrounding the plurality of voids.

5. The arena of claim 1, wherein the plurality of frame elements include a plurality of side frames defining sides of the outer wall.

6. The arena of claim 5, wherein each side frame includes: first and second spaced apart side frame vertical members, a top of the first side frame vertical member being higher than a top of the second side frame vertical member; and a side frame angled member extending downwardly between the tops thereof.

7. The arena of claim 6, wherein the plurality of frame elements further include a plurality of upper frame members extending between tops of the first side frame vertical members of the side frames.

8. The arena of claim 7, wherein the side frames further include upper brackets connecting the tops of the first side frame vertical members to the upper frame members.

9. The arena of claim 6, wherein the side frames further include lower brackets connecting the tops of the second side frame vertical members to the deck.

5

10. The arena of claim 1, wherein the plurality of frame elements include a plurality of intersecting longitudinal and transverse deck frame elements.

11. The arena of claim 10, wherein the plurality of frame elements further include a plurality of support legs supporting the longitudinal and transverse deck frame elements.

12. The arena of claim 11, wherein the plurality of support legs are arranged at least one of: intersections of the longitudinal and transverse deck frame elements and midpoints between the intersections of the longitudinal and transverse deck frame elements.

13. The arena of claim 12, wherein the plurality of support legs are arranged at both of the intersections of the longitudinal and transverse deck frame elements and midpoints between the intersections of the longitudinal and transverse deck frame elements.

14. The arena of claim 11, wherein at least a portion of the plurality of support legs are tripods.

15. The arena of claim 1, wherein each pyramid includes: four central vertical members;

at least one top member connecting tops of the central vertical members;

four perimeter legs spaced apart from, and shorter than, the four central vertical members; and

four diagonal members, each diagonal member extending from the top of a respective one of the central vertical members to a respective one of the perimeter legs.

16. The arena of claim 15, wherein the pyramids further include brackets connecting tops of the perimeter legs to the deck.

17. The arena of claim 1, wherein at least a portion of the plurality of pads have edges abutting the trampolines, the edges being tapered in the direction of the trampolines.

18. The arena of claim 1, wherein the plurality of pads include a plurality of side base pads that cover frame elements along a transition between the outer wall and the deck, the side base pads having a wedge-shaped profile.

19. The arena of claim 1, wherein corners of the outer wall include a pair of generally perpendicular side frames connected by generally horizontal upper and lower corner mem-

6

bers, such that trampoline covered voids are formed at the corners of the outer wall located at angles from adjacent sides of the outer walls.

20. The arena of claim 19, wherein the plurality of pads include triangular base pads covering the lower corner members.

21. A trampoline arena comprising:

a framework assembly including a plurality of frame elements defining an outwardly sloping outer wall, and a deck, a plurality of voids being defined between the framework elements;

a plurality of trampolines connected to the frame elements along peripheries thereof and extending across the plurality of voids to further define the outwardly sloping outer wall and deck; and

a padding assembly including a plurality of pads overlying the frame elements and the peripheries of the trampolines;

wherein corners of the outer wall include a pair of generally perpendicular side frames connected by generally horizontal upper and lower corner members, such that trampoline covered voids are formed at the corners of the outer wall located at angles from adjacent sides of the outer walls;

wherein the plurality of pads include triangular base pads covering the lower corner members; and

wherein the plurality of pads further include side base pads extending horizontally outward from opposite sides of the triangular base pads along wherein a pair of two-piece corner pads extend along a transition between the outer wall and the deck.

22. The arena of claim 21, wherein the plurality of pads further include two-piece corner pads extending generally upwards and outwards from the triangular base pads along opposite sides of the trampoline covered voids at the corners of the outer wall.

* * * * *

UNITED STATES PATENT AND TRADEMARK OFFICE

CERTIFICATE OF CORRECTION

PATENT NO. : 8,657,696 B1
APPLICATION NO. : 13/164356
DATED : February 25, 2014
INVENTOR(S) : Marcus E. Gurley

Page 1 of 1


It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

In the Specification

Column 2, Line 42 Delete: "assembly 16"
 Insert: -- assembly 12 --

Column 2, Line 50 Delete: "assembly 16"
 Insert: -- assembly 12 --

Signed and Sealed this
First Day of July, 2014

A handwritten signature in black ink, reading "Michelle K. Lee". The signature is written in a cursive, flowing style.

Michelle K. Lee
Deputy Director of the United States Patent and Trademark Office