



US008548548B2

(12) **United States Patent**
Al-Ali

(10) **Patent No.:** **US 8,548,548 B2**
(45) **Date of Patent:** ***Oct. 1, 2013**

(54) **PHYSIOLOGICAL MEASUREMENT COMMUNICATIONS ADAPTER**

(75) Inventor: **Ammar Al-Ali**, San Juan Capistrano, CA (US)

(73) Assignee: **Masimo Corporation**, Irvine, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 259 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **12/955,826**

(22) Filed: **Nov. 29, 2010**

(65) **Prior Publication Data**

US 2011/0071370 A1 Mar. 24, 2011

Related U.S. Application Data

(63) Continuation of application No. 11/417,006, filed on May 3, 2006, now Pat. No. 7,844,315, which is a continuation of application No. 11/048,330, filed on Feb. 1, 2005, now Pat. No. 7,844,314, which is a continuation of application No. 10/377,933, filed on Feb. 28, 2003, now Pat. No. 6,850,788.

(60) Provisional application No. 60/367,428, filed on Mar. 25, 2002.

(51) **Int. Cl.**
A61B 5/1455 (2006.01)
A61B 5/024 (2006.01)
A61B 5/00 (2006.01)

(52) **U.S. Cl.**
USPC **600/323; 600/324; 600/502; 600/300;**
128/903

(58) **Field of Classification Search**

USPC 600/310, 322, 323, 324, 300; 128/903
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,810,102	A	5/1974	Parks, III et al.
3,815,583	A	6/1974	Scheidt
3,972,320	A	8/1976	Kalman
4,960,128	A	10/1990	Gordon et al.
4,964,408	A	10/1990	Hink et al.
5,041,187	A	8/1991	Hink et al.
5,069,213	A	12/1991	Polczynski
5,163,438	A	11/1992	Gordon et al.
5,319,355	A	6/1994	Russek
5,337,744	A	8/1994	Branigan
5,341,805	A	8/1994	Stavrudi et al.
D353,195	S	12/1994	Savage et al.
D353,196	S	12/1994	Savage et al.
5,377,676	A	1/1995	Vari et al.
D359,546	S	6/1995	Savage et al.
5,431,170	A	7/1995	Mathews
D361,840	S	8/1995	Savage et al.
D362,063	S	9/1995	Savage et al.
5,452,717	A	9/1995	Branigan et al.
D363,120	S	10/1995	Savage et al.
5,456,252	A	10/1995	Vari et al.
5,479,934	A	1/1996	Imran

(Continued)


Primary Examiner — Eric Winakur

(74) *Attorney, Agent, or Firm* — Knobbe Martens Olson & Bear, LLP

(57) **ABSTRACT**

A sensor interface is configured to receive a sensor signal. A transmitter generates a transmit signal. A receiver receives the signal corresponding to the transmit signal. Further, a monitor interface is configured to communicate a waveform to the monitor so that measurements derived by the monitor from the waveform are generally equivalent to measurements derivable from the sensor signal.

8 Claims, 17 Drawing Sheets

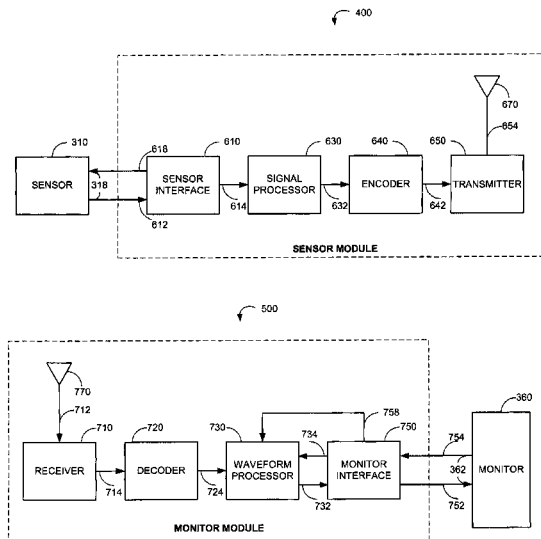

(56)

References Cited

U.S. PATENT DOCUMENTS

5,482,036	A	1/1996	Diab et al.	6,377,829	B1	4/2002	Al-Ali
5,490,505	A	2/1996	Diab et al.	6,388,240	B2	5/2002	Schulz et al.
5,494,043	A	2/1996	O'Sullivan et al.	6,397,091	B2	5/2002	Diab et al.
5,533,511	A	7/1996	Kaspari et al.	6,430,437	B1	8/2002	Marro
5,534,851	A	7/1996	Russek	6,430,525	B1	8/2002	Weber et al.
5,561,275	A	10/1996	Savage et al.	6,463,311	B1	10/2002	Diab
5,562,002	A	10/1996	Lalin	6,470,199	B1	10/2002	Kopotic et al.
5,590,649	A	1/1997	Caro et al.	6,501,975	B2	12/2002	Diab et al.
5,602,924	A	2/1997	Durand et al.	6,505,059	B1	1/2003	Kollias et al.
5,632,272	A	5/1997	Diab et al.	6,515,273	B2	2/2003	Al-Ali
5,638,816	A	6/1997	Kiani-Azarbayjany et al.	6,519,487	B1	2/2003	Parker
5,638,818	A	6/1997	Diab et al.	6,525,386	B1	2/2003	Mills et al.
5,645,440	A	7/1997	Tobler et al.	6,526,300	B1	2/2003	Kiani et al.
5,685,299	A	11/1997	Diab et al.	6,541,756	B2	4/2003	Schulz et al.
5,687,717	A *	11/1997	Halpern et al. 600/300	6,542,764	B1	4/2003	Al-Ali et al.
D393,830	S	4/1998	Tobler et al.	6,580,086	B1	6/2003	Schulz et al.
5,743,262	A	4/1998	Lepper, Jr. et al.	6,584,336	B1	6/2003	Ali et al.
5,758,644	A	6/1998	Diab et al.	6,595,316	B2	7/2003	Cybulski et al.
5,760,910	A	6/1998	Lepper, Jr. et al.	6,597,932	B2	7/2003	Tian et al.
5,769,785	A	6/1998	Diab et al.	6,597,933	B2	7/2003	Kiani et al.
5,782,757	A	7/1998	Diab et al.	6,606,511	B1	8/2003	Ali et al.
5,785,659	A	7/1998	Caro et al.	6,632,181	B2	10/2003	Flaherty et al.
5,791,347	A	8/1998	Flaherty et al.	6,639,668	B1	10/2003	Trepagnier
5,810,734	A	9/1998	Caro et al.	6,640,116	B2	10/2003	Diab
5,823,950	A	10/1998	Diab et al.	6,643,530	B2	11/2003	Diab et al.
5,830,131	A	11/1998	Caro et al.	6,650,917	B2	11/2003	Diab et al.
5,833,618	A	11/1998	Caro et al.	6,654,624	B2	11/2003	Diab et al.
5,860,919	A	1/1999	Kiani-Azarbayjany et al.	6,658,276	B2	12/2003	Kianl et al.
5,890,929	A	4/1999	Mills et al.	6,661,161	B1	12/2003	Lanzo et al.
5,904,654	A	5/1999	Wohltmann et al.	6,671,531	B2	12/2003	Al-Ali et al.
5,919,134	A	7/1999	Diab	6,678,543	B2	1/2004	Diab et al.
5,934,925	A	8/1999	Tobler et al.	6,684,090	B2	1/2004	Ali et al.
5,940,182	A	8/1999	Lepper, Jr. et al.	6,684,091	B2	1/2004	Parker
5,995,855	A	11/1999	Kiani et al.	6,697,656	B1	2/2004	Al-Ali
5,997,343	A	12/1999	Mills et al.	6,697,657	B1	2/2004	Shehada et al.
6,002,952	A	12/1999	Diab et al.	6,697,658	B2	2/2004	Al-Ali
6,011,986	A	1/2000	Diab et al.	RE38,476	E	3/2004	Diab et al.
6,027,452	A	2/2000	Flaherty et al.	6,699,194	B1	3/2004	Diab et al.
6,036,642	A	3/2000	Diab et al.	6,714,804	B2	3/2004	Al-Ali et al.
6,045,509	A	4/2000	Caro et al.	RE38,492	E	4/2004	Diab et al.
6,067,462	A	5/2000	Diab et al.	6,721,582	B2	4/2004	Trepagnier et al.
6,081,735	A	6/2000	Diab et al.	6,721,585	B1	4/2004	Parker
6,088,607	A	7/2000	Diab et al.	6,725,075	B2	4/2004	Al-Ali
6,110,522	A	8/2000	Lepper, Jr. et al.	6,728,560	B2	4/2004	Kollias et al.
6,124,597	A	9/2000	Shehada et al.	6,735,459	B2	5/2004	Parker
6,128,521	A	10/2000	Marro et al.	6,745,060	B2	6/2004	Diab et al.
6,129,675	A	10/2000	Jay	6,760,607	B2	7/2004	Al-Ali
6,144,868	A	11/2000	Parker	6,770,028	B1	8/2004	Ali et al.
6,151,516	A	11/2000	Kiani-Azarbayjany et al.	6,771,994	B2	8/2004	Kiani et al.
6,152,754	A	11/2000	Gerhardt et al.	6,792,300	B1	9/2004	Diab et al.
6,157,850	A	12/2000	Diab et al.	6,813,511	B2	11/2004	Diab et al.
6,165,005	A	12/2000	Mills et al.	6,816,741	B2	11/2004	Diab
6,175,752	B1 *	1/2001	Say et al. 600/345	6,822,564	B2	11/2004	Al-Ali
6,184,521	B1	2/2001	Coffin, IV et al.	6,826,419	B2	11/2004	Diab et al.
6,206,830	B1	3/2001	Diab et al.	6,830,711	B2	12/2004	Mills et al.
6,229,856	B1	5/2001	Diab et al.	6,850,787	B2	2/2005	Weber et al.
6,232,609	B1	5/2001	Snyder et al.	6,850,788	B2	2/2005	Al-Ali
6,236,872	B1	5/2001	Diab et al.	6,852,083	B2	2/2005	Caro et al.
6,241,683	B1	6/2001	Macklem et al.	6,861,639	B2	3/2005	Al-Ali
6,253,097	B1	6/2001	Aronow et al.	6,898,452	B2	5/2005	Al-Ali et al.
6,256,523	B1	7/2001	Diab et al.	6,920,345	B2	7/2005	Al-Ali et al.
6,263,222	B1	7/2001	Diab et al.	6,931,268	B1	8/2005	Kiani-Azarbayjany et al.
6,278,522	B1	8/2001	Lepper, Jr. et al.	6,934,570	B2	8/2005	Kiani et al.
6,280,213	B1	8/2001	Tobler et al.	6,939,305	B2	9/2005	Flaherty et al.
6,285,896	B1	9/2001	Tobler et al.	6,943,348	B1	9/2005	Coffin, IV
6,301,493	B1	10/2001	Marro et al.	6,950,687	B2	9/2005	Al-Ali
6,317,627	B1	11/2001	Ennen et al.	6,961,598	B2	11/2005	Diab
6,321,100	B1	11/2001	Parker	6,970,792	B1	11/2005	Diab
6,325,761	B1	12/2001	Jay	6,979,812	B2	12/2005	Al-Ali
6,334,065	B1	12/2001	Al-Ali et al.	6,985,764	B2	1/2006	Mason et al.
6,343,224	B1	1/2002	Parker	6,993,371	B2	1/2006	Kiani et al.
6,349,228	B1	2/2002	Kiani et al.	6,996,427	B2	2/2006	Ali et al.
6,360,114	B1	3/2002	Diab et al.	6,999,904	B2	2/2006	Weber et al.
6,368,283	B1	4/2002	Xu et al.	7,003,338	B2	2/2006	Weber et al.
6,371,921	B1	4/2002	Caro et al.	7,003,339	B2	2/2006	Diab et al.
				7,015,451	B2	3/2006	Dalke et al.
				7,024,233	B2	4/2006	Ali et al.
				7,027,849	B2	4/2006	Al-Ali

7,030,749 B2	4/2006	Al-Ali	7,454,240 B2	11/2008	Diab et al.
7,039,449 B2	5/2006	Al-Ali	7,467,002 B2	12/2008	Weber et al.
7,041,060 B2	5/2006	Flaherty et al.	7,469,157 B2	12/2008	Diab et al.
7,044,918 B2	5/2006	Diab	7,471,969 B2	12/2008	Diab et al.
7,067,893 B2	6/2006	Mills et al.	7,471,971 B2	12/2008	Diab et al.
7,096,052 B2	8/2006	Mason et al.	7,483,729 B2	1/2009	Al-Ali et al.
7,096,054 B2	8/2006	Abdul-Hafiz et al.	7,483,730 B2	1/2009	Diab et al.
7,132,641 B2	11/2006	Schulz et al.	7,489,958 B2	2/2009	Diab et al.
7,142,901 B2	11/2006	Kiani et al.	7,496,391 B2	2/2009	Diab et al.
7,149,561 B2	12/2006	Diab	7,496,393 B2	2/2009	Diab et al.
7,186,966 B2	3/2007	Al-Ali	D587,657 S	3/2009	Al-Ali et al.
7,190,261 B2	3/2007	Al-Ali	7,499,741 B2	3/2009	Diab et al.
7,215,984 B2	5/2007	Diab	7,499,835 B2	3/2009	Weber et al.
7,215,986 B2	5/2007	Diab	7,500,950 B2	3/2009	Al-Ali et al.
7,221,971 B2	5/2007	Diab	7,509,154 B2	3/2009	Diab et al.
7,225,006 B2	5/2007	Al-Ali et al.	7,509,494 B2	3/2009	Al-Ali
7,225,007 B2	5/2007	Al-Ali et al.	7,510,849 B2	3/2009	Schurman et al.
RE39,672 E	6/2007	Shehada et al.	7,526,328 B2	4/2009	Diab et al.
7,239,905 B2	7/2007	Kiani-Azarbayjany et al.	7,530,942 B1	5/2009	Diab
7,245,953 B1	7/2007	Parker	7,530,949 B2	5/2009	Al Ali et al.
7,254,429 B2	8/2007	Schurman et al.	7,530,955 B2	5/2009	Diab et al.
7,254,431 B2	8/2007	Al-Ali	7,563,110 B2	7/2009	Al-Ali et al.
7,254,433 B2	8/2007	Diab et al.	7,596,398 B2	9/2009	Al-Ali et al.
7,254,434 B2	8/2007	Schulz et al.	7,618,375 B2	11/2009	Flaherty et al.
7,272,425 B2	9/2007	Al-Ali	D606,659 S	12/2009	Kiani et al.
7,274,955 B2	9/2007	Kiani et al.	7,647,083 B2	1/2010	Al-Ali et al.
D554,263 S	10/2007	Al-Ali et al.	D609,193 S	2/2010	Al-Ali et al.
7,280,858 B2	10/2007	Al-Ali et al.	D614,305 S	4/2010	Al-Ali et al.
7,289,835 B2	10/2007	Mansfield et al.	RE41,317 E	5/2010	Parker
7,292,883 B2	11/2007	De Felice et al.	7,729,733 B2	6/2010	Al-Ali et al.
7,295,866 B2	11/2007	Al-Ali	7,734,320 B2	6/2010	Al-Ali
7,328,053 B1	2/2008	Diab et al.	7,761,127 B2	7/2010	Al-Ali et al.
7,332,784 B2	2/2008	Mills et al.	7,761,128 B2	7/2010	Al-Ali et al.
7,340,287 B2	3/2008	Mason et al.	7,764,982 B2	7/2010	Dalke et al.
7,341,559 B2	3/2008	Schulz et al.	D621,516 S	8/2010	Kiani et al.
7,343,186 B2	3/2008	Lamego et al.	7,791,155 B2	9/2010	Diab
D566,282 S	4/2008	Al-Ali et al.	7,801,581 B2	9/2010	Diab
7,355,512 B1	4/2008	Al-Ali	7,822,452 B2	10/2010	Schurman et al.
7,356,365 B2	4/2008	Schurman	RE41,912 E	11/2010	Parker
7,371,981 B2	5/2008	Abdul-Hafiz	7,844,313 B2	11/2010	Kiani et al.
7,373,193 B2	5/2008	Al-Ali et al.	7,844,314 B2	11/2010	Al-Ali
7,373,194 B2	5/2008	Weber et al.	7,844,315 B2	11/2010	Al-Ali
7,376,453 B1	5/2008	Diab et al.	7,865,222 B2	1/2011	Weber et al.
7,377,794 B2	5/2008	Al-Ali et al.	7,873,497 B2	1/2011	Weber et al.
7,377,899 B2	5/2008	Weber et al.	7,880,606 B2	2/2011	Al-Ali
7,383,070 B2	6/2008	Diab et al.	7,880,626 B2	2/2011	Al-Ali et al.
7,415,297 B2	8/2008	Al-Ali et al.	7,891,355 B2	2/2011	Al-Ali et al.
7,428,432 B2	9/2008	Ali et al.	7,894,868 B2	2/2011	Al-Ali et al.
7,438,683 B2	10/2008	Al-Ali et al.			
7,440,787 B2	10/2008	Diab			

* cited by examiner

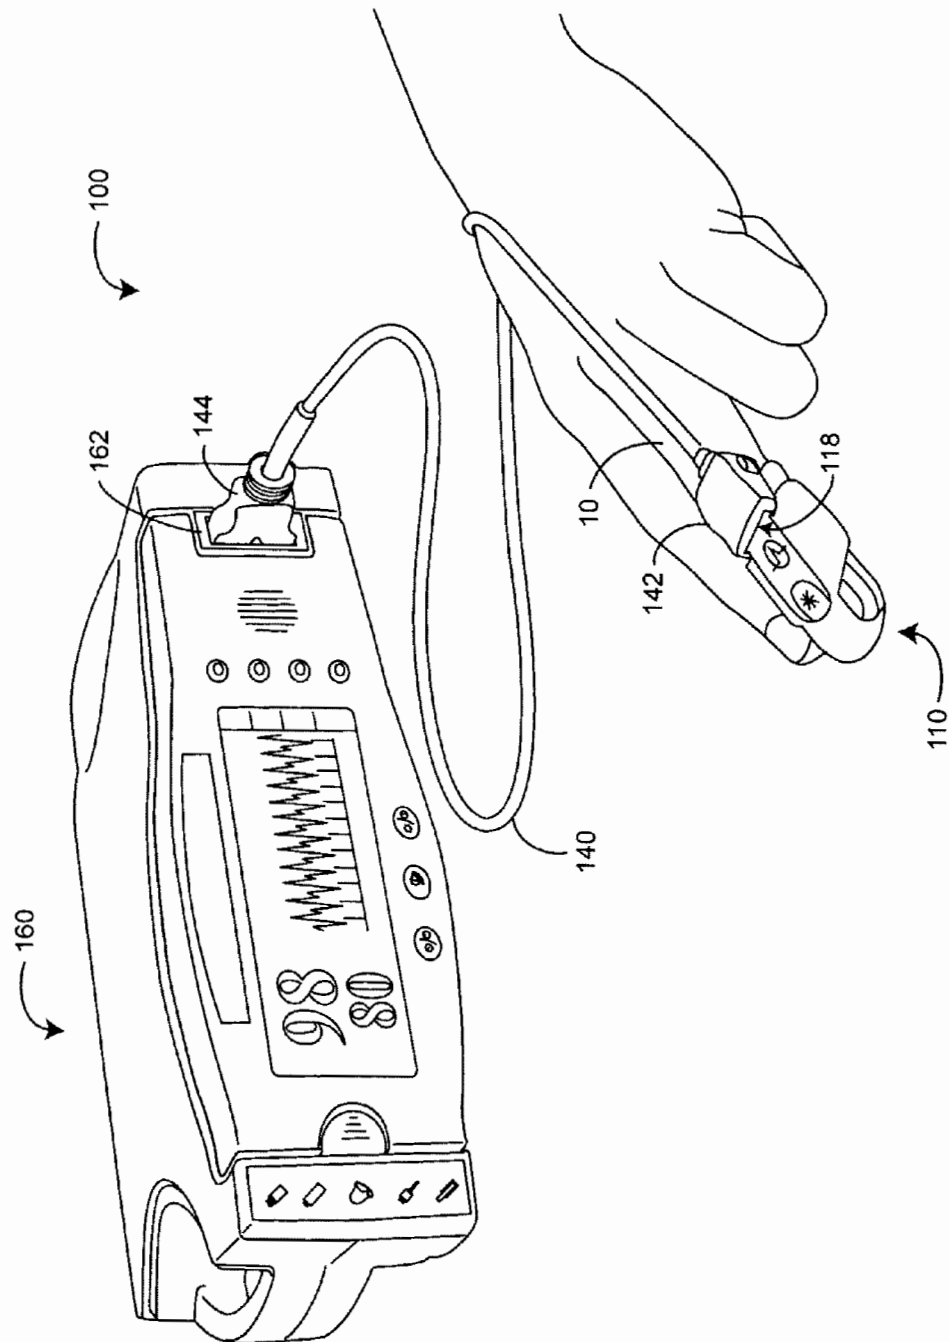


FIG. 1 (Prior Art)

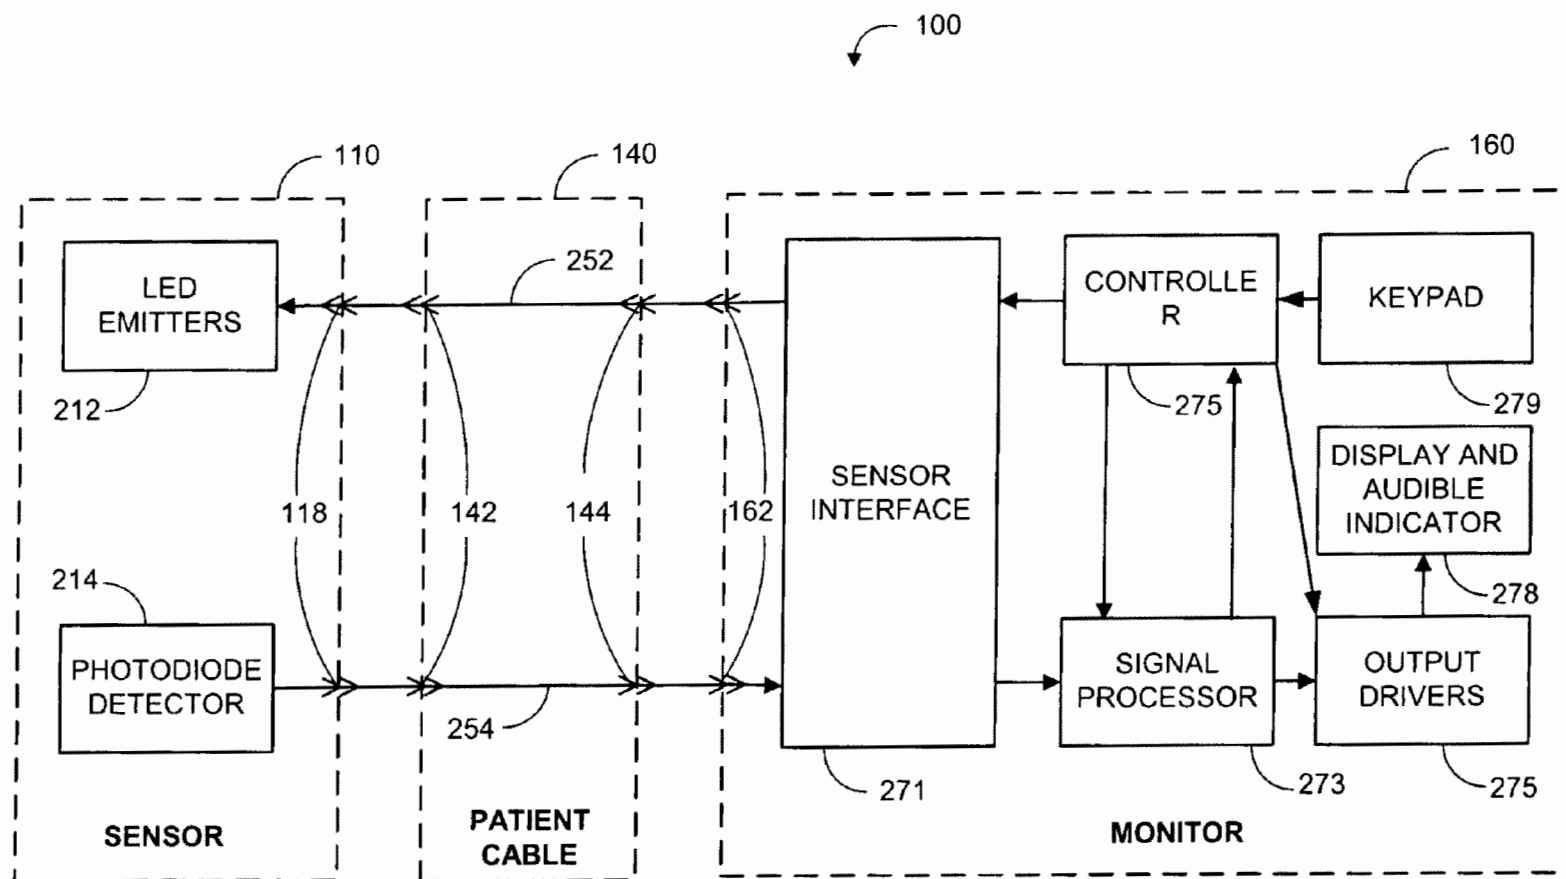


FIG. 2 (Prior Art)

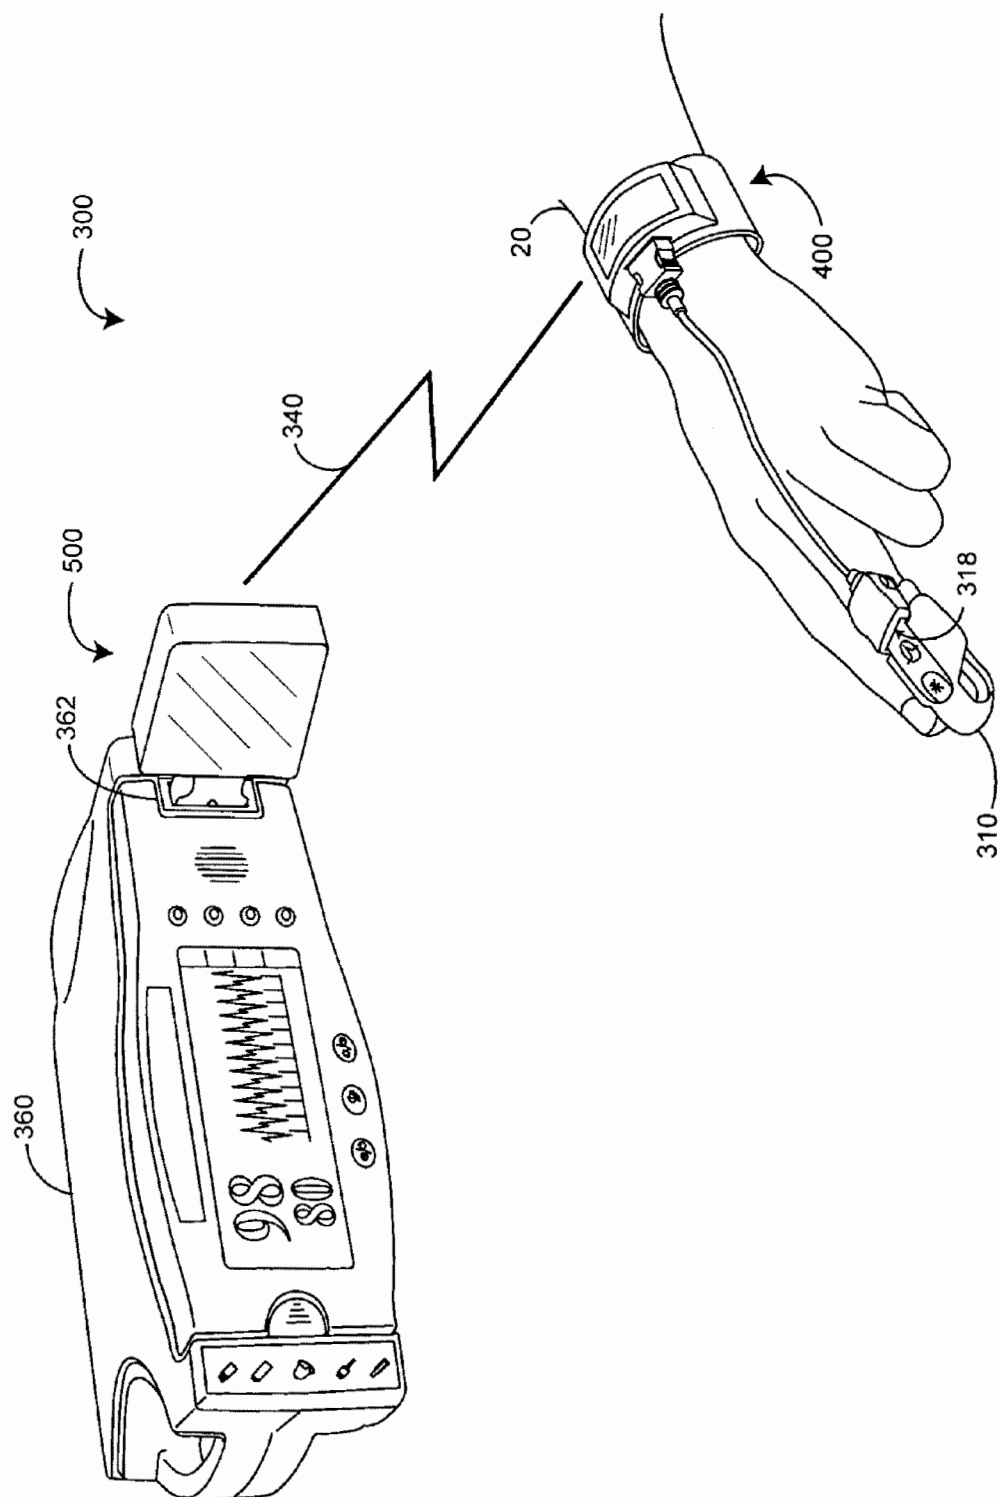


FIG. 3

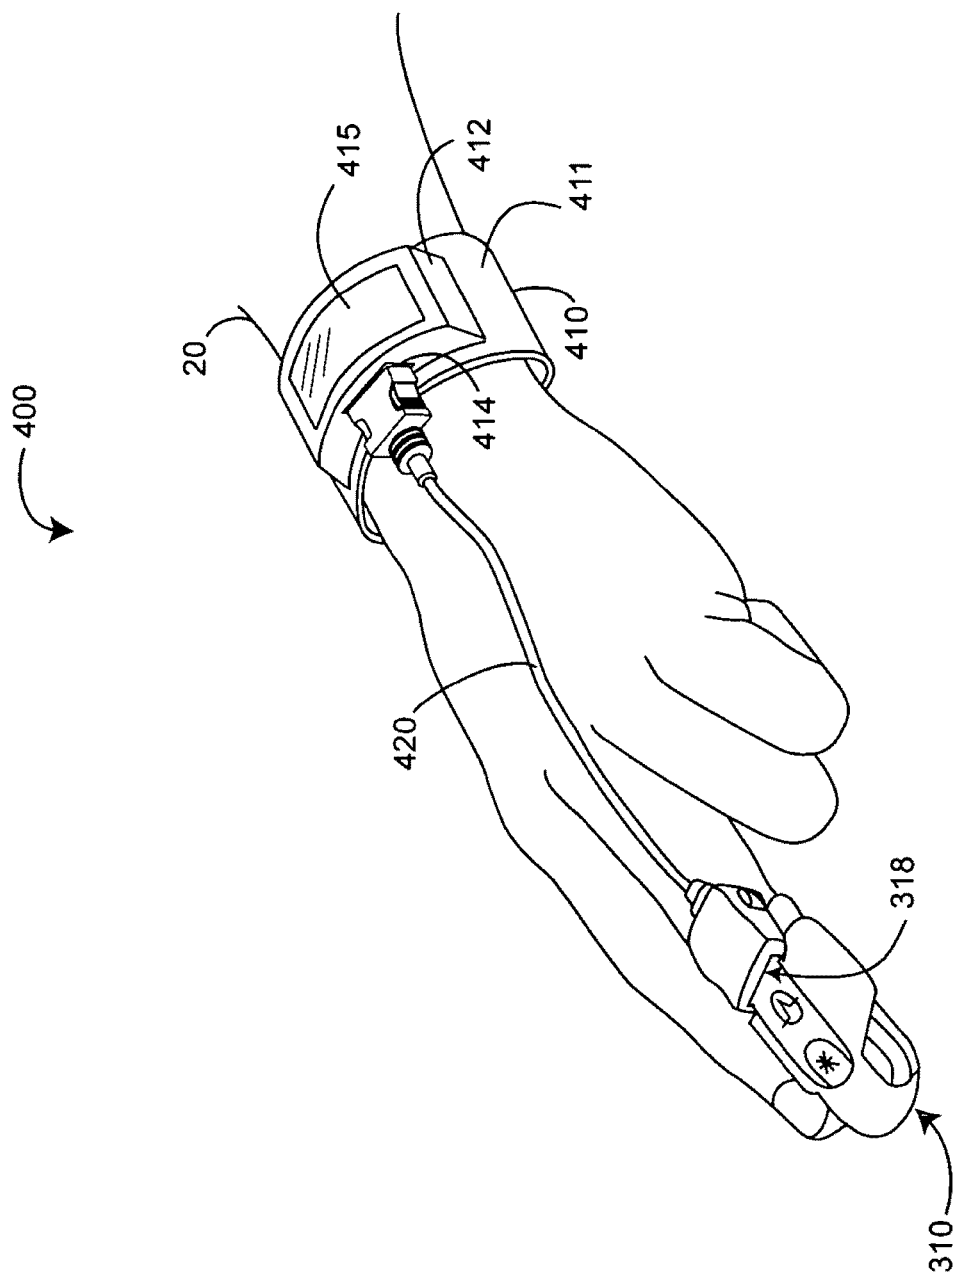


FIG. 4A

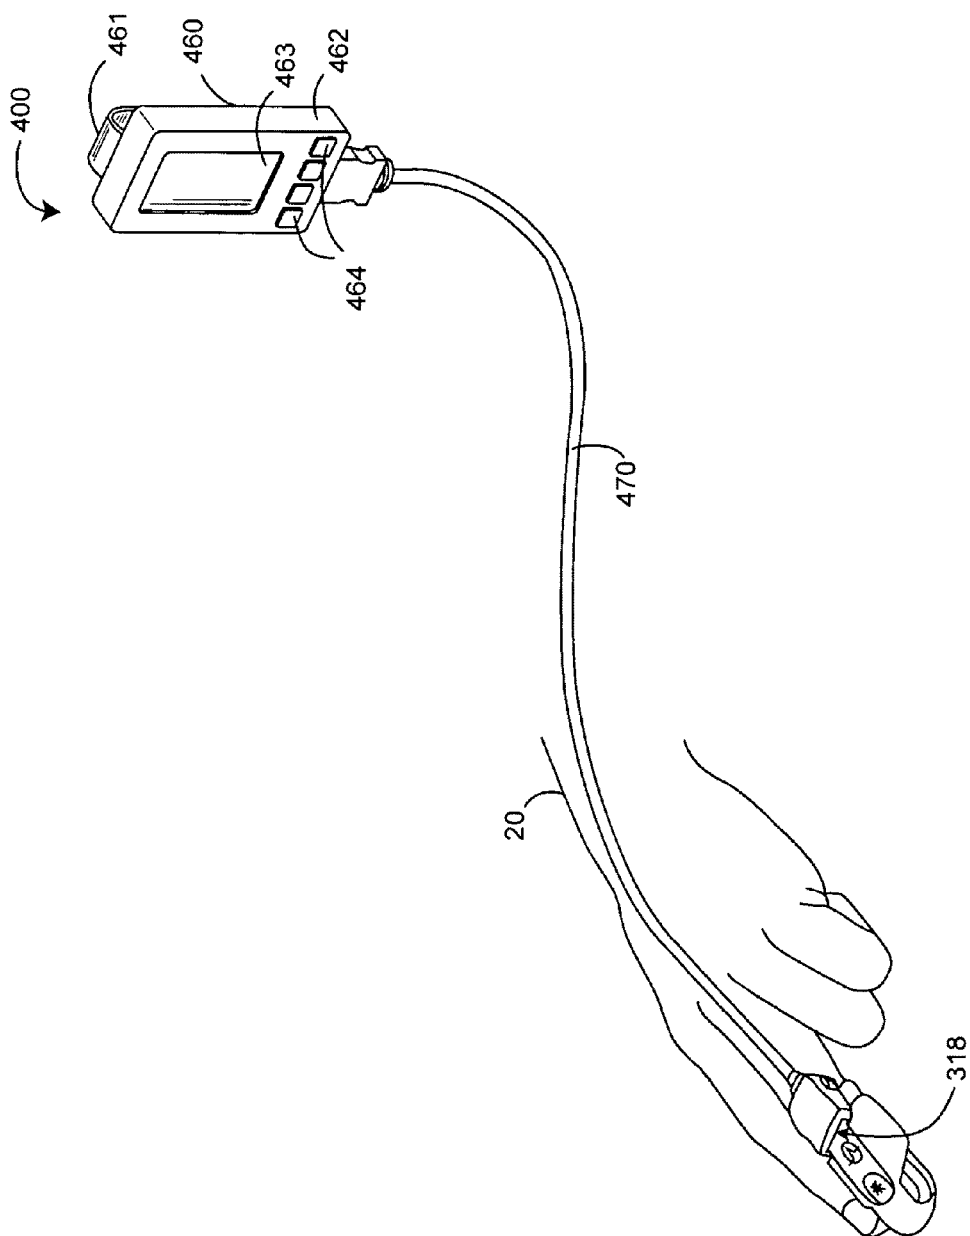


FIG. 4B

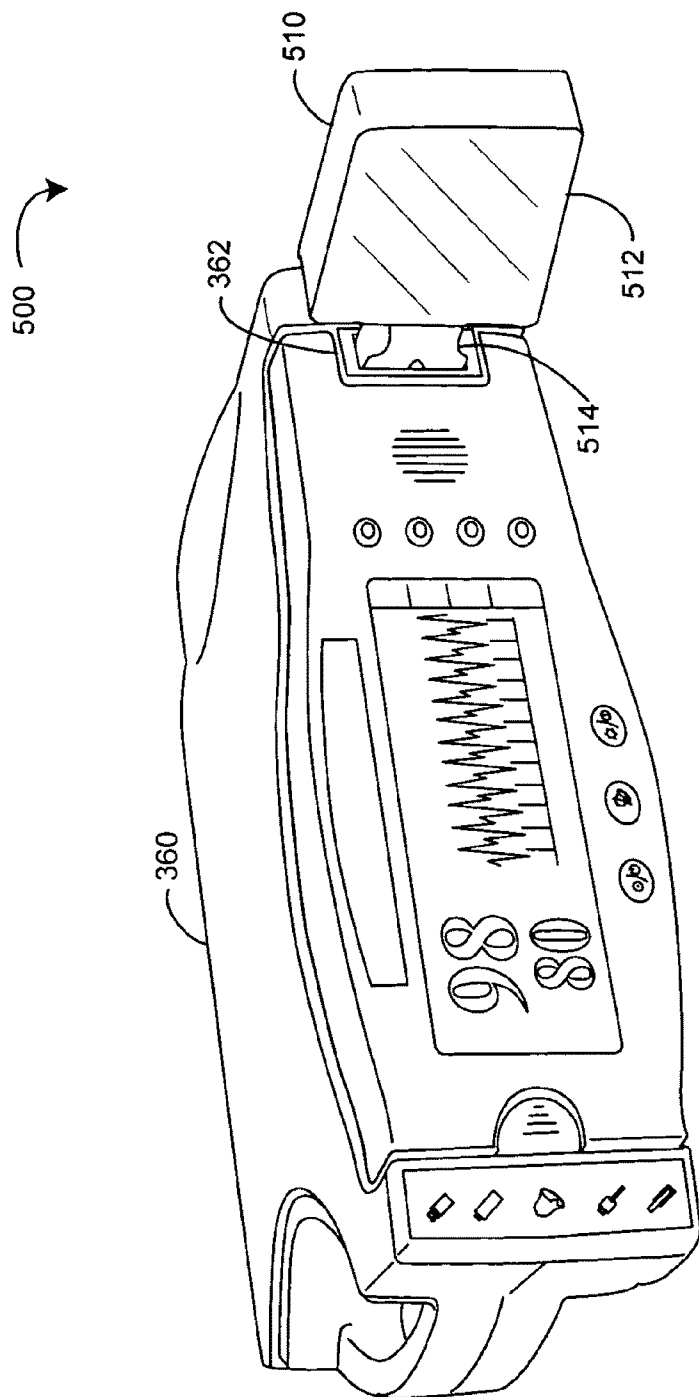


FIG. 5A

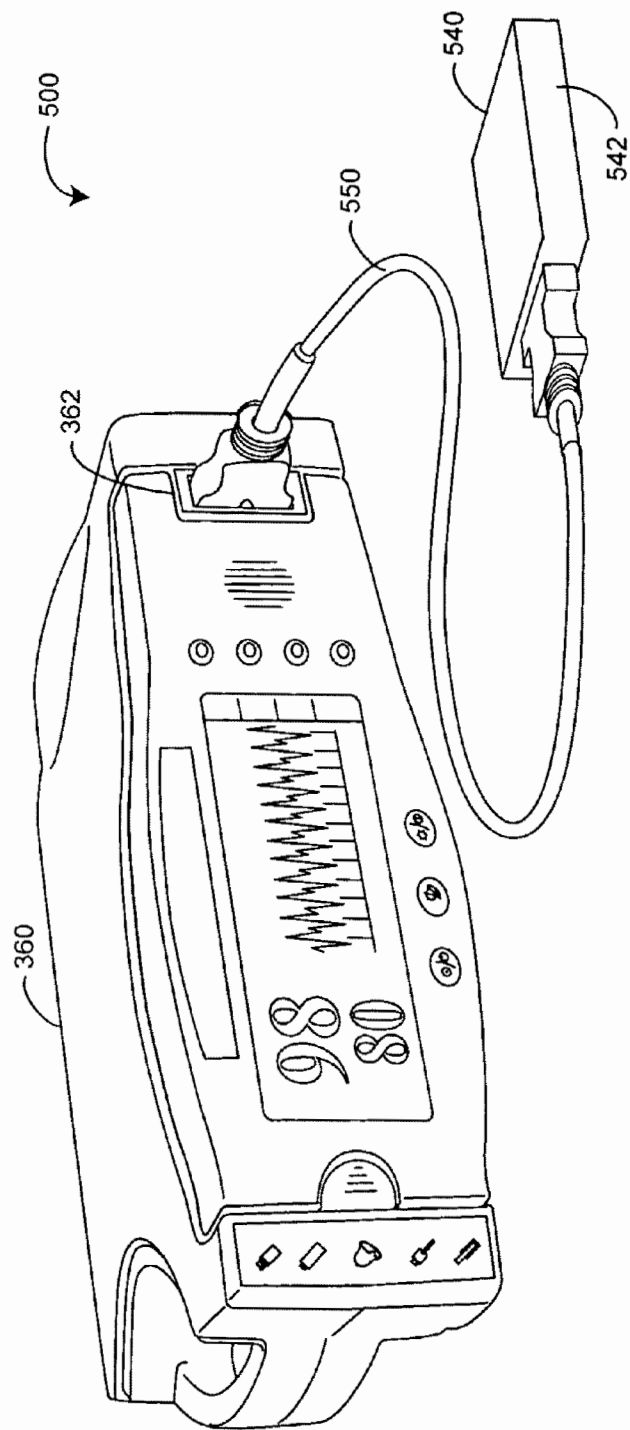


FIG. 5B

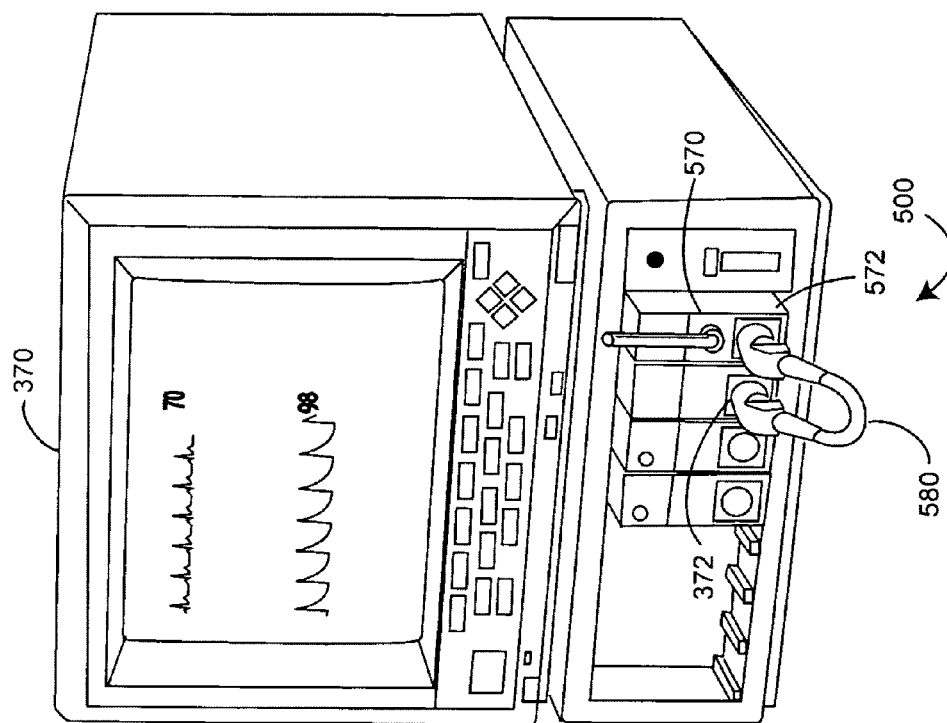


FIG. 5C

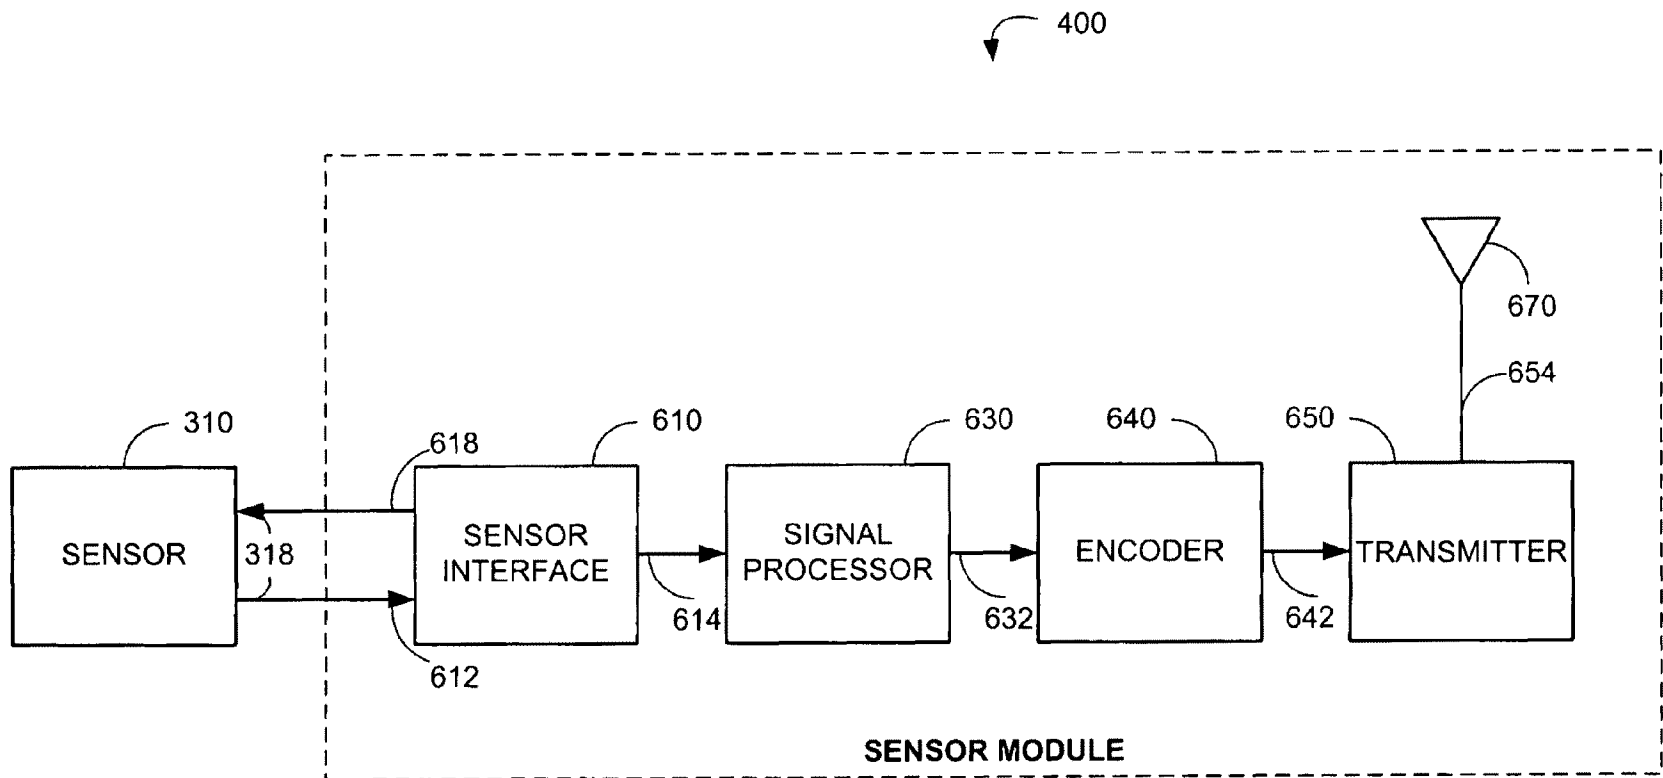


FIG. 6

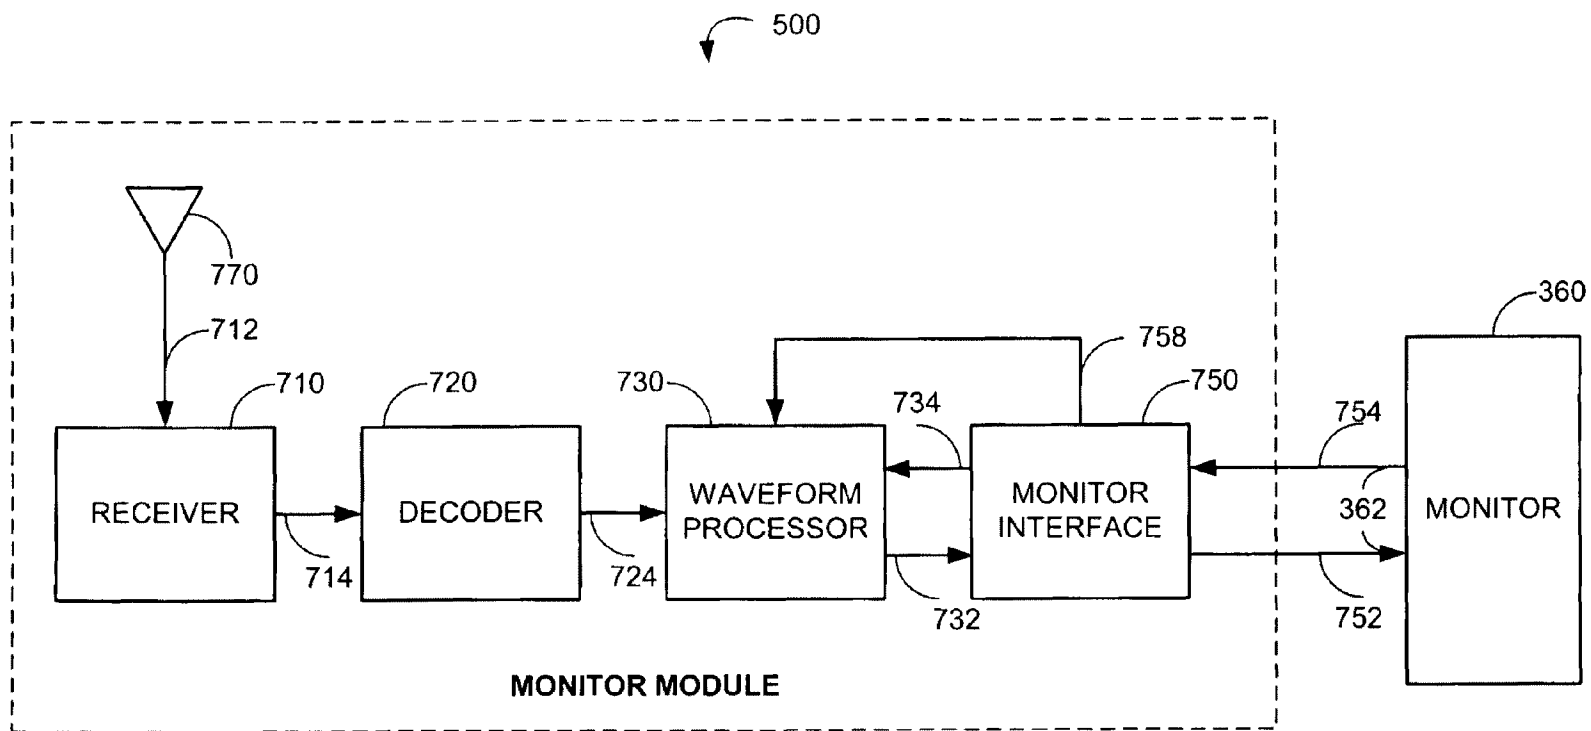


FIG. 7

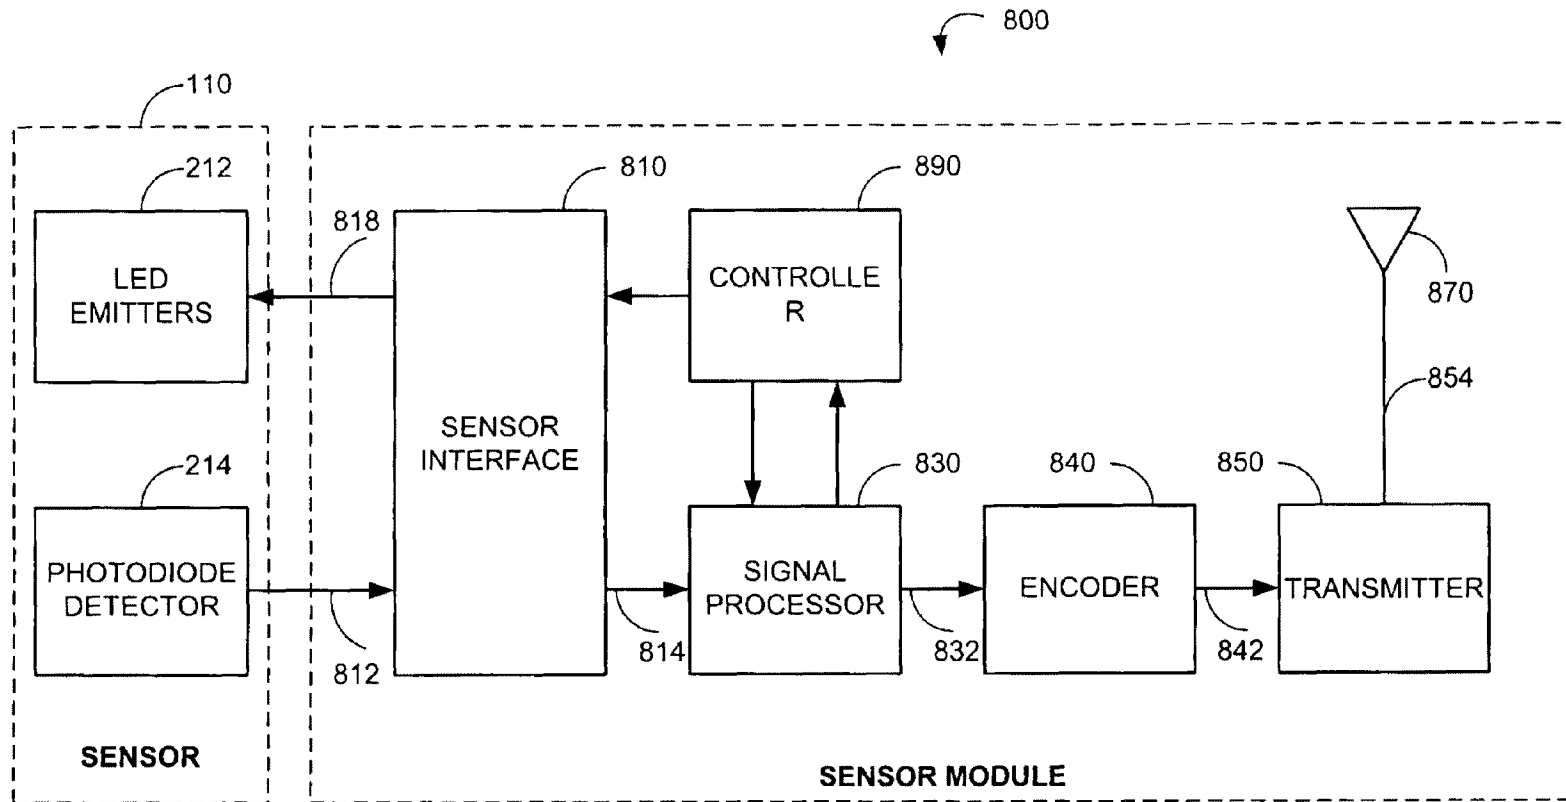


FIG. 8

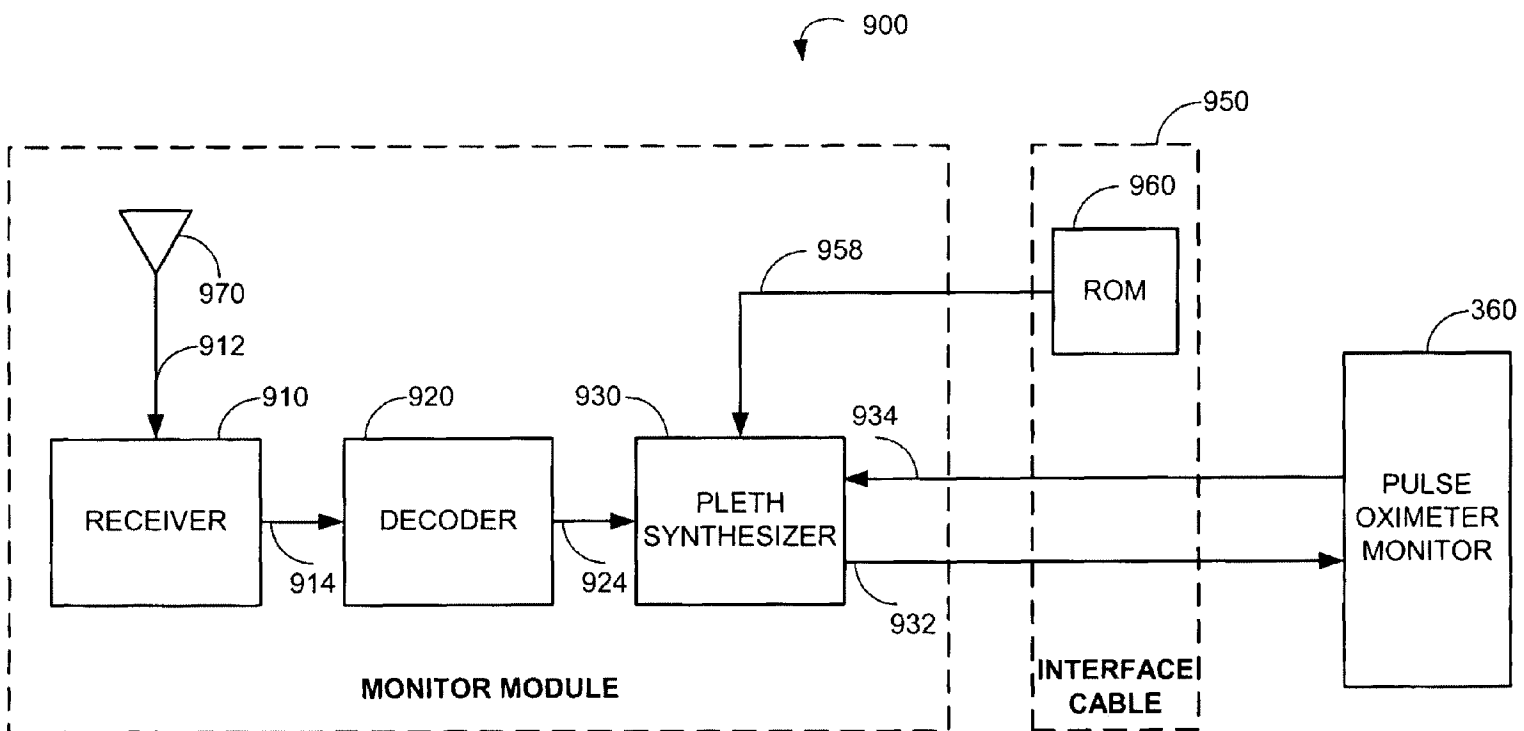


FIG. 9

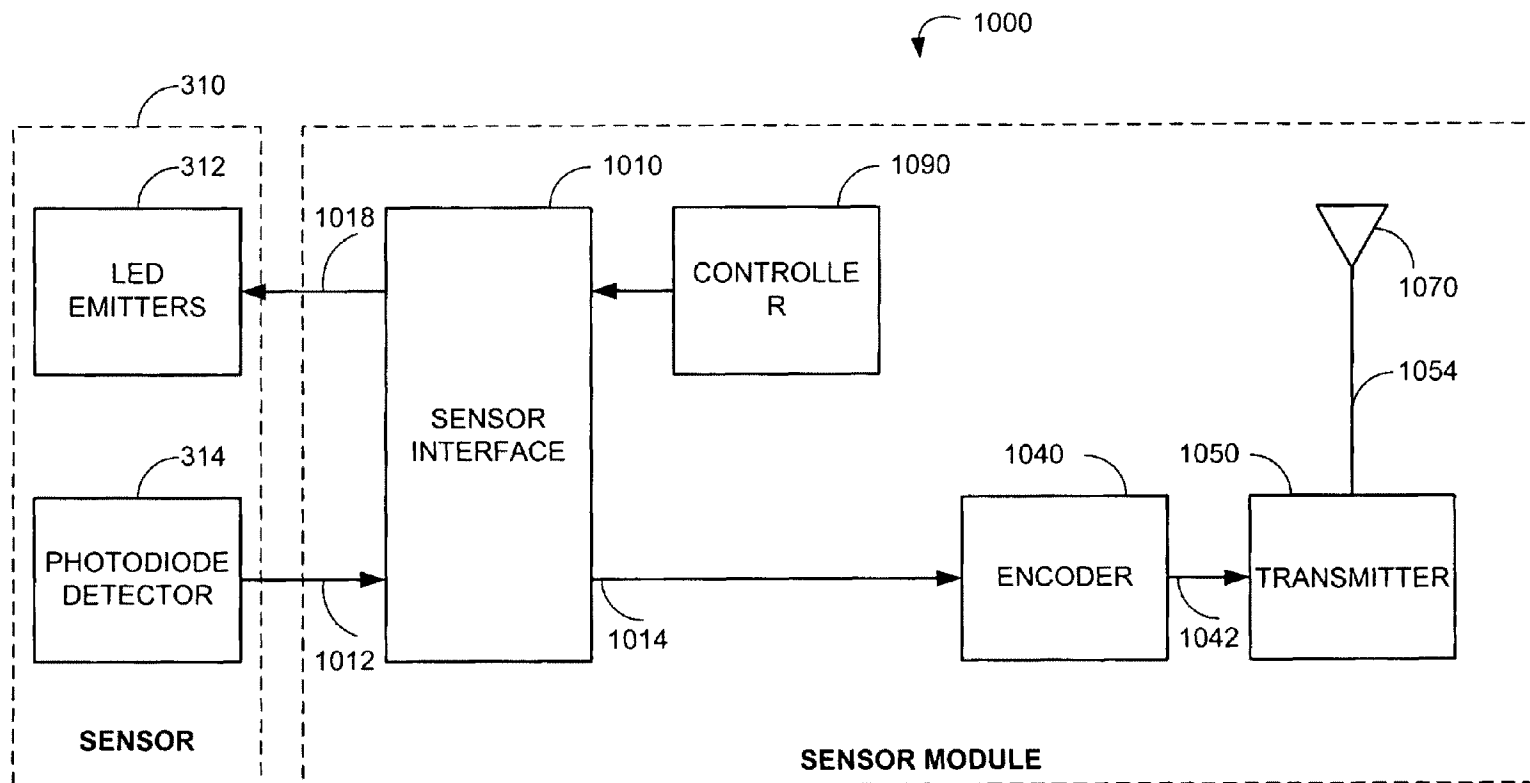


FIG. 10

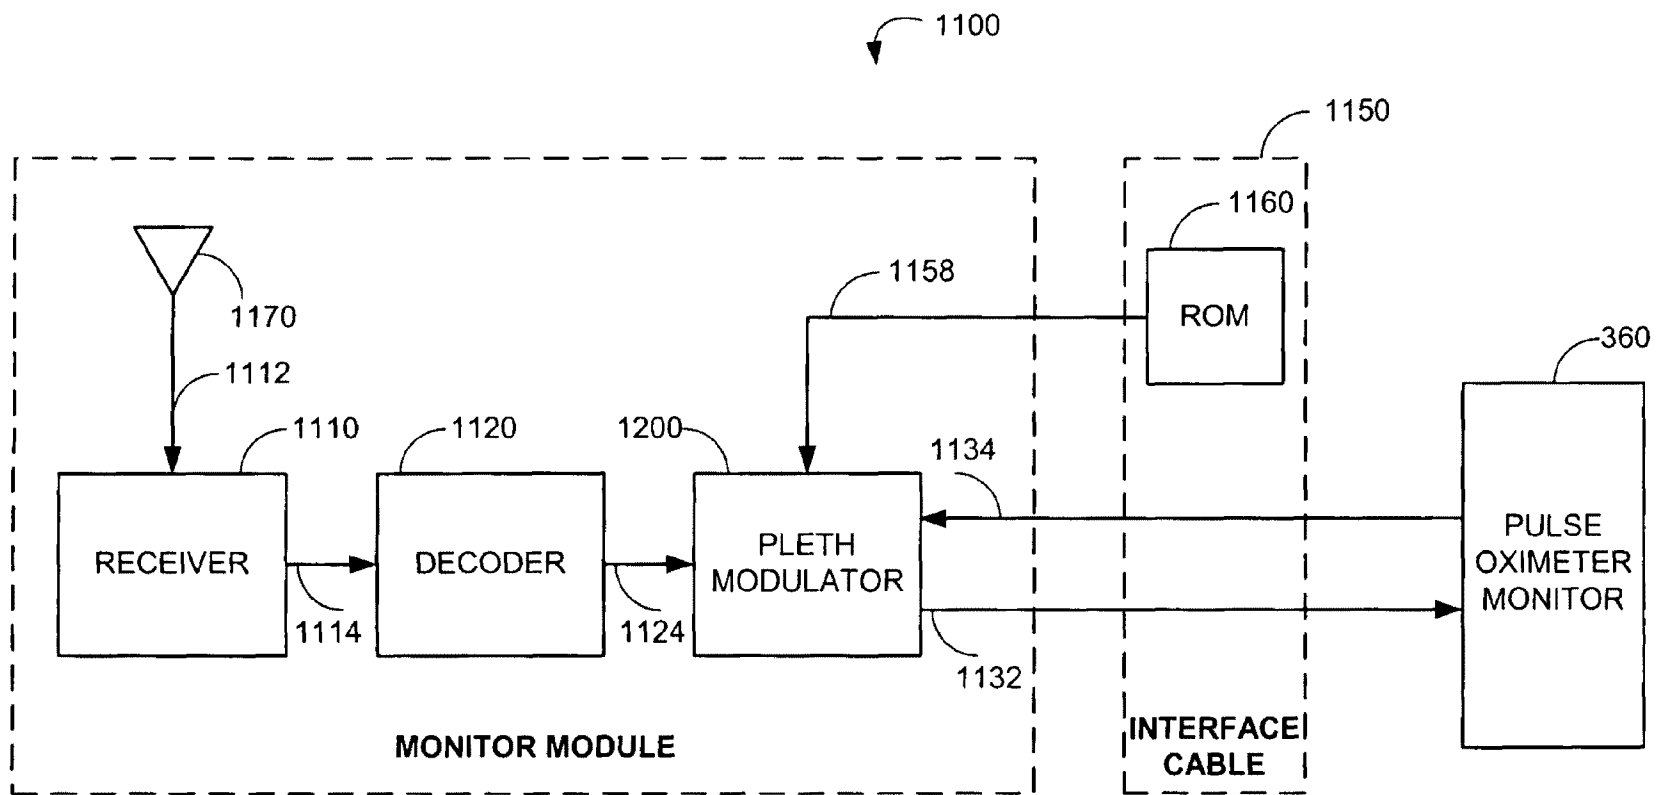


FIG. 11



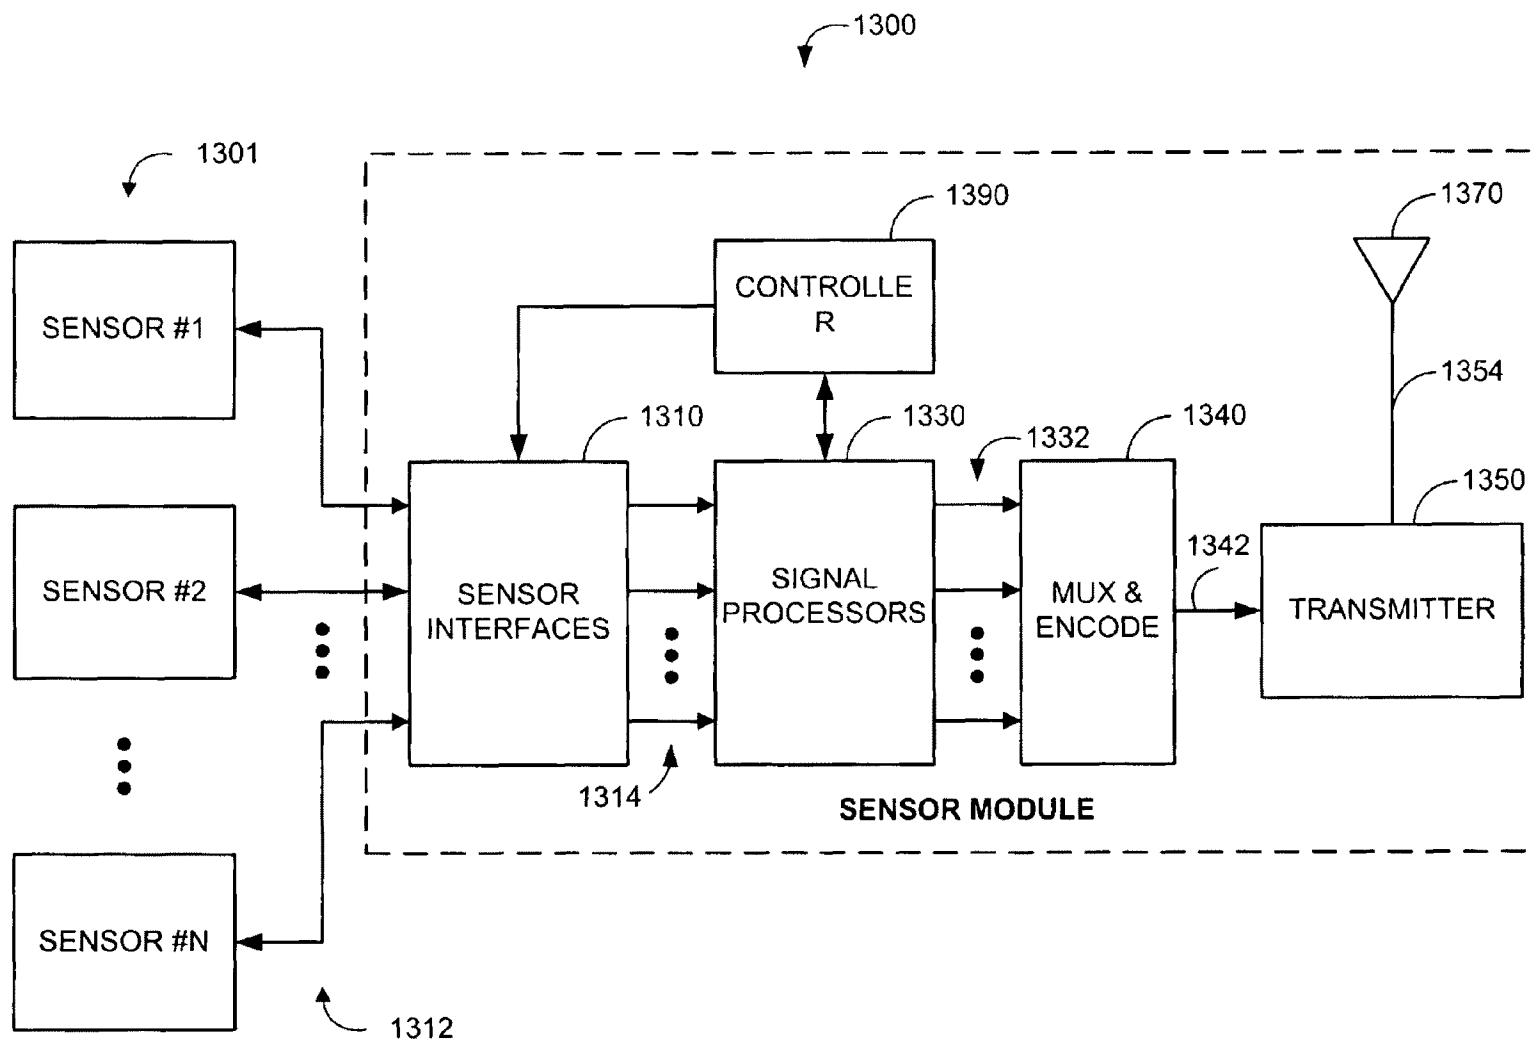


FIG. 13

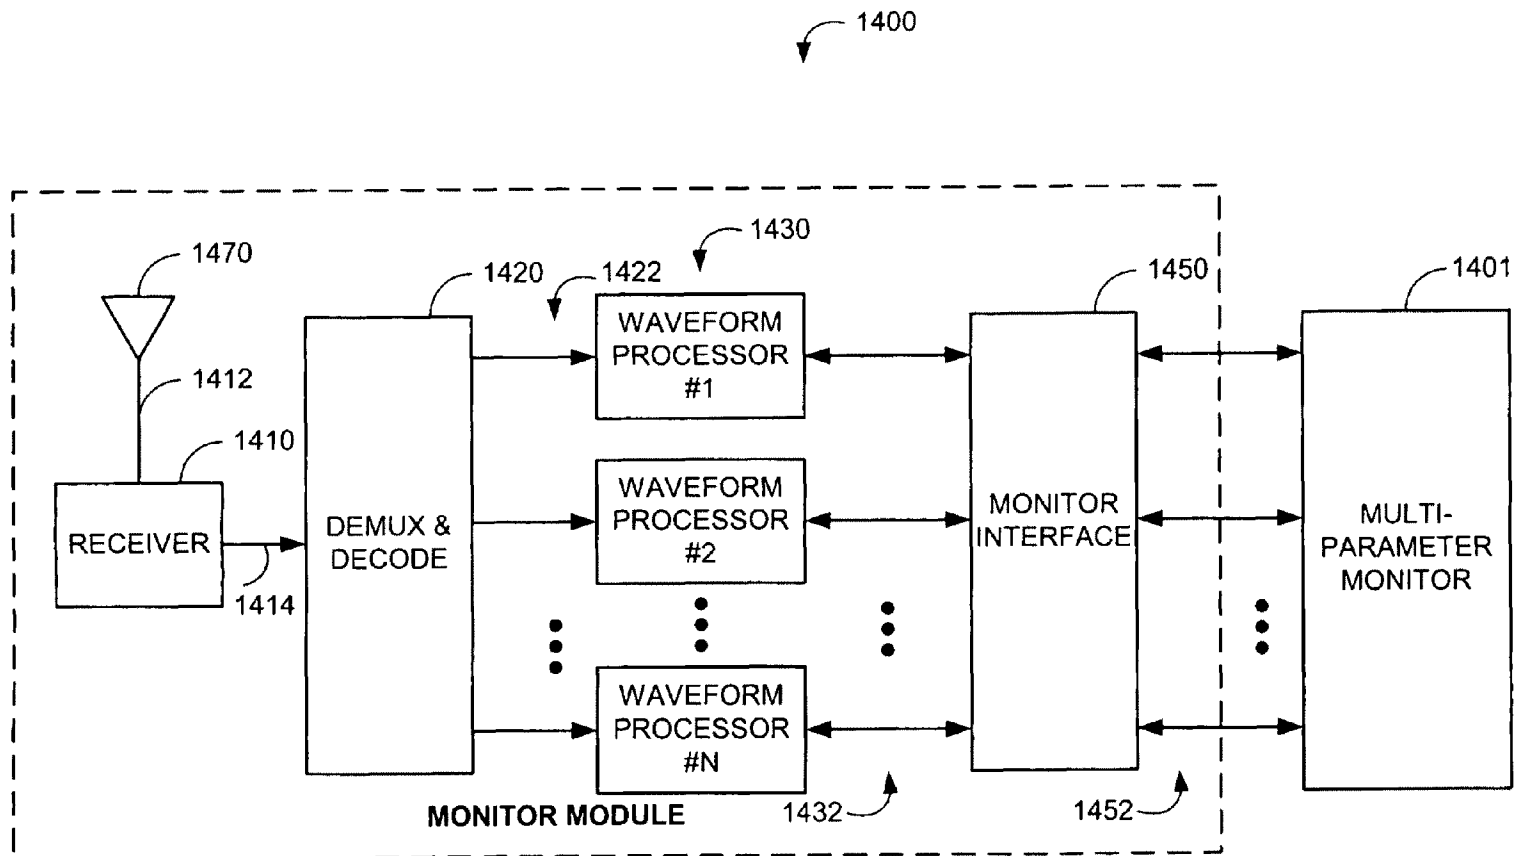


FIG. 14

1

PHYSIOLOGICAL MEASUREMENT COMMUNICATIONS ADAPTER

REFERENCE TO RELATED APPLICATION

The present application is a continuation of U.S. patent application Ser. No. 11/417,006, filed on May 3, 2006, entitled "Physiological Measurement Communications Adapter," now U.S. Pat. No. 7,844,315, which claims priority benefit under 35 U.S.C. § 120 to, and is a continuation of, U.S. patent application Ser. No. 11/048,330, filed Feb. 1, 2005, entitled "Physiological Measurement Communications Adapter," now U.S. Pat. No. 7,844,314, which is a continuation of U.S. patent application Ser. No. 10/377,933, entitled "Physiological Measurement Communications Adapter," now U.S. Pat. No. 6,850,788, which claims priority benefit under 35 U.S.C. § 119(e) from U.S. Provisional Application No. 60/367,428, filed Mar. 25, 2002, entitled "physiological Measurement Communications Adapter." The present application also incorporates the foregoing utility disclosures herein by reference.

BACKGROUND OF THE INVENTION

Patient vital sign monitoring may include measurements of blood oxygen, blood pressure, respiratory gas, and EKG among other parameters. Each of these physiological parameters typically requires a sensor in contact with a patient and a cable connecting the sensor to a monitoring device. For example, FIGS. 1-2 illustrate a conventional pulse oximetry system **100** used for the measurement of blood oxygen. As shown in FIG. 1, a pulse oximetry system has a sensor **110**, a patient cable **140** and a monitor **160**. The sensor **110** is typically attached to a finger **10** as shown. The sensor **110** has a plug **118** that inserts into a patient cable socket **142**. The monitor **160** has a socket **162** that accepts a patient cable plug **144**. The patient cable **140** transmits an LED drive signal **252** (FIG. 2) from the monitor **160** to the sensor **110** and a resulting detector signal **254** (FIG. 2) from the sensor **110** to the monitor **160**. The monitor **160** processes the detector signal **254** (FIG. 2) to provide, typically, a numerical readout of the patient's oxygen saturation, a numerical readout of pulse rate, and an audible indicator or "beep" that occurs in response to each arterial pulse.

As shown in FIG. 2, the sensor **110** has both red and infrared LED emitters **212** and a photodiode detector **214**. The monitor **160** has a sensor interface **271**, a signal processor **273**, a controller **275**, output drivers **276**, a display and audible indicator **278**, and a keypad **279**. The monitor **160** determines oxygen saturation by computing the differential absorption by arterial blood of the two wavelengths emitted by the sensor emitters **212**, as is well-known in the art. The sensor interface **271** provides LED drive current **252** which alternately activates the red and IR LED emitters **212**. The photodiode detector **214** generates a signal **254** corresponding to the red and infrared light energy attenuated from transmission through the patient finger **10** (FIG. 1). The sensor interface **271** also has input circuitry for amplification, filtering and digitization of the detector signal **254**. The signal processor **273** calculates a ratio of detected red and infrared intensities, and an arterial oxygen saturation value is empirically determined based on that ratio. The controller **275** provides hardware and software interfaces for managing the display and audible indicator **278** and keypad **279**. The display and audible indicator **278** shows the computed oxygen status, as described above, and provides the pulse beep as well as alarms indicating oxygen desaturation events. The keypad

2

279 provides a user interface for setting alarm thresholds, alarm enablement, and display options, to name a few.

SUMMARY OF THE INVENTION

Conventional physiological measurement systems are limited by the patient cable connection between sensor and monitor. A patient must be located in the immediate vicinity of the monitor. Also, patient relocation requires either disconnection of monitoring equipment and a corresponding loss of measurements or an awkward simultaneous movement of patient equipment and cables. Various devices have been proposed or implemented to provide wireless communication links between sensors and monitors, freeing patients from the patient cable tether. These devices, however, are incapable of working with the large installed base of existing monitors and sensors, requiring caregivers and medical institutions to suffer expensive wireless upgrades. It is desirable, therefore, to provide a communications adapter that is plug-compatible both with existing sensors and monitors and that implements a wireless link replacement for the patient cable.

An aspect of a physiological measurement communications adapter comprises a sensor interface configured to receive a sensor signal. A transmitter modulates a first baseband signal responsive to the sensor signal so as to generate a transmit signal. A receiver demodulates a receive signal corresponding to the transmit signal so as to generate a second baseband signal corresponding to the first baseband signal. Further, a monitor interface is configured to communicate a waveform responsive to the second baseband signal to a sensor port of a monitor. The waveform is adapted to the monitor so that measurements derived by the monitor from the waveform are generally equivalent to measurements derivable from the sensor signal. The communications adapter may further comprise a signal processor having an input in communications with the sensor interface, where the signal processor is operable to derive a parameter responsive to the sensor signal and where the first baseband signal is responsive to the parameter. The parameter may correspond to at least one of a measured oxygen saturation and a pulse rate.

One embodiment may further comprise a waveform generator that synthesizes the waveform from a predetermined shape. The waveform generator synthesizes the waveform at a frequency adjusted to be generally equivalent to the pulse rate. The waveform may have a first amplitude and a second amplitude, and the waveform generator may be configured to adjusted the amplitudes so that measurements derived by the monitor are generally equivalent to a measured oxygen saturation.

In another embodiment, the sensor interface is operable on the sensor signal to provide a plethysmograph signal output, where the first baseband signal is responsive to the plethysmograph signal. This embodiment may further comprise a waveform modulator that modifies a decoded signal responsive to the second baseband signal to provide the waveform. The waveform modulator may comprise a demodulator that separates a first signal and a second signal from the decoded signal, an amplifier that adjusts amplitudes of the first and second signals to generate a first adjusted signal and a second adjusted signal, and a modulator that combines the first and second adjusted signals into the waveform. The amplitudes of the first and second signals may be responsive to predetermined calibration data for the sensor and the monitor.

An aspect of a physiological measurement communications adapter method comprises the steps of inputting a sensor signal at a patient location, communicating patient data derived from the sensor signal between the patient location

3

and a monitor location, constructing a waveform at the monitor location responsive to the sensor signal, and providing the waveform to a monitor via a sensor port. The waveform is constructed so that the monitor calculates a parameter generally equivalent to a measurement derivable from the sensor signal.

In one embodiment, the communicating step may comprise the substeps of deriving a conditioned signal from the sensor signal, calculating a parameter signal from the conditioned signal, and transmitting the parameter signal from the patient location to the monitor location. The constructing step may comprise the substep of synthesizing the waveform from the parameter signal. In an alternative embodiment, the communicating step may comprise the substeps of deriving a conditioned signal from said sensor signal and transmitting the conditioned signal from the patient location to the monitor location. The constructing step may comprise the substeps of demodulating the conditioned signal and re-modulating the conditioned signal to generate the waveform. The providing step may comprise the substeps of inputting a monitor signal from an LED drive output of the sensor port, modulating the waveform in response to the monitor signal, and outputting the waveform on a detector input of the sensor port.

Another aspect of a physiological measurement communications adapter comprises a sensor interface means for inputting a sensor signal and outputting a conditioned signal, a transmitter means for sending data responsive to the sensor signal, and a receiver means for receiving the data. The communications adapter further comprises a waveform processor means for constructing a waveform from the data so that measurements derived by a monitor from the waveform are generally equivalent to measurements derivable from the sensor signal, and a monitor interface means for communicating the waveform to a sensor port of the monitor. The communications adapter may further comprise a signal processor means for deriving a parameter signal from the conditioned signal, where the data comprises the parameter signal. The waveform processor means may comprise a means for synthesizing the waveform from the parameter signal. The data may comprise the conditioned signal, and the waveform processor means may comprise a means for modulating the conditioned signal in response to the monitor.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an illustration of a prior art pulse oximetry system;

FIG. 2 is a functional block diagram of a prior art pulse oximetry system;

FIG. 3 is an illustration of a physiological measurement communications adapter;

FIGS. 4A-B are illustrations of communications adapter sensor modules;

FIGS. 5A-C are illustrations of communications adapter monitor modules;

FIG. 6 is a functional block diagram of a communications adapter sensor module;

FIG. 7 is a functional block diagram of a communications adapter monitor module;

FIG. 8 is a functional block diagram of a sensor module configured to transmit measured pulse oximeter parameters;

FIG. 9 is a functional block diagram of a monitor module configured to receive measured pulse oximeter parameters;

FIG. 10 is a functional block diagram of a sensor module configured to transmit a plethysmograph;

FIG. 11 is a functional block diagram of a monitor module configured to receive a plethysmograph;

4

FIG. 12 is a functional block diagram of a waveform modulator;

FIG. 13 is a functional block diagram of a sensor module configured for multiple sensors; and

FIG. 14 is a functional block diagram of a monitor module configured for multiple sensors.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Overview

FIG. 3 illustrates one embodiment of a communications adapter. FIGS. 4-5 illustrate physical configurations for a communications adapter. In particular, FIGS. 4A-B illustrate sensor module configurations and FIGS. 5A-C illustrate monitor module configurations. FIGS. 6-14 illustrate communications adapter functions. In particular, FIGS. 6-7 illustrate general functions for a sensor module and a monitor module, respectively. FIGS. 8-9 functionally illustrate a communications adapter where derived pulse oximetry parameters, such as saturation and pulse rate are transmitted between a sensor module and a monitor module. Also, FIGS. 10-12 functionally illustrate a communications adapter where a plethysmograph is transmitted between a sensor module and a monitor module. FIGS. 13-14 functionally illustrate a multiple-parameter communications adapter.

FIG. 3 illustrates a communications adapter 300 having a sensor module 400 and a monitor module 500. The communications adapter 300 communicates patient data derived from a sensor 310 between the sensor module 400, which is located proximate a patient 20 and the monitor module 500, which is located proximate a monitor 360. A wireless link 340 is provided between the sensor module 400 and the monitor module 500, replacing the conventional patient cable, such as a pulse oximetry patient cable 140 (FIG. 1). Advantageously, the sensor module 400 is plug-compatible with a conventional sensor 310. In particular, the sensor connector 318 connects to the sensor module 400 in a similar manner as to a patient cable. Further, the sensor module 400 outputs a drive signal to the sensor 310 and inputs a sensor signal from the sensor 310 in an equivalent manner as a conventional monitor 360. The sensor module 400 may be battery powered or externally powered. External power may be for recharging internal batteries or for powering the sensor module during operation or both.

As shown in FIG. 3, the monitor module 500 is advantageously plug-compatible with a conventional monitor 360. In particular, the monitor's sensor port 362 connects to the monitor module 500 in a similar manner as to a patient cable, such as a pulse oximetry patient cable 140 (FIG. 1). Further, the monitor module 500 inputs a drive signal from the monitor 360 and outputs a corresponding sensor signal to the monitor 360 in an equivalent manner as a conventional sensor 310. As such, the combination sensor module 400 and monitor module 500 provide a plug-compatible wireless replacement for a patient cable, adapting an existing wired physiological measurement system into a wireless physiological measurement system. The monitor module 500 may be battery powered, powered from the monitor, such as by tapping current from a monitor's LED drive, or externally powered from an independent AC or DC power source.

Although a communications adapter 300 is described herein with respect to a pulse oximetry sensor and monitor, one of ordinary skill in the art will recognize that a communications adapter may provide a plug-compatible wireless replace for a patient cable that connects any physiological

5

sensor and corresponding monitor. For example, a communications adapter 300 may be applied to a biopotential sensor, a non-invasive blood pressure (NIBP) sensor, a respiratory rate sensor, a glucose sensor and the corresponding monitors, to name a few.

Sensor Module Physical Configurations

FIGS. 4A-B illustrate physical embodiments of a sensor module 400. FIG. 4A illustrates a wrist-mounted module 410 having a wrist strap 411, a case 412 and an auxiliary cable 420. The case 412 contains the sensor module electronics, which are functionally described with respect to FIG. 6, below. The case 412 is mounted to the wrist strap 411, which attaches the wrist-mounted module 410 to a patient 20. The auxiliary cable 420 mates to a sensor connector 318 and a module connector 414, providing a wired link between a conventional sensor 310 and the wrist-mounted module 410. Alternatively, the auxiliary cable 420 is directly wired to the sensor module 400. The wrist-mounted module 410 may have a display 415 that shows sensor measurements, module status and other visual indicators, such as monitor status. The wrist-mounted module 410 may also have keys (not shown) or other input mechanisms to control its operational mode and characteristics. In an alternative embodiment, the sensor 310 may have a tail (not shown) that connects directly to the wrist-mounted module 410, eliminating the auxiliary cable 420.

FIG. 4B illustrates a clip-on module 460 having a clip 461, a case 462 and an auxiliary cable 470. The clip 461 attaches the clip-on module 460 to patient clothing or objects near a patient 20, such as a bed frame. The auxiliary cable 470 mates to the sensor connector 318 and functions as for the auxiliary cable 420 (FIG. 4A) of the wrist-mounted module 410 (FIG. 4A), described above. The clip-on module 460 may have a display 463 and keys 464 as for the wrist-mounted module 410 (FIG. 4A). Either the wrist-mounted module 410 or the clip-on module 460 may have other input or output ports (not shown) that download software, configure the module, or provide a wired connection to other measurement instruments or computing devices, to name a few examples.

Monitor Module Physical Configurations

FIGS. 5A-C illustrate physical embodiments of a monitor module 500. FIG. 5A illustrates a direct-connect module 510 having a case 512 and an integrated monitor connector 514. The case 512 contains the monitor module electronics, which are functionally described with respect to FIG. 7, below. The monitor connector 514 mimics that of the monitor end of a patient cable, such as a pulse oximetry patient cable 140 (FIG. 1), and electrically and mechanically connects the monitor module 510 to the monitor 360 via the monitor's sensor port 362.

FIG. 5B illustrates a cable-connect module 540 having a case 542 and an auxiliary cable 550. The case 542 functions as for the direct-connect module 510 (FIG. 5A), described above. Instead of directly plugging into the monitor 360, the cable-connect module 540 utilizes the auxiliary cable 550, which mimics the monitor end of a patient cable, such as a pulse oximetry patient cable 140 (FIG. 1), and electrically connects the cable-connect module 540 to the monitor sensor port 362.

FIG. 5C illustrates a plug-in module 570 having a plug-in case 572 and an auxiliary cable 580. The plug-in case 572 is mechanically compatible with the plug-in chassis of a multiparameter monitor 370 and may or may not electrically connect to the chassis backplane. The auxiliary cable 580 mimics a patient cable and electrically connects the plug-in module 570 to the sensor port 372 of another plug-in device. A direct-

6

connect module 510 (FIG. 5A) or a cable-connect module 540 (FIG. 5B) may also be used with a multiparameter monitor 370.

In a multiparameter embodiment, such as described with respect to FIGS. 13-14, below, a monitor module 500 may connect to multiple plug-in devices of a multiparameter monitor 370. For example, a cable-connect module 540 (FIG. 5B) may have multiple auxiliary cables 550 (FIG. 5B) that connect to multiple plug-in devices installed within a multiparameter monitor chassis. Similarly, a plug-in module 570 may have one or more auxiliary cables 580 with multiple connectors for attaching to the sensor ports 372 of multiple plug-in devices.

Communications Adapter Functions

FIGS. 6-7 illustrate functional embodiments of a communications adapter. FIG. 6 illustrates a sensor module 400 having a sensor interface 610, a signal processor 630, an encoder 640, a transmitter 650 and a transmitting antenna 670. A physiological sensor 310 provides an input sensor signal 612 at the sensor connector 318. Depending on the sensor 310, the sensor module 400 may provide one or more drive signals 618 to the sensor 310. The sensor interface 610 inputs the sensor signal 612 and outputs a conditioned signal 614. The conditioned signal 614 may be coupled to the transmitter 650 or further processed by a signal processor 630. If the sensor module configuration utilizes a signal processor 630, it derives a parameter signal 632 responsive to the sensor signal 612, which is then coupled to the transmitter 650. Regardless, the transmitter 650 inputs a baseband signal 642 that is responsive to the sensor signal 612. The transmitter 650 modulates the baseband signal 642 with a carrier to generate a transmit signal 654. The transmit signal 654 may be derived by various amplitude, frequency or phase modulation schemes, as is well known in the art. The transmit signal 654 is coupled to the transmit antenna 670, which provides wireless communications to a corresponding receive antenna 770 (FIG. 7), as described below.

As shown in FIG. 6, the sensor interface 610 conditions and digitizes the sensor signal 612 to generate the conditioned signal 614. Sensor signal conditioning may be performed in the analog domain or digital domain or both and may include amplification and filtering in the analog domain and filtering, buffering and data rate modification in the digital domain, to name a few. The resulting conditioned signal 614 is responsive to the sensor signal 612 and may be used to calculate or derive a parameter signal 632.

Further shown in FIG. 6, the signal processor 630 performs signal processing on the conditioned signal 614 to generate the parameter signal 632. The signal processing may include buffering, digital filtering, smoothing, averaging, adaptive filtering and frequency transforms to name a few. The resulting parameter signal 632 may be a measurement calculated or derived from the conditioned signal, such as oxygen saturation, pulse rate, blood glucose, blood pressure and EKG to name a few. Also, the parameter signal 632 may be an intermediate result from which the above-stated measurements may be calculated or derived.

As described above, the sensor interface 610 performs mixed analog and digital pre-processing of an analog sensor signal and provides a digital output signal to the signal processor 630. The signal processor 630 then performs digital post-processing of the front-end processor output. In alternative embodiments, the input sensor signal 612 and the output conditioned signal 614 may be either analog or digital, the front-end processing may be purely analog or purely digital, and the back-end processing may be purely analog or mixed analog or digital.

7

In addition, FIG. 6 shows an encoder 640, which translates a digital word or serial bit stream, for example, into the baseband signal 642, as is well-known in the art. The baseband signal 642 comprises the symbol stream that drives the transmit signal 654 modulation, and may be a single signal or multiple related signal components, such as in-phase and quadrature signals. The encoder 640 may include data compression and redundancy, also well-known in the art.

FIG. 7 illustrates a monitor module 500 having a receive antenna 770, a receiver 710, a decoder 720, a waveform processor 730 and a monitor interface 750. A receive signal 712 is coupled from the receive antenna 770, which provides wireless communications to a corresponding transmit antenna 670 (FIG. 6), as described above. The receiver 710 inputs the receive signal 712, which corresponds to the transmit signal 654 (FIG. 6). The receiver 710 demodulates the receive signal to generate a baseband signal 714. The decoder 720 translates the symbols of the demodulated baseband signal 714 into a decoded signal 724, such as a digital word stream or bit stream. The waveform processor 730 inputs the decoded signal 724 and generates a constructed signal 732. The monitor interface 750 is configured to communicate the constructed signal 732 to a sensor port 362 of a monitor 360. The monitor 360 may output a sensor drive signal 754, which the monitor interface 750 inputs to the waveform processor 730 as a monitor drive signal 734. The waveform processor 730 may utilize the monitor drive signal 734 to generate the constructed signal 732. The monitor interface 750 may also provide characterization information 758 to the waveform processor 730, relating to the monitor 360, the sensor 310 or both, that the waveform processor 730 utilizes to generate the constructed signal 732.

The constructed signal 732 is adapted to the monitor 360 so that measurements derived by the monitor 360 from the constructed signal 732 are generally equivalent to measurements derivable from the sensor signal 612 (FIG. 6). Note that the sensor 310 (FIG. 6) may or may not be directly compatible with the monitor 360. If the sensor 310 (FIG. 6) is compatible with the monitor 360, the constructed signal 732 is generated so that measurements derived by the monitor 360 from the constructed signal 732 are generally equivalent (within clinical significance) with those derivable directly from the sensor signal 612 (FIG. 6). If the sensor 310 (FIG. 6) is not compatible with the monitor 360, the constructed signal 732 is generated so that measurements derived by the monitor 360 from the constructed signal 732 are generally equivalent to those derivable directly from the sensor signal 612 (FIG. 6) using a compatible monitor.

Wireless Pulse Oximetry

FIGS. 8-11 illustrate pulse oximeter embodiments of a communications adapter. FIGS. 8-9 illustrate a sensor module and a monitor module, respectively, configured to communicate measured pulse oximeter parameters. FIG. 10-11 illustrate a sensor module and a monitor module, respectively, configured to communicate a plethysmograph signal. Parameter Transmission

FIG. 8 illustrates a pulse oximetry sensor module 800 having a sensor interface 810, signal processor 830, encoder 840, transmitter 850, transmitting antenna 870 and controller 890. The sensor interface 810, signal processor 830 and controller 890 function as described with respect to FIG. 2, above. The sensor interface 810 communicates with a standard pulse oximetry sensor 310, providing an LED drive signal 818 to the LED emitters 312 and receiving a sensor signal 812 from the detector 314 in response. The sensor interface 810 provides front-end processing of the sensor signal 812, also described above, providing a plethysmograph

8

signal 814 to the signal processor 830. The signal processor 830 then derives a parameter signal 832 that comprises a real time measurement of oxygen saturation and pulse rate. The parameter signal 832 may include other parameters, such as measurements of perfusion index and signal quality. In one embodiment, the signal processor is an MS-5 or MS-7 board available from Masimo Corporation, Irvine, Calif.

As shown in FIG. 8, the encoder 840, the transmitter 850 and the transmitting antenna 870 function as described with respect to FIG. 6, above. For example, the parameter signal 832 may be a digital word stream that is serialized into a bit stream and encoded into a baseband signal 842. The baseband signal 842 may be, for example, two bit symbols that drive a quadrature phase shift keyed (QPSK) modulator in the transmitter 850. Other encodings and modulations are also applicable, as described above. The transmitter 850 inputs the baseband signal 842 and generates a transmit signal 854 that is a modulated carrier having a frequency suitable for short-range transmission, such as within a hospital room, doctor's office, emergency vehicle or critical care ward, to name a few. The transmit signal 854 is coupled to the transmit antenna 870, which provides wireless communications to a corresponding receive antenna 970 (FIG. 9), as described below.

FIG. 9 illustrates a monitor module 900 having a receive antenna 970, a receiver 910, a decoder 920, a waveform generator 930 and an interface cable 950. The receive antenna 970, receiver 910 and decoder 920 function as described with respect to FIG. 7, above. In particular, the receive signal 912 is coupled from the receive antenna 970, which provides wireless communications to a corresponding transmit antenna 870 (FIG. 8). The receiver 910 inputs the receive signal 912, which corresponds to the transmit signal 854 (FIG. 8). The receiver 910 demodulates the receive signal 912 to generate a baseband signal 914. Not accounting for transmission errors, the baseband signal 914 corresponds to the sensor module baseband signal 842 (FIG. 8), for example a symbol stream of two bits each. The decoder 920 assembles the baseband signal 914 into a parameter signal 924, which, for example, may be a sequence of digital words corresponding to oxygen saturation and pulse rate. Again, not accounting for transmission errors, the monitor module parameter signal 924 corresponds to the sensor module parameter signal 832 (FIG. 8), derived by the signal processor 830 (FIG. 8).

Also shown in FIG. 9, the waveform generator 930 is a particular embodiment of the waveform processor 730 (FIG. 7) described above. The waveform generator 930 generates a synthesized waveform 932 that the pulse oximeter monitor 360 can process to calculate SpO₂ and pulse rate values or exception messages. In the present embodiment, the waveform generator output does not reflect a physiological waveform. In particular, the synthesized waveform is not physiological data from the sensor module 800, but is a waveform synthesized from predetermined stored waveform data to cause the monitor 360 to calculate oxygen saturation and pulse rate equivalent to or generally equivalent (within clinical significance) to that calculated by the signal processor 830 (FIG. 8). The actual intensity signal from the patient received by the detector 314 (FIG. 8) is not provided to the monitor 360 in the present embodiment. Indeed, the waveform provided to the monitor 360 will usually not resemble a plethysmographic waveform or other physiological data from the patient to whom the sensor module 800 (FIG. 8) is attached.

The synthesized waveform 932 is modulated according to the drive signal input 934. That is, the pulse oximeter monitor 360 expects to receive a red and IR modulated intensity signal originating from a detector, as described with respect to FIGS. 1-2, above. The waveform generator 930 generates the

9

synthesized waveform **932** with a predetermined shape, such as a triangular or sawtooth waveform stored in waveform generator memory or derived by a waveform generator algorithm. The waveform is modulated synchronously with the drive input **934** with first and second amplitudes that are processed in the monitor **360** as red and IR portions of a sensor signal. The frequency and the first and second amplitudes are adjusted so that pulse rate and oxygen saturation measurements derived by the pulse oximeter monitor **360** are generally equivalent to the parameter measurements derived by the signal processor **830** (FIG. 8), as described above. One embodiment of a waveform generator **930** is described in U.S. Patent Application No. 60/117,097 entitled "Universal/Upgrading Pulse Oximeter," assigned to Masimo Corporation, Irvine, Calif. and incorporated by reference herein. Although the waveform generator **930** is described above as synthesizing a waveform that does not resemble a physiological signal, one of ordinary skill will recognize that another embodiment of the waveform generator **930** could incorporate, for example, a plethysmograph simulator or other physiological signal simulator.

Further shown in FIG. 9, the interface cable **950** functions in a manner similar to the monitor interface **750** (FIG. 7) described above. The interface cable **950** is configured to communicate the synthesized waveform **932** to the monitor **360** sensor port and to communicate the sensor drive signal **934** to the waveform generator **930**. The interface cable **950** may include a ROM **960** that contains monitor and sensor characterization data. The ROM **960** is read by the waveform generator **930** so that the synthesized waveform **932** is adapted to a particular monitor **360**. For example, the ROM **960** may contain calibration data of red/IR versus oxygen saturation, waveform amplitude and waveform shape information. An interface cable is described in U.S. Patent Application No. 60/117,092, referenced above. Monitor-specific SatShare™ brand interface cables are available from Masimo Corporation, Irvine, Calif. In an alternative embodiment, such as a direct connect monitor module as illustrated in FIG. 5A, an interface cable **950** is not used and the ROM **960** may be incorporated within the monitor module **900** itself.

Plethysmograph Transmission

FIG. 10 illustrates another pulse oximetry sensor module **1000** having a sensor interface **1010**, encoder **1040**, transmitter **1050**, transmitting antenna **1070** and controller **1090**, which have the corresponding functions as those described with respect to FIG. 8, above. The encoder **1040**, however, inputs a plethysmograph signal **1014** rather than oxygen saturation and pulse rate measurements **832** (FIG. 8). Thus, the sensor module **1000** according to this embodiment encodes and transmits a plethysmograph signal **1014** to a corresponding monitor module **1100** (FIG. 11) in contrast to derived physiological parameters, such as oxygen saturation and pulse rate. The plethysmograph signal **1014** is illustrated in FIG. 10 as being a direct output from the sensor interface **1010**. In another embodiment, the sensor module **1000** incorporates a decimation processor, not shown, after the sensor interface **1010** so as to provide a plethysmograph signal **1014** having a reduced sample rate.

FIG. 11 illustrates another pulse oximetry monitor module **1100** having a receive antenna **1170**, a receiver **1110**, a decoder **1120** and an interface cable **1150**, which have the corresponding functions as those described with respect to FIG. 9, above. This monitor module embodiment **1100**, however, has a waveform modulator **1200** rather than a waveform generator **930** (FIG. 9), as described above. The waveform modulator **1200** inputs a plethysmograph signal from the decoder **1120** rather than oxygen saturation and pulse rate

10

measurements, as described with respect to FIG. 9, above. Further, the waveform modulator **1200** provides an modulated waveform **1132** to the pulse oximeter monitor **360** rather than a synthesized waveform, as described with respect to FIG. 9. The modulated waveform **1132** is a plethysmographic waveform modulated according to the monitor drive signal input **1134**. That is, the waveform modulator **1200** does not synthesize a waveform, but rather modifies the received plethysmograph signal **1124** to cause the monitor **360** to calculate oxygen saturation and pulse rate generally equivalent (within clinical significance) to that derivable by a compatible, calibrated pulse oximeter directly from the sensor signal **1012** (FIG. 10). The waveform modulator **1200** is described in further detail with respect to FIG. 12, below.

FIG. 12 shows a waveform modulator **1200** having a demodulator **1210**, a red digital-to-analog converter (DAC) **1220**, an IR DAC **1230**, a red amplifier **1240**, an IR amplifier **1250**, a modulator **1260**, a modulator control **1270**, a look-up table (LUT) **1280** and a ratio calculator **1290**. The waveform modulator **1200** demodulates red and IR plethysmographs ("pleths") from the decoder output **1124** into a separate red pleth **1222** and IR pleth **1232**. The waveform modulator **1200** also adjusts the amplitudes of the pleths **1222**, **1232** according to stored calibration curves for the sensor **310** (FIG. 10) and the monitor **360** (FIG. 11). Further, the waveform modulator **1200** re-modulates the adjusted red pleth **1242** and adjusted IR pleth **1252**, generating a modulated waveform **1132** to the monitor **360** (FIG. 11).

As shown in FIG. 12, the demodulator **1210** performs the demodulation function described above, generating digital red and IR pleth signals **1212**, **1214**. The DACs **1220**, **1230** convert the digital pleth signals **1212**, **1214** to corresponding analog pleth signals **1222**, **1232**. The amplifiers **1240**, **1250** have variable gain control inputs **1262**, **1264** and perform the amplitude adjustment function described above, generating adjusted red and IR pleth signals **1242**, **1252**. The modulator **1260** performs the re-modulation function described above, combining the adjusted red and IR pleth signals **1242**, **1252** according to a control signal **1272**. The modulator control **1270** generates the control signal **1272** synchronously with the LED drive signal(s) **1134** from the monitor **360**.

Also shown in FIG. 12, the ratio calculator **1290** derives a red/IR ratio from the demodulator outputs **1212**, **1214**. The LUT **1280** stores empirical calibration data for the sensor **310** (FIG. 10). The LUT **1280** also downloads monitor-specific calibration data from the ROM **1160** (FIG. 11) via the ROM output **1158**. From this calibration data, the LUT **1280** determines a desired red/IR ratio for the modulated waveform **1132** and generates red and IR gain outputs **1262**, **1264** to the corresponding amplifiers **1240**, **1250**, accordingly. A desired red/IR ratio is one that allows the monitor **360** (FIG. 11) to derive oxygen saturation measurements from the modulated waveform **1132** that are generally equivalent to that derivable directly from the sensor signal **1012** (FIG. 10).

One of ordinary skill in the art will recognize that some of the signal processing functions described with respect to FIGS. 8-11 may be performed either within a sensor module or within a monitor module. Signal processing functions performed within a sensor module may advantageously reduce the transmission bandwidth to a monitor module at a cost of increased sensor module size and power consumption. Likewise, signal processing functions performed within a monitor module may reduce sensor module size and power consumption at a cost of increase transmission bandwidth.

For example, a monitor module embodiment **900** (FIG. 9) described above receives measured pulse oximeter parameters, such as oxygen saturation and pulse rate, and generates

11

a corresponding synthesized waveform. In that embodiment, the oxygen saturation and pulse rate computations are performed within a sensor module **800** (FIG. **8**). Another monitor module embodiment **1100** (FIG. **11**), also described above, receives a plethysmograph waveform and generates a remodulated waveform. In that embodiment, minimal signal processing is performed within a sensor module **1000** (FIG. **10**). In yet another embodiment, not shown, a sensor module transmits a plethysmograph waveform or a decimated plethysmograph waveform having a reduced sample rate. A corresponding monitor module has a signal processor, such as described with respect to FIG. **8**, in addition to a waveform generator, as described with respect to FIG. **9**. The signal processor computes pulse oximeter parameters and the waveform generator generates a corresponding synthesized waveform, as described above. In this embodiment, minimal signal processing is performed within the sensor module, and the monitor module functions are performed on the pulse oximeter parameters computed within the monitor module.

Wireless Multiple Parameter Measurements

FIGS. **13-14** illustrate a multiple parameter communications adapter. FIG. **13** illustrates a multiple parameter sensor module **1300** having sensor interfaces **1310**, one or more signal processors **1330**, a multiplexer and encoder **1340**, a transmitter **1350**, a transmitting antenna **1370** and a controller **1390**. One or more physiological sensors **1301** provide input sensor signals **1312** to the sensor module **1300**. Depending on the particular sensors **1301**, the sensor module **1300** may provide one or more drive signals **1312** to the sensors **1301** as determined by the controller **1390**. The sensor interfaces **1310** input the sensor signals **1312** and output one or more conditioned signals **1314**. The conditioned signals **1314** may be coupled to the transmitter **1350** or further processed by the signal processors **1330**. If the sensor module configuration utilizes signal processors **1330**, it derives multiple parameter signals **1332** responsive to the sensor signals **1312**, which are then coupled to the transmitter **1350**. Regardless, the transmitter **1350** inputs a baseband signal **1342** that is responsive to the sensor signals **1312**. The transmitter **1350** modulates the baseband signal **1342** with a carrier to generate a transmit signal **1354**, which is coupled to the transmit antenna **1370** and communicated to a corresponding receive antenna **1470** (FIG. **14**), as described with respect to FIG. **6**, above. Alternatively, there may be multiple baseband signals **1342**, and the transmitter **1350** may transmit on multiple frequency channels, where each channel conveys data responsive to one or more of the sensor signals **1314**.

As shown in FIG. **13**, the sensor interface **1310** conditions and digitizes the sensor signals **1312** as described for a single sensor with respect to FIG. **6**, above. The resulting conditioned signals **1314** are responsive to the sensor signals **1312**. The signal processors **1330** perform signal processing on the conditioned signals **1314** to derive parameter signals **1332**, as described for a single conditioned signal with respect to FIG. **6**, above. The parameter signals **1332** may be physiological measurements such as oxygen saturation, pulse rate, blood glucose, blood pressure, EKG, respiration rate and body temperature to name a few, or may be intermediate results from which the above-stated measurements may be calculated or derived. The multiplexer and encoder **1340**

combines multiple digital word or serial bit streams into a single digital word or bit stream. The multiplexer and encoder also encodes the digital word or bit stream to generate the baseband signal **1342**, as described with respect to FIG. **6**, above.

FIG. **14** illustrates a multiple parameter monitor module **1400** having a receive antenna **1470**, a receiver **1410**, a demul-

12

tiplexer and decoder **1420**, one or more waveform processors **1430** and a monitor interface **1450**. The receiver **1410** inputs and demodulates the receive signal **1412** corresponding to the transmit signal **1354** (FIG. **13**) to generate a baseband signal **1414** as described with respect to FIG. **7**, above. The demultiplexer and decoder **1420** separates the symbol streams corresponding to the multiple conditioned signals **1314** (FIG. **13**) and/or parameter signals **1332** (FIG. **13**) and translates these symbol streams into multiple decoded signals **1422**, as described for a single symbol stream with respect to FIG. **7**, above. Alternatively, multiple frequency channels are received to generate multiple baseband signals, each of which are decoded to yield multiple decoded signals **1422**. The waveform processors **1430** input the decoded signals **1422** and generate multiple constructed signals **1432**, as described for a single decoded signal with respect to FIGS. **7-12**, above. The monitor interface **1450** is configured to communicate the constructed signals **1432** to the sensor ports of a multiple parameter monitor **1401** or multiple single parameter monitors, in a manner similar to that for a single constructed signal, as described with respect to FIGS. **7-12**, above. In particular, the constructed signals **1432** are adapted to the monitor **1401** so that measurements derived by the monitor **1401** from the constructed signals **1432** are generally equivalent to measurements derivable directly from the sensor signals **1312** (FIG. **13**).

A physiological measurement communications adapter is described above with respect to wireless communications and, in particular, radio frequency communications. A sensor module and monitor module, however, may also communicate via wired communications, such as telephone, Internet or fiberoptic cable to name a few. Further, wireless communications can also utilize light frequencies, such as IR or laser to name a few.

A physiological measurement communications adapter has been disclosed in detail in connection with various embodiments. These embodiments are disclosed by way of examples only. One of ordinary skill in the art will appreciate many variations and modifications of a physiological measurement communications adapter within the scope of the claims that follow.

What is claimed is:

1. A personal, wearable, wireless physiological system comprising:
 - a physiological sensor configured to be attached to a patient and further configured to measure data useable to determine a physiological parameter;
 - a housing including a first processor configured to receive sensor signals from said physiological sensor and further configured to calculate at least one physiological parameter of a patient, said housing configured to be wearable by the patient;
 - a first communications link in communication with said first processor, the communication link configured to at least wirelessly transmit an indication of the calculated at least one physiological parameter;
 - a second communications link configured to wirelessly receive the transmitted indication of the calculated at least one physiological parameter transmitted by the first communications link; and
 - a second processor in communication with the second communications link, the second processor configured to provide a signal to the sensor input of a physiological monitor, the signal useable to cause the physiological

13

monitor to calculate and display a physiological measurement consistent with the calculated at least one physiological parameter of the patient.

2. The personal, wearable, wireless physiological system according to claim 1, wherein the second processor utilizes characterization information corresponding to said physiological monitor usable to cause the physiological monitor to display a physiological measurement consistent with the calculated at least one physiological parameter of the patient.

3. The personal, wearable, wireless physiological system according to claim 1, wherein the housing houses the first communications link in addition to the first processor.

4. The personal, wearable, wireless physiological according to claim 1, wherein said second processor adapts said first signal so that said physiological monitor derives said physiological measurements comprising at least one of oxygen saturation, blood pressure, EKG, respiration rate, body temperature and blood glucose.

5. The personal, wearable, wireless physiological system according to claim 1, wherein the physiological measurement is oxygen saturation.

14

6. A physiological measurement method comprising:
receiving a physiological sensor signal at a wearable processing unit configured to be worn by a patient under measurement;

calculating an indication of a physiological parameter;
wirelessly transmitting the indication of the calculated physiological parameter;

receiving the transmitted indication of the calculated physiological parameter; and

outputting an adapted physiological waveform to a sensor port of the patient monitor so that the patient monitor calculates physiological measurements from the adapted physiological waveform.

7. The physiological measurement method of claim 6, wherein the physiological parameter is at least one of oxygen saturation, blood pressure, EKG, respiration rate, body temperature and blood glucose.

8. The physiological measurement method of claim 6, wherein calculating the indication of the physiological parameter comprises calculating a value of the physiological parameter.

* * * * *

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 8,548,548 B2
APPLICATION NO. : 12/955826
DATED : October 1, 2013
INVENTOR(S) : Al-Ali

Page 1 of 1

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

In the Specifications

In column 11 at lines 61-65, Delete “combines multiple digital respect to FIG. 6, above.” and insert the same on column 11, line 60, after “encoder 1340” as the continuation of the same paragraph.


In the Claims

In column 13 at line 11 (approx.), In Claim 3, change “wherein” to --where in--.

In column 13 at line 14 (approx.), In Claim 4, change “physiological” to --physiological system--.

In column 13 at line 15 (approx.), In Claim 4, change “said first” to --said--.

Signed and Sealed this
Twentieth Day of May, 2014



Michelle K. Lee
Deputy Director of the United States Patent and Trademark Office