

(12) **United States Patent**  
**Al-Ali**

(10) **Patent No.:** **US 9,113,831 B2**  
(45) **Date of Patent:** **\*Aug. 25, 2015**

(54) **PHYSIOLOGICAL MEASUREMENT COMMUNICATIONS ADAPTER**

(71) Applicant: **MASIMO CORPORATION**, Irvine, CA (US)

(72) Inventor: **Ammar Al-Ali**, San Juan Capistrano, CA (US)

(73) Assignee: **Masimo Corporation**, Irvine, CA (US)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **14/037,137**

(22) Filed: **Sep. 25, 2013**

(65) **Prior Publication Data**

US 2014/0125495 A1 May 8, 2014

**Related U.S. Application Data**

(63) Continuation of application No. 12/955,826, filed on Nov. 29, 2010, now Pat. No. 8,548,548, which is a continuation of application No. 11/417,006, filed on May 3, 2006, now Pat. No. 7,844,315, which is a

(Continued)

(51) **Int. Cl.**

**A61B 5/1455** (2006.01)

**A61B 5/00** (2006.01)

**A61B 5/024** (2006.01)

(52) **U.S. Cl.**

CPC ..... **A61B 5/14552** (2013.01); **A61B 5/002** (2013.01); **A61B 5/0026** (2013.01); **A61B 5/02427** (2013.01); **A61B 5/6826** (2013.01); **A61B 5/6838** (2013.01);

(Continued)

(58) **Field of Classification Search**

CPC .. A61B 5/6826; A61B 5/6838; A61B 5/0026; A61B 5/002; A61B 5/02438; A61B 5/02427; A61B 5/1455; A61B 5/14552

USPC ..... 600/300, 310, 322, 323, 504, 505, 506, 600/507; 128/903

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,690,313 A 9/1972 Weppner et al.  
3,978,849 A 9/1976 Geneen

(Continued)

FOREIGN PATENT DOCUMENTS

EP 735499 A1 10/1996  
EP 2 335 569 A2 6/2011

(Continued)

OTHER PUBLICATIONS

Extended European Search Report for European Application No. 10195398.2 dated Jul. 5, 2012.

(Continued)


*Primary Examiner* — Eric Winakur

(74) *Attorney, Agent, or Firm* — Knobbe, Martens, Olson & Bear LLP

(57) **ABSTRACT**

A sensor interface is configured to receive a sensor signal. A transmitter generates a transmit signal. A receiver receives the signal corresponding to the transmit signal. Further, a monitor interface is configured to communicate a waveform to the monitor so that measurements derived by the monitor from the waveform are generally equivalent to measurements derivable from the sensor signal.

**18 Claims, 17 Drawing Sheets**

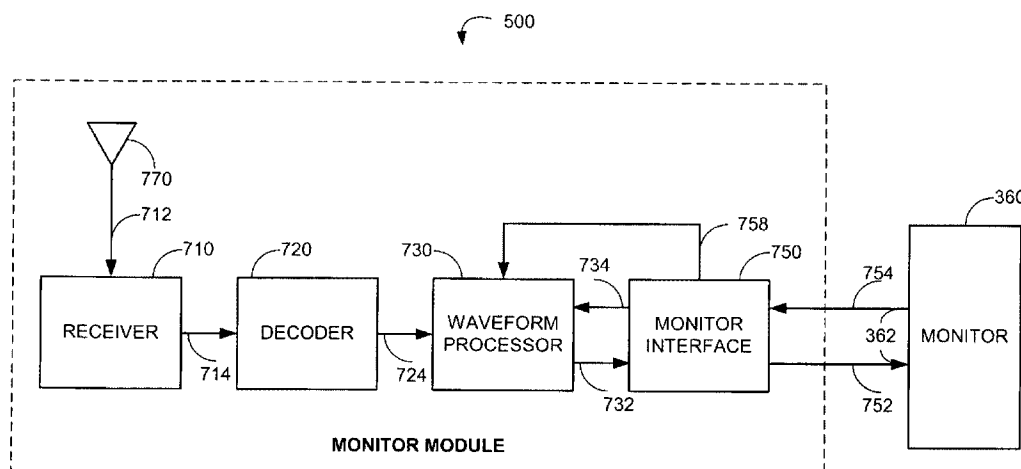

**Related U.S. Application Data**

continuation of application No. 11/048,330, filed on Feb. 1, 2005, now Pat. No. 7,844,314, which is a continuation of application No. 10/377,933, filed on Feb. 28, 2003, now Pat. No. 6,850,788.

(60) Provisional application No. 60/367,428, filed on Mar. 25, 2002.

(52) **U.S. Cl.**

CPC ..... *A61B 5/02438* (2013.01); *A61B 5/1455* (2013.01); *Y10S 128/903* (2013.01)

(56) **References Cited**

## U.S. PATENT DOCUMENTS

4,108,166	A	8/1978	Schmid	5,724,983	A	3/1998	Selker et al.
4,231,354	A	11/1980	Kurtz et al.	5,725,308	A	3/1998	Smith et al.
4,589,415	A	5/1986	Haaga	5,734,739	A	3/1998	Sheehan et al.
4,662,378	A	5/1987	Thomis	D393,830	S	4/1998	Tobler et al.
4,960,128	A	10/1990	Gordon et al.	5,743,262	A	4/1998	Lepper, Jr. et al.
4,964,408	A	10/1990	Hink et al.	5,758,644	A	6/1998	Diab et al.
5,041,187	A	8/1991	Hink et al.	5,760,910	A	6/1998	Lepper, Jr. et al.
5,069,213	A	12/1991	Polczynski	5,769,785	A	6/1998	Diab et al.
5,092,340	A	3/1992	Yamaguchi et al.	5,782,757	A	7/1998	Diab et al.
5,140,519	A	8/1992	Friesdorf et al.	5,785,659	A	7/1998	Caro et al.
5,159,932	A	11/1992	Zanetti et al.	5,791,347	A	8/1998	Flaherty et al.
5,161,539	A	11/1992	Evans et al.	5,801,637	A	9/1998	Lomholt
5,163,438	A	11/1992	Gordon et al.	5,810,734	A	9/1998	Caro et al.
5,262,944	A	11/1993	Weisner et al.	5,822,546	A	10/1998	George
5,277,189	A	1/1994	Jacobs	5,823,950	A	10/1998	Diab et al.
5,278,627	A	1/1994	Aoyagi et al.	5,830,131	A	11/1998	Caro et al.
5,282,474	A	2/1994	Valdes Sosa et al.	5,833,618	A	11/1998	Caro et al.
5,318,037	A	6/1994	Evans et al.	5,860,919	A	1/1999	Kiani-Azarbayjany et al.
5,319,355	A	6/1994	Russek	5,890,929	A	4/1999	Mills et al.
5,333,106	A	7/1994	Lanpher et al.	5,904,654	A	5/1999	Wohltmann et al.
5,337,744	A	8/1994	Branigan	5,910,139	A	6/1999	Cochran et al.
5,341,805	A	8/1994	Stavridi et al.	5,919,134	A	7/1999	Diab
5,358,519	A	10/1994	Grandjean	5,921,920	A	7/1999	Marshall et al.
D353,195	S	12/1994	Savage et al.	5,931,160	A	8/1999	Gilmore et al.
D353,196	S	12/1994	Savage et al.	5,934,925	A	8/1999	Tobler et al.
5,375,599	A	12/1994	Schimizu	5,940,182	A	8/1999	Lepper, Jr. et al.
5,377,676	A	1/1995	Vari et al.	5,995,855	A	11/1999	Kiani et al.
5,400,794	A	3/1995	Gorman	5,997,343	A	12/1999	Mills et al.
D359,546	S	6/1995	Savage et al.	6,002,952	A	12/1999	Diab et al.
5,431,170	A	7/1995	Mathews	6,011,986	A	1/2000	Diab et al.
D361,840	S	8/1995	Savage et al.	6,018,673	A	1/2000	Chin et al.
D362,063	S	9/1995	Savage et al.	6,027,452	A	2/2000	Flaherty et al.
5,452,717	A	9/1995	Branigan et al.	6,032,678	A	3/2000	Rottem
D363,120	S	10/1995	Savage et al.	6,035,230	A	3/2000	Kang et al.
5,456,252	A	10/1995	Vari et al.	6,036,642	A	3/2000	Diab et al.
5,479,934	A	1/1996	Imran	6,045,509	A	4/2000	Caro et al.
5,482,036	A	1/1996	Diab et al.	6,067,462	A	5/2000	Diab et al.
5,483,968	A	1/1996	Adam et al.	6,081,735	A	6/2000	Diab et al.
5,490,505	A	2/1996	Diab et al.	6,088,607	A	7/2000	Diab et al.
5,494,041	A	2/1996	Wilk	6,106,463	A	8/2000	Wilk
5,494,043	A	2/1996	O'Sullivan et al.	6,110,522	A	8/2000	Lepper, Jr. et al.
5,503,149	A	4/1996	Beavin	6,124,597	A	9/2000	Shehada
5,505,202	A	4/1996	Mogi et al.	6,128,521	A	10/2000	Marro et al.
5,533,511	A	7/1996	Kaspari et al.	6,129,675	A	10/2000	Jay
5,534,851	A	7/1996	Russek	6,132,218	A	10/2000	Benja-Athon
5,561,275	A	10/1996	Savage et al.	6,144,868	A	11/2000	Parker
5,562,002	A	10/1996	Lalin	6,151,516	A	11/2000	Kiani-Azarbayjany et al.
5,566,678	A	10/1996	Cadwell	6,152,754	A	11/2000	Gerhardt et al.
5,579,001	A	11/1996	Dempsey et al.	6,157,850	A	12/2000	Diab et al.
5,590,649	A	1/1997	Caro et al.	6,165,005	A	12/2000	Mills et al.
5,602,924	A	2/1997	Durand et al.	6,167,258	A	12/2000	Schmidt et al.
5,632,272	A	5/1997	Diab et al.	6,183,417	B1	2/2001	Gehab et al.
5,638,816	A	6/1997	Kiani-Azarbayjany et al.	6,184,521	B1	2/2001	Coffin, IV et al.
5,638,818	A	6/1997	Diab et al.	6,185,448	B1	2/2001	Borovsky
5,640,967	A	6/1997	Fine et al.	6,195,576	B1	2/2001	John
5,645,440	A	7/1997	Tobler et al.	6,206,830	B1	3/2001	Diab et al.
5,685,299	A	11/1997	Diab et al.	6,221,012	B1	4/2001	Maschke et al.
5,685,314	A	11/1997	Geheb et al.	6,224,553	B1	5/2001	Nevo
5,687,717	A	11/1997	Halpern et al.	6,229,856	B1	5/2001	Diab et al.
5,694,020	A	12/1997	Lang et al.	6,232,609	B1	5/2001	Snyder et al.
				6,236,872	B1	5/2001	Diab et al.
				6,241,683	B1	6/2001	Macklem et al.
				6,253,097	B1	6/2001	Aronow et al.
				6,256,523	B1	7/2001	Diab et al.
				6,263,222	B1	7/2001	Diab et al.
				6,267,723	B1	7/2001	Matsumura et al.
				6,269,262	B1	7/2001	Kandori et al.
				6,278,522	B1	8/2001	Lepper, Jr. et al.
				6,280,213	B1	8/2001	Tobler et al.
				6,285,896	B1	9/2001	Tobler et al.
				6,301,493	B1	10/2001	Marro et al.
				6,317,627	B1	11/2001	Ennen et al.
				6,321,100	B1	11/2001	Parker
				6,325,761	B1	12/2001	Jay
				6,334,065	B1	12/2001	Al-Ali et al.
				6,343,224	B1	1/2002	Parker
				6,349,228	B1	2/2002	Kiani et al.
				6,354,235	B1	3/2002	Davies
				6,360,114	B1	3/2002	Diab et al.

(56)

**References Cited**

## U.S. PATENT DOCUMENTS

6,368,283 B1	4/2002	Xu et al.	6,850,788 B2	2/2005	Al-Ali
6,371,921 B1	4/2002	Caro et al.	6,852,083 B2	2/2005	Caro et al.
6,377,829 B1	4/2002	Al-Ali	6,855,112 B2	2/2005	Kao et al.
6,385,476 B1	5/2002	Osadchy et al.	6,860,266 B2	3/2005	Blike
6,388,240 B2	5/2002	Schulz et al.	6,861,639 B2	3/2005	Al-Ali
6,397,091 B2	5/2002	Diab et al.	6,897,788 B2	5/2005	Khair et al.
6,430,437 B1	8/2002	Marro	6,898,452 B2	5/2005	Al-Ali et al.
6,430,525 B1	8/2002	Weber et al.	6,907,237 B1	6/2005	Dorenbosch et al.
6,463,311 B1	10/2002	Diab	6,915,149 B2	7/2005	Ben-haim
6,470,199 B1	10/2002	Kopotic et al.	6,920,345 B2	7/2005	Al-Ali et al.
6,470,893 B1	10/2002	Boesen	6,931,268 B1	8/2005	Kiani-Azarbayjany et al.
6,501,975 B2	12/2002	Diab et al.	6,934,570 B2	8/2005	Kiani et al.
6,505,059 B1	1/2003	Kollias et al.	6,939,305 B2	9/2005	Flaherty et al.
6,515,273 B2	2/2003	Al-Ali	6,943,348 B1	9/2005	Coffin, IV
6,519,487 B1	2/2003	Parker	6,950,687 B2	9/2005	Al-Ali
6,524,240 B1	2/2003	Thede	6,952,340 B2	10/2005	Son
6,525,386 B1	2/2003	Mills et al.	6,961,598 B2	11/2005	Diab
6,526,300 B1	2/2003	Kiani et al.	6,970,792 B1	11/2005	Diab
6,541,756 B2	4/2003	Schulz et al.	6,979,812 B2	12/2005	Al-Ali
6,542,764 B1	4/2003	Al-Ali et al.	6,980,419 B2	12/2005	Smith et al.
6,544,174 B2	4/2003	West et al.	6,983,179 B2	1/2006	Ben-haim
6,580,086 B1	6/2003	Schulz et al.	6,985,764 B2	1/2006	Mason et al.
6,584,336 B1	6/2003	Ali et al.	6,988,989 B2	1/2006	Weiner et al.
6,595,316 B2	7/2003	Cybulski et al.	6,990,087 B2	1/2006	Rao et al.
6,597,932 B2	7/2003	Tian et al.	6,993,371 B2	1/2006	Kiani et al.
6,597,933 B2	7/2003	Kiani et al.	6,996,427 B2	2/2006	Ali et al.
6,606,511 B1	8/2003	Ali et al.	6,997,884 B2	2/2006	Ulmsten
6,616,606 B1	9/2003	Peterson et al.	6,999,904 B2	2/2006	Weber et al.
6,632,181 B2	10/2003	Flaherty et al.	7,003,338 B2	2/2006	Weber et al.
6,639,668 B1	10/2003	Trepagnier	7,003,339 B2	2/2006	Diab et al.
6,640,116 B2	10/2003	Diab	7,015,451 B2	3/2006	Dalke et al.
6,641,533 B2	11/2003	Causey et al.	7,024,233 B2	4/2006	Ali et al.
6,643,530 B2	11/2003	Diab et al.	7,025,729 B2	4/2006	De Chazal et al.
6,650,917 B2	11/2003	Diab et al.	7,027,849 B2	4/2006	Al-Ali
6,650,939 B2	11/2003	Takpke, II et al.	7,030,749 B2	4/2006	Al-Ali
6,654,624 B2	11/2003	Diab et al.	7,033,761 B2	4/2006	Shafer
6,658,276 B2	12/2003	Kianl et al.	7,035,686 B2	4/2006	Hogan
6,661,161 B1	12/2003	Lanzo et al.	7,039,449 B2	5/2006	Al-Ali
6,671,531 B2	12/2003	Al-Ali et al.	7,041,060 B2	5/2006	Flaherty et al.
6,678,543 B2	1/2004	Diab et al.	7,044,918 B2	5/2006	Diab
6,684,090 B2	1/2004	Ali et al.	7,063,666 B2	6/2006	Weng et al.
6,684,091 B2	1/2004	Parker	7,067,893 B2	6/2006	Mills et al.
6,694,180 B1	2/2004	Boesen	7,079,035 B2	7/2006	Bock et al.
6,697,656 B1	2/2004	Al-Ali	7,096,052 B2	8/2006	Mason et al.
6,697,657 B1	2/2004	Shehada et al.	7,096,054 B2	8/2006	Abdul-Hafiz et al.
6,697,658 B2	2/2004	Al-Ali	7,132,641 B2	11/2006	Schulz et al.
RE38,476 E	3/2004	Diab et al.	7,142,901 B2	11/2006	Kiani et al.
6,699,194 B1	3/2004	Diab et al.	7,149,561 B2	12/2006	Diab
6,714,804 B2	3/2004	Al-Ali et al.	7,186,966 B2	3/2007	Al-Ali
RE38,492 E	4/2004	Diab et al.	7,188,621 B2	3/2007	DeVries et al.
6,719,694 B2	4/2004	Weng et al.	7,190,261 B2	3/2007	Al-Ali
6,721,582 B2	4/2004	Trepagnier et al.	7,208,119 B1	4/2007	Kurtock et al.
6,721,585 B1	4/2004	Parker	7,215,984 B2	5/2007	Diab
6,725,075 B2	4/2004	Al-Ali	7,215,986 B2	5/2007	Diab
6,728,560 B2	4/2004	Kollias et al.	7,221,971 B2	5/2007	Diab
6,735,459 B2	5/2004	Parker	7,225,006 B2	5/2007	Al-Ali et al.
6,745,060 B2	6/2004	Diab et al.	7,225,007 B2	5/2007	Al-Ali
6,751,492 B2	6/2004	Ben-haim	RE39,672 E	6/2007	Shehada et al.
6,760,607 B2	7/2004	Al-Ali	7,229,415 B2	6/2007	Schwartz
6,770,028 B1	8/2004	Ali et al.	7,239,905 B2	7/2007	Kiani-Azarbayjany et al.
6,771,994 B2	8/2004	Kiani et al.	7,241,287 B2	7/2007	Shehada et al.
6,783,492 B2	8/2004	Dominguez	7,244,251 B2	7/2007	Shehada et al.
6,790,178 B1	9/2004	Mault et al.	7,245,953 B1	7/2007	Parker
6,792,300 B1	9/2004	Diab et al.	7,252,659 B2	8/2007	Shehada et al.
6,795,724 B2	9/2004	Hogan	7,254,429 B2	8/2007	Schurman et al.
6,807,050 B1	10/2004	Whitehorn et al.	7,254,431 B2	8/2007	Al-Ali
6,813,511 B2	11/2004	Diab et al.	7,254,433 B2	8/2007	Diab et al.
6,816,741 B2	11/2004	Diab	7,254,434 B2	8/2007	Schulz et al.
6,817,979 B2	11/2004	Nihtila et al.	7,264,616 B2	9/2007	Shehada et al.
6,822,564 B2	11/2004	Al-Ali	7,267,671 B2	9/2007	Shehada et al.
6,826,419 B2	11/2004	Diab et al.	7,272,425 B2	9/2007	Al-Ali
6,830,711 B2	12/2004	Mills et al.	7,274,955 B2	9/2007	Kiani et al.
6,837,848 B2	1/2005	Bonner et al.	D554,263 S	10/2007	Al-Ali
6,841,535 B2	1/2005	Divita et al.	7,280,858 B2	10/2007	Al-Ali et al.
6,850,787 B2	2/2005	Weber et al.	7,285,090 B2	10/2007	Stivorice
			7,289,835 B2	10/2007	Mansfield et al.
			7,292,883 B2	11/2007	De Felice et al.
			7,295,866 B2	11/2007	Al-Ali
			7,313,423 B2	12/2007	Griffin et al.

(56)

**References Cited**

## U.S. PATENT DOCUMENTS

7,314,446 B2	1/2008	Byrd et al.	7,761,128 B2	7/2010	Al-Ali et al.
7,322,971 B2	1/2008	Shehada et al.	7,763,420 B2	7/2010	Strizker et al.
7,328,053 B1	2/2008	Diab et al.	7,764,982 B2	7/2010	Dalke et al.
7,332,784 B2	2/2008	Mills et al.	D621,516 S	8/2010	Kiani et al.
7,340,287 B2	3/2008	Mason et al.	7,766,818 B2	8/2010	Iketani et al.
7,341,559 B2	3/2008	Schulz et al.	7,774,060 B2	8/2010	Westenskow et al.
7,343,186 B2	3/2008	Lamego et al.	7,778,851 B2	8/2010	Schoenberg et al.
D566,282 S	4/2008	Al-Ali et al.	7,791,155 B2	9/2010	Diab
7,355,512 B1	4/2008	Al-Ali	7,794,407 B2	9/2010	Rothenberg
7,356,178 B2	4/2008	Ziel et al.	7,801,581 B2	9/2010	Diab
7,356,365 B2	4/2008	Schurman	7,820,184 B2	10/2010	Strizker et al.
7,371,981 B2	5/2008	Abdul-Hafiz	7,822,452 B2	10/2010	Schurman et al.
7,373,193 B2	5/2008	Al-Ali et al.	RE41,912 E	11/2010	Parker
7,373,194 B2	5/2008	Weber et al.	7,841,986 B2	11/2010	He et al.
7,376,453 B1	5/2008	Diab et al.	7,844,313 B2	11/2010	Kiani et al.
7,377,794 B2	5/2008	Al-Ali et al.	7,844,314 B2	11/2010	Al-Ali
7,377,899 B2	5/2008	Weber et al.	7,844,315 B2	11/2010	Al-Ali
7,382,247 B2	6/2008	Welch et al.	7,858,322 B2	12/2010	Tymianski et al.
7,383,070 B2	6/2008	Diab et al.	7,865,222 B2	1/2011	Weber et al.
7,413,546 B2	8/2008	Agutter et al.	7,865,232 B1	1/2011	Krishnaswamy et al.
7,415,297 B2	8/2008	Al-Ali et al.	7,873,497 B2	1/2011	Weber et al.
7,419,483 B2	9/2008	Shehada	7,880,606 B2	2/2011	Al-Ali
7,428,432 B2	9/2008	Ali et al.	7,880,626 B2	2/2011	Al-Ali et al.
7,438,683 B2	10/2008	Al-Ali et al.	7,890,156 B2	2/2011	Ooi et al.
7,439,856 B2	10/2008	Weiner et al.	7,891,355 B2	2/2011	Al-Ali et al.
7,440,787 B2	10/2008	Diab	7,894,868 B2	2/2011	Al-Ali et al.
7,454,240 B2	11/2008	Diab et al.	7,899,507 B2	3/2011	Al-Ali et al.
7,462,151 B2	12/2008	Childre et al.	7,899,518 B2	3/2011	Trepagnier et al.
7,467,002 B2	12/2008	Weber et al.	7,904,132 B2	3/2011	Weber et al.
7,469,157 B2	12/2008	Diab et al.	7,909,772 B2	3/2011	Popov et al.
7,471,969 B2	12/2008	Diab et al.	7,910,875 B2	3/2011	Al-Ali
7,471,971 B2	12/2008	Diab et al.	7,914,514 B2	3/2011	Calderon
7,483,729 B2	1/2009	Al-Ali et al.	7,919,713 B2	4/2011	Al-Ali et al.
7,483,730 B2	1/2009	Diab et al.	7,937,128 B2	5/2011	Al-Ali
7,489,250 B2	2/2009	Bock et al.	7,937,129 B2	5/2011	Mason et al.
7,489,958 B2	2/2009	Diab et al.	7,937,130 B2	5/2011	Diab et al.
7,496,391 B2	2/2009	Diab et al.	7,941,199 B2	5/2011	Kiani
7,496,393 B2	2/2009	Diab et al.	7,951,086 B2	5/2011	Flaherty et al.
D587,657 S	3/2009	Al-Ali et al.	7,957,780 B2	6/2011	Lamego et al.
7,497,828 B1	3/2009	Wilk et al.	7,962,188 B2	6/2011	Kiani et al.
7,499,741 B2	3/2009	Diab et al.	7,962,190 B1	6/2011	Diab et al.
7,499,835 B2	3/2009	Weber et al.	7,963,927 B2	6/2011	Kelleher et al.
7,500,950 B2	3/2009	Al-Ali et al.	7,967,749 B2	6/2011	Hutchinson et al.
7,509,154 B2	3/2009	Diab et al.	7,976,472 B2	7/2011	Kiani
7,509,494 B2	3/2009	Al-Ali	7,988,637 B2	8/2011	Diab
7,510,849 B2	3/2009	Schurman et al.	7,988,639 B2	8/2011	Starks
7,526,328 B2	4/2009	Diab et al.	7,990,382 B2	8/2011	Kiani
7,530,942 B1	5/2009	Diab	7,991,446 B2	8/2011	Ali et al.
7,530,949 B2	5/2009	Al-Ali et al.	7,991,463 B2	8/2011	Kelleher et al.
7,530,955 B2	5/2009	Diab et al.	8,000,761 B2	8/2011	Al-Ali
7,549,961 B1	6/2009	Hwang	8,008,088 B2	8/2011	Bellott et al.
7,551,717 B2	6/2009	Tome et al.	RE42,753 E	9/2011	Kiani-Azarbayjany et al.
7,559,520 B2	7/2009	Quijano et al.	8,019,400 B2	9/2011	Diab et al.
7,563,110 B2	7/2009	Al-Ali et al.	8,028,701 B2	10/2011	Al-Ali et al.
7,577,475 B2	8/2009	Consentino et al.	8,029,765 B2	10/2011	Bellott et al.
7,590,950 B2	9/2009	Collins et al.	8,033,996 B2	10/2011	Behar
7,596,398 B2	9/2009	Al-Ali et al.	8,036,727 B2	10/2011	Schurman et al.
7,597,665 B2	10/2009	Wilk et al.	8,036,728 B2	10/2011	Diab et al.
7,612,999 B2	11/2009	Clark et al.	8,036,736 B2	10/2011	Snyder et al.
7,618,375 B2	11/2009	Flaherty	8,038,625 B2	10/2011	Afonso et al.
D606,659 S	12/2009	Kiani et al.	8,046,040 B2	10/2011	Ali et al.
7,639,145 B2	12/2009	Lawson et al.	8,046,041 B2	10/2011	Diab et al.
7,647,083 B2	1/2010	Al-Ali et al.	8,046,042 B2	10/2011	Diab et al.
D609,193 S	2/2010	Al-Ali et al.	8,048,040 B2	11/2011	Kiani
7,654,966 B2	2/2010	Westinskow et al.	8,050,728 B2	11/2011	Al-Ali et al.
7,684,845 B2	3/2010	Juan	8,068,104 B2	11/2011	Rampersad
7,689,437 B1	3/2010	Teller et al.	8,073,707 B2	12/2011	Teller et al.
RE41,236 E	4/2010	Seely	RE43,169 E	2/2012	Parker
D614,305 S	4/2010	Al-Ali et al.	8,118,620 B2	2/2012	Al-Ali et al.
7,693,697 B2	4/2010	Westinskow et al.	8,126,528 B2	2/2012	Diab et al.
RE41,317 E	5/2010	Parker	8,128,572 B2	3/2012	Diab et al.
7,729,733 B2	6/2010	Al-Ali et al.	8,130,105 B2	3/2012	Al-Ali et al.
7,734,320 B2	6/2010	Al-Ali	8,145,287 B2	3/2012	Diab et al.
7,736,318 B2	6/2010	Consentino et al.	8,150,487 B2	4/2012	Diab et al.
7,761,127 B2	7/2010	Al-Ali et al.	8,175,672 B2	5/2012	Parker
			8,180,420 B2	5/2012	Diab et al.
			8,182,443 B1	5/2012	Kiani
			8,185,180 B2	5/2012	Diab et al.
			8,190,223 B2	5/2012	Al-Ali et al.

(56)

**References Cited**

## U.S. PATENT DOCUMENTS

8,190,227 B2	5/2012	Diab et al.	8,548,550 B2	10/2013	Al-Ali et al.
8,203,438 B2	6/2012	Kiani et al.	8,560,032 B2	10/2013	Al-Ali et al.
8,203,704 B2	6/2012	Merritt et al.	8,560,034 B1	10/2013	Diab et al.
8,204,566 B2	6/2012	Schurman et al.	8,570,167 B2	10/2013	Al-Ali
8,206,312 B2	6/2012	Farquhar	8,570,503 B2	10/2013	Vo et al.
8,219,172 B2	7/2012	Schurman et al.	8,571,617 B2	10/2013	Reichgott et al.
8,224,411 B2	7/2012	Al-Ali et al.	8,571,618 B1	10/2013	Lamego et al.
8,228,181 B2	7/2012	Al-Ali	8,571,619 B2	10/2013	Al-Ali et al.
8,229,533 B2	7/2012	Diab et al.	8,577,431 B2	11/2013	Lamego et al.
8,233,955 B2	7/2012	Al-Ali et al.	8,579,813 B2	11/2013	Causey
8,235,907 B2	8/2012	Wilk et al.	8,581,732 B2	11/2013	Al-Ali et al.
8,239,780 B2	8/2012	Manetta et al.	8,584,345 B2	11/2013	Al-Ali et al.
8,241,213 B2	8/2012	Lynn et al.	8,588,880 B2	11/2013	Abdul-Hafiz et al.
8,244,325 B2	8/2012	Al-Ali et al.	8,588,924 B2	11/2013	Dion
8,249,815 B2	8/2012	Taylor	8,600,467 B2	12/2013	Al-Ali et al.
8,255,026 B1	8/2012	Al-Ali	8,606,342 B2	12/2013	Diab
8,255,027 B2	8/2012	Al-Ali et al.	8,626,255 B2	1/2014	Al-Ali et al.
8,255,028 B2	8/2012	Al-Ali et al.	8,630,691 B2	1/2014	Lamego et al.
8,260,577 B2	9/2012	Weber et al.	8,634,889 B2	1/2014	Al-Ali et al.
8,265,723 B1	9/2012	McHale et al.	8,641,631 B2	2/2014	Sierra et al.
8,274,360 B2	9/2012	Sampath et al.	8,652,060 B2	2/2014	Al-Ali
8,294,716 B2	10/2012	Lord et al.	8,663,107 B2	3/2014	Kiani
8,301,217 B2	10/2012	Al-Ali et al.	8,666,468 B1	3/2014	Al-Ali
8,306,596 B2	11/2012	Schurman et al.	8,667,967 B2	3/2014	Al-Ali et al.
8,310,336 B2	11/2012	Muhsin et al.	8,670,811 B2	3/2014	O'Reilly
8,311,747 B2	11/2012	Taylor	8,670,814 B2	3/2014	Diab et al.
8,311,748 B2	11/2012	Taylor et al.	8,676,286 B2	3/2014	Weber et al.
8,315,683 B2	11/2012	Al-Ali et al.	8,682,407 B2	3/2014	Al-Ali
8,315,812 B2	11/2012	Taylor	RE44,823 E	4/2014	Parker
8,315,813 B2	11/2012	Taylor et al.	RE44,875 E	4/2014	Kiani et al.
8,315,814 B2	11/2012	Taylor et al.	8,690,799 B2	4/2014	Telfort et al.
8,321,150 B2	11/2012	Taylor	8,700,112 B2	4/2014	Kiani
RE43,860 E	12/2012	Parker	8,702,627 B2	4/2014	Telfort et al.
8,337,403 B2	12/2012	Al-Ali et al.	8,706,179 B2	4/2014	Parker
8,346,330 B2	1/2013	Lamego	8,712,494 B1	4/2014	MacNeish, III et al.
8,353,842 B2	1/2013	Al-Ali et al.	8,715,206 B2	5/2014	Telfort et al.
8,355,766 B2	1/2013	MacNeish, III et al.	8,718,735 B2	5/2014	Lamego et al.
8,359,080 B2	1/2013	Diab et al.	8,718,737 B2	5/2014	Diab et al.
8,360,936 B2	1/2013	Dibenedetto et al.	8,718,738 B2	5/2014	Blank et al.
8,364,223 B2	1/2013	Al-Ali et al.	8,720,249 B2	5/2014	Al-Ali
8,364,226 B2	1/2013	Diab et al.	8,721,541 B2	5/2014	Al-Ali et al.
8,374,665 B2	2/2013	Lamego	8,721,542 B2	5/2014	Al-Ali et al.
8,385,995 B2	2/2013	Al-Ali et al.	8,723,677 B1	5/2014	Kiani
8,385,996 B2	2/2013	Smith et al.	8,740,792 B1	6/2014	Kiani et al.
8,388,353 B2	3/2013	Kiani et al.	8,754,776 B2	6/2014	Poeze et al.
8,399,822 B2	3/2013	Al-Ali	8,755,535 B2	6/2014	Telfort et al.
8,401,602 B2	3/2013	Kiani	8,755,856 B2	6/2014	Diab et al.
8,405,608 B2	3/2013	Al-Ali et al.	8,755,872 B1	6/2014	Marinow
8,414,499 B2	4/2013	Al-Ali et al.	8,761,850 B2	6/2014	Lamego
8,418,524 B2	4/2013	Al-Ali	8,764,671 B2	7/2014	Kiani
8,423,106 B2	4/2013	Lamego et al.	8,768,423 B2	7/2014	Shakespeare et al.
8,428,967 B2	4/2013	Olsen et al.	8,771,204 B2	7/2014	Telfort et al.
8,430,817 B1	4/2013	Al-Ali et al.	8,777,634 B2	7/2014	Kiani et al.
8,437,825 B2	5/2013	Dalvi et al.	8,781,543 B2	7/2014	Diab et al.
8,455,290 B2	6/2013	Siskavich	8,781,544 B2	7/2014	Al-Ali et al.
8,457,703 B2	6/2013	Al-Ali	8,781,549 B2	7/2014	Al-Ali et al.
8,457,707 B2	6/2013	Kiani	8,788,003 B2	7/2014	Schurman et al.
8,463,349 B2	6/2013	Diab et al.	8,790,268 B2	7/2014	Al-Ali
8,466,286 B2	6/2013	Bellott et al.	8,801,613 B2	8/2014	Al-Ali et al.
8,471,713 B2	6/2013	Poeze et al.	8,821,397 B2	9/2014	Al-Ali et al.
8,473,020 B2	6/2013	Kiani et al.	8,821,415 B2	9/2014	Al-Ali et al.
8,483,787 B2	7/2013	Al-Ali et al.	8,830,449 B1	9/2014	Lamego et al.
8,489,364 B2	7/2013	Weber et al.	8,831,700 B2	9/2014	Schurman et al.
8,498,684 B2	7/2013	Weber et al.	8,840,549 B2	9/2014	Al-Ali
8,504,128 B2	8/2013	Blank et al.	8,847,740 B2	9/2014	Kiani et al.
8,509,867 B2	8/2013	Workman et al.	8,849,365 B2	9/2014	Smith et al.
8,515,509 B2	8/2013	Bruinsma et al.	8,852,094 B2	10/2014	Al-Ali et al.
8,523,781 B2	9/2013	Al-Ali	8,852,994 B2	10/2014	Wojtczuk et al.
8,529,301 B2	9/2013	Al-Ali et al.	8,868,147 B2	10/2014	Stippick et al.
8,532,727 B2	9/2013	Ali et al.	8,868,150 B2	10/2014	Al-Ali et al.
8,532,728 B2	9/2013	Diab et al.	8,870,792 B2	10/2014	Al-Ali et al.
D692,145 S	10/2013	Al-Ali et al.	8,886,271 B2	11/2014	Kiani et al.
8,547,209 B2	10/2013	Kiani et al.	8,888,539 B2	11/2014	Al-Ali et al.
8,548,548 B2	10/2013	Al-Ali	8,888,708 B2	11/2014	Diab et al.
8,548,549 B2	10/2013	Schurman et al.	8,892,180 B2	11/2014	Weber et al.
			8,897,847 B2	11/2014	Al-Ali
			8,909,310 B2	12/2014	Lamego et al.
			2001/0011355 A1	8/2001	Kawai
			2001/0031922 A1	10/2001	Weng et al.

(56)

## References Cited

## U.S. PATENT DOCUMENTS

2002/0045836 A1	4/2002	Alkawwas	2008/0119412 A1	5/2008	Tymianski et al.
2002/0052311 A1	5/2002	Solomon et al.	2008/0138278 A1	6/2008	Scherz et al.
2002/0063690 A1	5/2002	Chung et al.	2008/0171919 A1	7/2008	Stivoric et al.
2002/0140675 A1	10/2002	Ali et al.	2008/0208912 A1	8/2008	Garibaldi
2002/0198445 A1	12/2002	Dominguez et al.	2008/0221396 A1	9/2008	Garces et al.
2003/0027326 A1	2/2003	Ulmsten et al.	2008/0228077 A1	9/2008	Wilk et al.
2004/0013647 A1	1/2004	Solomon et al.	2008/0275309 A1	11/2008	Stivoric et al.
2004/0073095 A1	4/2004	Causey et al.	2008/0281167 A1	11/2008	Soderberg et al.
2004/0090742 A1	5/2004	Son et al.	2008/0281168 A1	11/2008	Gibson et al.
2004/0122787 A1	6/2004	Avinash et al.	2008/0281181 A1	11/2008	Manziona et al.
2004/0126007 A1	7/2004	Ziel et al.	2008/0287751 A1	11/2008	Stivoric et al.
2004/0147818 A1	7/2004	Levy et al.	2008/0292172 A1	11/2008	Assmann et al.
2004/0152957 A1	8/2004	Stivoric et al.	2008/0300020 A1	12/2008	Nishizawa et al.
2004/0179332 A1	9/2004	Smith et al.	2008/0319275 A1	12/2008	Chiu et al.
2004/0186357 A1	9/2004	Soderberg et al.	2008/0319354 A1	12/2008	Bell et al.
2004/0230118 A1	11/2004	Shehada et al.	2009/0005651 A1	1/2009	Ward et al.
2004/0230132 A1	11/2004	Shehada et al.	2009/0018808 A1	1/2009	Bronstein et al.
2004/0230179 A1	11/2004	Shehada et al.	2009/0024008 A1	1/2009	Brunner et al.
2004/0243017 A1	12/2004	Causevic	2009/0052623 A1	2/2009	Tome et al.
2004/0254431 A1	12/2004	Shehada et al.	2009/0054735 A1	2/2009	Higgins et al.
2004/0254432 A1	12/2004	Shehada et al.	2009/0054743 A1	2/2009	Stewart
2005/0020918 A1	1/2005	Wilk et al.	2009/0062682 A1	3/2009	Bland et al.
2005/0038332 A1	2/2005	Saidara et al.	2009/0069642 A1	3/2009	Gao et al.
2005/0038680 A1	2/2005	McMahon	2009/0119330 A1	5/2009	Sampath et al.
2005/0065417 A1	3/2005	Ali et al.	2009/0124867 A1	5/2009	Hirsh et al.
2005/0080336 A1	4/2005	Byrd et al.	2009/0131759 A1	5/2009	Sims et al.
2005/0096542 A1	5/2005	Weng et al.	2009/0143832 A1	6/2009	Saba
2005/0113653 A1	5/2005	Fox et al.	2009/0157058 A1	6/2009	Ferren et al.
2005/0164933 A1	7/2005	Tymianski et al.	2009/0171225 A1	7/2009	Gadodia et al.
2005/0191294 A1	9/2005	Arap et al.	2009/0177090 A1	7/2009	Grunwald et al.
2005/0277872 A1	12/2005	Colby et al.	2009/0182287 A1	7/2009	Kassab
2006/0058647 A1	3/2006	Strommer et al.	2009/0226372 A1	9/2009	Ruoslahti et al.
2006/0089543 A1	4/2006	Kim et al.	2009/0247984 A1	10/2009	Lamego et al.
2006/0094936 A1	5/2006	Russ	2009/0264778 A1	10/2009	Markowitz et al.
2006/0149393 A1	7/2006	Calderon	2009/0275844 A1	11/2009	Al-Ali
2006/0155175 A1	7/2006	Ogino et al.	2009/0281462 A1	11/2009	Heliot et al.
2006/0200009 A1	9/2006	Wekell et al.	2009/0299157 A1	12/2009	Telfort et al.
2006/0217684 A1	9/2006	Shehada et al.	2009/0309755 A1	12/2009	Williamson et al.
2006/0217685 A1	9/2006	Shehada et al.	2010/0004518 A1	1/2010	Vo et al.
2006/0224413 A1	10/2006	Kim et al.	2010/0030040 A1	2/2010	Poeze et al.
2006/0235300 A1	10/2006	Weng et al.	2010/0030094 A1	2/2010	Lundback
2006/0253042 A1	11/2006	Stahmann et al.	2010/0036209 A1	2/2010	Ferren et al.
2007/0000490 A1	1/2007	DeVries et al.	2010/0069725 A1	3/2010	Al-Ali
2007/0021675 A1	1/2007	Childre et al.	2010/0125217 A1	5/2010	Kuo et al.
2007/0027368 A1	2/2007	Collins et al.	2010/0144627 A1	6/2010	Vitek et al.
2007/0032733 A1	2/2007	Burton et al.	2010/0185101 A1	7/2010	Sakai et al.
2007/0055116 A1	3/2007	Clark et al.	2010/0198622 A1	8/2010	Gajic et al.
2007/0055544 A1	3/2007	Jung et al.	2010/0210958 A1	8/2010	Manwaring et al.
2007/0060798 A1	3/2007	Krupnik et al.	2010/0261979 A1	10/2010	Kiani
2007/0088406 A1	4/2007	Bennett et al.	2010/0298659 A1	11/2010	Mccombie et al.
2007/0096897 A1	5/2007	Weiner	2010/0298661 A1	11/2010	Mccombie et al.
2007/0118399 A1	5/2007	Avinash et al.	2010/0305412 A1	12/2010	Darrah et al.
2007/0140475 A1	6/2007	Kurtock et al.	2010/0312103 A1	12/2010	Gorek et al.
2007/0156033 A1	7/2007	Causey et al.	2010/0317936 A1	12/2010	Al-Ali et al.
2007/0163589 A1	7/2007	DeVries et al.	2010/0317951 A1	12/2010	Rutkowski et al.
2007/0185390 A1	8/2007	Perkins et al.	2011/0001605 A1	1/2011	Kiani et al.
2007/0232941 A1	10/2007	Rabinovich	2011/0021930 A1	1/2011	Mazzeo et al.
2007/0244724 A1	10/2007	Pendergast et al.	2011/0023130 A1	1/2011	Gudgel et al.
2007/0254593 A1	11/2007	Jollota et al.	2011/0028809 A1	2/2011	Goodman
2007/0255114 A1	11/2007	Ackermann et al.	2011/0046495 A1	2/2011	Osypka
2007/0255116 A1	11/2007	Mehta et al.	2011/0080294 A1	4/2011	Tanishima et al.
2007/0255250 A1	11/2007	Moberg	2011/0082711 A1	4/2011	Poeze et al.
2008/0000479 A1	1/2008	Elaz et al.	2011/0087084 A1	4/2011	Jeong et al.
2008/0003200 A1	1/2008	Arap et al.	2011/0087117 A1	4/2011	Tremper et al.
2008/0021854 A1	1/2008	Jung et al.	2011/0087756 A1	4/2011	Biondi
2008/0033661 A1	2/2008	Syroid et al.	2011/0098583 A1	4/2011	Pandia et al.
2008/0053438 A1	3/2008	DeVries et al.	2011/0105854 A1	5/2011	Kiani et al.
2008/0058657 A1	3/2008	Schwartz et al.	2011/0118573 A1	5/2011	Mckenna
2008/0090626 A1	4/2008	Griffin et al.	2011/0172967 A1	7/2011	Al-Ali et al.
2008/0091089 A1	4/2008	Guillory et al.	2011/0184252 A1	7/2011	Archer et al.
2008/0091090 A1	4/2008	Guillory et al.	2011/0184253 A1	7/2011	Archer et al.
2008/0091471 A1	4/2008	Michon et al.	2011/0208015 A1	8/2011	Welch et al.
2008/0097167 A1	4/2008	Yudkovitch et al.	2011/0208018 A1	8/2011	Kiani
2008/0099366 A1	5/2008	Niemiec et al.	2011/0208073 A1	8/2011	Matsukawa et al.
2008/0108884 A1	5/2008	Kiani	2011/0209915 A1	9/2011	Telfort et al.
			2011/0212090 A1	9/2011	Pedersen et al.
			2011/0213212 A1	9/2011	Al-Ali
			2011/0230733 A1	9/2011	Al-Ali
			2011/0237911 A1	9/2011	Lamego et al.

(56)

**References Cited****U.S. PATENT DOCUMENTS**

2011/0257544 A1 10/2011 Kaasinen et al.  
 2011/0295094 A1 12/2011 Doyle et al.  
 2012/0004579 A1 1/2012 Luo et al.  
 2012/0059230 A1 3/2012 Teller et al.  
 2012/0059267 A1 3/2012 Lamego et al.  
 2012/0071771 A1 3/2012 Behar  
 2012/0101353 A1 4/2012 Reggiardo et al.  
 2012/0116175 A1 5/2012 Al-Ali et al.  
 2012/0123799 A1 5/2012 Nolen et al.  
 2012/0136221 A1 5/2012 Killen et al.  
 2012/0179006 A1 7/2012 Jansen et al.  
 2012/0197619 A1 8/2012 Namer Yelin et al.  
 2012/0209082 A1 8/2012 Al-Ali  
 2012/0209084 A1 8/2012 Olsen et al.  
 2012/0226160 A1 9/2012 Kudoh  
 2012/0227739 A1 9/2012 Kiani  
 2012/0239434 A1 9/2012 Breslow et al.  
 2012/0265039 A1 10/2012 Kiani  
 2012/0282583 A1 11/2012 Thaler et al.  
 2012/0283524 A1 11/2012 Kiani et al.  
 2012/0286955 A1 11/2012 Welch et al.  
 2012/0294801 A1 11/2012 Scherz et al.  
 2012/0296178 A1 11/2012 Lamego et al.  
 2012/0319816 A1 12/2012 Al-Ali  
 2012/0330112 A1 12/2012 Lamego et al.  
 2013/0006131 A1 1/2013 Narayan et al.  
 2013/0006151 A1 1/2013 Main et al.  
 2013/0023775 A1 1/2013 Lamego et al.  
 2013/0035603 A1 2/2013 Jarausch et al.  
 2013/0041591 A1 2/2013 Lamego  
 2013/0045685 A1 2/2013 Kiani  
 2013/0046204 A1 2/2013 Lamego et al.  
 2013/0060108 A1 3/2013 Schurman et al.  
 2013/0060147 A1 3/2013 Welch et al.  
 2013/0079610 A1 3/2013 Al-Ali  
 2013/0096405 A1 4/2013 Garfio  
 2013/0096936 A1 4/2013 Sampath et al.  
 2013/0109935 A1 5/2013 Al-Ali et al.  
 2013/0162433 A1 6/2013 Muhsin et al.  
 2013/0178749 A1 7/2013 Lamego  
 2013/0190581 A1 7/2013 Al-Ali et al.  
 2013/0197328 A1 8/2013 Diab et al.  
 2013/0211214 A1 8/2013 Olsen  
 2013/0243021 A1 9/2013 Siskavich  
 2013/0253334 A1 9/2013 Al-Ali et al.  
 2013/0262730 A1 10/2013 Al-Ali et al.  
 2013/0274571 A1 10/2013 Diab et al.  
 2013/0296672 A1 11/2013 O'Neil et al.  
 2013/0317327 A1 11/2013 Al-Ali et al.  
 2013/0317370 A1 11/2013 Dalvi et al.  
 2013/0324808 A1 12/2013 Al-Ali et al.  
 2013/0324817 A1 12/2013 Diab  
 2013/0331670 A1 12/2013 Kiani  
 2013/0338461 A1 12/2013 Lamego et al.  
 2014/0012100 A1 1/2014 Al-Ali et al.  
 2014/0025306 A1 1/2014 Weber et al.  
 2014/0034353 A1 2/2014 Al-Ali et al.  
 2014/0051952 A1 2/2014 Reichgott et al.  
 2014/0051953 A1 2/2014 Lamego et al.  
 2014/0051954 A1 2/2014 Al-Ali et al.  
 2014/0058230 A1 2/2014 Abdul-Hafiz et al.  
 2014/0066783 A1 3/2014 Kiani et al.  
 2014/0077956 A1 3/2014 Sampath et al.  
 2014/0081097 A1 3/2014 Al-Ali et al.  
 2014/0081100 A1 3/2014 Muhsin et al.  
 2014/0081175 A1 3/2014 Telfort  
 2014/0094667 A1 4/2014 Schurman et al.  
 2014/0100434 A1 4/2014 Diab et al.  
 2014/0114199 A1 4/2014 Lamego et al.  
 2014/0120564 A1 5/2014 Workman et al.  
 2014/0121482 A1 5/2014 Merritt et al.  
 2014/0121483 A1 5/2014 Kiani  
 2014/0125495 A1 5/2014 Al-Ali  
 2014/0127137 A1 5/2014 Bellott et al.

2014/0128696 A1 5/2014 Al-Ali  
 2014/0128699 A1 5/2014 Al-Ali et al.  
 2014/0129702 A1 5/2014 Lamego et al.  
 2014/0135588 A1 5/2014 Al-Ali et al.  
 2014/0142399 A1 5/2014 Al-Ali et al.  
 2014/0142401 A1 5/2014 Al-Ali et al.  
 2014/0142402 A1 5/2014 Al-Ali et al.  
 2014/0163344 A1 6/2014 Al-Ali  
 2014/0163402 A1 6/2014 Lamego et al.  
 2014/0166076 A1 6/2014 Kiani et al.  
 2014/0171763 A1 6/2014 Diab  
 2014/0180038 A1 6/2014 Kiani  
 2014/0180154 A1 6/2014 Sierra et al.  
 2014/0194709 A1 7/2014 Al-Ali et al.  
 2014/0194711 A1 7/2014 Al-Ali  
 2014/0194766 A1 7/2014 Al-Ali et al.  
 2014/0200420 A1 7/2014 Al-Ali  
 2014/0200422 A1 7/2014 Weber et al.  
 2014/0206963 A1 7/2014 Al-Ali  
 2014/0213864 A1 7/2014 Abdul-Hafiz et al.  
 2014/0243627 A1 8/2014 Diab et al.  
 2014/0266790 A1 9/2014 Al-Ali et al.  
 2014/0275808 A1 9/2014 Poeze et al.  
 2014/0275835 A1 9/2014 Lamego et al.  
 2014/0275871 A1 9/2014 Lamego et al.  
 2014/0275872 A1 9/2014 Merritt et al.  
 2014/0275881 A1 9/2014 Lamego et al.  
 2014/0288400 A1 9/2014 Diab et al.  
 2014/0296664 A1 10/2014 Bruinsma et al.  
 2014/0303520 A1 10/2014 Telfort et al.  
 2014/0309506 A1 10/2014 Lamego et al.  
 2014/0309559 A1 10/2014 Telfort et al.  
 2014/0316228 A1 10/2014 Blank et al.  
 2014/0323825 A1 10/2014 Al-Ali et al.  
 2014/0330092 A1 11/2014 Al-Ali et al.  
 2014/0330098 A1 11/2014 Merritt et al.  
 2014/0330099 A1 11/2014 Al-Ali et al.  
 2014/0333440 A1 11/2014 Kiani  
 2014/0336481 A1 11/2014 Shakespeare et al.  
 2014/0343436 A1 11/2014 Kiani  
 2014/0357966 A1 12/2014 Al-Ali

**FOREIGN PATENT DOCUMENTS**

EP 2 766 834 8/2014  
 JP 2014/533997 12/2014  
 WO WO 2004/056266 7/2004  
 WO WO 2004/059551 7/2004  
 WO WO 2013/056160 4/2013  
 WO WO 2013/119982 8/2013

**OTHER PUBLICATIONS**

PCT International Search Report & Written Opinion, App. No. PCT/US2012/060109, dated Jun. 5, 2013.

PCT International Preliminary Report on Patentability for Application No. PCT/US2012/060109, dated Apr. 24, 2014.

PCT International Search Report & Written Opinion, App. No. PCT/US2014/060177, dated Dec. 19, 2014.

PCT International Search Report and Written Opinion, App. No. PCT/US2013/025384, dated Aug. 6, 2013.

Elmer-Dewitt, Philip, Apple's iWatch: The killer apps may be in hospitals, not health clubs, Fortune.com, Feb. 3, 2014, <http://fortune.com/2014/02/03/apples-iwatch-the-killer-apps-may-be-in-hospitals-not-health-clubs/>, in 4 pages.

Wachter, S. Blake; Journal of the American Medical Informatics Association; The Employment of an Iterative Design Process to Develop a Pulmonary Graphical Display; vol. 10, No. 4, Jul./Aug. 2003; pp. 363-372.

US 8,845,543, 09/2014, Diab et al. (withdrawn)

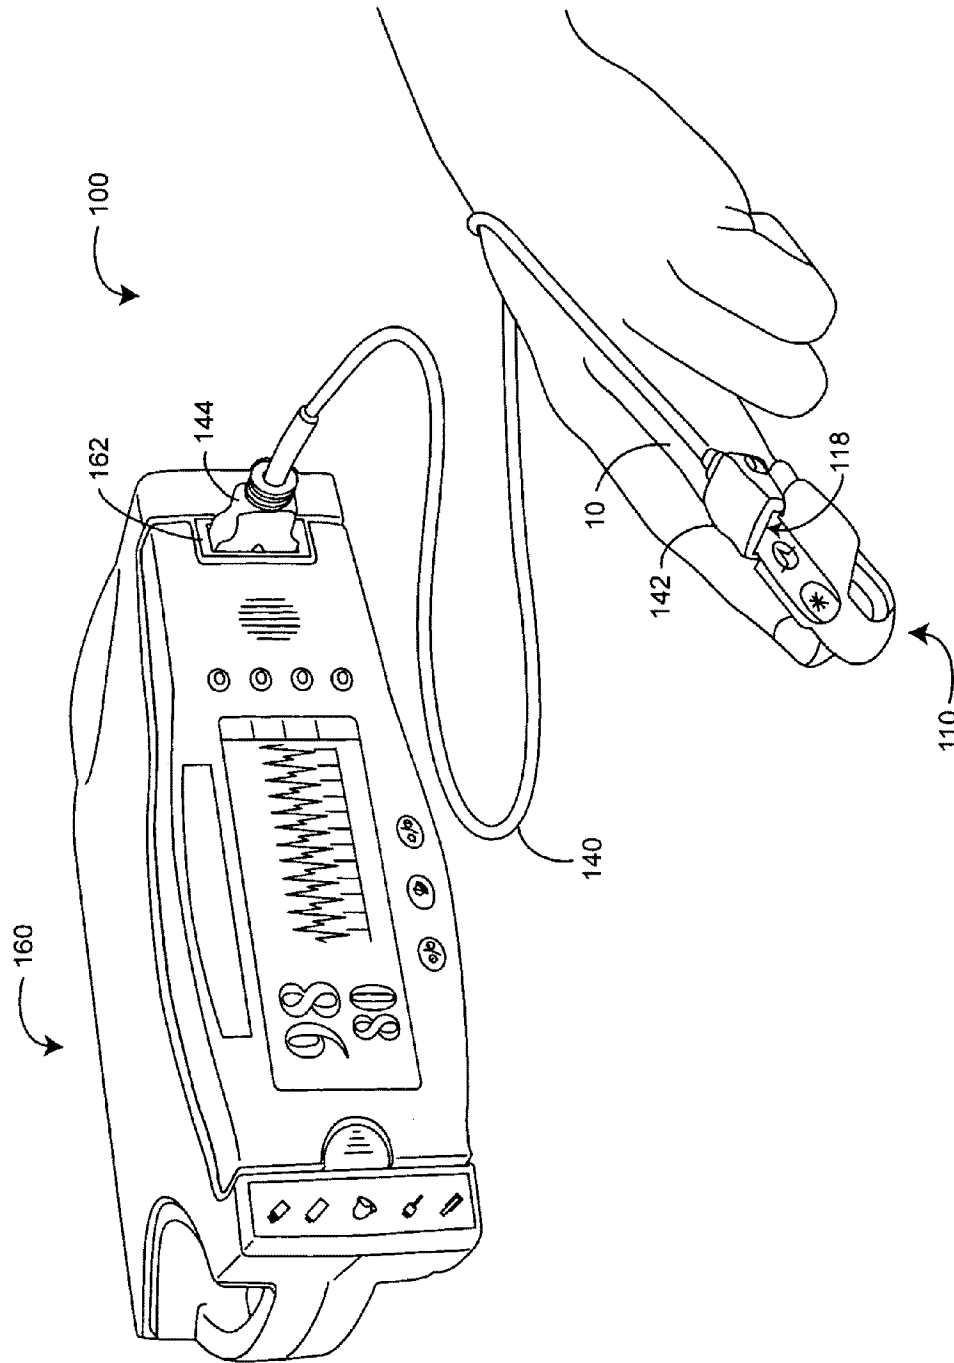


FIG. 1 (Prior Art)



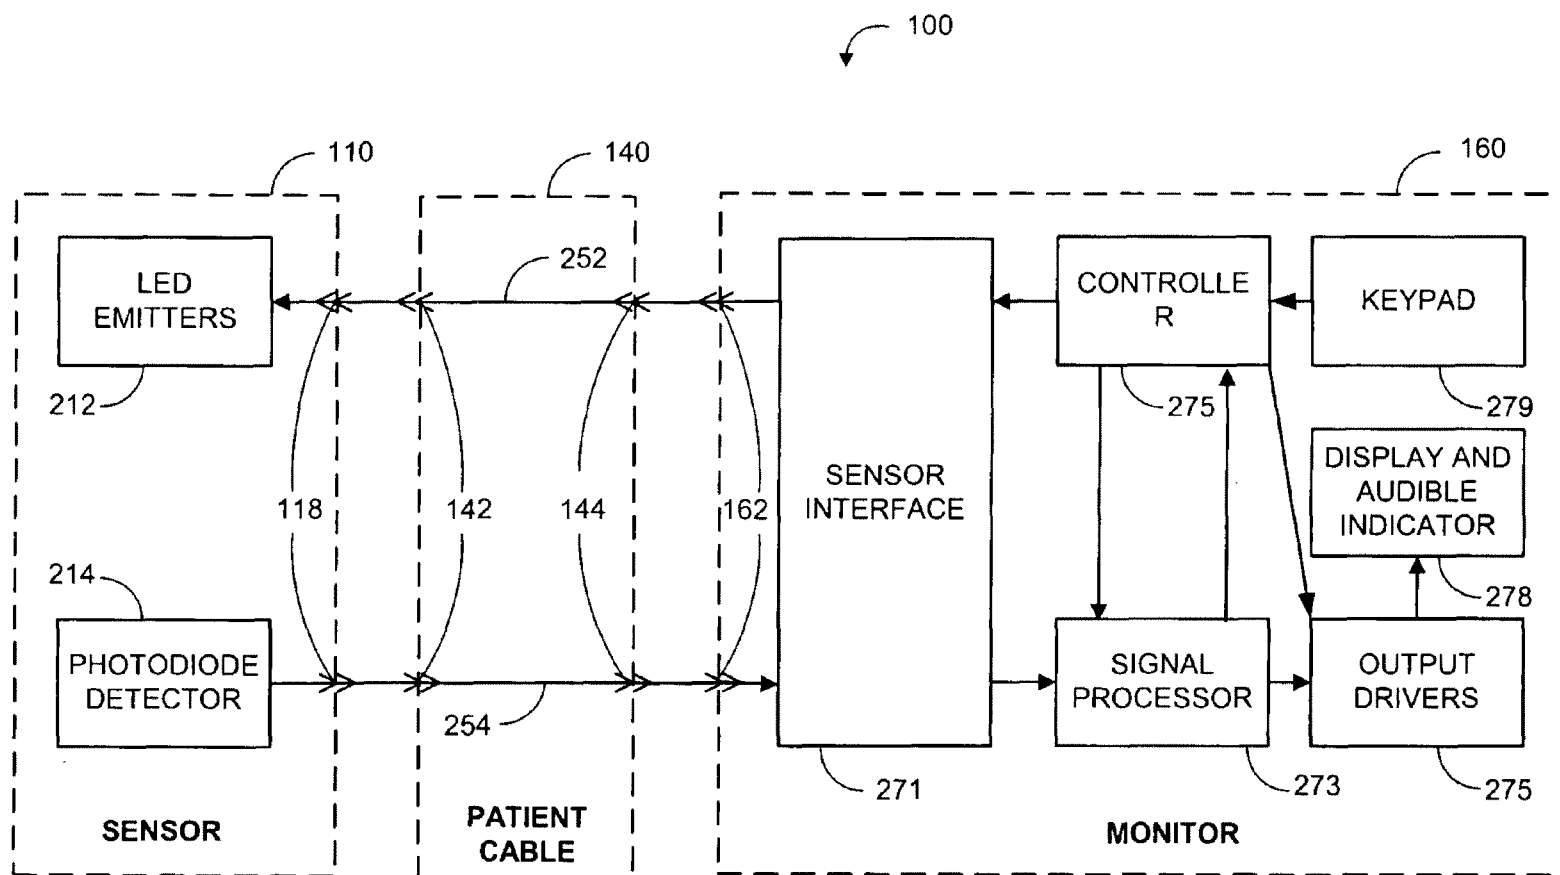


FIG. 2 (Prior Art)

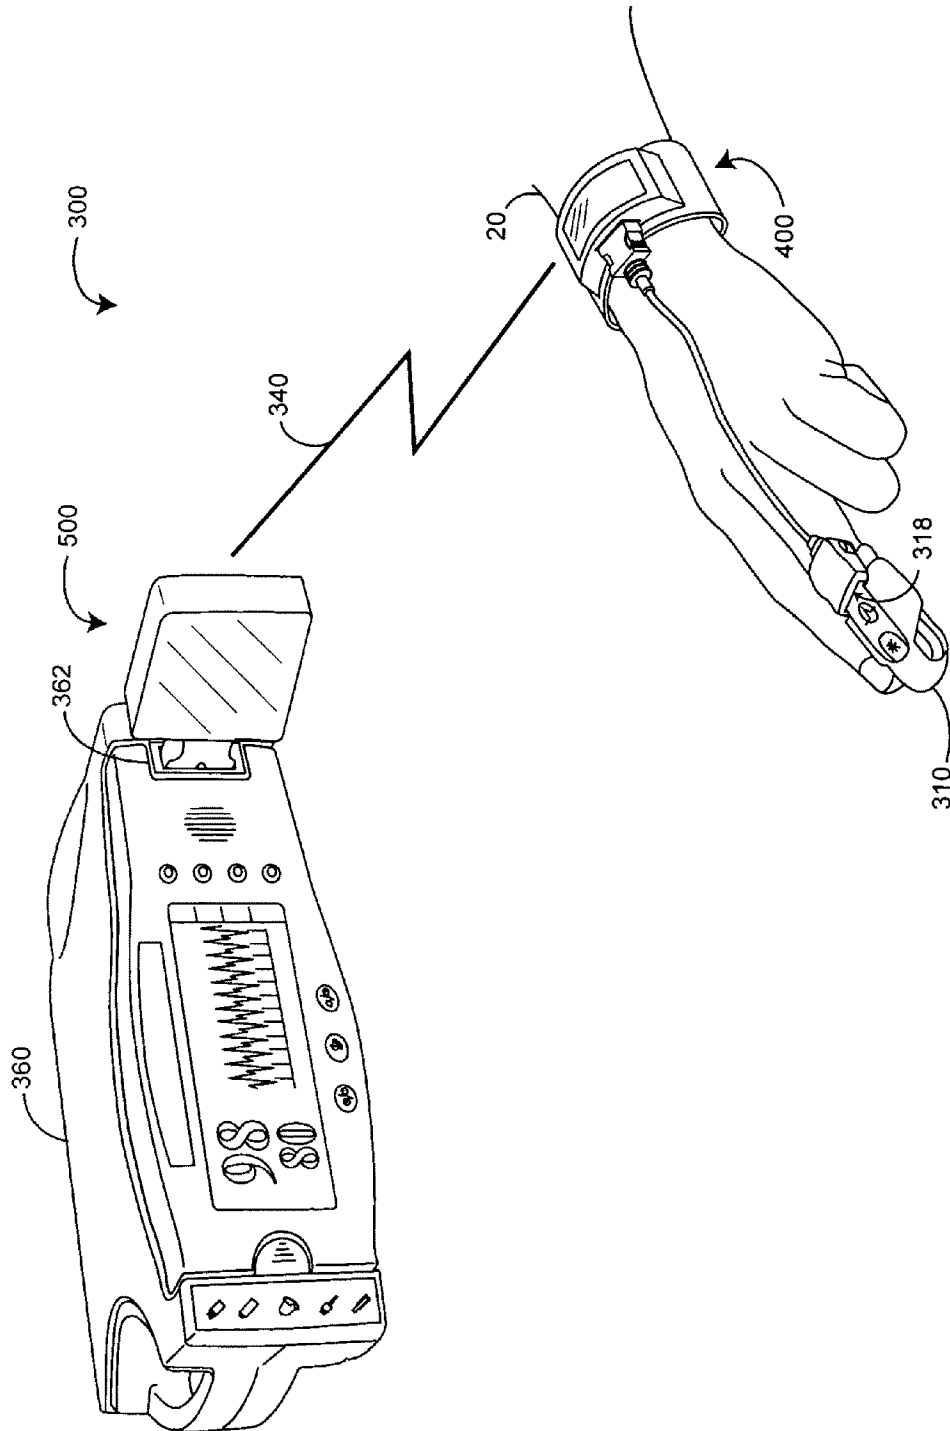


FIG. 3

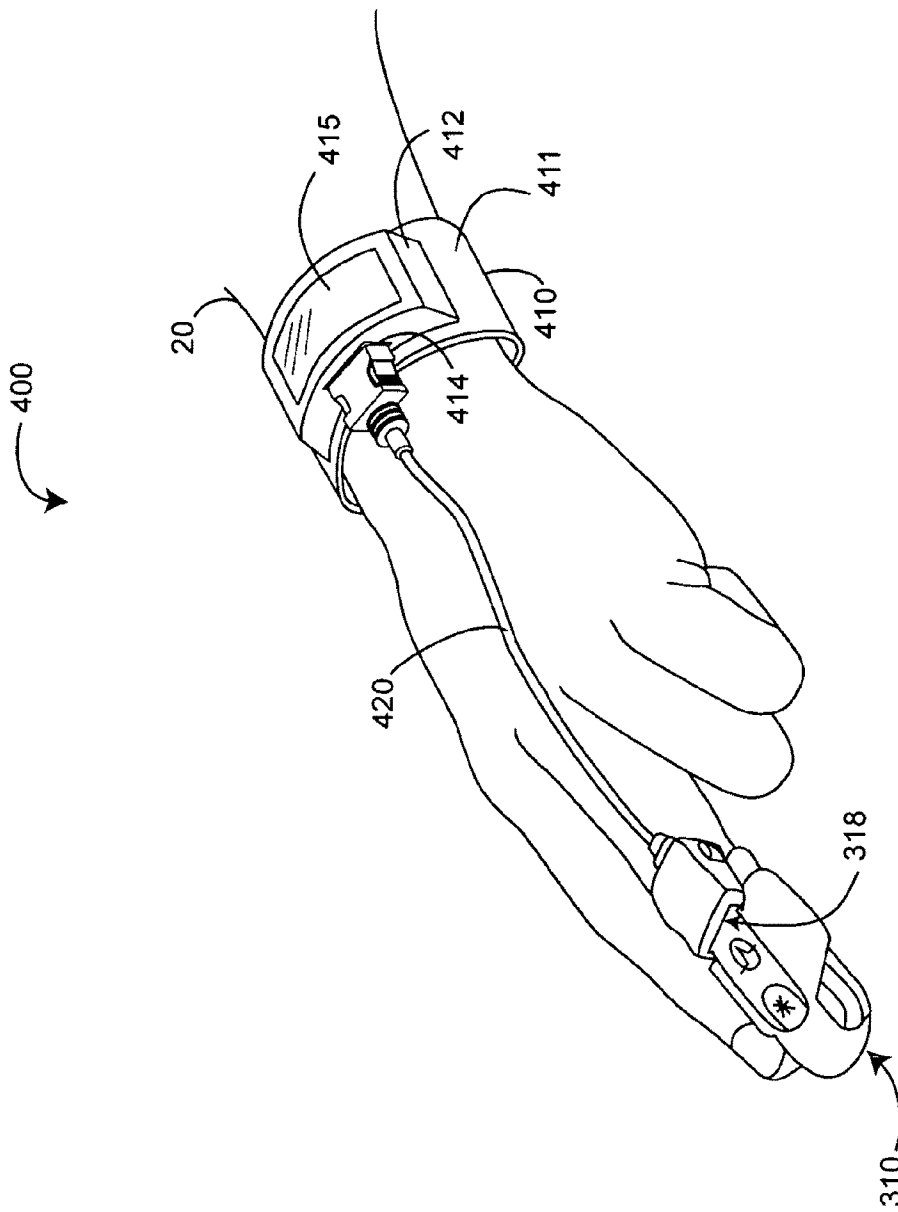


FIG. 4A

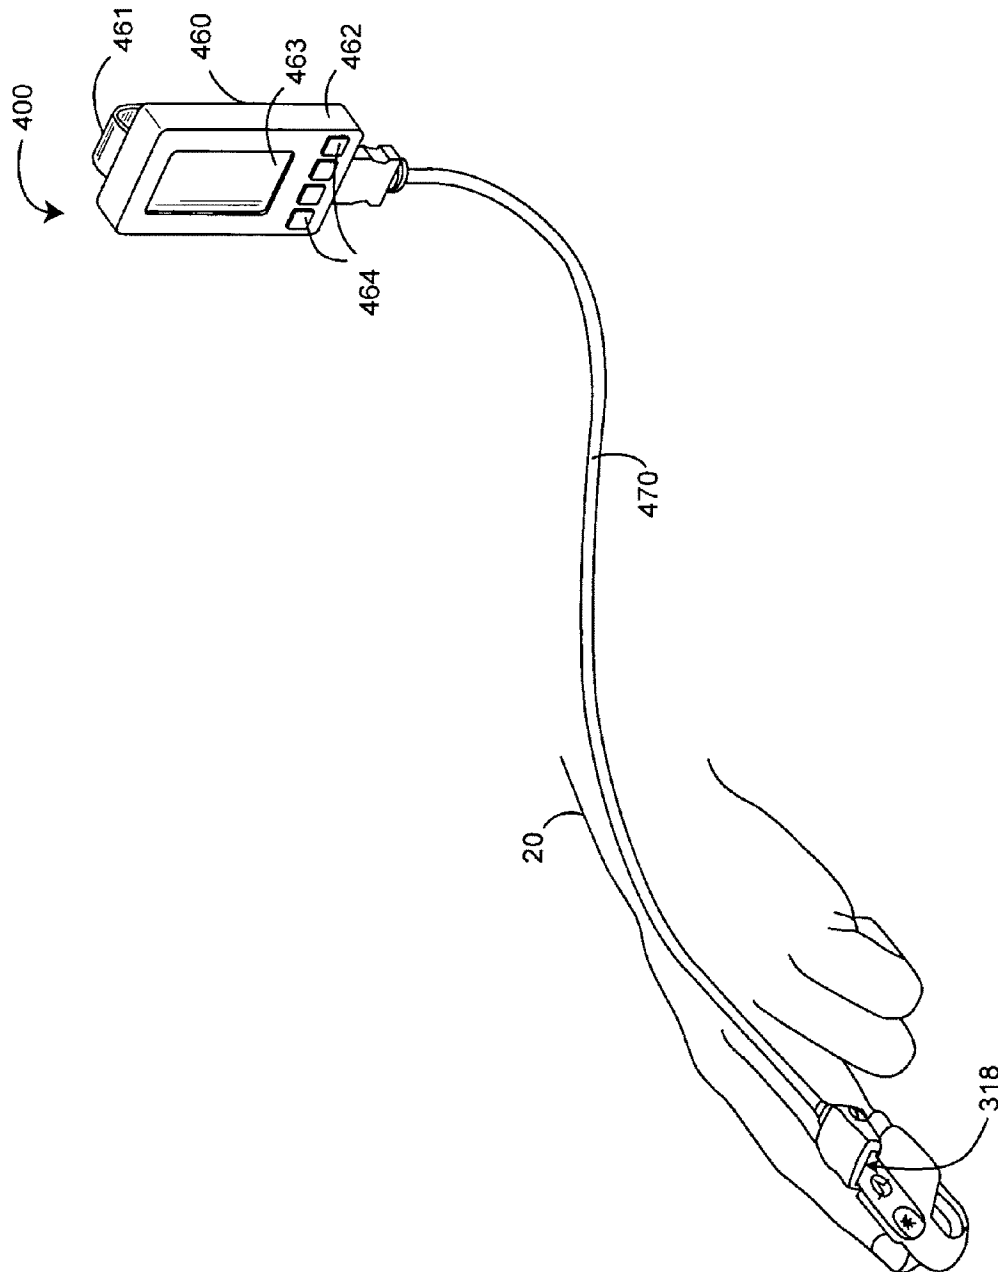


FIG. 4B

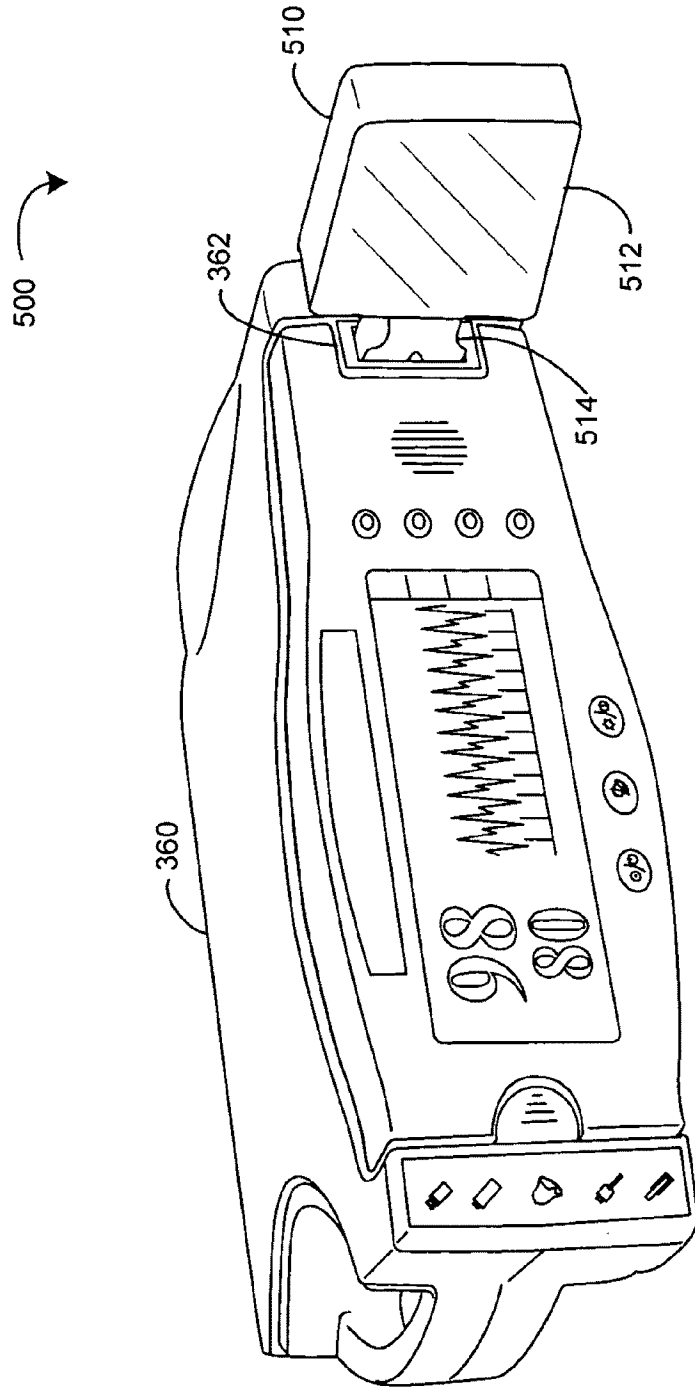


FIG. 5A

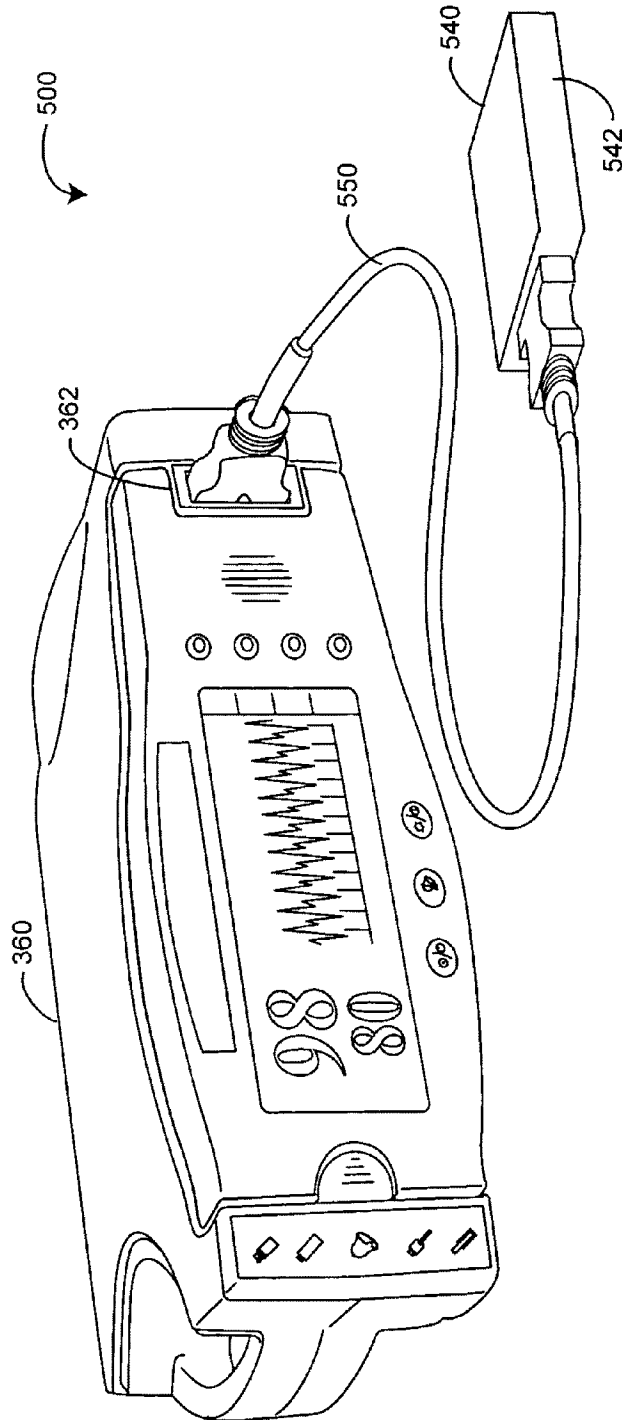


FIG. 5B

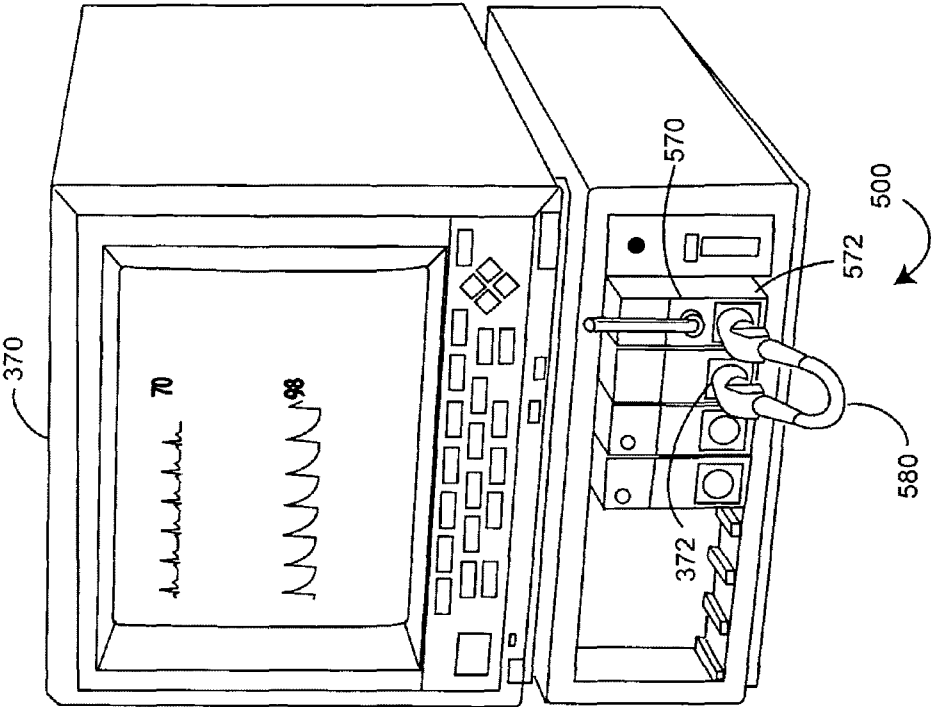


FIG. 5C

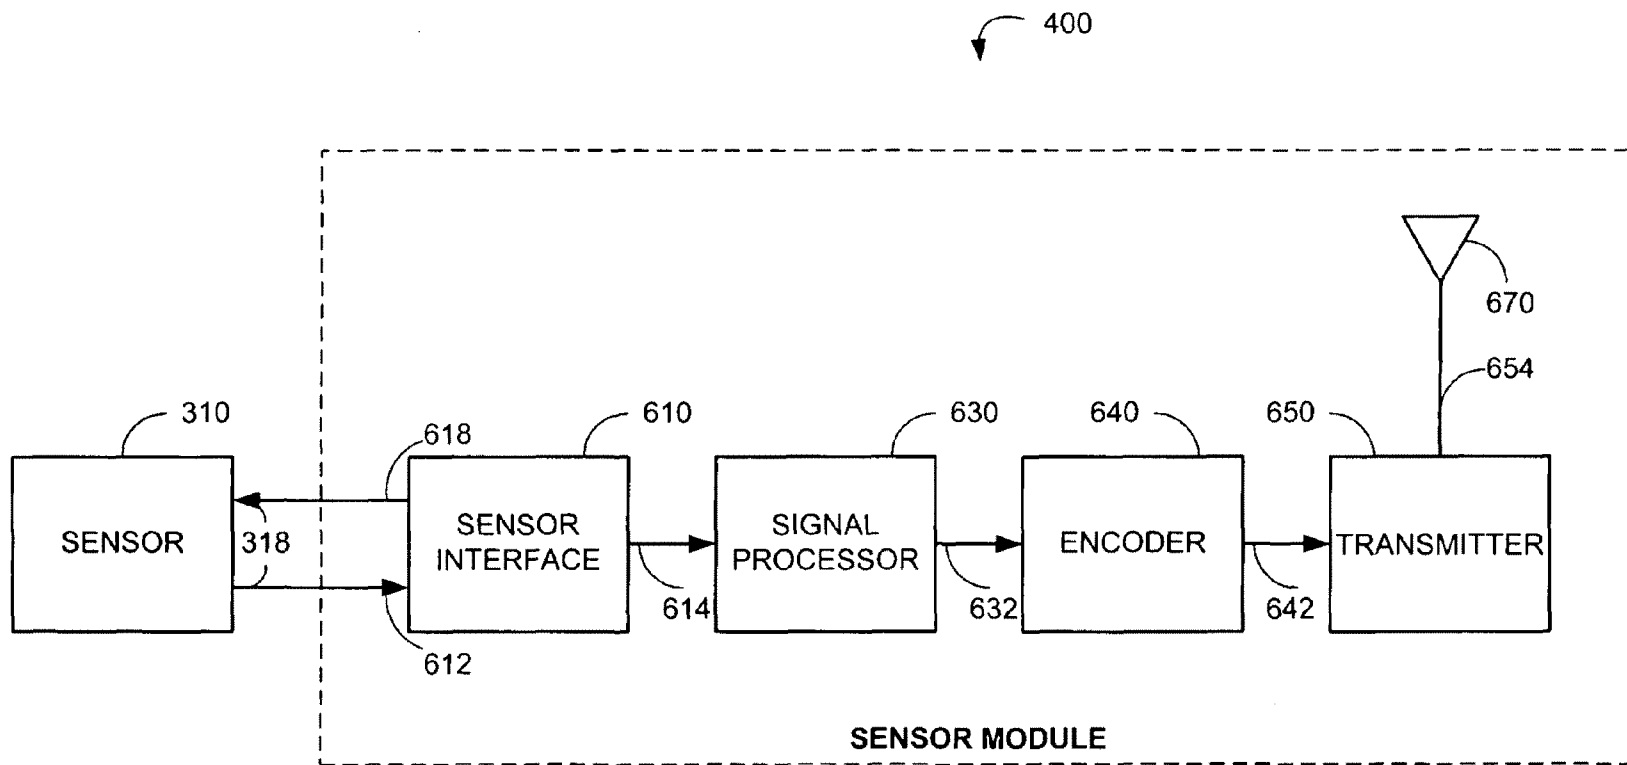


FIG. 6



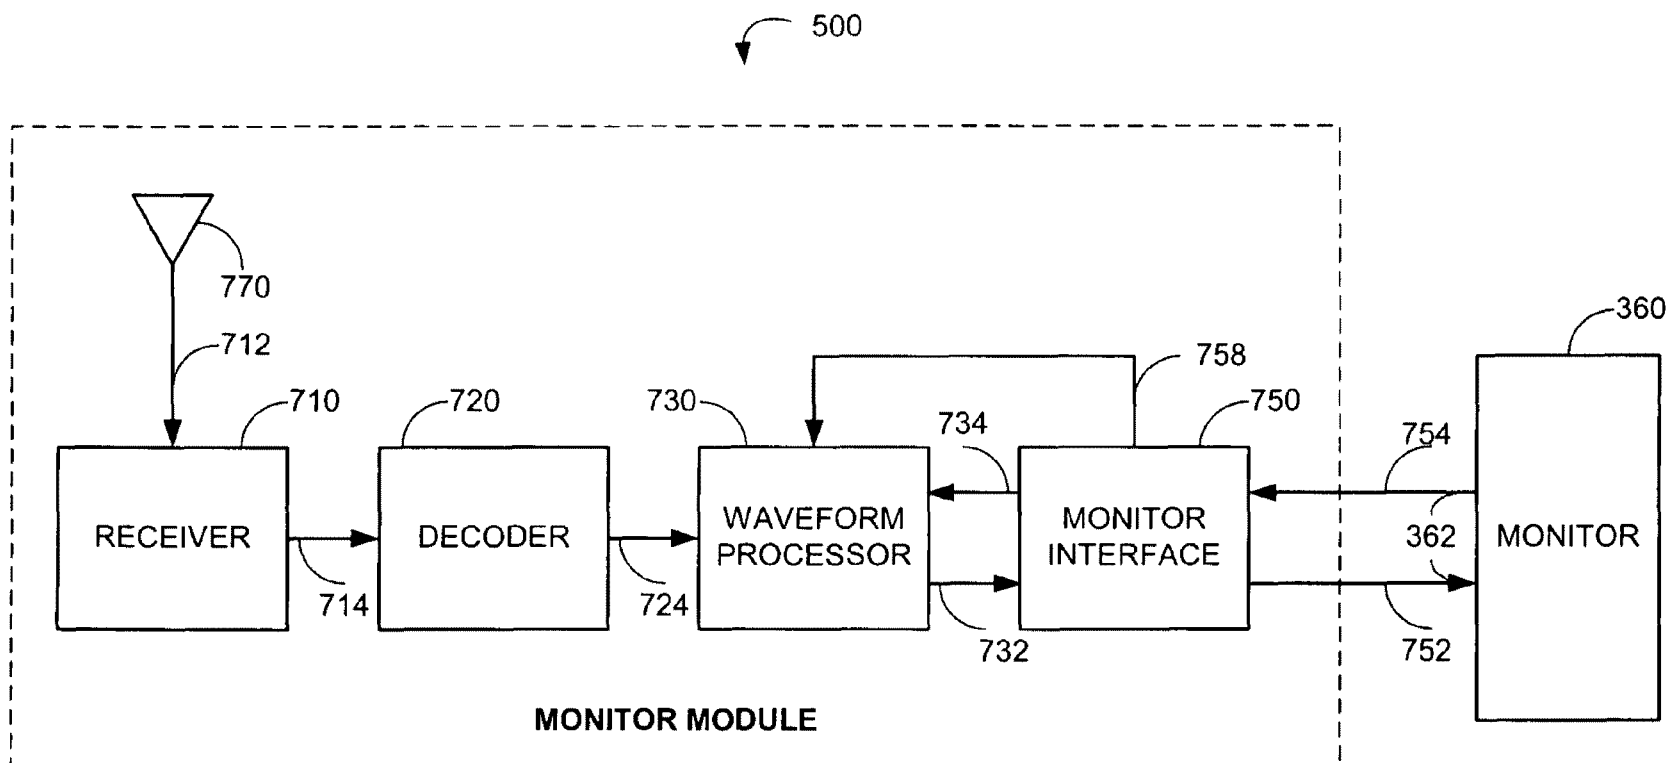


FIG. 7

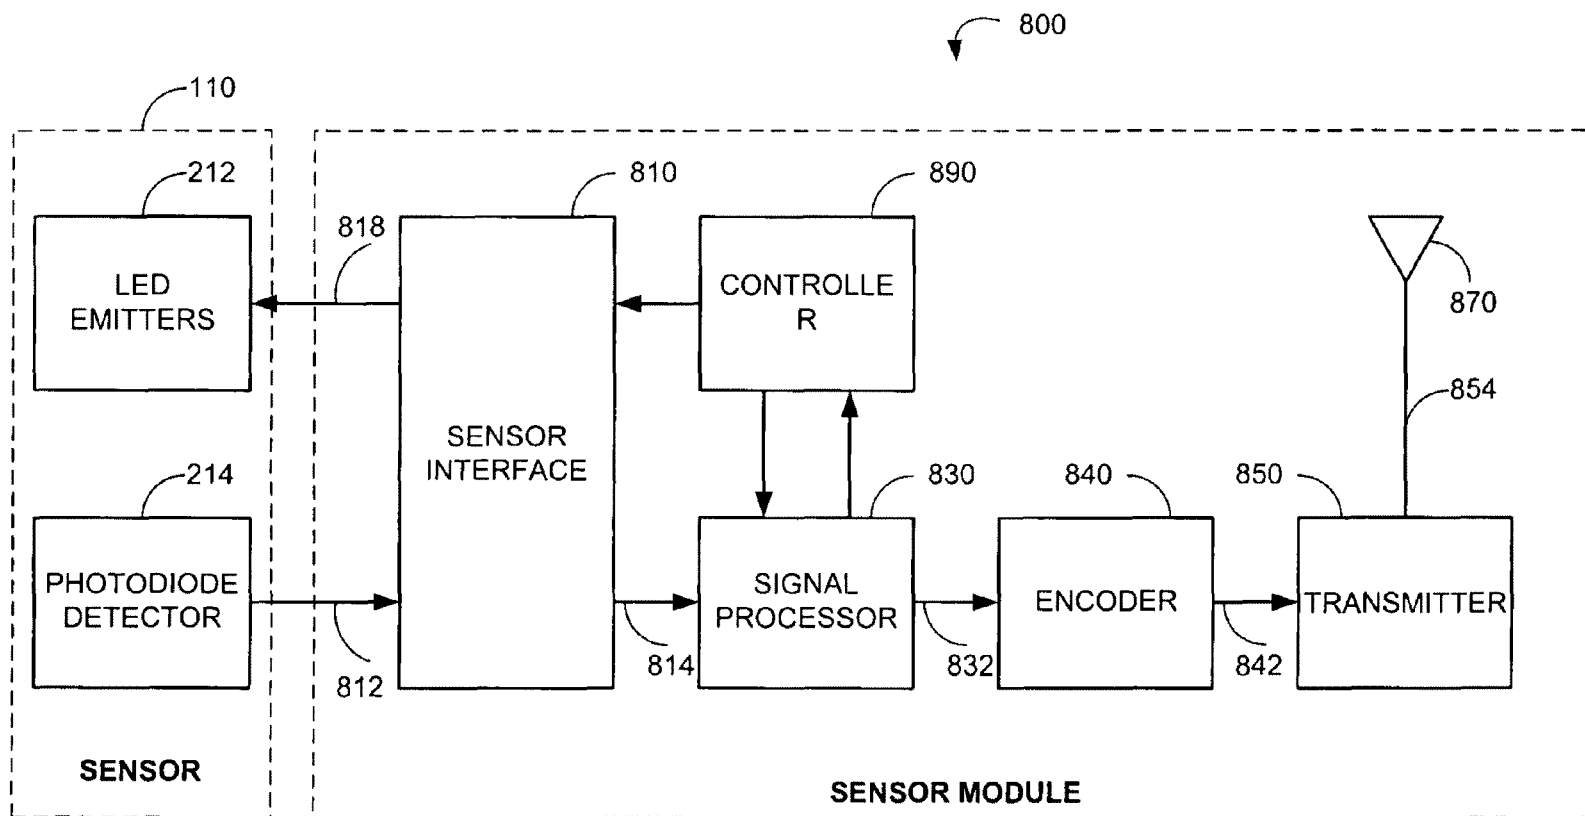


FIG. 8

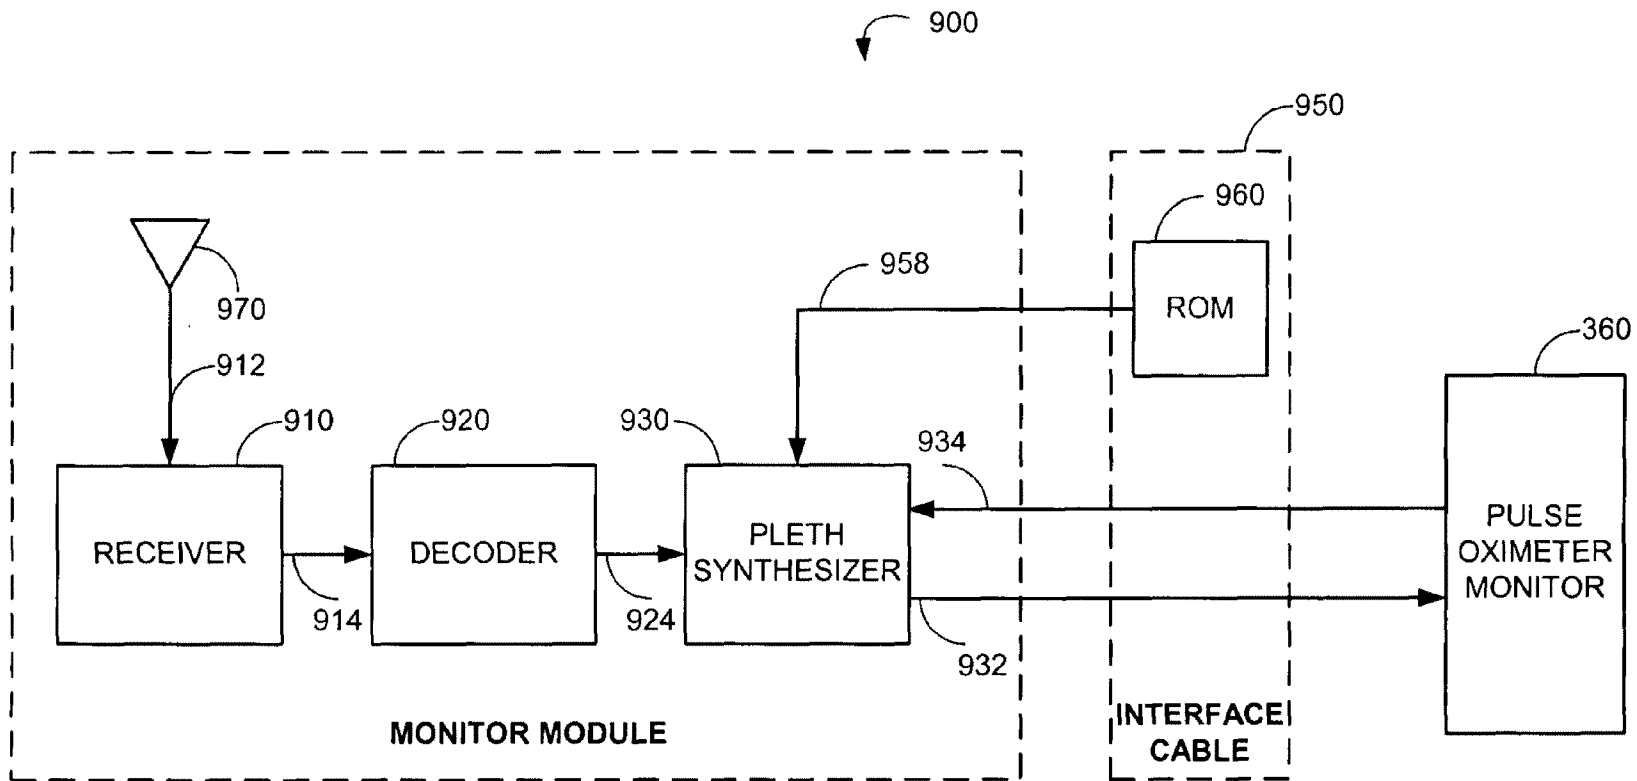


FIG. 9

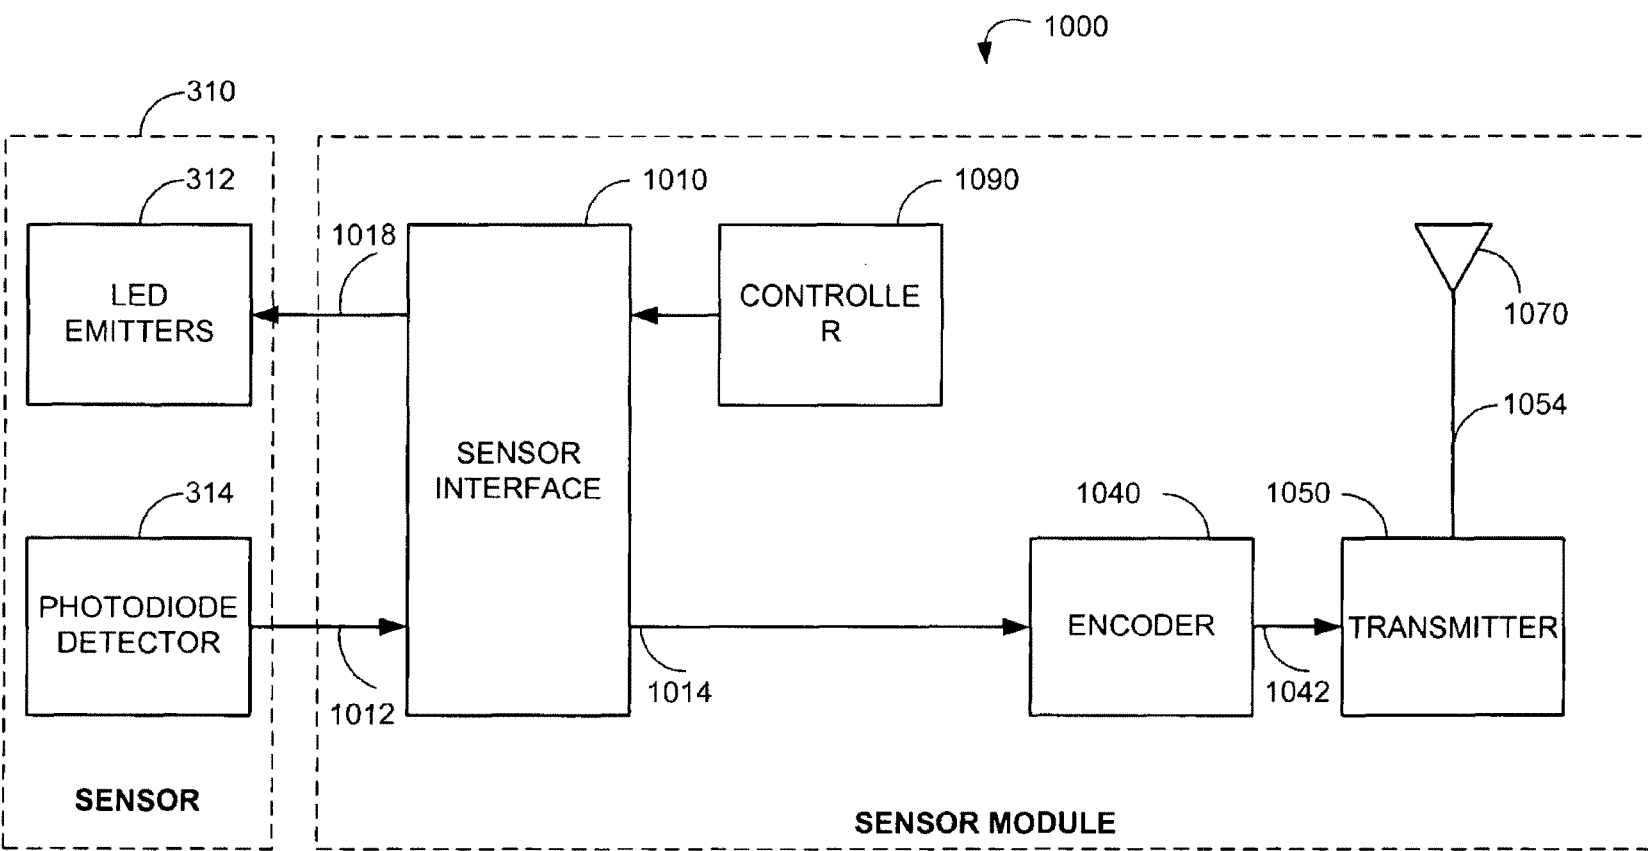


FIG. 10

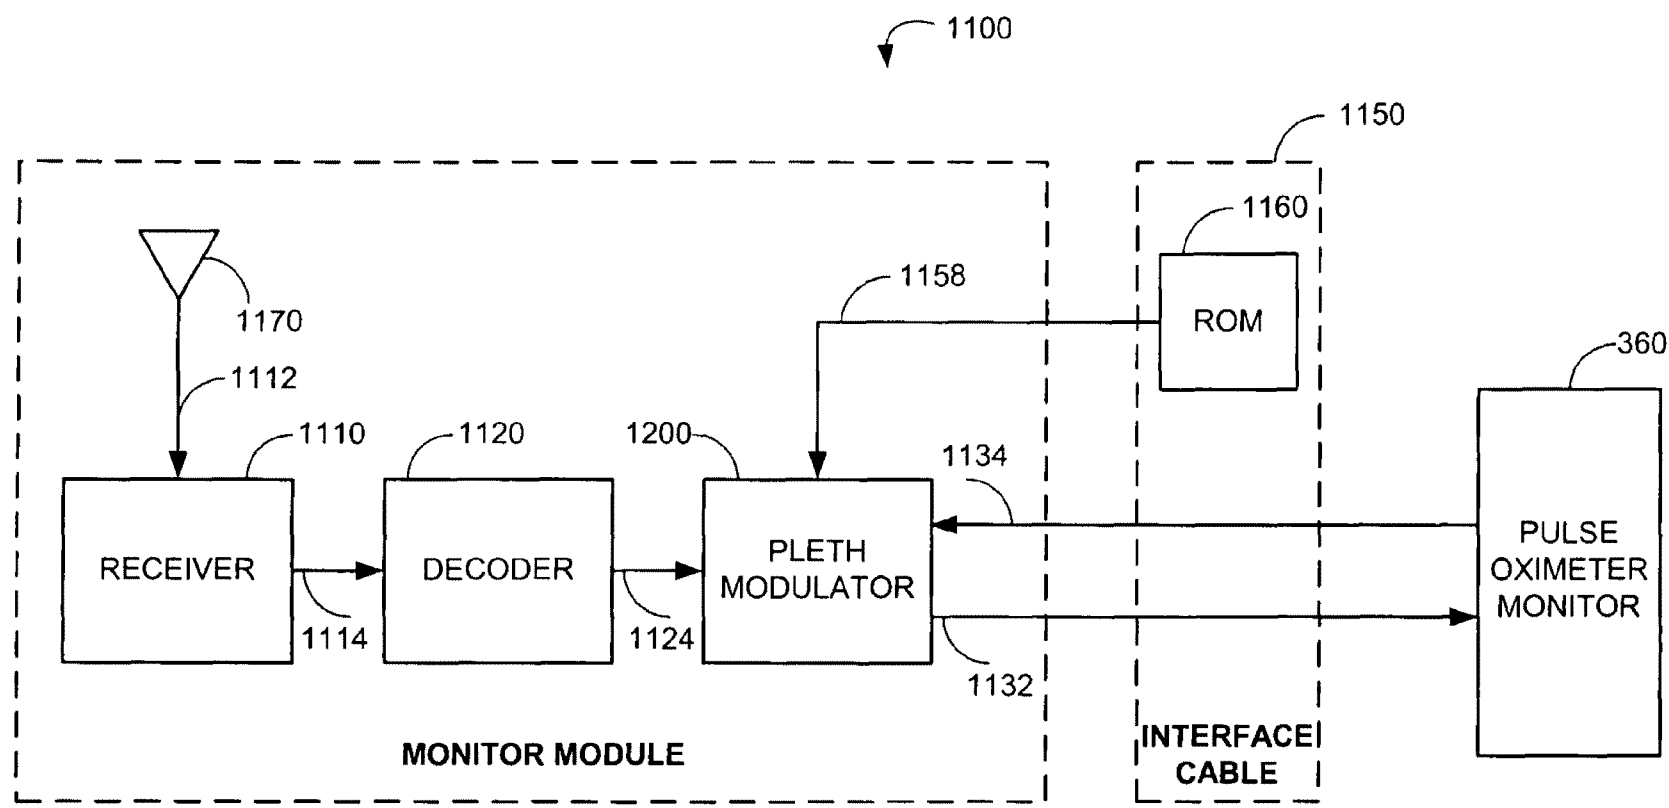


FIG. 11

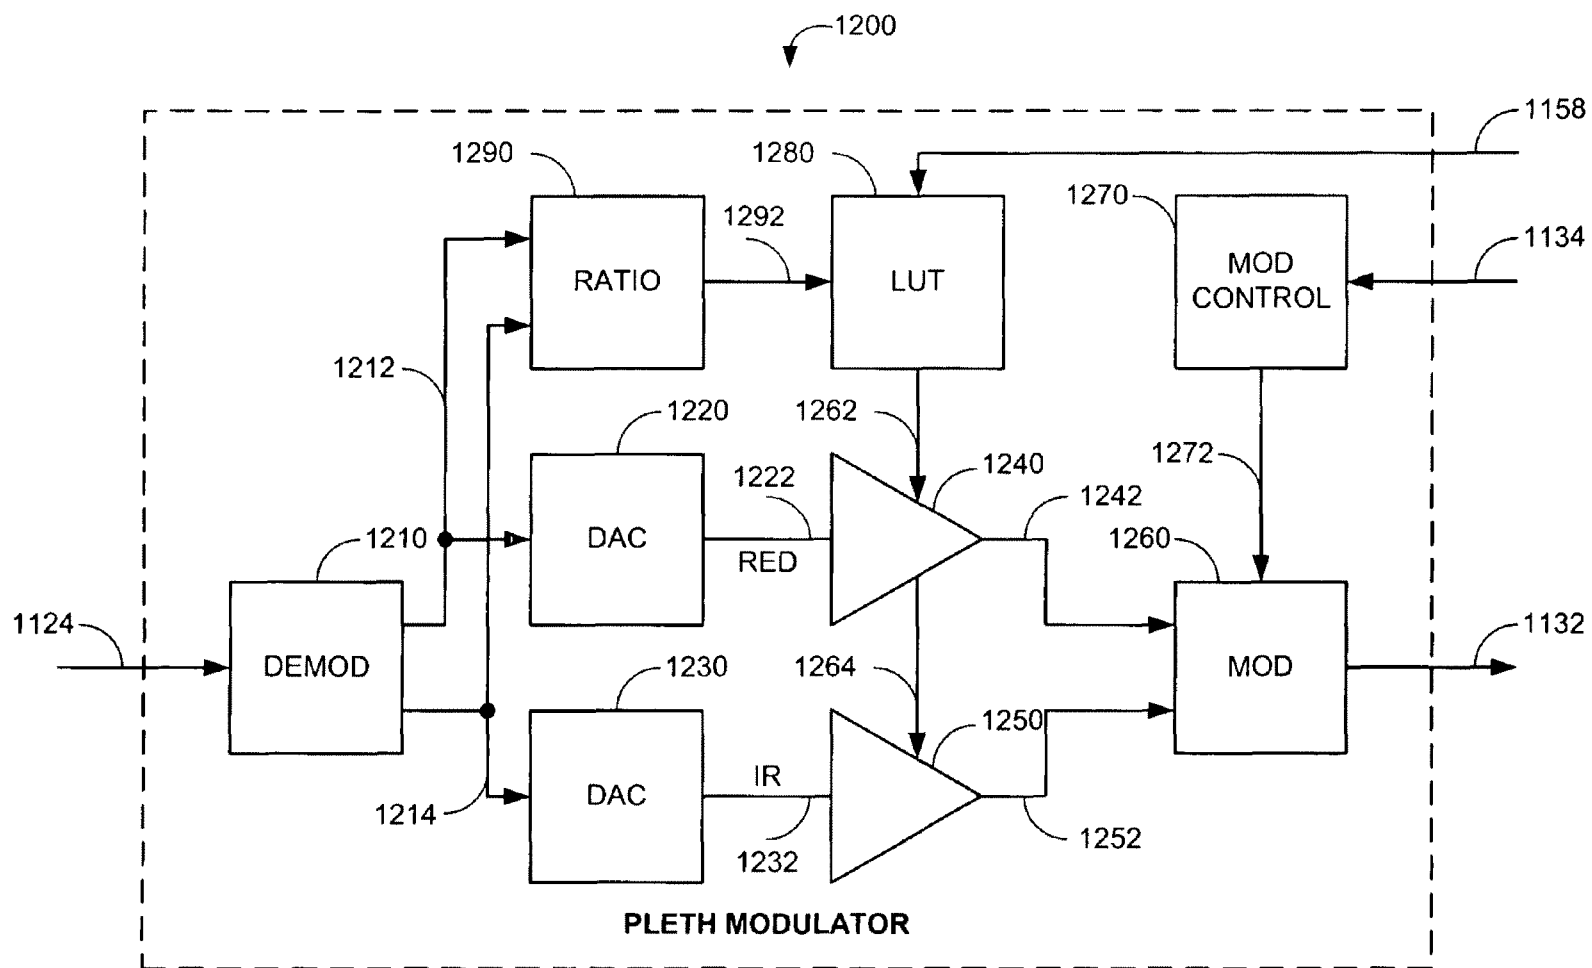


FIG. 12

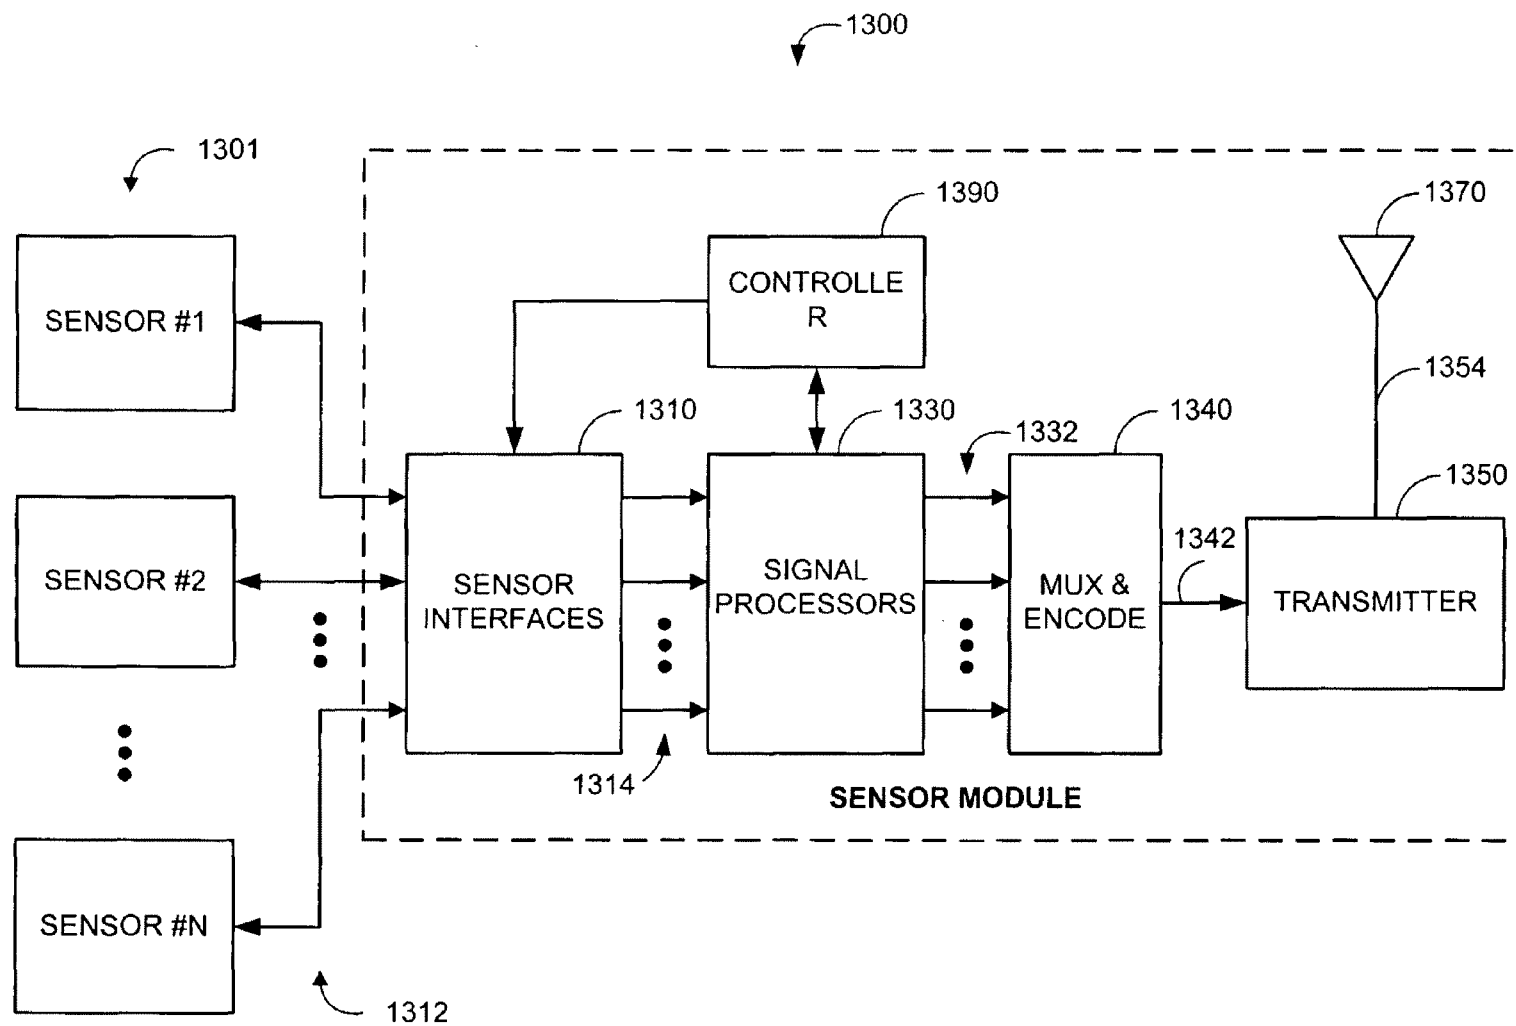


FIG. 13

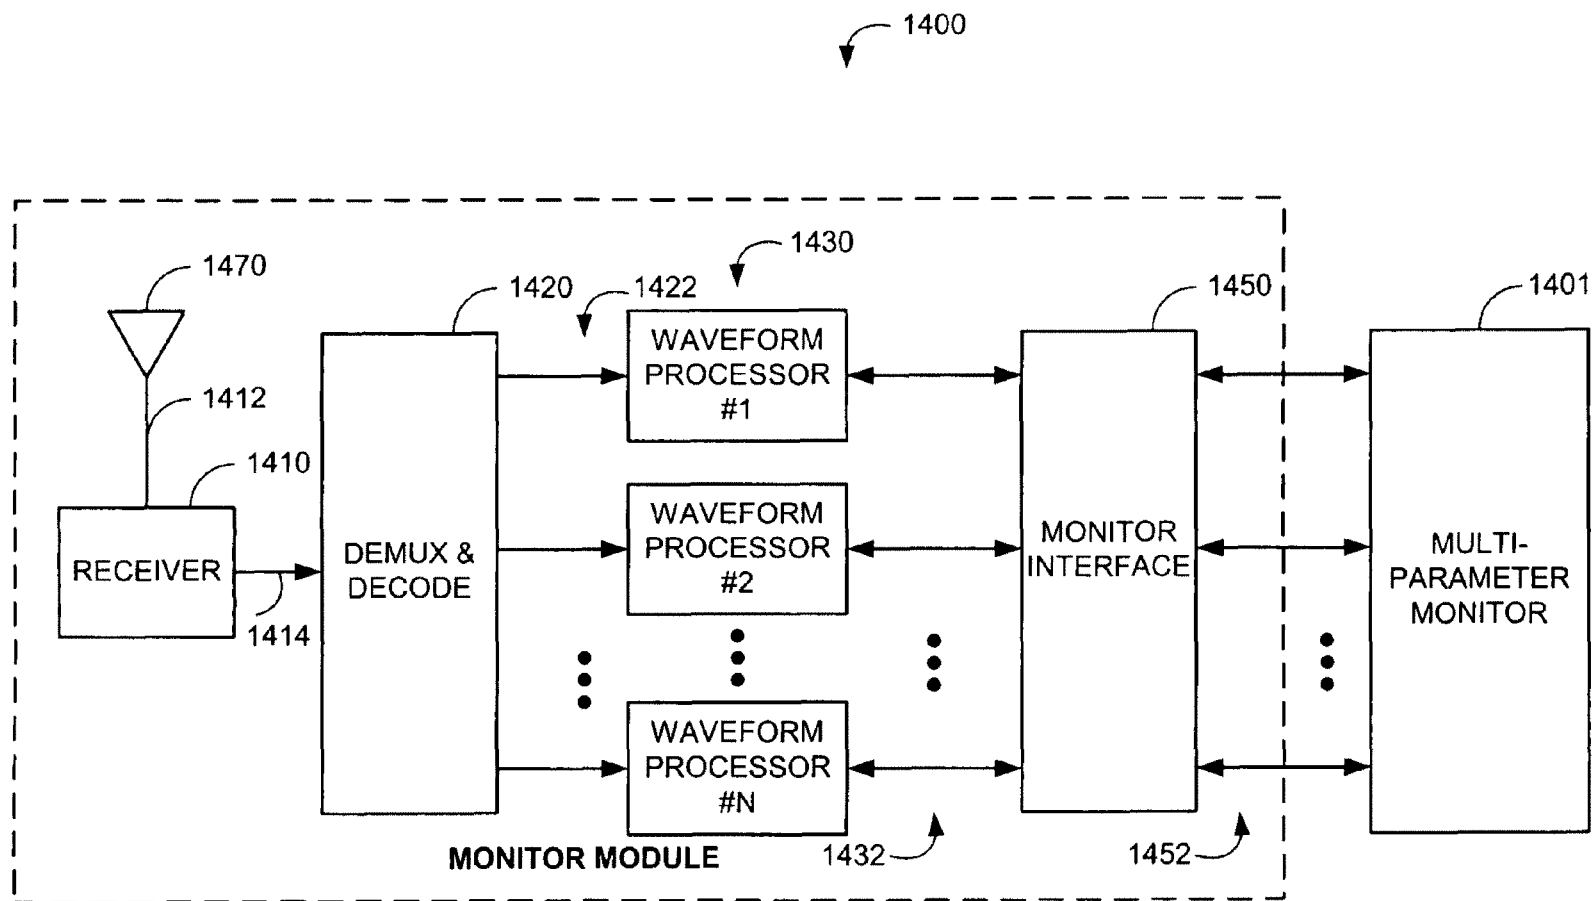


FIG. 14



1

## PHYSIOLOGICAL MEASUREMENT COMMUNICATIONS ADAPTER

### REFERENCE TO RELATED APPLICATION

The present application is a continuation of U.S. patent application Ser. No. 12/955,826, filed on Nov. 29, 2010, entitled "Physiological Measurement Communications Adapter," which is a continuation of U.S. patent application Ser. No. 11/417,006, filed on May 3, 2006, entitled "Physiological Measurement Communications Adapter," now U.S. Pat. No. 7,844,315, which claims priority benefit under 35 U.S.C. §120 to, and is a continuation of, U.S. patent application Ser. No. 11/048,330, filed Feb. 1, 2005, entitled "Physiological Measurement Communications Adapter," now U.S. Pat. No. 7,844,314, which is a continuation of U.S. patent application Ser. No. 10/377,933, entitled "Physiological Measurement Communications Adapter," now U.S. Pat. No. 6,850,788, which claims priority benefit under 35 U.S.C. §119(e) from U.S. Provisional Application No. 60/367,428, filed Mar. 25, 2002, entitled "physiological Measurement Communications Adapter." The present application also incorporates the foregoing utility disclosures herein by reference.

### BACKGROUND OF THE INVENTION

Patient vital sign monitoring may include measurements of blood oxygen, blood pressure, respiratory gas, and EKG among other parameters. Each of these physiological parameters typically requires a sensor in contact with a patient and a cable connecting the sensor to a monitoring device. For example, FIGS. 1-2 illustrate a conventional pulse oximetry system **100** used for the measurement of blood oxygen. As shown in FIG. 1, a pulse oximetry system has a sensor **110**, a patient cable **140** and a monitor **160**. The sensor **110** is typically attached to a finger **10** as shown. The sensor **110** has a plug **118** that inserts into a patient cable socket **142**. The monitor **160** has a socket **162** that accepts a patient cable plug **144**. The patient cable **140** transmits an LED drive signal **252** (FIG. 2) from the monitor **160** to the sensor **110** and a resulting detector signal **254** (FIG. 2) from the sensor **110** to the monitor **160**. The monitor **160** processes the detector signal **254** (FIG. 2) to provide, typically, a numerical readout of the patient's oxygen saturation, a numerical readout of pulse rate, and an audible indicator or "beep" that occurs in response to each arterial pulse.

As shown in FIG. 2, the sensor **110** has both red and infrared LED emitters **212** and a photodiode detector **214**. The monitor **160** has a sensor interface **271**, a signal processor **273**, a controller **275**, output drivers **276**, a display and audible indicator **278**, and a keypad **279**. The monitor **160** determines oxygen saturation by computing the differential absorption by arterial blood of the two wavelengths emitted by the sensor emitters **212**, as is well-known in the art. The sensor interface **271** provides LED drive current **252** which alternately activates the red and IR LED emitters **212**. The photodiode detector **214** generates a signal **254** corresponding to the red and infrared light energy attenuated from transmission through the patient finger **10** (FIG. 1). The sensor interface **271** also has input circuitry for amplification, filtering and digitization of the detector signal **254**. The signal processor **273** calculates a ratio of detected red and infrared intensities, and an arterial oxygen saturation value is empirically determined based on that ratio. The controller **275** provides hardware and software interfaces for managing the display and audible indicator **278** and keypad **279**. The dis-

2

play and audible indicator **278** shows the computed oxygen status, as described above, and provides the pulse beep as well as alarms indicating oxygen desaturation events. The keypad **279** provides a user interface for setting alarm thresholds, alarm enablement, and display options, to name a few.

### SUMMARY OF THE INVENTION

Conventional physiological measurement systems are limited by the patient cable connection between sensor and monitor. A patient must be located in the immediate vicinity of the monitor. Also, patient relocation requires either disconnection of monitoring equipment and a corresponding loss of measurements or an awkward simultaneous movement of patient equipment and cables. Various devices have been proposed or implemented to provide wireless communication links between sensors and monitors, freeing patients from the patient cable tether. These devices, however, are incapable of working with the large installed base of existing monitors and sensors, requiring caregivers and medical institutions to suffer expensive wireless upgrades. It is desirable, therefore, to provide a communications adapter that is plug-compatible both with existing sensors and monitors and that implements a wireless link replacement for the patient cable.

An aspect of a physiological measurement communications adapter comprises a sensor interface configured to receive a sensor signal. A transmitter modulates a first baseband signal responsive to the sensor signal so as to generate a transmit signal. A receiver demodulates a receive signal corresponding to the transmit signal so as to generate a second baseband signal corresponding to the first baseband signal. Further, a monitor interface is configured to communicate a waveform responsive to the second baseband signal to a sensor port of a monitor. The waveform is adapted to the monitor so that measurements derived by the monitor from the waveform are generally equivalent to measurements derivable from the sensor signal. The communications adapter may further comprise a signal processor having an input in communications with the sensor interface, where the signal processor is operable to derive a parameter responsive to the sensor signal and where the first baseband signal is responsive to the parameter. The parameter may correspond to at least one of a measured oxygen saturation and a pulse rate.

One embodiment may further comprise a waveform generator that synthesizes the waveform from a predetermined shape. The waveform generator synthesizes the waveform at a frequency adjusted to be generally equivalent to the pulse rate. The waveform may have a first amplitude and a second amplitude, and the waveform generator may be configured to adjusted the amplitudes so that measurements derived by the monitor are generally equivalent to a measured oxygen saturation.

In another embodiment, the sensor interface is operable on the sensor signal to provide a plethysmograph signal output, where the first baseband signal is responsive to the plethysmograph signal. This embodiment may further comprise a waveform modulator that modifies a decoded signal responsive to the second baseband signal to provide the waveform. The waveform modulator may comprise a demodulator that separates a first signal and a second signal from the decoded signal, an amplifier that adjusts amplitudes of the first and second signals to generate a first adjusted signal and a second adjusted signal, and a modulator that combines the first and second adjusted signals into the waveform. The amplitudes of the first and second signals may be responsive to predetermined calibration data for the sensor and the monitor.

## 3

An aspect of a physiological measurement communications adapter method comprises the steps of inputting a sensor signal at a patient location, communicating patient data derived from the sensor signal between the patient location and a monitor location, constructing a waveform at the monitor location responsive to the sensor signal, and providing the waveform to a monitor via a sensor port. The waveform is constructed so that the monitor calculates a parameter generally equivalent to a measurement derivable from the sensor signal.

In one embodiment, the communicating step may comprise the substeps of deriving a conditioned signal from the sensor signal, calculating a parameter signal from the conditioned signal, and transmitting the parameter signal from the patient location to the monitor location. The constructing step may comprise the substep of synthesizing the waveform from the parameter signal. In an alternative embodiment, the communicating step may comprise the substeps of deriving a conditioned signal from said sensor signal and transmitting the conditioned signal from the patient location to the monitor location. The constructing step may comprise the substeps of demodulating the conditioned signal and re-modulating the conditioned signal to generate the waveform. The providing step may comprise the substeps of inputting a monitor signal from an LED drive output of the sensor port, modulating the waveform in response to the monitor signal, and outputting the waveform on a detector input of the sensor port.

Another aspect of a physiological measurement communications adapter comprises a sensor interface means for inputting a sensor signal and outputting a conditioned signal, a transmitter means for sending data responsive to the sensor signal, and a receiver means for receiving the data. The communications adapter further comprises a waveform processor means for constructing a waveform from the data so that measurements derived by a monitor from the waveform are generally equivalent to measurements derivable from the sensor signal, and a monitor interface means for communicating the waveform to a sensor port of the monitor. The communications adapter may further comprise a signal processor means for deriving a parameter signal from the conditioned signal, where the data comprises the parameter signal. The waveform processor means may comprise a means for synthesizing the waveform from the parameter signal. The data may comprise the conditioned signal, and the waveform processor means may comprise a means for modulating the conditioned signal in response to the monitor.

## BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an illustration of a prior art pulse oximetry system;

FIG. 2 is a functional block diagram of a prior art pulse oximetry system;

FIG. 3 is an illustration of a physiological measurement communications adapter;

FIGS. 4A-B are illustrations of communications adapter sensor modules;

FIGS. 5A-C are illustrations of communications adapter monitor modules;

FIG. 6 is a functional block diagram of a communications adapter sensor module;

FIG. 7 is a functional block diagram of a communications adapter monitor module;

FIG. 8 is a functional block diagram of a sensor module configured to transmit measured pulse oximeter parameters;

FIG. 9 is a functional block diagram of a monitor module configured to receive measured pulse oximeter parameters;

## 4

FIG. 10 is a functional block diagram of a sensor module configured to transmit a plethysmograph;

FIG. 11 is a functional block diagram of a monitor module configured to receive a plethysmograph;

FIG. 12 is a functional block diagram of a waveform modulator;

FIG. 13 is a functional block diagram of a sensor module configured for multiple sensors; and

FIG. 14 is a functional block diagram of a monitor module configured for multiple sensors.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

## Overview

FIG. 3 illustrates one embodiment of a communications adapter. FIGS. 4-5 illustrate physical configurations for a communications adapter. In particular, FIGS. 4A-B illustrate sensor module configurations and FIGS. 5A-C illustrate monitor module configurations. FIGS. 6-14 illustrate communications adapter functions. In particular, FIGS. 6-7 illustrate general functions for a sensor module and a monitor module, respectively. FIGS. 8-9 functionally illustrate a communications adapter where derived pulse oximetry parameters, such as saturation and pulse rate are transmitted between a sensor module and a monitor module. Also, FIGS. 10-12 functionally illustrate a communications adapter where a plethysmograph is transmitted between a sensor module and a monitor module. FIGS. 13-14 functionally illustrate a multiple-parameter communications adapter.

FIG. 3 illustrates a communications adapter 300 having a sensor module 400 and a monitor module 500. The communications adapter 300 communicates patient data derived from a sensor 310 between the sensor module 400, which is located proximate a patient 20 and the monitor module 500, which is located proximate a monitor 360. A wireless link 340 is provided between the sensor module 400 and the monitor module 500, replacing the conventional patient cable, such as a pulse oximetry patient cable 140 (FIG. 1). Advantageously, the sensor module 400 is plug-compatible with a conventional sensor 310. In particular, the sensor connector 318 connects to the sensor module 400 in a similar manner as to a patient cable. Further, the sensor module 400 outputs a drive signal to the sensor 310 and inputs a sensor signal from the sensor 310 in an equivalent manner as a conventional monitor 360. The sensor module 400 may be battery powered or externally powered. External power may be for recharging internal batteries or for powering the sensor module during operation or both.

As shown in FIG. 3, the monitor module 500 is advantageously plug-compatible with a conventional monitor 360. In particular, the monitor's sensor port 362 connects to the monitor module 500 in a similar manner as to a patient cable, such as a pulse oximetry patient cable 140 (FIG. 1). Further, the monitor module 500 inputs a drive signal from the monitor 360 and outputs a corresponding sensor signal to the monitor 360 in an equivalent manner as a conventional sensor 310. As such, the combination sensor module 400 and monitor module 500 provide a plug-compatible wireless replacement for a patient cable, adapting an existing wired physiological measurement system into a wireless physiological measurement system. The monitor module 500 may be battery powered, powered from the monitor, such as by tapping current from a monitor's LED drive, or externally powered from an independent AC or DC power source.

Although a communications adapter 300 is described herein with respect to a pulse oximetry sensor and monitor,

5

one of ordinary skill in the art will recognize that a communications adapter may provide a plug-compatible wireless replace for a patient cable that connects any physiological sensor and corresponding monitor. For example, a communications adapter 300 may be applied to a biopotential sensor, a non-invasive blood pressure (NIBP) sensor, a respiratory rate sensor, a glucose sensor and the corresponding monitors, to name a few.

#### Sensor Module Physical Configurations

FIGS. 4A-B illustrate physical embodiments of a sensor module 400. FIG. 4A illustrates a wrist-mounted module 410 having a wrist strap 411, a case 412 and an auxiliary cable 420. The case 412 contains the sensor module electronics, which are functionally described with respect to FIG. 6, below. The case 412 is mounted to the wrist strap 411, which attaches the wrist-mounted module 410 to a patient 20. The auxiliary cable 420 mates to a sensor connector 318 and a module connector 414, providing a wired link between a conventional sensor 310 and the wrist-mounted module 410. Alternatively, the auxiliary cable 420 is directly wired to the sensor module 400. The wrist-mounted module 410 may have a display 415 that shows sensor measurements, module status and other visual indicators, such as monitor status. The wrist-mounted module 410 may also have keys (not shown) or other input mechanisms to control its operational mode and characteristics. In an alternative embodiment, the sensor 310 may have a tail (not shown) that connects directly to the wrist-mounted module 410, eliminating the auxiliary cable 420.

FIG. 4B illustrates a clip-on module 460 having a clip 461, a case 462 and an auxiliary cable 470. The clip 461 attaches the clip-on module 460 to patient clothing or objects near a patient 20, such as a bed frame. The auxiliary cable 470 mates to the sensor connector 318 and functions as for the auxiliary cable 420 (FIG. 4A) of the wrist-mounted module 410 (FIG. 4A), described above. The clip-on module 460 may have a display 463 and keys 464 as for the wrist-mounted module 410 (FIG. 4A). Either the wrist-mounted module 410 or the clip-on module 460 may have other input or output ports (not shown) that download software, configure the module, or provide a wired connection to other measurement instruments or computing devices, to name a few examples.

#### Monitor Module Physical Configurations

FIGS. 5A-C illustrate physical embodiments of a monitor module 500. FIG. 5A illustrates a direct-connect module 510 having a case 512 and an integrated monitor connector 514. The case 512 contains the monitor module electronics, which are functionally described with respect to FIG. 7, below. The monitor connector 514 mimics that of the monitor end of a patient cable, such as a pulse oximetry patient cable 140 (FIG. 1), and electrically and mechanically connects the monitor module 510 to the monitor 360 via the monitor's sensor port 362.

FIG. 5B illustrates a cable-connect module 540 having a case 542 and an auxiliary cable 550. The case 542 functions as for the direct-connect module 510 (FIG. 5A), described above. Instead of directly plugging into the monitor 360, the cable-connect module 540 utilizes the auxiliary cable 550, which mimics the monitor end of a patient cable, such as a pulse oximetry patient cable 140 (FIG. 1), and electrically connects the cable-connect module 540 to the monitor sensor port 362.

FIG. 5C illustrates a plug-in module 570 having a plug-in case 572 and an auxiliary cable 580. The plug-in case 572 is mechanically compatible with the plug-in chassis of a multiparameter monitor 370 and may or may not electrically connect to the chassis backplane. The auxiliary cable 580 mimics a patient cable and electrically connects the plug-in module

6

570 to the sensor port 372 of another plug-in device. A direct-connect module 510 (FIG. 5A) or a cable-connect module 540 (FIG. 5B) may also be used with a multiparameter monitor 370.

In a multiparameter embodiment, such as described with respect to FIGS. 13-14, below, a monitor module 500 may connect to multiple plug-in devices of a multiparameter monitor 370. For example, a cable-connect module 540 (FIG. 5B) may have multiple auxiliary cables 550 (FIG. 5B) that connect to multiple plug-in devices installed within a multiparameter monitor chassis. Similarly, a plug-in module 570 may have one or more auxiliary cables 580 with multiple connectors for attaching to the sensor ports 372 of multiple plug-in devices.

#### Communications Adapter Functions

FIGS. 6-7 illustrate functional embodiments of a communications adapter. FIG. 6 illustrates a sensor module 400 having a sensor interface 610, a signal processor 630, an encoder 640, a transmitter 650 and a transmitting antenna 670. A physiological sensor 310 provides an input sensor signal 612 at the sensor connector 318. Depending on the sensor 310, the sensor module 400 may provide one or more drive signals 618 to the sensor 310. The sensor interface 610 inputs the sensor signal 612 and outputs a conditioned signal 614. The conditioned signal 614 may be coupled to the transmitter 650 or further processed by a signal processor 630. If the sensor module configuration utilizes a signal processor 630, it derives a parameter signal 632 responsive to the sensor signal 612, which is then coupled to the transmitter 650. Regardless, the transmitter 650 inputs a baseband signal 642 that is responsive to the sensor signal 612. The transmitter 650 modulates the baseband signal 642 with a carrier to generate a transmit signal 654. The transmit signal 654 may be derived by various amplitude, frequency or phase modulation schemes, as is well known in the art. The transmit signal 654 is coupled to the transmit antenna 670, which provides wireless communications to a corresponding receive antenna 770 (FIG. 7), as described below.

As shown in FIG. 6, the sensor interface 610 conditions and digitizes the sensor signal 612 to generate the conditioned signal 614. Sensor signal conditioning may be performed in the analog domain or digital domain or both and may include amplification and filtering in the analog domain and filtering, buffering and data rate modification in the digital domain, to name a few. The resulting conditioned signal 614 is responsive to the sensor signal 612 and may be used to calculate or derive a parameter signal 632.

Further shown in FIG. 6, the signal processor 630 performs signal processing on the conditioned signal 614 to generate the parameter signal 632. The signal processing may include buffering, digital filtering, smoothing, averaging, adaptive filtering and frequency transforms to name a few. The resulting parameter signal 632 may be a measurement calculated or derived from the conditioned signal, such as oxygen saturation, pulse rate, blood glucose, blood pressure and EKG to name a few. Also, the parameter signal 632 may be an intermediate result from which the above-stated measurements may be calculated or derived.

As described above, the sensor interface 610 performs mixed analog and digital pre-processing of an analog sensor signal and provides a digital output signal to the signal processor 630. The signal processor 630 then performs digital post-processing of the front-end processor output. In alternative embodiments, the input sensor signal 612 and the output conditioned signal 614 may be either analog or digital, the

7

front-end processing may be purely analog or purely digital, and the back-end processing may be purely analog or mixed analog or digital.

In addition, FIG. 6 shows an encoder 640, which translates a digital word or serial bit stream, for example, into the baseband signal 642, as is well-known in the art. The baseband signal 642 comprises the symbol stream that drives the transmit signal 654 modulation, and may be a single signal or multiple related signal components, such as in-phase and quadrature signals. The encoder 640 may include data compression and redundancy, also well-known in the art.

FIG. 7 illustrates a monitor module 500 having a receive antenna 770, a receiver 710, a decoder 720, a waveform processor 730 and a monitor interface 750. A receive signal 712 is coupled from the receive antenna 770, which provides wireless communications to a corresponding transmit antenna 670 (FIG. 6), as described above. The receiver 710 inputs the receive signal 712, which corresponds to the transmit signal 654 (FIG. 6). The receiver 710 demodulates the receive signal to generate a baseband signal 714. The decoder 720 translates the symbols of the demodulated baseband signal 714 into a decoded signal 724, such as a digital word stream or bit stream. The waveform processor 730 inputs the decoded signal 724 and generates a constructed signal 732. The monitor interface 750 is configured to communicate the constructed signal 732 to a sensor port 362 of a monitor 360. The monitor 360 may output a sensor drive signal 754, which the monitor interface 750 inputs to the waveform processor 730 as a monitor drive signal 734. The waveform processor 730 may utilize the monitor drive signal 734 to generate the constructed signal 732. The monitor interface 750 may also provide characterization information 758 to the waveform processor 730, relating to the monitor 360, the sensor 310 or both, that the waveform processor 730 utilizes to generate the constructed signal 732.

The constructed signal 732 is adapted to the monitor 360 so that measurements derived by the monitor 360 from the constructed signal 732 are generally equivalent to measurements derivable from the sensor signal 612 (FIG. 6). Note that the sensor 310 (FIG. 6) may or may not be directly compatible with the monitor 360. If the sensor 310 (FIG. 6) is compatible with the monitor 360, the constructed signal 732 is generated so that measurements derived by the monitor 360 from the constructed signal 732 are generally equivalent (within clinical significance) with those derivable directly from the sensor signal 612 (FIG. 6). If the sensor 310 (FIG. 6) is not compatible with the monitor 360, the constructed signal 732 is generated so that measurements derived by the monitor 360 from the constructed signal 732 are generally equivalent to those derivable directly from the sensor signal 612 (FIG. 6) using a compatible monitor.

#### Wireless Pulse Oximetry

FIGS. 8-11 illustrate pulse oximeter embodiments of a communications adapter. FIGS. 8-9 illustrate a sensor module and a monitor module, respectively, configured to communicate measured pulse oximeter parameters. FIG. 10-11 illustrate a sensor module and a monitor module, respectively, configured to communicate a plethysmograph signal. Parameter Transmission

FIG. 8 illustrates a pulse oximetry sensor module 800 having a sensor interface 810, signal processor 830, encoder 840, transmitter 850, transmitting antenna 870 and controller 890. The sensor interface 810, signal processor 830 and controller 890 function as described with respect to FIG. 2, above. The sensor interface 810 communicates with a standard pulse oximetry sensor 310, providing an LED drive signal 818 to the LED emitters 312 and receiving a sensor

8

signal 812 from the detector 314 in response. The sensor interface 810 provides front-end processing of the sensor signal 812, also described above, providing a plethysmograph signal 814 to the signal processor 830. The signal processor 830 then derives a parameter signal 832 that comprises a real time measurement of oxygen saturation and pulse rate. The parameter signal 832 may include other parameters, such as measurements of perfusion index and signal quality. In one embodiment, the signal processor is an MS-5 or MS-7 board available from Masimo Corporation, Irvine, Calif.

As shown in FIG. 8, the encoder 840, the transmitter 850 and the transmitting antenna 870 function as described with respect to FIG. 6, above. For example, the parameter signal 832 may be a digital word stream that is serialized into a bit stream and encoded into a baseband signal 842. The baseband signal 842 may be, for example, two bit symbols that drive a quadrature phase shift keyed (QPSK) modulator in the transmitter 850. Other encodings and modulations are also applicable, as described above. The transmitter 850 inputs the baseband signal 842 and generates a transmit signal 854 that is a modulated carrier having a frequency suitable for short-range transmission, such as within a hospital room, doctor's office, emergency vehicle or critical care ward, to name a few. The transmit signal 854 is coupled to the transmit antenna 870, which provides wireless communications to a corresponding receive antenna 970 (FIG. 9), as described below.

FIG. 9 illustrates a monitor module 900 having a receive antenna 970, a receiver 910, a decoder 920, a waveform generator 930 and an interface cable 950. The receive antenna 970, receiver 910 and decoder 920 function as described with respect to FIG. 7, above. In particular, the receive signal 912 is coupled from the receive antenna 970, which provides wireless communications to a corresponding transmit antenna 870 (FIG. 8). The receiver 910 inputs the receive signal 912, which corresponds to the transmit signal 854 (FIG. 8). The receiver 910 demodulates the receive signal 912 to generate a baseband signal 914. Not accounting for transmission errors, the baseband signal 914 corresponds to the sensor module baseband signal 842 (FIG. 8), for example a symbol stream of two bits each. The decoder 920 assembles the baseband signal 914 into a parameter signal 924, which, for example, may be a sequence of digital words corresponding to oxygen saturation and pulse rate. Again, not accounting for transmission errors, the monitor module parameter signal 924 corresponds to the sensor module parameter signal 832 (FIG. 8), derived by the signal processor 830 (FIG. 8).

Also shown in FIG. 9, the waveform generator 930 is a particular embodiment of the waveform processor 730 (FIG. 7) described above. The waveform generator 930 generates a synthesized waveform 932 that the pulse oximeter monitor 360 can process to calculate  $SpO_2$  and pulse rate values or exception messages. In the present embodiment, the waveform generator output does not reflect a physiological waveform. In particular, the synthesized waveform is not physiological data from the sensor module 800, but is a waveform synthesized from predetermined stored waveform data to cause the monitor 360 to calculate oxygen saturation and pulse rate equivalent to or generally equivalent (within clinical significance) to that calculated by the signal processor 830 (FIG. 8). The actual intensity signal from the patient received by the detector 314 (FIG. 8) is not provided to the monitor 360 in the present embodiment. Indeed, the waveform provided to the monitor 360 will usually not resemble a plethysmographic waveform or other physiological data from the patient to whom the sensor module 800 (FIG. 8) is attached.

The synthesized waveform 932 is modulated according to the drive signal input 934. That is, the pulse oximeter monitor

360 expects to receive a red and IR modulated intensity signal originating from a detector, as described with respect to FIGS. 1-2, above. The waveform generator 930 generates the synthesized waveform 932 with a predetermined shape, such as a triangular or sawtooth waveform stored in waveform generator memory or derived by a waveform generator algorithm. The waveform is modulated synchronously with the drive input 934 with first and second amplitudes that are processed in the monitor 360 as red and IR portions of a sensor signal. The frequency and the first and second amplitudes are adjusted so that pulse rate and oxygen saturation measurements derived by the pulse oximeter monitor 360 are generally equivalent to the parameter measurements derived by the signal processor 830 (FIG. 8), as described above. One embodiment of a waveform generator 930 is described in U.S. Patent Application No. 60/117,097 entitled "Universal/Upgrading Pulse Oximeter," assigned to Masimo Corporation, Irvine, Calif. and incorporated by reference herein. Although the waveform generator 930 is described above as synthesizing a waveform that does not resemble a physiological signal, one of ordinary skill will recognize that another embodiment of the waveform generator 930 could incorporate, for example, a plethysmograph simulator or other physiological signal simulator.

Further shown in FIG. 9, the interface cable 950 functions in a manner similar to the monitor interface 750 (FIG. 7) described above. The interface cable 950 is configured to communicate the synthesized waveform 932 to the monitor 360 sensor port and to communicate the sensor drive signal 934 to the waveform generator 930. The interface cable 950 may include a ROM 960 that contains monitor and sensor characterization data. The ROM 960 is read by the waveform generator 930 so that the synthesized waveform 932 is adapted to a particular monitor 360. For example, the ROM 960 may contain calibration data of red/IR versus oxygen saturation, waveform amplitude and waveform shape information. An interface cable is described in U.S. Patent Application No. 60/117,092, referenced above. Monitor-specific SatShare™ brand interface cables are available from Masimo Corporation, Irvine, Calif. In an alternative embodiment, such as a direct connect monitor module as illustrated in FIG. 5A, an interface cable 950 is not used and the ROM 960 may be incorporated within the monitor module 900 itself.

#### Plethysmograph Transmission

FIG. 10 illustrates another pulse oximetry sensor module 1000 having a sensor interface 1010, encoder 1040, transmitter 1050, transmitting antenna 1070 and controller 1090, which have the corresponding functions as those described with respect to FIG. 8, above. The encoder 1040, however, inputs a plethysmograph signal 1014 rather than oxygen saturation and pulse rate measurements 832 (FIG. 8). Thus, the sensor module 1000 according to this embodiment encodes and transmits a plethysmograph signal 1014 to a corresponding monitor module 1100 (FIG. 11) in contrast to derived physiological parameters, such as oxygen saturation and pulse rate. The plethysmograph signal 1014 is illustrated in FIG. 10 as being a direct output from the sensor interface 1010. In another embodiment, the sensor module 1000 incorporates a decimation processor, not shown, after the sensor interface 1010 so as to provide a plethysmograph signal 1014 having a reduced sample rate.

FIG. 11 illustrates another pulse oximetry monitor module 1100 having a receive antenna 1170, a receiver 1110, a decoder 1120 and an interface cable 1150, which have the corresponding functions as those described with respect to FIG. 9, above. This monitor module embodiment 1100, however, has a waveform modulator 1200 rather than a waveform

generator 930 (FIG. 9), as described above. The waveform modulator 1200 inputs a plethysmograph signal from the decoder 1120 rather than oxygen saturation and pulse rate measurements, as described with respect to FIG. 9, above. Further, the waveform modulator 1200 provides an modulated waveform 1132 to the pulse oximeter monitor 360 rather than a synthesized waveform, as described with respect to FIG. 9. The modulated waveform 1132 is a plethysmographic waveform modulated according to the monitor drive signal input 1134. That is, the waveform modulator 1200 does not synthesize a waveform, but rather modifies the received plethysmograph signal 1124 to cause the monitor 360 to calculate oxygen saturation and pulse rate generally equivalent (within clinical significance) to that derivable by a compatible, calibrated pulse oximeter directly from the sensor signal 1012 (FIG. 10). The waveform modulator 1200 is described in further detail with respect to FIG. 12, below.

FIG. 12 shows a waveform modulator 1200 having a demodulator 1210, a red digital-to-analog converter (DAC) 1220, an IR DAC 1230, a red amplifier 1240, an IR amplifier 1250, a modulator 1260, a modulator control 1270, a look-up table (LUT) 1280 and a ratio calculator 1290. The waveform modulator 1200 demodulates red and IR plethysmographs ("pleths") from the decoder output 1124 into a separate red pleth 1222 and IR pleth 1232. The waveform modulator 1200 also adjusts the amplitudes of the pleths 1222, 1232 according to stored calibration curves for the sensor 310 (FIG. 10) and the monitor 360 (FIG. 11). Further, the waveform modulator 1200 re-modulates the adjusted red pleth 1242 and adjusted IR pleth 1252, generating a modulated waveform 1132 to the monitor 360 (FIG. 11).

As shown in FIG. 12, the demodulator 1210 performs the demodulation function described above, generating digital red and IR pleth signals 1212, 1214. The DACs 1220, 1230 convert the digital pleth signals 1212, 1214 to corresponding analog pleth signals 1222, 1232. The amplifiers 1240, 1250 have variable gain control inputs 1262, 1264 and perform the amplitude adjustment function described above, generating adjusted red and IR pleth signals 1242, 1252. The modulator 1260 performs the re-modulation function described above, combining the adjusted red and IR pleth signals 1242, 1252 according to a control signal 1272. The modulator control 1270 generates the control signal 1272 synchronously with the LED drive signal(s) 1134 from the monitor 360.

Also shown in FIG. 12, the ratio calculator 1290 derives a red/IR ratio from the demodulator outputs 1212, 1214. The LUT 1280 stores empirical calibration data for the sensor 310 (FIG. 10). The LUT 1280 also downloads monitor-specific calibration data from the ROM 1160 (FIG. 11) via the ROM output 1158. From this calibration data, the LUT 1280 determines a desired red/IR ratio for the modulated waveform 1132 and generates red and IR gain outputs 1262, 1264 to the corresponding amplifiers 1240, 1250, accordingly. A desired red/IR ratio is one that allows the monitor 360 (FIG. 11) to derive oxygen saturation measurements from the modulated waveform 1132 that are generally equivalent to that derivable directly from the sensor signal 1012 (FIG. 10).

One of ordinary skill in the art will recognize that some of the signal processing functions described with respect to FIGS. 8-11 may be performed either within a sensor module or within a monitor module. Signal processing functions performed within a sensor module may advantageously reduce the transmission bandwidth to a monitor module at a cost of increased sensor module size and power consumption. Likewise, signal processing functions performed within a monitor module may reduce sensor module size and power consumption at a cost of increase transmission bandwidth.

11

For example, a monitor module embodiment **900** (FIG. 9) described above receives measured pulse oximeter parameters, such as oxygen saturation and pulse rate, and generates a corresponding synthesized waveform. In that embodiment, the oxygen saturation and pulse rate computations are performed within a sensor module **800** (FIG. 8). Another monitor module embodiment **1100** (FIG. 11), also described above, receives a plethysmograph waveform and generates a remodulated waveform. In that embodiment, minimal signal processing is performed within a sensor module **1000** (FIG. 10). In yet another embodiment, not shown, a sensor module transmits a plethysmograph waveform or a decimated plethysmograph waveform having a reduced sample rate. A corresponding monitor module has a signal processor, such as described with respect to FIG. 8, in addition to a waveform generator, as described with respect to FIG. 9. The signal processor computes pulse oximeter parameters and the waveform generator generates a corresponding synthesized waveform, as described above. In this embodiment, minimal signal processing is performed within the sensor module, and the monitor module functions are performed on the pulse oximeter parameters computed within the monitor module.

#### Wireless Multiple Parameter Measurements

FIGS. 13-14 illustrate a multiple parameter communications adapter. FIG. 13 illustrates a multiple parameter sensor module **1300** having sensor interfaces **1310**, one or more signal processors **1330**, a multiplexer and encoder **1340**, a transmitter **1350**, a transmitting antenna **1370** and a controller **1390**. One or more physiological sensors **1301** provide input sensor signals **1312** to the sensor module **1300**. Depending on the particular sensors **1301**, the sensor module **1300** may provide one or more drive signals **1312** to the sensors **1301** as determined by the controller **1390**. The sensor interfaces **1310** input the sensor signals **1312** and output one or more conditioned signals **1314**. The conditioned signals **1314** may be coupled to the transmitter **1350** or further processed by the signal processors **1330**. If the sensor module configuration utilizes signal processors **1330**, it derives multiple parameter signals **1332** responsive to the sensor signals **1312**, which are then coupled to the transmitter **1350**. Regardless, the transmitter **1350** inputs a baseband signal **1342** that is responsive to the sensor signals **1312**. The transmitter **1350** modulates the baseband signal **1342** with a carrier to generate a transmit signal **1354**, which is coupled to the transmit antenna **1370** and communicated to a corresponding receive antenna **1470** (FIG. 14), as described with respect to FIG. 6, above. Alternatively, there may be multiple baseband signals **1342**, and the transmitter **1350** may transmit on multiple frequency channels, where each channel conveys data responsive to one or more of the sensor signals **1314**.

As shown in FIG. 13, the sensor interface **1310** conditions and digitizes the sensor signals **1312** as described for a single sensor with respect to FIG. 6, above. The resulting conditioned signals **1314** are responsive to the sensor signals **1312**. The signal processors **1330** perform signal processing on the conditioned signals **1314** to derive parameter signals **1332**, as described for a single conditioned signal with respect to FIG. 6, above. The parameter signals **1332** may be physiological measurements such as oxygen saturation, pulse rate, blood glucose, blood pressure, EKG, respiration rate and body temperature to name a few, or may be intermediate results from which the above-stated measurements may be calculated or derived. The multiplexer and encoder **1340**

combines multiple digital word or serial bit streams into a single digital word or bit stream. The multiplexer and encoder

12

also encodes the digital word or bit stream to generate the baseband signal **1342**, as described with respect to FIG. 6, above.

FIG. 14 illustrates a multiple parameter monitor module **1400** having a receive antenna **1470**, a receiver **1410**, a demultiplexer and decoder **1420**, one or more waveform processors **1430** and a monitor interface **1450**. The receiver **1410** inputs and demodulates the receive signal **1412** corresponding to the transmit signal **1354** (FIG. 13) to generate a baseband signal **1414** as described with respect to FIG. 7, above. The demultiplexer and decoder **1420** separates the symbol streams corresponding to the multiple conditioned signals **1314** (FIG. 13) and/or parameter signals **1332** (FIG. 13) and translates these symbol streams into multiple decoded signals **1422**, as described for a single symbol stream with respect to FIG. 7, above. Alternatively, multiple frequency channels are received to generate multiple baseband signals, each of which are decoded to yield multiple decoded signals **1422**. The waveform processors **1430** input the decoded signals **1422** and generate multiple constructed signals **1432**, as described for a single decoded signal with respect to FIGS. 7-12, above. The monitor interface **1450** is configured to communicate the constructed signals **1432** to the sensor ports of a multiple parameter monitor **1401** or multiple single parameter monitors, in a manner similar to that for a single constructed signal, as described with respect to FIGS. 7-12, above. In particular, the constructed signals **1432** are adapted to the monitor **1401** so that measurements derived by the monitor **1401** from the constructed signals **1432** are generally equivalent to measurements derivable directly from the sensor signals **1312** (FIG. 13).

A physiological measurement communications adapter is described above with respect to wireless communications and, in particular, radio frequency communications. A sensor module and monitor module, however, may also communicate via wired communications, such as telephone, Internet or fiberoptic cable to name a few. Further, wireless communications can also utilize light frequencies, such as IR or laser to name a few.

A physiological measurement communications adapter has been disclosed in detail in connection with various embodiments. These embodiments are disclosed by way of examples only. One of ordinary skill in the art will appreciate many variations and modifications of a physiological measurement communications adapter within the scope of the claims that follow.

#### What is claimed is:

1. A wireless communications adapter configured to provide a monitor-compatible signal to a patient monitor that is useable by the patient monitor to determine a physiological parameter measurement, the wireless communications adapter comprising:

- a receiver configured to receive a wirelessly transmitted signal from a physiological sensor, the wirelessly transmitted signal including information from which a physiological parameter measurement may be derived; and
- a processor configured to obtain characterization information specific to a patient monitor and adapt the received wirelessly transmitted signal to a monitor-compatible signal utilizing the characterization information, the monitor-compatible signal adapted for compatibility with the patient monitor, the monitor-compatible signal usable by the patient monitor to determine a physiological parameter measurement consistent with physiological data collected by the physiological sensor.

## 13

2. The wireless communications adapter of claim 1 further comprising:

a monitor interface configured to output the monitor-compatible signal to a sensor port of the patient monitor.

3. The wireless communication adapter of claim 2, wherein the processor is configured to obtain the characterization information from the monitor interface.

4. The wireless communications adapter of claim 1 further comprising:

an adapter housing that houses the receiver and the processor and which further includes a monitor connector configured to electrically and mechanically connect the wireless communications adapter to the patient monitor via a sensor port of the patient monitor.

5. The wireless communications adapter of claim 4, wherein the monitor-compatible signal is output, by the processor, to the sensor port of the patient monitor via the monitor connector.

6. The wireless communications adapter of claim 1, wherein the characterization information is provided by the patient monitor.

7. The wireless communications adapter of claim 1 further comprising:

an adapter housing that houses the receiver and the processor and which further includes a monitor connector configured to electrically and mechanically connect the wireless communications adapter to one end of an auxiliary cable, wherein another end of the auxiliary cable may be connected to a patient monitor via a sensor port of the patient monitor.

8. The wireless communications adapter of claim 7, wherein the processor is configured to further adapt the received wirelessly transmitted signal based on calibration information provided by the auxiliary cable.

9. The wireless communications adapter of claim 1, wherein the physiological sensor comprises a noninvasive physiological sensor configured to provide a signal responsive to optical radiation attenuated by a tissue site of a patient.

10. A physiological measurement method comprising: receiving, at a wireless communications adapter, a wirelessly transmitted signal from a physiological sensor, the wirelessly transmitted signal including information from which a physiological parameter measurement may be derived; and

adapting, utilizing characterization information specific to a patient monitor and by a processor of the wireless communications adapter, the received wirelessly transmitted signal to a monitor-compatible signal, the monitor-compatible signal adapted for compatibility with the

## 14

patient monitor, the monitor-compatible signal usable by the patient monitor to determine a physiological parameter measurement consistent with physiological data collected by the physiological sensor.

11. The physiological measurement method of claim 10 further comprising:

outputting, by a monitor interface of the wireless communications adapter, the monitor-compatible signal to a sensor port of the patient monitor.

12. The physiological measurement method of claim 11 further comprising:

accessing, by the processor of the wireless communication adapter and from the monitor interface, the characterization information specific to the patient monitor.

13. The physiological measurement method of claim 10, further comprising:

providing a wireless communications adapter housing that houses the processor and which further includes a monitor connector; and

electrically and mechanically connecting, by the monitor connector, the wireless communications adapter to the patient monitor via a sensor port of the patient monitor.

14. The physiological measurement method of claim 13 further comprising:

outputting the monitor-compatible signal to the sensor port of the patient monitor via the monitor connector.

15. The physiological measurement method of claim 10, wherein the characterization information is provided by the patient monitor.

16. The physiological measurement method of claim 10 further comprising:

providing a wireless communications adapter housing that houses the processor and which further includes a monitor connector; and

electrically and mechanically connecting, by the monitor connector, the wireless communications adapter to one end of an auxiliary cable, wherein another end of the auxiliary cable may be connected to a patient monitor via a sensor port of the patient monitor.

17. The physiological measurement method of claim 16, wherein adapting the received wirelessly transmitted signal is further based on calibration information provided by the auxiliary cable.

18. The physiological measurement method of claim 10, wherein the physiological sensor comprises a noninvasive physiological sensor configured to provide a signal responsive to optical radiation attenuated by a tissue site of a patient.

\* \* \* \* \*