



US006843949B2

(12) **United States Patent**
Brady et al.

(10) **Patent No.:** **US 6,843,949 B2**
(45) **Date of Patent:** **Jan. 18, 2005**

(54) **PROCESS FOR ADJUSTING WVTR AND
OTHER PROPERTIES OF A POLYOLEFIN
FILM**

3,233,029 A 2/1966 Rasmussen 264/288
3,299,174 A 1/1967 Kuhre et al. 260/876
3,378,512 A 4/1968 Hamed et al. 260/33.6

(List continued on next page.)

FOREIGN PATENT DOCUMENTS

AU 577644 9/1988 B32B/33/00
AU 621048 4/1989 B32B/5/24
CA 1296225 2/1992 B01D/67/00
CA 1311181 12/1992 B32B/27/06

(List continued on next page.)

OTHER PUBLICATIONS

International Search Report for International Patent Appli-
cation No. PCTA/US 97/23705 dated May 14, 1998.
International Search Report for International Patent Appli-
cation No. PCT/US 97/24174 dated May 25, 1998.
International Search Report for International Patent Appli-
cation No. PCT/US 98/22200 dated Feb. 26, 1999.
International Search Report for International Patent Appli-
cation No. PCT/US 97/13579 dated Nov. 7, 1997.

(List continued on next page.)

Primary Examiner—Mark Eashoo

(74) *Attorney, Agent, or Firm*—Fish & Richardson P.C.

(57)

ABSTRACT

A process for rendering films, film composites, and articles made therefrom less resistant to passage of water vapor by passing a filled precursor film or film composite through the nip of interdigitating grooved rollers. The films or film composites are generally formed using a precursor film of a film forming polyolefin or polyolefin blend, with a relatively high filler loading and optionally an elastomer. A process is disclosed for making diapers or other disposable items where a relatively high water vapor is coupled with a resistance to liquid strikethrough. In one embodiment of the invention, the interdigitating grooved rollers are maintained in a temperature range of from about 91° F. to about 159° F.

(75) Inventors: **Kevin A. Brady**, Cary, IL (US); **John H. Mackay**, Lake Zurich, IL (US)

(73) Assignee: **Tredegar Film Products Corporation**,
Richmond, VA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 30 days.

(21) Appl. No.: **10/364,215**

(22) Filed: **Feb. 11, 2003**

(65) **Prior Publication Data**

US 2003/0168776 A1 Sep. 11, 2003

Related U.S. Application Data

(60) Division of application No. 09/883,764, filed on Jun. 18, 2001, now abandoned, which is a division of application No. 09/312,103, filed on May 14, 1999, now Pat. No. 6,258,308, which is a continuation-in-part of application No. 08/690,136, filed on Jul. 31, 1996, now Pat. No. 6,776,947.

(60) Provisional application No. 60/104,452, filed on Oct. 16, 1998, provisional application No. 60/104,455, filed on Oct. 16, 1998, provisional application No. 60/104,948, filed on Oct. 20, 1998, and provisional application No. 60/104,985, filed on Oct. 20, 1998.

(51) **Int. Cl.**⁷ **B29C 55/18**

(52) **U.S. Cl.** **264/210.2**; 264/288.8;
428/500


(58) **Field of Search** 264/210.2, 154,
264/288.8; 156/244.18, 206; 428/156, 163,
174, 175, 181, 308.4, 315.9, 516, 500;
422/290, 398

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,896,626 A 7/1959 Voigtman 128/287

22 Claims, 2 Drawing Sheets

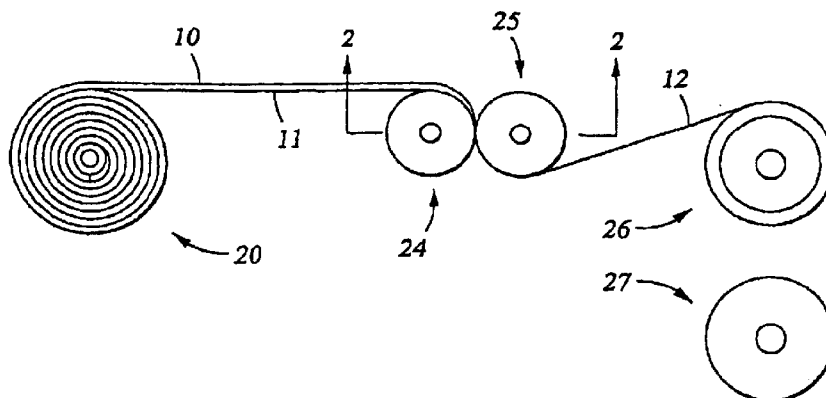

Attends Healthcare Products, Inc

EX1039

Page 1 of 19

U.S. PATENT DOCUMENTS

3,407,253 A	10/1968	Yoshimura et al.	264/289	4,357,439 A	11/1982	Blumel et al.	524/493
3,424,649 A	1/1969	Nyberg et al.	161/253	4,367,316 A	1/1983	Tanaka et al.	525/173
3,426,757 A	2/1969	Bierebaum et al.	128/156	4,368,565 A	1/1983	Schwarz	26/99
3,562,356 A	2/1971	Nyberg et al.	260/876	4,369,284 A	1/1983	Chen	524/476
3,642,967 A	2/1972	Doll	264/51	4,378,067 A	3/1983	Butler et al.	206/447
3,654,929 A	4/1972	Nilsson et al.	128/287	4,380,564 A	4/1983	Cancio et al.	428/167
3,678,134 A	7/1972	Middlebrook	260/876	4,381,364 A	4/1983	Georgacopoulos et al. .	524/376
3,683,917 A	8/1972	Comerford	128/287	4,385,142 A	5/1983	Bohm et al.	524/68
3,738,904 A	6/1973	Ikeda et al.	161/117	4,402,688 A	9/1983	Julemont	604/385
3,832,267 A	8/1974	Liu	161/116	4,418,112 A	11/1983	Toyoda et al.	428/212
3,837,773 A	9/1974	Raley	264/173	4,425,127 A	1/1984	Suzuki et al.	604/366
3,840,418 A	10/1974	Sabee	156/244	4,425,129 A	1/1984	Karami	604/385
3,844,865 A	10/1974	Elton et al.	156/229	4,427,737 A	1/1984	Cilento et al.	428/315.7
3,860,003 A	1/1975	Buell	128/287	4,435,141 A	3/1984	Weisner et al.	425/131.1
3,870,593 A	3/1975	Elton et al.	161/159	4,436,520 A	3/1984	Lipko et al.	604/385
3,894,827 A	7/1975	Riley et al.	425/363	4,438,167 A	3/1984	Schwarz	428/138
3,903,234 A	9/1975	Ikeda et al.	264/210 R	4,440,911 A	4/1984	Inoue et al.	525/301
RE28,606 E	11/1975	Ikeda et al.	428/155	4,446,189 A	5/1984	Romanek	428/152
RE28,608 E	11/1975	Dixon	29/211 R	4,449,977 A	5/1984	Korpman	604/366
3,927,144 A	12/1975	Hayashi et al.	260/888	4,450,026 A	5/1984	Pieniak et al.	156/164
3,939,562 A	2/1976	Suzuki	428/155	4,460,646 A	7/1984	Inoue et al.	428/344
3,941,859 A	3/1976	Batiuk et al.	260/897 B	4,463,156 A	7/1984	McGary, Jr. et al.	528/65
4,076,698 A	2/1978	Anderson et al.	526/348	4,465,729 A	8/1984	Cancio et al.	428/167
4,091,164 A	5/1978	Schwarz	428/404	4,472,328 A	9/1984	Sugimoto et al.	264/41
4,107,238 A	8/1978	Roper et al.	260/880	4,476,150 A	10/1984	Rose	427/10
4,116,892 A	9/1978	Schwarz	521/62	4,476,180 A	10/1984	Wnuk	428/220
4,116,914 A	9/1978	Coran et al.	260/30.6 R	4,479,989 A	10/1984	Mahal	428/35
4,131,654 A	12/1978	Herman et al.	260/897 B	4,480,061 A	10/1984	Coughlin et al.	524/13
4,132,698 A	1/1979	Gessler et al.	260/33.6 AQ	4,485,133 A	11/1984	Ohtsuka et al.	428/35
4,134,951 A	1/1979	Dow et al.	264/147	4,517,714 A	5/1985	Sneed et al.	28/103
4,135,023 A	1/1979	Lloyd et al.	428/167	4,525,531 A	6/1985	Zukosky et al.	525/92
4,144,008 A	3/1979	Schwarz	425/66	4,527,989 A	7/1985	Karami	604/385
4,151,137 A	4/1979	Duvdevani et al.	260/23.5	4,534,769 A	8/1985	De Jonckheere et al. ...	604/369
4,153,664 A	5/1979	Sabee	264/289	4,535,020 A	8/1985	Thomas et al.	428/131
4,153,751 A	5/1979	Schwarz	428/304	4,544,734 A	10/1985	McCready	528/288
4,171,411 A	10/1979	Ehrenfreund	521/98	4,556,688 A	12/1985	McCready et al.	525/33
4,173,612 A	11/1979	Kelly	264/176 R	4,556,705 A	12/1985	McCready	528/289
4,205,021 A	5/1980	Morita et al.	525/240	4,585,447 A	4/1986	Karami	604/385
4,210,709 A	7/1980	Doi et al.	429/250	4,585,604 A	4/1986	Okuyama et al.	264/41
4,211,808 A	7/1980	Trankle	428/131	4,590,020 A	5/1986	Itaba et al.	264/22
4,212,787 A	7/1980	Matsuda et al.	260/22.6 AQ	4,590,202 A	5/1986	Remy	514/392
4,220,579 A	9/1980	Rinehart	260/33.6 AQ	4,613,640 A	9/1986	Deisler et al.	524/264
4,220,879 A	9/1980	Hoshimi et al.	310/68 R	4,626,252 A	12/1986	Nishizawa et al.	604/370
4,223,059 A	9/1980	Schwarz	428/198	4,627,993 A	12/1986	Loomis	428/36
4,226,952 A	10/1980	Halasa et al.	525/192	4,628,073 A	12/1986	Fisher	525/70
4,243,576 A	1/1981	Fischer et al.	260/42.15	4,636,340 A	1/1987	Itaba et al.	264/22
4,251,585 A	2/1981	Schwarz	428/188	4,639,487 A	1/1987	Hazelton et al.	524/425
4,252,914 A	2/1981	Halasa et al.	525/98	4,639,949 A	2/1987	Ales et al.	2/400
4,253,461 A	3/1981	Strickland et al.	128/287	4,640,859 A	2/1987	Hansen et al.	428/105
4,277,578 A	7/1981	Yoshimura et al.	525/211	4,657,539 A	4/1987	Hasse	604/385
4,285,100 A	8/1981	Schwarz	19/161.1	4,663,220 A	5/1987	Wisneski et al.	428/221
4,289,832 A	9/1981	Schwarz	428/542	4,673,619 A	6/1987	Itaba et al.	428/338
4,298,647 A	11/1981	Cancio et al.	428/167	4,681,580 A	7/1987	Reising et al.	604/385
4,303,571 A	12/1981	Jansen et al.	260/33.6 AQ	4,681,781 A	7/1987	Murray et al.	428/35
4,303,712 A	12/1981	Woodroof	428/58	4,684,578 A	8/1987	Inoue et al.	428/462
4,303,714 A	12/1981	Mercer	428/135	4,704,112 A	11/1987	Suzuki et al.	604/378
4,315,882 A	2/1982	Hiratsuka et al.	264/171	4,704,238 A	11/1987	Okuyama et al.	264/41
4,316,828 A	2/1982	Makowski et al.	260/23.5	4,705,812 A	11/1987	Ito et al.	521/92
4,317,792 A	3/1982	Raley et al.	264/504	4,713,068 A	12/1987	Wang et al.	604/366
4,318,408 A	3/1982	Korpman	128/287	4,713,069 A	12/1987	Wang et al.	604/378
4,319,950 A	3/1982	Sznopek et al.	156/475	4,714,735 A	12/1987	Hodgson, Jr. et al.	524/514
4,329,309 A	5/1982	Kelly	264/167	4,714,753 A	12/1987	McCready et al.	528/288
4,331,622 A	5/1982	Doi et al.	264/45.3	4,716,197 A	12/1987	Seiss et al.	525/75
4,335,193 A	6/1982	Doi et al.	429/251	4,719,144 A	1/1988	Kamat	428/257
4,335,225 A	6/1982	Collette et al.	525/240	4,721,592 A	1/1988	Fruehauf et al.	264/171
4,344,999 A	8/1982	Gohlke	428/212	4,725,481 A	2/1988	Ostapchenko	428/213
4,350,655 A	9/1982	Hoge	264/145	4,732,947 A	3/1988	McCready et al.	525/437
4,351,784 A	9/1982	Thomas et al.	264/22	4,734,324 A	3/1988	Hill	428/317.3
4,352,355 A	10/1982	Mesek et al.	128/287	4,740,258 A	4/1988	Breitscheidel	156/209
4,353,945 A	10/1982	Sampson	428/90	4,740,564 A	4/1988	McCready et al.	525/437
				4,740,565 A	4/1988	McCready et al.	525/437

US 6,843,949 B2

Page 3

4,758,297 A	7/1988	Calligarich	156/251	5,382,630 A	1/1995	Stehling et al.	525/240
4,775,375 A	10/1988	Aledo	604/378	5,385,769 A	1/1995	Wick	428/141
4,777,073 A	10/1988	Sheth	428/155	5,385,972 A	1/1995	Yamamoto et al.	524/579
4,777,703 A	10/1988	Knox	24/71 ST	5,399,396 A	3/1995	Ohlsson et al.	428/34.7
4,791,144 A	12/1988	Nagou et al.	521/90	5,409,761 A	4/1995	Langley	428/198
4,793,956 A	12/1988	Nogiwa et al.	264/41	5,415,905 A	5/1995	Middlesworth et al.	528/35.7
4,795,790 A	1/1989	McCready et al.	525/437	5,445,862 A	8/1995	Kaneko et al.	428/148
4,798,604 A	1/1989	Carter	604/383	5,447,788 A	9/1995	Rhim et al.	428/284
4,798,858 A	1/1989	McCready et al.	524/100	5,451,450 A	9/1995	Erderly et al.	428/220
4,803,244 A	2/1989	Umpleby	525/105	5,470,811 A	11/1995	Jejelowo et al.	502/117
4,806,300 A	2/1989	Walton et al.	264/288.8	5,472,775 A	12/1995	Obijeski et al.	428/220
4,808,252 A	2/1989	Lash	156/73.1	5,500,260 A	3/1996	Halle et al.	428/35.7
4,814,124 A	3/1989	Aoyama et al.	264/41	5,500,360 A	3/1996	Ahlquist et al.	435/172.3
4,814,380 A	3/1989	Liu	525/66	5,525,659 A	6/1996	Falla et al.	524/257
4,814,396 A	3/1989	Liu	525/433	5,549,777 A	8/1996	Langdon et al.	156/244.18
4,820,590 A	4/1989	Hodgson et al.	428/516	5,558,930 A	9/1996	DiPoto	428/216
4,824,718 A	4/1989	Hwang	428/284	5,560,974 A	10/1996	Langley	428/198
4,829,096 A	5/1989	Kitamura et al.	521/79	5,565,250 A	10/1996	Ohlsson et al.	428/34.7
4,829,124 A	5/1989	Clark	525/108	5,571,619 A	11/1996	McAlpin et al.	428/364
4,833,172 A	5/1989	Schwarz et al.	521/62	5,575,785 A	11/1996	Gryskiewicz et al.	604/385.2
4,841,392 A	6/1989	Muramatsu et al.	523/200	5,580,910 A	12/1996	Isaac et al.	529/17
4,848,564 A	7/1989	Scheller et al.	206/83.5	5,580,914 A	12/1996	Falla et al.	524/257
4,877,679 A	10/1989	Leatherman et al.	428/224	5,674,944 A	10/1997	Falla et al.	525/239
4,878,974 A	11/1989	Kagawa	156/85	5,690,949 A	11/1997	Weimer et al.	424/402
4,879,078 A	11/1989	Antoon, Jr.	264/41	5,695,868 A	12/1997	McCormack	428/283
4,892,901 A	1/1990	Liu	524/303	5,695,871 A	12/1997	Tallentire et al.	428/320.2
4,902,553 A	2/1990	Hwang et al.	428/156	5,738,111 A	4/1998	Weimer et al.	128/849
4,910,245 A	3/1990	Flynn et al.	524/298	5,783,270 A	7/1998	Fischer et al.	428/35.2
4,921,653 A	5/1990	Aoyama et al.	264/41	5,800,758 A	9/1998	Topolkaraev et al.	264/154
4,921,749 A	5/1990	Bossaert et al.	428/216	5,814,569 A	9/1998	Suzuki et al.	442/328
4,923,650 A	5/1990	Antoon, Jr. et al.	264/41	5,865,926 A	2/1999	Wu et al.	156/229
4,929,303 A	5/1990	Sheth	156/209	5,910,225 A	6/1999	McAmish et al.	156/229
4,935,287 A	6/1990	Johnson et al.	428/198	5,995,187 A	11/1999	Wakagi et al.	428/315.5
4,957,943 A	9/1990	McAllister et al.	521/64	6,037,281 A	3/2000	Mathis et al.	442/394
4,970,259 A	11/1990	Mitchell et al.	428/220	6,096,014 A	8/2000	Haffner et al.	604/367
4,977,014 A	12/1990	Mitchell et al.	524/505	6,179,939 B1	1/2001	Jones et al.	156/73.1
4,978,570 A	12/1990	Heyn et al.	428/231	H1955 H	4/2001	Middlesworth et al.	524/427
4,992,505 A	2/1991	Liu	524/416	6,258,308 B1	7/2001	Brady et al.	264/210.2
4,995,930 A	2/1991	Merz et al.	156/209	6,264,864 B1	7/2001	Mackay	264/154
5,008,204 A	4/1991	Stehling	436/85	H2000 H	11/2001	Middlesworth et al.	156/244.11
5,008,296 A	4/1991	Antoon, Jr. et al.	521/91				
5,017,323 A	5/1991	Balk	264/288.4				
5,021,475 A	6/1991	Isayev	524/30	CA	1322082	9/1993	C08J/5/18
5,026,798 A	6/1991	Canich	526/127	CA	2144737	3/1994	C08L/23/08
5,032,450 A	7/1991	Rechlicz et al.	428/196	CA	2130192	2/1998	C08F/210/16
5,034,078 A	7/1991	Hodgson, Jr. et al.	156/85	DE	2 035 117	1/1971	C08F/29/04
5,035,338 A	7/1991	Kaufhold et al.	213/50	DE	34 36 065 A1	4/1986	C08J/5/18
5,047,495 A	9/1991	Kolycheck	528/76	DE	43 11 422 A1	10/1994	B32B/37/32
5,055,338 A	10/1991	Sheth et al.	428/155	DE	38 50 987 T2	12/1994	B29D/7/00
5,066,526 A	11/1991	German, Jr.	428/35.2	DE	32 33 693 C2	1/1995	C08L/23/08
5,068,138 A	11/1991	Mitchell et al.	428/36.8	EP	0 032 804 A2	7/1981	C08L/23/08
5,098,755 A	3/1992	Tanquary et al.	428/35.5	EP	0 114 964 A1	8/1984	A61J/1/00
5,126,391 A	6/1992	Yamamoto et al.	524/310	EP	0115 940 A1	8/1984	C08F/210/00
5,145,747 A	9/1992	Jottier	428/484	EP	0 119 815 A2	9/1984	C08L/71/00
5,167,652 A	12/1992	Mueller	604/385.1	EP	0 119 827 A2	9/1984	A41B/13/02
5,169,712 A	12/1992	Tapp	428/315.5	EP	0 193 938 A2	9/1986	B32B/27/10
5,174,231 A	12/1992	White	112/420	EP	0 114 964 B1	11/1986	A61J/1/00
5,182,069 A	1/1993	Wick	264/210.2	EP	0 201 331 A2	11/1986	B29C/61/00
5,198,401 A	3/1993	Turner et al.	502/155	EP	0 219 198 A1	4/1987	C08J/5/18
5,206,075 A	4/1993	Hodgson, Jr.	428/216	EP	0 227 037 A2	7/1987	C08J/5/18
5,241,031 A	8/1993	Mehta	526/348.1	EP	0 232 060 A3	8/1987	C08J/5/18
5,272,236 A	12/1993	Lai et al.	526/348.5	EP	0 119 827 B1	7/1988	A41B/13/02
5,278,272 A	1/1994	Lai et al.	526/348.5	EP	0 276 100 A1	7/1988	B29C/55/18
5,296,184 A	3/1994	Wu et al.	264/154	EP	0 283 200 A2	9/1988	B29D/7/00
5,317,035 A	5/1994	Jacoby et al.	521/143	EP	0 283 200 A3	9/1988	B29D/7/00
5,322,728 A	6/1994	Davey et al.	428/296	EP	0 283 200 B1	9/1988	B29D/7/00
5,328,760 A	7/1994	Gillberg-LaForce	428/315.5	EP	0 288 021 A2	10/1988	C08J/5/18
5,358,792 A	10/1994	Mehta et al.	428/516	EP	0 288 021 A3	10/1988	C08J/9/28
5,364,695 A	11/1994	Gurewitz	428/323	EP	0 201 331 B1	12/1989	B29C/61/00
5,376,439 A	12/1994	Hodgson et al.	428/220	EP	0 352 802 A3	1/1990	C08J/5/18
5,382,461 A	1/1995	Wu	428/86	EP	0 352 802 A2	1/1990	C08J/5/18

FOREIGN PATENT DOCUMENTS



US 6,843,949 B2

Page 4

EP	0 361 865 A3	4/1990 B29D/9/00	JP	64-49619	2/1989 B29C/67/20
EP	0 361 865 A2	4/1990 B29D/9/00	JP	64-79620	3/1989 G01F/23/28
EP	0 361 865 B1	4/1990 B29D/9/00	JP	2-276636	4/1989 B32B/27/12
EP	0 193 938 B1	6/1990 B32B/27/10	JP	1-144431	6/1989 C08J/9/00
EP	0 385 599 A2	9/1990 C08L/23/04	JP	1-235439	9/1989 H04L/11/20
EP	0 385 599 A3	9/1990 C08L/23/04	JP	1-264031	10/1989 H04L/11/00
EP	0 227 037 B1	7/1991 C08J/5/18	JP	1-266150	10/1989 C08J/9/00
EP	0 219 198 B1	10/1991 C08J/5/18	JP	2-36938	2/1990 B32B/5/18
EP	0 288 021 B1	12/1992 C08J/9/28	JP	2-179543	7/1990 B60K/17/04
EP	0 550 115 A3	7/1993 B29C/55/00	JP	3-221540	9/1991 C08J/9/00
EP	0 550 115 A2	7/1993 B29C/55/00	JP	6-29842	2/1994 H03M/1/08
EP	0 598 970 A1	6/1994 C08J/1/24	JP	7-116429	5/1995 B01D/3/16
EP	0 380 353 B1	9/1994 B29C/55/00	JP	7-118431	5/1995 C08J/9/00
EP	0 444 671 B1	4/1995 C08F/29/08	PL	175038 B1	2/1994 C08J/5/18
EP	0 598 970 B1	5/1995 B26F/1/24	WO	WO 93/03093	2/1993 C08L/23/04
EP	0 145 014 A2	6/1995 C08J/5/18	WO	WO 93/16863	9/1993 B32B/55/00
EP	0 691 203 A1	1/1996 B32B/31/04	WO	WO 94/01276	1/1994 B32B/7/06
EP	0 742 248 A1	11/1996 C08L/5/18	WO	WO 94/01376	1/1994 C04B/33/30
EP	0 629 151 B1	12/1996 B29C/55/00	WO	WO 94/06857	3/1994 C08L/23/04
EP	0 662 988 B1	2/1997 C08L/23/04	WO	WO 94/18263	8/1994 C08J/5/18
EP	0 115 940 B2	3/1997 C08F/210/06	WO	WO 95/02630	1/1995 C08J/5/18
EP	0 769 525 A1	4/1997 C08L/53/00	WO	WO 95/03765	2/1995 A61F/13/15
EP	0 779 325 A2	6/1997 C08J/5/18	WO	WO 95/07314	3/1995 C08J/3/22
EP	0 659 808 B1	12/1997 C08J/5/18	WO	WO 95/09199	4/1995 C08L/23/08
EP	0 527 589 B1	6/1998 C08L/23/10	WO	WO 95/16562	6/1995 B32B/5/24
EP	0 682 678 B1	12/1998 C08J/5/18	WO	WO 96/19346	6/1996 B32B/7/00
EP	0 716 121 B1	3/1999 C08L/23/10	WO	WO 96/39032	12/1996 A01N/25/34
EP	0 604 731 B1	6/1999 B32B/31/00	WO	WO 98/04397	2/1998 B29C/55/18
EP	0 145 014 B1	8/1999 C08J/5/18	WO	WO 98/05502	2/1998 B32B/31/12
EP	0 598 970 B2	4/2000 B26F/1/24	WO	WO 98/24834	6/1998 C08J/5/18
FR	2074338	9/1971 B29D/7/00	WO	WO 98/29247	7/1998 B32B/27/12
FR	2446176	8/1980 B32B/5/16	WO	WO 98/29481	7/1998 C08J/5/18
GB	1 454 218	11/1976 D04H/13/00	WO	WO 98/29504	7/1998 C08L/23/14
GB	2 101 468 A	1/1983 A41B/13/02	WO	WO 98/58799	12/1998 B32B/27/20
GB	2115702 A	9/1983 A61F/13/16	WO	WO 99/23139	5/1999 C08J/5/18
GB	2 137 632 A	10/1984 C08L/23/08	WO	WO 00/23255	4/2000 B29C/55/18
GB	2151538 A	7/1985 C08J/5/18	WO	WO 00/69615 A3	11/2000 B29C/55/18
GB	2 178 433 A	2/1987 C08L/23/02				
GB	2285408 A	7/1995 C08J/5/18				
GB	2290052 A	12/1995 B32B/27/12				
JP	48-60774	8/1973					
JP	51-30856	3/1976 B29C/24/00				
JP	54-120646	9/1979 C08L/25/10				
JP	54-120658	9/1979 C08L/25/06				
JP	55-110141	8/1980 C08L/23/08				
JP	57-023350	1/1982 C08L/23/08				
JP	57-117038	7/1982 G06F/3/02				
JP	57-117039	7/1982 G06F/3/03				
JP	58-129034	8/1983 C08L/23/08				
JP	61-9448	1/1986 C08L/23/06				
JP	61-284439	12/1986 B32B/27/32				
JP	62-169642	7/1987 B32B/27/32				
JP	62-176843	8/1987 B32B/27/32				
JP	62-179543	8/1987 C08L/23/06				
JP	62-282003	12/1987 C08J/9/00				

OTHER PUBLICATIONS

Patent Abstracts of Japan, vol. 015, No. 409 (C-0876), Oct. 18, 1991 of JP 03 168229 A, Jul. 22, 1991.
Database WIP, Section Ch., Derwent Publications Ltd., London, GB; Class A 17, of JP 48 060 774 A.
Database WIP, Section Ch., Derwent Publications Ltd., London, GB; Class A18, of JP 01 266 150 A.
Japanese Kokai Patent Application No. HEI 2[1990]-276636; Examination not requested.
Karen K. Leonas, "Evaluation of Five Nonwoven Surgical Gowns As Barriers To Liquid Strikethrough and Bacterial Transmission," INDA Journal, vol. 5, No. 2, pp. 22-26.
Van A. Wentz, "Superfine Thermoplastic Fibers," Industrial Engineering Chemistry, Aug., 1956, vol. 48, No. 8, pp. 1342-1346.

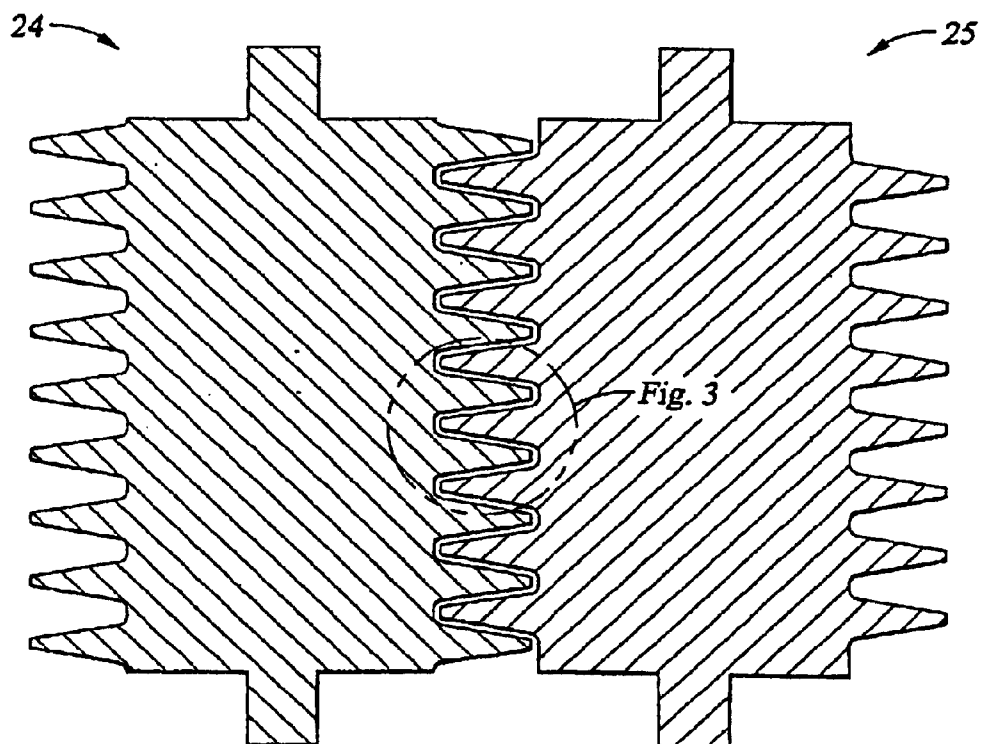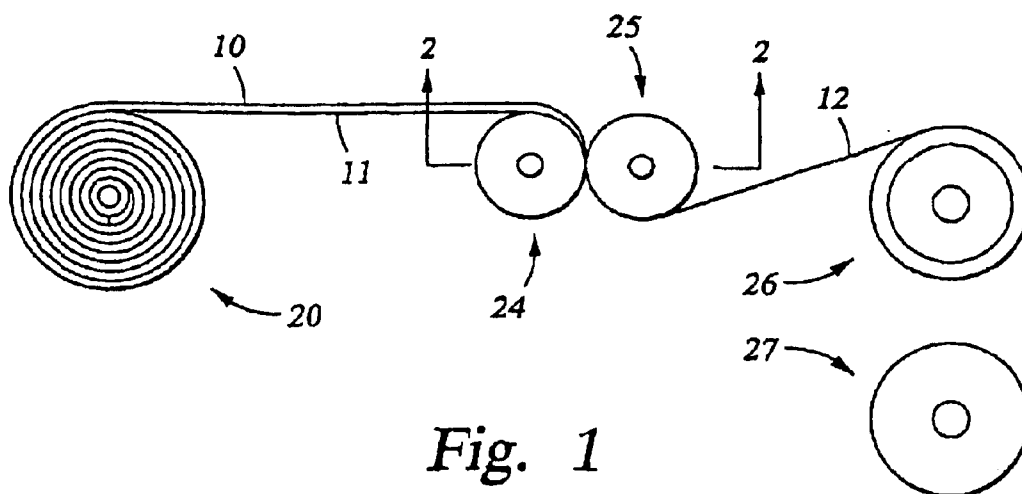

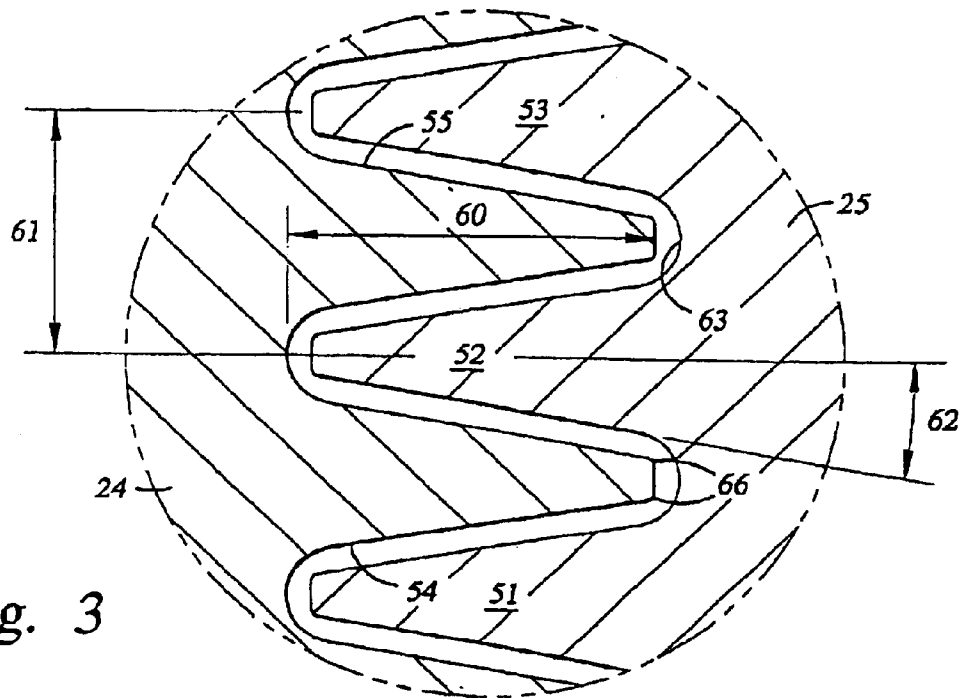


Fig. 3

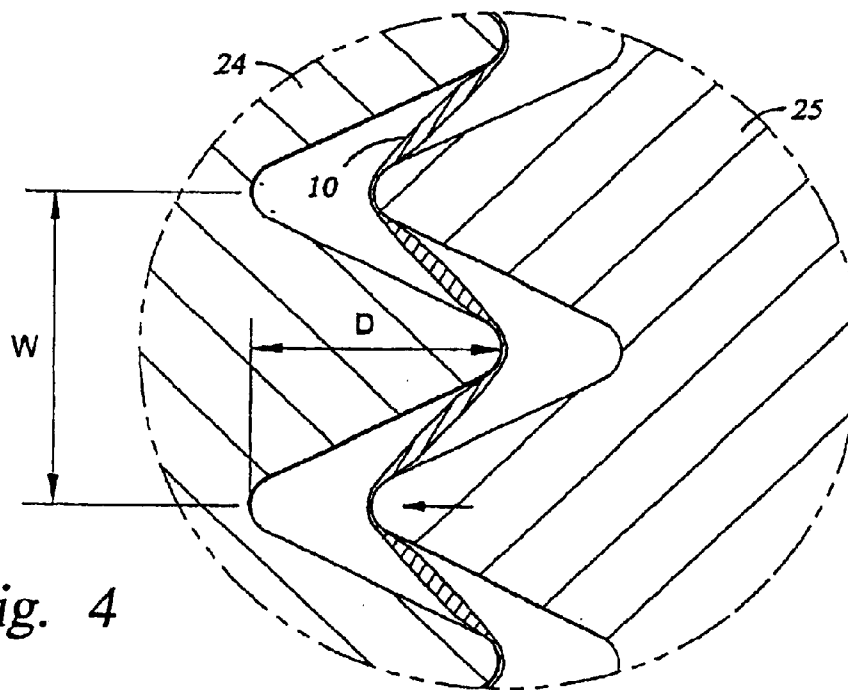


Fig. 4

1

PROCESS FOR ADJUSTING WVTR AND OTHER PROPERTIES OF A POLYOLEFIN FILM

RELATED APPLICATIONS

This application is a divisional of U.S. patent application Ser. No. 09/883,764, filed Jun. 18, 2001, now abandoned, which is a divisional of U.S. Ser. No. 09/312,103, filed May 14, 1999, now U.S. Pat. No. 6,258,308, which is a continuation-in-part application of U.S. application Ser. No. 08/690,136 filed Jul. 31, 1996, now U.S. Pat. No. 6,776,947. This application claims the benefit of U.S. Provisional Application Nos. 60/104,452 and 60/104,455 filed Oct. 16, 1998 and U.S. Provisional Application Nos. 60/104,948 and 60/104,985 filed Oct. 20, 1998. Each of the aforementioned related patent applications is herein incorporated by reference.

TECHNICAL FIELD

This invention relates generally to a process of adjusting the water vapor transmission/porosity of films and film composites, while maintaining general resistance to liquid transmission (striethrough). More specifically this invention is directed towards a process for producing films, film composites, and articles made therefrom, that are made permeable to water vapor, by passing them through interdigitating grooved rollers. Also, more specifically this invention is directed toward filled polypropylene films having excellent Water Vapor Transmission Rates (WVTR), high tear strength, high dart impact strength, and a soft feel.

BACKGROUND OF THE INVENTION

Field of the Invention

Polyolefin films which are rendered more permeable to water vapor using filler loading and orientation are known. Such films or film composites are said to be more breathable, that is to have improved, increased permeability to water vapors, while maintaining a resistance to liquid striethrough (defined herein). Uses of such films or film composites include on a diaper the permeability of which may permit the passage of moisture vapor and air, while substantially preventing the passage of liquid. The advantages of such a film used in a diaper are that after the wearer voids, the liquid is generally retained, while much of the liquid vapor can escape decreasing the "wet feeling", and lowering the possibility of uncomfortable diaper rash.

Interdigitating grooved rollers have been used to orient either certain films or exclusively nonwoven laminates. Use of such rollers to orient (i.e., stretch) a film or nonwoven substrate is typically referred to as a ring-rolling process. To increase the water vapor transmission rate ("WVTR") of a film stretched by a ring-rolling process, it has been customary to increase either the filler loading in the formulation or the depth of engagement of the interdigitating grooves. However, both of these processing options have technical limitations on their ability to increase the WVTR of a film. Also, each option can potentially have negative effects on the physical properties of the stretched film, if a specific film's tolerance for filler loading and/or groove engagement depth is exceeded. Accordingly, there is a need for alternative means for increasing the WVTR, without negatively effecting a film's physical properties.

Also, it is desired for many applications of breathable films, such as disposable diapers, adult incontinent products, and feminine hygiene devices, to produce a film appearance

2

that can provide the manufacturer and consumers of such products visual evidence of those products made of breathable films versus those made from non-breathable films.

U.S. Pat. No. 4,472,328, assigned to Mitsubishi Chemical Industries, Ltd., suggests a breathable polyolefin film prepared from a polyolefin/filler composition having from 20 percent to 80 percent by weight of a filler such as a surface treated calcium carbonate. A liquid or waxy hydrocarbon polymer elastomer such as a hydroxyl-terminated liquid polybutadiene was purported to produce a precursor film that could be mono-axially or biaxially stretched to make a film breathable. The breathable film described by Mitsubishi is also described in Great Britain Patent No. 2,115,702, assigned to Kao Corporation. The Kao patent further describes a disposable diaper prepared with a breathable film as disclosed by the Mitsubishi patent. The breathable film is used as a backing for the diaper to contain liquid.

U.S. Pat. No. 4,350,655 by W. H. Hoge, assigned to Biax Fiber Film, describes a porous polyolefin synthetic paper film containing at least 50 percent by weight of a coated inorganic filler. The film composition was comprised of from 50 to 70 weight percent of an inorganic filler material coated with a silicon or titanium fatty acid ester. To produce such a film product, Hoge teaches to cool the disclosed film substrate down into a temperature range of 10° C. to 70° C. (i.e., 50° F. to 158° F., respectively) prior to stretching the film. Hoge refers to such a process as a "cold stretching" the film. Hoge also indicates that such cold stretching helps develop the desired void volume and surface ruptures per unit area so that weight percent resin content of the final product ranges from 0.18 to about 0.32 g/cm³. Moreover, the precursor film is formed without the addition of an elastomer and contains an inorganic filler surface coated with either a Si or Ti fatty acid ester. Some of the resulting films were stated to be both vapor and liquid permeable, however, at least one film (Example 3) was stated to be permeable to air.

U.S. Pat. No. 4,777,073 (Sheth) suggests a breathable film produced by stretching of a precursor film prepared from a polyolefin/filler composition. Sheth suggests that the permeability and strength, especially tear strength are improved by melt embossing the precursor film with a patterned melt embossing roller and stretching the film to impart a pattern of different film thickness having greater permeability within the areas of reduced thickness compared to the areas of greater thickness.

Most of these techniques require that a film or film composite be rendered breathable, regardless of the technique but generally through tentering (for transverse direction or TD orientation, and differential speeds of two rollers for machine direction or MD orientation), in a separate operation, prior to final construction of the end-use article, for instance the diaper, leading to expensive double processing or more expensive transport of the film rendered less dense by the tentering operation.

Among the most serious limitations, is the extreme difficulty in producing a cost effective lamination between polypropylene nonwoven materials and polyethylene breathable films. Traditional glue, hotmelt, or meltblown adhesive techniques can be used, but require the additional cost and process complexity of the gluing system and the adhesive. The preferred method of heat lamination was generally not reliable because the difference in melting points of the polypropylene nonwoven (~16120° C.) and the polyethylene film (about 125° C.). To achieve an adequate lamination bond strength between the two materials, pin holes or damage to the breathable film at the film/nonwoven bond site resulted.

3

Previous polypropylene breathable films, while having lamination advantages over polyethylene films, have been deficient in a number of other performance categories. Film oriented by traditional Machine Direction Orientation, Transverse Direction Orientation, or Biaxial Orientation (all known in the art) have had very low tear and impact strength.

For those product applications which do not laminate the breathable film directly to a nonwoven, or which by nature of the product, a hot melt type adhesive gluing system is desirable (such as a breathable film diaper backsheet), polypropylene breathable film will be more resistant to glue burn through of the film. Thus, the use of a polypropylene breathable film helps to achieve product integrity. Also, the use of higher temperature glues, as well as a lower quantity of glue is required for adequate product bond strength.

Accordingly, there is need for an improved ring-rolling process and/or polymer film composition that can increase the WVTR of a film, without significantly diminishing the film's physical properties. There is also a commercial need for a polypropylene microporous breathable film with high tear and impact strengths well as a soft feel. Also, there is need for films produced by such an improved process to be readily distinguishable as breathable films.

SUMMARY OF THE INVENTION

According to one aspect of the present invention, there is provided a process for producing a film having a WVTR greater than 200 g/m²/day at 38° C. and 90% relative humidity comprising a polyolefin and a filler, said process comprising: a) extruding a precursor film from said polyolefin blend comprising said first and said second polymer compositions and said filler, said filler concentration being in a range of from about 16.5 to about 71.5 wt. %; and b) passing said precursor film between at least one pair of interdigitating grooved rollers, said rollers being maintained in a temperature range from about 91° F. to about 159° F., so that said film is heated to produce said film having a WVTR greater than 200 g/m²/day at 38° C. and 90% relative humidity.

According to another aspect of the present invention, there is provided a process for producing a film having a WVTR of at least 200 g/m²/day at 38° C. and 90% relative humidity comprising a polyolefin blend, said polyolefin blend having at least a first and a second polymer composition, and a filler, said process comprising: a) extruding a precursor film from said polyolefin blend comprising said first and said second polymer compositions and said filler, said filler concentration being in a range of from about 16.5 to about 71.5 wt. %, wherein, i) said first polymer composition is a polypropylene and ii) said second polymer composition is selected from the group consisting of elastomers, plastomers, styrenic block copolymers, ethylene-maleic anhydride copolymers, ethylene ethyl acetate, and combinations thereof, and b) passing said precursor film between at least one pair of interdigitating grooved rollers so that said film has at least: i) a WVTR in a range of from about 200 g/m²/day to about 10,000 g/m²/day at 38° C. and 90% relative humidity, ii) a dart drop impact in a range of from about 100 grams to about 300 grams, and iii) an elongation selected from the group consisting of machine direction, transverse direction and combinations thereof in a range of from about 150% to about 550%.

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing aspects, features and advantages of the present invention will become clearer and more fully under-

4

stood when the following detailed description, and appended claims are read in conjunction with the accompanying drawings, in which is a schematic drawing of an embodiment of our invention for imparting breathability to a film or film composite:

FIG. 1 is a schematic view of a process for converting a precursor film (and optionally other layers) into a film with greater WVTR;

FIG. 2 illustrates a cross-sectional view of the interdigitating grooved rollers of FIG. 1, taken along the lines 2—2;

FIG. 3 illustrates an enlarged view of area 3 from FIG. 2 showing several interdigitating teeth from the grooved rollers; and

FIG. 4 shows how a film is stretched with interdigitating rollers.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

We have discovered that certain polyolefin films and film composites can be processed to have greater water vapor transmission rates, relatively low liquid strikethrough, while maintaining film integrity, by using certain film forming formulations and techniques and passing the film, the film composite and/or the finished fabricated disposable article, through a nip of at least one pair of interdigitating grooved rollers.

We have discovered that applying heat to interdigitating grooved rollers results in a substantial improvement in orientation effectiveness (WVTR increases), and imparts a 3 dimensionality to the film which differentiates it from other breathable film. In addition a new control is provided for the adjustment of film breathability, i.e. rather than require a formulation change, or adjustment to the depth of activation, to control WVTR levels, roller temperature merely needs to be adjusted. As can be seen from the following examples, with all other factors constant, an increase in interdigitating roll temperature from 70° F. to 140° F., increases WVTR from 1900 g/m²/day to 4100 g/m²/day.

We have also discovered that producing a precursor film from a polypropylene and filler (preferably calcium carbonate) blend, then incrementally orienting the film with interdigitating grooved rollers in the machine direction, or the transverse direction, or both, will yield a reasonably soft film (to the touch) with good impact and tear strength. It was further discovered that by adding a minority amount of low density polyethylene, extrusion processability was greatly improved. It was further discovered that the addition of a minority amount of an elastomer or plastomer improved impact and tear strength further, and contributed to an even softer film "feel". Impact strength is approximately double that of previously available polypropylene breathable films stretched by conventional techniques, other than interdigitating grooved rollers. MD tear strength is more than triple that of Machine Direction Oriented and Biaxial Oriented polypropylene breathable films. TD tear strength is greater than triple that of Transverse Direction Oriented and Biaxial Oriented polypropylene breathable films. Because stretching such film blends by interdigitating grooved rollers was expected to produce film with substantially similar physical properties as films with stretched with conventional stretching techniques, such dramatic improvements in physical properties proved most surprising.

In certain embodiments of the invention, a polyolefin film or film composite comprises at least one layer of a disposable article and is rendered breathable by passing the film, film composite or fabricated article through interdigitating

5

grooved rollers. The film, film composite or fabricated article will have either a single layer or multilayer construction and the polyolefin/filler combination can be co-extruded, laminated or blended with other polymers or polymer based fabricated articles.

In an embodiment of the invention, a film ("precursor film") is made, utilizing a polyolefin or a polyolefin blend with a relatively higher filler loading, generally including embossing a pattern thereupon, such that its subsequent manipulation, either by itself, in a film composite or as a part of a disposable article, will render the film breathable (hereinafter defined as water vapor permeable, within certain limits of WVTR, while maintaining a certain level of liquid impermeability) while maintaining a minimum level of physical properties, elongation/tensile strength being of most importance. The manipulation of the film, film composite, and/or fabricated disposable article includes passing all or parts of the film, film composite, and/or fabricated disposable article through a grooved roller and/or interdigitating grooved rollers, at a rate sufficient to develop a minimum level of breathability to the film or film portion of the article, at a commercial and economical rate.

The tear strength, elasticity, and softness of a film prepared from the polyolefin/filler composition may be improved by addition of small amounts of an olefinic elastomer. The WVTR desired is above 100 g/m²/day @ 38° C., 90% RH (Relative Humidity), preferably above 200 g/m²/day, and can be easily greater than 1000 g/m²/day.

Introduction

This invention concerns all polyolefin/filler based breathable films that have high WVTR, the ability to be drawn down to low basis weights, and methods for making same. Particularly useful in these films and methods are impact copolymer polypropylene. The process is also effective for all polyolefin materials. The term impact copolymer herein refers to a homopolymer matrix having a small amount of an ethylene/propylene copolymer dispersed throughout.

This invention further includes certain polyolefins, their conversion into fabricated articles such as films, articles made from such films, and applications in which such articles having high WVTR combined with good physical properties are desirable. The resulting films, and film composites, (including co-extruded and laminated films) have combinations of properties rendering them superior and unique to films or film composites previously available. The films disclosed herein are particularly well suited for use in producing certain classes of high WVTR films, consumer and industrial articles using the films in combination with for instance, polymeric woven or non-woven materials. Such consumer articles include, but are not limited to diapers, adult incontinence devices, feminine hygiene articles, medical and surgical gowns, medical drapes, industrial apparel, building products such as "house-wrap", roofing components, and the like made using one or more of the films disclosed herein. Additionally the films of the present invention may also be used in metallized films with a high WVTR, according to the disclosure of U.S. Pat. No. 5,055,338, fully incorporated herein for purposes of U.S. patent practice.

High WVTR films, high WVTR film composites, and disposable articles made therefrom of our invention, are produced from a precursor film that is prepared from a polymer composition that comprises at least one polyolefin component, at least one filler component, and optionally an elastomeric component. The polyolefin component may be any polyolefin which is suitable for film formation such as homo- or co-polymer polypropylene, homo- or co-polymer

6

polyethylenes or blends thereof. A preferred polyolefin is a copolymer of propylene and low density polyethylene, particularly preferred is linear low density polyethylene. The linear low density polyethylene may be a polymer made from either traditional Ziegler-Natta or metallocene catalysts, or combinations thereof.

In an embodiment of the invention, the films, film composites, and articles made therefrom based on polyolefin filler combinations, when passed through a nip of interdigitating grooved rollers (hereinafter used interchangeably with "ring-rolling") would surprisingly and unexpectedly have improved water vapor transmission rates while maintaining resistance to liquid permeability; and retaining film integrity. Following is a detailed description of certain preferred films, film composites, and/or fabricated disposable articles made therefrom, within the scope of the present invention. Also disclosed are preferred methods of producing these films, film composites, and fabricated disposable articles made therefrom as well as preferred applications thereof. Those skilled in the art will appreciate that numerous modifications to these preferred embodiments can be made without departing from the scope of the invention. For example: though the properties of certain films, film composites, and fabricated articles such as diapers are exemplified, especially after ring-rolling, the films and composites will have numerous other uses. To the extent our description is specific, it is solely for the purpose of illustrating preferred embodiments of our invention and should not be taken as limiting the present invention to these specific embodiments.

It will be appreciated by those of ordinary skill in the art that the films and film composites of certain embodiments of the present invention, can be combined with other polymers or polymer based fabricated articles such as films, fibers, fabrics (including non-woven fabrics) and the like, depending on the intended function of the resulting film, film composite or fabricated article.

As an example of such combinations, by extrusion coating, co-extrusion coating, or by co-extrusion or laminating of the film with other polymer films, e.g. polyolefin, other properties may be achieved. For instance, after ring-rolling an entire film cross-section, certain (machine direction) sections could be extrusion coated to eliminate breathability in those selected portions so coated. Also contemplated are varying combinations of the precursor film, or the film after ring-rolling, with other films, or non-woven fabrics, generally made from one or more polyolefins. Such combinations, while including the precursor or the post ring-rolled film, can include several combinations, such as non-woven/film, film/non-woven, film/non-woven/film, film/film, and the like.

Other methods of improving WVTR of a film or article fabricated from the film, may be used in addition to use of the filled polyolefin and process of passing the filled polyolefin film through the nip of interdigitating grooved rollers described herein, without departing from the intended scope of the invention. For example, including microporous voids through pin-point punctures (also known as "apertured film") to improve the WVTR, in addition to ring-rolling is not excluded by the present invention. Also, it is well known that manipulation of a film by changing quench conditions during melt processing, and/or by irradiating the film will have an effect on WVTR and/or physical properties. Such mechanical or other treatment or manipulation is not excluded by this invention.

Films or film composites employing the polyolefin/filler blends of certain embodiments of the present invention can be oriented, annealed, or crosslinked. Additionally,

polyolefin/filler combinations of the present invention can be made into film by processes including blown or cast film manufacturing techniques. The blend components can function to modify barrier, opacity, sealing, cost, or other functions that will be known to those of ordinary skill in the art.

The films or composite structures are often used in infant diapers, toddler training pants, adult incontinence devices, medical drapes and apparel, such as surgical gowns, feminine hygiene articles, and the like. Use of the term "film composites" may include one or more film and/or non-woven layers bonded mechanically, thermally, or adhesively to the film. Such non-woven materials include spun-bond, meltblown, and combinations thereof.

Such non-woven materials are most often made from polyolefins, such as homopolymer polyethylene, copolymer polyethylene (including one or more of alpha-olefins of 4–10 carbon atoms, vinyl acetate, ethylenically unsaturated acrylic acid esters, acrylic acid, methacrylic acid, ionomers, polypropylene homopolymers, polypropylene copolymers including one or more of ethylene and alpha-olefins of 4–10 carbon atoms, homopolymer and copolymer polypropylene).

Components of a Precursor Film Film Forming Polyolefin

Most film forming polyolefins and combinations of film forming polyolefins may be used in embodiments of our invention.

Polyolefin Component

The polyolefin component can be any film forming polyolefin, including polyethylene and polypropylene and others, or polyolefin blend. Examples of suitable materials are listed in Table 1 below.

TABLE 1

Suitable Polymers & Relative Benefits				
Polymer	Impact	Tear	Softness	Drawdown
Metallocene Homo-Polymers and Copolymers (e.g., Exxon Achieve™ PD3854)	Preferred	Preferred	Preferred	Most Preferred
Random Copolymer PP (e.g. Exxon PP 9263)	More Preferred	More Preferred	More Preferred	More Preferred
Impact Copolymer Polypropylene (e.g. Exxon PP 7623)	Most Preferred	Most Preferred	Most Preferred	Preferred
Homopolymer PP (e.g. Exxon PP 1016)	Preferred	Preferred	Preferred	Preferred
Exxon LD 3003	Preferred	Preferred	Preferred	Preferred
Elastomer	Preferred	Preferred	Preferred	Preferred
Plastomer	Most Preferred	Most Preferred	Most Preferred	Most Preferred

Polyethylene

Linear low density polyethylenes are among the materials favored in embodiments of the invention. Linear low density polyethylene (LLDPE), generally that having density from 0.910 to 0.935 g/cm³ and a melt index from 0.01 to 10 dg/min. Another polyolefin that may be considered in such composites is very low density polyethylene (VLDPE, also plastomer) which will have densities in the range of from about 0.860 to about 0.910 g/cm³.

Conventional high pressure low density polyethylene (LDPE) is another example of a suitable polyethylene which has a density of from 0.910 to 0.925 g/cm³.

High density polyethylene (HDPE) having densities in the range of from about 0.935 to about 0.970 g/cm³ may also be

considered. Such polyethylenes may be produced by copolymerizing ethylene with one or more C₄ to C₂₀ alpha-olefin. Generally the preferred alpha-olefins include those selected from the group consisting of butene-1, pentene-1, 4-methyl-1-pentene, hexene-1, octene-1, decene-1 and combinations thereof. Most preferred are ethylene copolymers of butene-1, hexene-1, octene-1 and combinations thereof. The comonomers may be present in amounts up to 20 mole percent. The amount of comonomer or comonomers will generally determine density, for instance HDPE will have from 0 to 1 mole percent comonomer, while plastomers with densities lower than 0.900 g/cm³ will have up to 15 or even 20 mole percent comonomer(s). Such polyethylenes may be made utilizing traditional Ziegler-Natta, chromium based, and metallocene catalysts which may be used with alumoxane and/or ionic activators. Processes useful for preparing such polyethylenes include gas phase, slurry, solution and the like. The density of polyethylenes such as these, in preferred embodiments, will generally be in the range of from about 0.900 and 0.935 g/cm³, preferably in the range of from about 0.910 to 0.925 g/cm³, most preferably from about 0.915 to 0.920 g/cm³. The polyethylenes will have a melt index in the range of from about 0.1 to about 10 g/10 min, preferably 0.5 to 5 g/10 min, generally consistent with film forming conditions.

Polypropylene

Polypropylene may be used in conjunction with one or more polyethylenes, or by-itself as the polyolefin component of the precursor film. Polypropylene may be made from many of the catalysts and processes discussed supra, including optional inclusion of one or more alpha-olefins. As indicated in Table 1, one of the preferred polymers is a random copolymer having low levels, for example up to about 8 wt. %, of ethylene randomly included in a predominantly polypropylene chain.

Elastomer

One or more elastomers may be included in the polyolefin component. Such elastomers include, but are not limited to vulcanized natural rubber, ethylene alpha olefin rubber (EPM), ethylene alpha olefin diene monomer rubber (EPDM), styrene-isoprene-styrene (SIS), styrene-butadiene-styrene (SBS), styrene-ethylene-butylene-styrene (SEBS), ethylene-propylene (EP), ethylene-vinyl acetate copolymer (EVA), ethylene-maleic anhydride (EMA), ethylene-acrylic acid (EEA), butyl rubber and the like. Of these SIS and SBS are preferred, with SBS more particularly preferred. The range of elastomer inclusion are generally from about 1.4 to about 25 wt. %, preferably from about 1.4 to about 20 wt. %, and more preferably from about 1.4 to 17.2 wt. %.

Amounts of each component can vary with the desired properties for the precursor film or film composite. For instance, a nominal 0.917 g/cm³ density LLDPE may be combined with 4 wt. % of an elastomer. Such a combination might provide improved elastic behavior.

Other components in a film forming polyolefin are not excluded. Such components may include additives such as anti-oxidants, anti-static agents, colors and the like, well known to those of ordinary skill. Further, blending of polyolefins with polymers is also contemplated. For example, blending of traditional Ziegler Natta catalyzed (ZN), chromium catalyzed (CR), metallocene catalyzed (MCN) and free radical initiated (FR) polyolefins using one or all in a blend as the film forming component is contemplated. For instance including, but not limited to MCN/ZN, MCN/CR, MCN/FR, MCN/ZN/FR, combinations and the like are contemplated. Other free radical initiated

polyethylenes, high pressure polyethylene, ethylene homopolymers as well as ethylene copolymers may be included.

Both in the case of other polyolefins and the elastomeric polymers, the combinations should be generally formable into a film.

As used in this application, the term "polyolefin" will mean the polyolefin, any combination of polyolefins, including plastomers, elastomers, additives, and the like.

Film Physical Property Modification

It was found that the addition of small amounts of low density polyethylene, the polyolefin/filler blend allowed film extrusion at higher throughput levels with some majority polymers but with little to no reduction in film breathability. Low density polyethylene with a Melt Index of 0.9 to 25 (12 MI being preferred), and a density of 0.900 g/cm³ to 0.930 g/cm³ may be used.

Further improvements in film impact and tear strength are possible by the addition of plastomers, elastomers, styrenic block co-polymers (SIS, SBS, SEBS), EVA, EMA, EEA, or rubbers. Material grades included are listed in Table 2 below.

TABLE 2

Property Improvement Materials			
Supplier	Grade	Comment 1	Comment 2
Exxon Chemical	Exact™ 3139	7.5 MI	Density = 0.900 g/cm ³
Exxon Chemical	Exact™ 4044	16.5 MI	Density = 0.895 g/cm ³
Exxon Chemical	Exact™ 9095	2.2 MI	Density = 0.893 g/cm ³
Exxon Chemical	Exact™ 3131	3.5 MI	Density = 0.900 g/cm ³
Exxon Chemical	Paxox™	2.0 MI	Density = 0.900 g/cm ³
	SLX 9106		
Exxon Chemical	Paxox™	3.5 MI	Density = 0.900 g/cm ³
	SLX 9101		
Dexco	Vector™ 4211	13 MI	
Dexco	Vector™ 4411	40 MI	
Exxon	Vistalon™	EPDM	
	3708		
Exxon	Vistalon™	EPDM	
	3030		
Shell	Kraton™	8 MI	SEBS
	G1657		
Union Carbide	UC 9042	5.1 MI	Density = 0.900 g/cm ³
Union Carbide	UC 1085	0.8 MI	Density = 0.884 g/cm ³

Filler Materials

To impart breathability to polyolefin films, addition of fillers and subsequent straining is known.

To form the precursor film, fillers may be incorporated at relatively high levels, limited only by the ability of the combination (polyolefin/filler) to be formed into a film. The amount of filler added to the polyethylene depends on the desired properties of the film including tear strength, WVTR, and stretchability.

However, it is believed that a film with good WVTR generally cannot be produced as is taught herein with an amount of filler less than about 16.5 wt. % of the polyolefin/filler composition. Further, it is believed that useful films may not be made with an amount of the filler in excess of about 71.5 wt. %. While at lower than about 16.5 wt. % of filler, the polyolefin/filler composition may not have sufficient breathability. Higher amounts of filler may cause difficulty in compounding and losses in strength of the final breathable film. Generally, the range of filler may be in the range of from about 26 to about 67 wt. %, preferably in the range of from about 33 to about 60 wt. %. The minimum amount of filler is needed to insure the interconnection within the film of voids created at the situs of the filler, particularly by the stretching operation to be subsequently performed. The preferred filler range is from about 30 to

about 70 wt. %, based on the total weight of the film. More preferred filler loading is from about 40 to about 60 wt. %.

Fillers useful in certain embodiments of the invention may be any inorganic or organic material or combinations thereof having a low affinity for and a significantly lower elasticity than the polyolefin component or the optional elastomeric component. Preferably, the filler should be a rigid material having a non-smooth surface, or a material which is treated to render its surface hydrophobic. The mean average particle size of the filler is from about 0.5 to about 7 microns, preferably from about 1 to about 5, more preferably from about 2 to about 3.5 microns. It should be understood that smaller particle sizes, such as from about 0.75 to 2, will provide the best balance of compoundability and eventual breathability, but there relative economics makes them generally less useful than particle sizes of 3 microns and above. Such particle sizes are preferred for films having a thickness of from about 0.5–6 mils. Examples of the inorganic fillers include calcium carbonate, talc, clay, kaolin, silica diatomaceous earth, magnesium carbonate, barium carbonate, magnesium sulfate, barium sulfate, calcium sulfate, aluminum hydroxide, zinc oxide, magnesium oxide, calcium oxide, magnesium oxide, titanium oxide, alumina, mica, glass powder, zeolite, silica clay, and combinations thereof, and the like. Calcium carbonate is particularly preferred. The inorganic fillers such as calcium carbonate are preferably surface treated to be hydrophobic so that the filler can repel water to reduce agglomeration of the filler. Also, the surface coating should improve binding of the filler to the polymer while allowing the filler to be pulled away from the polyolefin when the film formed from the polyolefin/filler combination is stretched or oriented. Preferred coatings are stearates, such as calcium stearate, which are generally compliant with FDA regulations. Organic fillers such as wood powder, pulp powder, and other cellulose type powders may be used. Polymer powders such as Teflon® powder and Kevlar® powder may also be included. Combinations of these fillers are also contemplated.

While a broad range of fillers has been described at a broad range of inclusion parameters based on weight percentages, other embodiments are contemplated. For instance, fillers with much higher or much lower specific gravity may be included in the polyolefin at amounts outside the weight ranges disclosed, they will be understood to be contemplated as embodiments of the invention as long as the final film, after orientation has WVTR or drawn down similar to that described herein. For example, while a preferred filler such as calcium carbonate has a density of 2.7 g/cm³, other examples of suitable fillers include, without limitation, hollow glass beads (density=0.3 g/cm³), glass fibers or beads (density=1.11 g/cm³) and barium sulfate (density=4.6 g/cm³).

Compounding of the Polyolefin/Filler Composition

Polyolefin/filler compositions usable in this invention may be compounded in several different ways. The components may be brought into intimate contact by, for example, dry blending these materials and then passing the overall composition through a compounding extruder. Alternatively, the polyolefin and filler components may be fed directly to a mixing device such as a compounding extruder, higher shear continuous mixer, two roll mill or an internal mixer such as a Banbury mixer. Overall, the objective is to obtain a uniform dispersion of the filler in the polymer without agglomeration, and this is readily achieved by inducing sufficient shear and heat to cause the polyolefin component to melt. However, time and temperature of mixing should be controlled as is normally done to avoid molecular weight degradation.

11

Film Extrusion and/or Embossing

Films contemplated by certain embodiments of the present invention may be made utilizing a polyolefin, by processes including, blown, cast, and cast melt embossed, preferred is a cast melt embossed film process. In such extrusion processes, the films of the present invention can be formed into a single layer film, or may be one layer or more of a multi-layer film or film composite. Alternatively, the polyolefin films described in this disclosure can be formed or utilized in the form of a resin blend where the blend components can function to modify WVTR, physical properties, draw-down, sealing, cost or other functions. Both blend components and functions provided thereby will be known to those of ordinary skill in the art. Films of the present invention may also be included in laminated structures. As long as a film, multi-layer film, or laminated structure includes one or more polyolefin/filler film layers having the WVTR, or draw-down, and the like of the film, it will be understood to be contemplated as an embodiment of the present invention.

The film forming composition (polyolefin/polyolefin blends and filler or fillers) may be manufactured into a precursor film by conventional tubular extrusion (blown bubble process) or by cast extrusion. Film formation by cast extrusion may be more convenient, as the film can be immediately melt embossed as described below.

In the cast extrusion process, the molten resin is extruded from an elongate die in the form of a web. The web may be pulled over at least one patterned embossing roller to chill and solidify the film with an embossed pattern for reasons discussed further below. The precursor film is may be produced to a gauge of from about 0.5 to 6 mils, preferably from about 0.75 to about 5 mils, more preferably from about 1 to about 4 mils, most preferably from about 1.5 to about 3 mils, which allows for further stretching as described below. However, those of ordinary skill in the art will understand that many factors affect the response of the precursor film to the ring-rolling process. It is our intent that the film or film part of a film composite will have breathability, and at least a minimum of physical properties to maintain its function, that is the film after ring-rolling (either as part of a composite or by itself) should have the ability to perform its function. For instance in the side panel of a diaper, the film might even have substantial voids, providing excellent breathability, but having enough strength to maintain the physical form of the diaper or other article during its use.

The extrusion temperatures, die temperatures, and embossing roller (if used) temperatures will depend on the composition employed, but generally will be in the following ranges for compositions of the present invention prepared by cast extrusion:

3 Melt Temperature (° F.)	350–550
Die Temperature (° F.)	350–550
Embossing Roller Temperature (° F.)	50–130

Embossing may be used on the surface of polyolefin films to reduce gloss, although such will not be the films primary function in a ring-rolling process. Embossing can be imposed on the precursor film surface at the time of the film fabrication for cast extrusion, or at a subsequent time for cast or tubular extrusion by procedures well known in the art.

For the present invention, embossing may impose a pattern of different film thicknesses within the precursor film, and can be conducted with an micro/macro pattern, e.g.

12

cross-hatching, dots, lines, circles, diamonds, hexagons, etc. The pattern can be either in line and/or off line and the rollers can be engraved with either pin up and/or pin down type configurations.

5 Use of the Precursor Film

Traditionally, breathable film has been made using such film precursors as described above, and then orienting the film by a variety of techniques, such as tentering in one or both of the machine direction (MD) or cross or transverse direction (TD). The oriented and breathable film could then be used for a variety of end use articles, such as diapers (usually back sheets, but also top sheets), feminine hygiene items, bandages, catamenial pads, panty liners, incontinent briefs, and the like. However, use of certain embodiments of the present invention will include the precursor film either by itself or a film composite in an interdigitating grooved roller process. By film composite, we intend that one or more additional layers or materials are added or laminated to the film. Such additional materials and layers include synthetic woven, synthetic non-woven, synthetic knit, non-woven, apertured film, macroscopically expanded three-dimensional formed film, filled compositions or laminates and/or a combination of these items. The non-wovens may be made by processes including, but not limited to spunlace, spunbond, meltblown, carded and or air-through or calendar bonded. The materials or layers of the composite can be combined by many method known to those of ordinary skill. For instance, adhesives (including spray adhesives, hot melt adhesives, latex based adhesives and the like), thermal bonding, ultrasonic bonding, extrusion lamination, needle punching, and the like. For instance, in the manufacture of infant diapers, toddler training pants, adult incontinence devices, feminine hygiene items, medical gowns, medical drapes, and house wrap, parts or all of the final product may be assembled (by for instance heat or adhesive lamination) then the partial or finished construction is passed through one or more pairs of interdigitating grooved-rollers to render the precursor film high in WVTR.

Stretching

High WVTR film, film composites or fabricated articles made therefrom may achieved by stretching the precursor film to form interconnected voids prior to ring-rolling. Stretching or "orientation" of the film may be carried out monoaxially in the machine direction (MD) or the transverse direction (TD) or in both directions (biaxially) either simultaneously or sequentially using conventional equipment and processes following cooling of the precursor film.

Blown films are preferably stretched in the machine direction or in both directions whereas cast films are preferably stretched in the transverse direction. For orientation in the MD, the precursor film is passed around two rollers driven at different surface speeds and finally to a take up roller. The second driven roller which is closest to the take up roller is driven faster than the first driven roller. As a consequence the film is stretched between the driven rollers.

Stretching of melt embossed precursor films either using both a tentering device and a directly in a ring-rolling device or just the ring-rolling device produces breathable films having the desired water vapor permeability. The resulting films had greater permeability in the areas of reduced thickness in comparison to the areas of greater thickness.

Preferably, the film is stretched through a pair or pairs of interdigitating rollers. In this embodiment machine direction orientation is accomplished by stretching the film through a gear like pair of rollers. Transverse direction orientation is accomplished by stretching the film through a pair of disk like rollers. The preferred embodiment employs rollers with

13

a tooth pitch, $W=0.080$ ", however a pitch of 0.040 " to 0.500 " is acceptable. The tooth depth (d), is preferably 0.100 ", however a depth of 0.030 " to 0.500 " is acceptable (see FIG. 4). For the transverse direction orientation rollers, the depth may be up to 1 " as mechanical interference is less of an issue with the TD rollers. The preferred embodiment employs interdigitating grooved rollers that can be temperature controlled from 50°F. to 210°F. , more preferred is a range of from 70°F. – 190°F. , more preferred is 85°F. – 180°F. , most preferred is 95°F. – 159°F. Roller temperature may be maintained through internal liquid, electrical systems, an external source of cooling/heating, combinations thereof, and other methods which will be apparent to those of ordinary skill in the art. The preferred embodiment is internal liquid cooled/heated rollers.

The depth of engagement of the roller teeth determines the amount of orientation imparted on the film. A balance must be drawn between the depth of engagement and the level of filler in the film, as many properties are affected as depicted in Table 3 below.

TABLE 3

Relationships Between Process Factors and Resulting Film Properties					
Increasing Process Factor	WVTR	Dart Impact	Basis Weight	CD Tensile	MD Tear
CaCO_3	Increase	Decrease			Decrease
MD	Increase	Decrease	Decrease		Decrease
Orientation	/				
TD Orientation	Increase	Decrease	Decrease	Decrease	
Roll	Increase		Decrease		
Temperature					

Although not thoroughly investigated, controlling of the strain on the film during stretching is believed to be important to controlling the WVTR. For stretching in the transverse direction, strain is controlled for a given stretch ratio by adjusting the film speed and the stretching distance. The stretching distance is measured, between the point where the film starts to increase in width to the closest point where the film is fully stretched. For stretching in the machine direction, strain is controlled for a given stretch ratio by controlling film speed and the gap between the first and second driven rollers.

A range of stretching ratios from 1:2 to 1:5 prove satisfactory for MD stretching with a ratio of 1:4 being preferred. A range of stretching ratios of 1:2 to 1:5 prove satisfactory for TD stretching with a ratio of 1:4 being preferred.

It is a further object of this invention to provide such a process for producing a barrier layer having high liquid strikethrough resistance.

The process of ring-rolling also may activate the elasticity of the web (dependent upon specific ring-rolling pattern used), in addition to imparting breathability to the web.

Precursor webs containing elastomeric components add to the elasticity developed during the ring-rolling process. Ring-Rolling Process

To illustrate the process, the term web or webs are used. As used herein, the term web will include a precursor film and optionally one or more additional webs or layers, as discussed above, for instance one or more non-woven webs and/or one or more film webs. Such web components can be pre-assembled or laminated. Prior to ring-rolling, at least one additional web may be added. Web 10 and alternatively optional web 11 may be webs of a precursor film with either another film or fabric (11) the precursor film will have a thickness from 0.5 to 6 mils. For example, the optional web

14

11 may be melt-blown webs of the type taught in the article entitled "Superfine Thermoplastic Fibers" by Van A. Wente, appearing in Industrial Engineering Chemistry, August, 1956, Vol. 48, No. 8 (pages 1342–1346). While melt-blown material may be nylon, polyester, or any polymer or polymer blend capable of being melt-blown, a melt-blown polypropylene web is preferred. A melt-blown web could comprise two or more zones of different melt-blown polymers. Melt-blown webs having a basis weight of up to about 30 g/m^2 or greater can be used in the present invention, but lower weight webs are generally preferred in order to minimize the cost of the barrier layer produced therefrom. Technology provides for the production of melt-blown webs with a minimum basis weight of about 3 g/m^2 , but available commercial melt-blown webs generally have a basis weight of 10 g/m^2 or more. The preferred basis weight for optional web 11 is from about 10 g/m^2 to about 30 g/m^2 ; most preferably from about 10 g/m^2 to about 20 g/m^2 . The density of melt-blown optional web 11 is preferably up to about 0.15 g/cm^3 and most preferably up to about 0.1 g/cm^3 . Web 10 and optional web 11 may be the same or different.

Web 10 and (when present) optional web 11 have preferably been rolled up together as plies with adjacent surfaces on feed roller 20. They are unrolled from feed roller 20 retaining their contiguous relationship and passed into the nip of interdigitating grooved rollers 24 and 25. Grooved rollers 24 and 25 have grooves perpendicular to the axis of the rollers (parallel to the machine direction) as shown in FIG. 2 which is a sectional view of grooved rollers 24 and 25 taken along line 2–2 of FIG. 1.

It has been found that the web 10 and optional web 11 will be stretched more uniformly with less tendency to tear the webs when interdigitating grooved rollers 24 and 25 are heated. The rollers are preferably heated such that their surface temperature are within the range of about 160°F. to 220°F. ; more preferably within the range of 180°F. to 200°F.

FIG. 1 shows a preferred arrangement of interdigitating grooved rollers 24 and 25 being located with their centers in a horizontal plane and webs 10 and 11 contacting the surface of roll 24 for about one-fourth of a revolution before entering the nip between rollers 24 and 25; this provides an opportunity for the web or webs 10 and optional web 11 to be heated prior to entering the nip. However, interdigitating grooved rollers 24 and 25 could be positioned with their centers in a vertical plan or at any other angle and web 10 and optional web 11 could be fed directly into the nip of the rollers. Preheating of webs 10 and 11 if found to be necessary in order to avoid tearing of the webs, could be accomplished in any conventional manner. FIG. 4 illustrates how the web 10 is stretched between the interdigitating grooved rollers 24 and 25.

The webs where two or more webs are fed is stretched and enmeshed while passing between the interdigitating grooved rollers 24 and 25 and are thus lightly bonded together producing final product 12. Where final improved WVTR composite film 12 has been stretched in the cross-machine direction by the grooved rollers 24 and 25 of FIGS. 1 and 2, a device such as a curved Mount Hope roll 26 or tenter clamps is needed to extend the now high WVTR film or film composite to its fullest width. The extended and smoothed film 12 is then rolled up on a takeup roller 27.

The amount of lateral stretch imparted to web plies by the grooved rollers 24 and 25 will depend on the shape and depth of the grooves of the rollers, and on the gap spacing between the rollers.

U.S. Pat. No. 4,223,059, issued to Eckhard C. A. Schwarz on Sep. 16, 1980 discloses interdigitating rollers having

15

grooves of generally sine-wave shape cross-section which may be used for the present invention. U.S. Pat. No. 4,153, 664 issued to Rinehardt N. Sabee on May 8, 1979, discloses the stretching of polymeric webs by ring-rolling with rollers having grooves with a variety of shapes. The shape of the grooves of the rollers will generally determine whether the web is stretched uniformly or at incremental, spaced portions of the web. Incremental stretching of the web is more likely to cause some local tearing of film or film composites which would damage the liquid strikethrough resistance of the film and, therefore, is not preferred for the present invention.

A preferred groove pattern for interdigitating rollers **24** and **25** is shown in FIG. **3** which is an enlarged view of area **3** of FIG. **2**. FIG. **3** shows a partial cutaway view of interdigitating rollers **24** and **25**. Teeth **54** and **55** of grooved roller **24** intermesh with teeth **51**, **52** and **53** of grooved roller **25**. The length **60** of the teeth is 3.81 mm, and the distance **61** between the centerlines of adjacent teeth on each roller is 2.54 mm. The teeth have generally straight sides which are at an angle **62** from a plane perpendicular to the axis of rollers **24** and **25** of 9° 17". The land at the base of the teeth has a radius **63** of 0.51 mm. Sharp corners **66** at the ends of the teeth are removed.

It is preferred that the interdigitating grooves of rollers **24** and **25** be perpendicular to the axis of the rollers. In this way, the maximum number of grooves of a given size will engage the web **10** and **11** at the same time and impact stretch to the webs. By having the maximum number of teeth engage the web at a given time, a more uniform stretching of the webs is achieved so that local tearing of the film or film composite is minimized. The stretched film **12** can be easily smoothed in the cross-machine direction.

A reproducible gap setting between grooved rollers **24** and **25** can be achieved by having the bearing of one of the grooved rollers, e.g. **24**, stationary while those of the other grooved roller **25** can be moved in the horizontal direction. Grooved roller **25** is moved in the horizontal direction. Grooved roller **25** is moved toward roll **24** until its teeth are intermeshed with those of grooved roller **24** and it will move no further. The bearings of grooved roller **25** are then moved away from grooved roller **24** a measured distance, the gap setting. The preferred gap setting for practicing the present invention are from about 0.76 mm. to about 1.65 mm. With grooved rollers **24** and **25** having a tooth configuration as shown in FIG. **3** and described above, the maximum width of film or film composite layer **12** which can be achieved for a single pass is about 2½ to 3 times the width of starting webs **10** and **11**. By incising the gap between grooved rollers **24** and **25**, the amount of lateral stretch imparted to webs **10** and **11** is decreased. Therefore, the width of film or film composite **12** compared to the width of starting web can be varied for a single pass between grooved rollers **24** and **25** from a maximum increase of 2½ to 3 times to no increase by the appropriate gap setting.

If it is desired to stretch the web more than can be achieved by a single pass between the grooved rollers, multiple passes between grooved rollers **24** and **25** can be used.

Basis weight is generally an important property desired to be controlled for film or film composite layer (total ring-rolled web) **12**. For cost reasons, the lightest film or film composite that will provide sufficient breathability is desired. A basis weight of the film produced by itself will be generally above 20 g/cm². The desired basis weight can be obtained by controlling the amount of stretch imparted to web **10** and optional web **11** by grooved rollers **24** and **25** as

16

described above, and by the selection of the basis weights of the starting webs **10** and **11**. For the present invention, starting webs **10** and **11** have a cumulative basis weight in the range of about 1.1 to 4 times the ultimate desired basis weight, preferably in the range of about 1.5 to 3 times the desired basis weight, most preferably about 2 times the desired basis weight. Correspondingly, the desired width of breathable film or film composite **12** can be achieved by selecting a proper combination of stretch imparted by the grooved rollers **24** and **25** and initial width of starting webs **10** and **11**. For the present invention, the initial width of starting webs **10** and **11** before passing between grooved rollers **24** and **25** is within the range of about 0.9 to about 0.25 times the desired width, preferably within the range of about 0.7 to about 0.3 times the desired width, most preferably about 0.5 times the desired width.

Properties of Films Produced WVTR

In an embodiment of the present invention, certain films and articles made therefrom have higher WVTR than previously thought possible. The WVTR of such films are greater than 100 g/m²/24 hr @ 37.8° C., 100% RH, preferably greater than 1000, and more preferably greater than 2000 g/m²/24 hr (37.8° C., 100% RH). Some applications benefit from film with a WVTR at or greater than 10,000 g/m²/24 hr @ 37.8° C., 100% RH.

Test Procedures

The test procedures used to determine the unique properties of the layers of the present invention and to provide the test results in the examples below are as follows:

Water Vapor Transmission Rate (WVTR)

Both a Mocon W1, and a Mocon W600 instrument are used to measure water evaporated from a sealed wet cell at 37.8° C. through the test film and into a stream of dry air or nitrogen. It is assumed that the relative humidity on the wet side of the film is approximately 100%, and the dry side is approximately 0%. The amount of water vapor in the air stream is precisely measured by a pulse modulated infra red (PMIR) cell. Following appropriate purging of residual air, and after reaching a steady state water vapor transmission rate, a reading is taken. WVTR of the test films are reported as grams of water/meter²/day. The output of the unit is calibrated to the results obtained with a film of known WVTR. The testing protocols are based on ASTM F1249-90.

Mocon W1

The Mocon W1 has a single test cell and an analog chart recorder. Air is pumped through a desiccant dryer, then through the test cell, and then past the PMIR sensor. A 5 minute purge of residual air is followed by a 6 minute test cycle with controlled air flow. The result is a steady state value for WVTR. The purge and test cycles are controlled manually. The unit is calibrated to a film with a known WVTR every 12 hours. Calibration results are control charted and adjustments are made to the instrument calibration accordingly.

Mocon W600

The Mocon W600 has 6 measurement cells with PMIR data fed into a computer. Nitrogen is fed through a desiccant dryer, then through the active test cell, then past the PMIR sensor. In addition to data compilation, the computer controls test cycle sequencing. All cells are purged simultaneously for an 8 minute period. This is followed by an 8 minute test cycle for each of the six cells. Total testing time is 56 minutes. Two of the test cells always measure reference films with a known WVTR.

17

Gurley Porosity

Teleyn Gurley Model 4190 Porosity Tester with sensitivity attachment is used. The procedure is as follows:

- a) Cut a strip of film (~2" wide) across the entire web width,
- b) Insert a film sample to be tested between orifice plates,
- c) Set the sensitivity adjustment on "5"
- d) Turn the inner cylinder so that the timer eye is vertically centered below the 10 cm³ silver step on the cylinder,
- e) Reset the timer to zero,
- f) Pull the spring clear of the top flange and releasing the cylinder, when the timer stops counting, the test is completed. The number of counts is multiplied by 10 and the resulting number is "Gurley seconds per 100 cm³".

It will be appreciated by those of ordinary skill in the art that the films of m-polyethylene resins of certain embodiments of the present invention, can be combined with other materials, depending on the intended function of the resulting film.

Other methods of improving and/or controlling WVTR properties of the film or container may be used in addition to the methods described herein without departing from the intended scope of the invention. For example, mechanical treatment such as micro pores.

Liquid Column Strikethrough Resistance Test

The liquid strikethrough resistance test is a method for determining the water pressure in millimeters of water at which water penetrates a repellent barrier layer at a specified

18

fill rate and with the water and barrier layer at a specified temperature. Such a test is described in *INDA Journal*, Vol. 5, No. 2, Karen K. Leonas; the strikethrough resistance of embodiments of the invention are from 50–500 cm.

The following non-limiting examples are provided for illustrative purposes only.

EXAMPLES

Examples 1–12

LLDPE/CaCO₃ films are made utilizing the following conditions, materials and equipment shown in Table 4.

Examples 1–12 used LL-3003.09 (a 3 MI, 0.917 g/cm³ polyethylene (Z-N) available from Exxon Chemical Co., Houston, Tex.) containing levels of CaCO₃ as shown in Table 4, blended with 100 parts of LL-3003.

Examples 13–16

Example 13–16 were made under the conditions shown in Table 4, Examples 1–12, but with Exceed® ECD-112 (a 3.4 MI, 0.917 g/cm³ density m-LLDPE from Exxon Chemical Co., Houston, Tex.) with filler, master batch (MB) and elastomer levels as shown in Table 5.

Examples 1–4, 9, 10, 11, 12, 13, 14 and 15 were run on a Davis Standard cast line. Examples 9, 10, 11, 12, 14, and 15 were oriented in the TD, Example 9, 10, 11, 12, and 15 were further MD drawn. Examples 5, 6, 7, 8, and 16 were run on a blown film extruder.

Each film sample was run through various ring-rolling apparatus as shown in Tables 5, 6 and 7, with the results for basis weight shown in Table 5, the results for WVTR in Table 6, the results for air porosity shown in Table 7.

TABLE 4

Condition	Example 1	Example 2	Example 3	Example 4	Example 5	Example 6	Example 7	Example 8
Material	A	B	B	B	C	D	E	F
Process	Cast/TD	Cast	Cast	Cast	Blown	Blown	Blown	Blown
Ext. RPM	17	6	8	11	45	65	65	61
Screen PSI	2600	2150	2380	2800	5290	6000	5730	6300
Die PSI	940	750	810	900	N/A	N/A	N/A	N/A
Melt Temp	390	374	378	388	400	410	411	430
Up Width	23	28	28	28	9	11	11	11
Down Width	62.4	N/A	N/A	N/A	N/A	N/A	N/A	N/A
FPM	165	65	77	102	30	28	30	28
MD Down	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Condition	Example 9	Example 10	Example 11	Example 12	Example 13	Example 14	Example 15	Example 16
Material	G	B	H	B	B	B	B	E
Process	Cast/TD/ MD/Drawn	Cast/TD/ MD Drawn	Cast/TD/ MD Drawn	Cast/TD/ MD Drawn	Cast	Cast/TD/ MD Drawn	Cast/TD/ MD Drawn	Blown
Ext. RPM	15	21	15	22	19	19	19	35
Screen PSI	3600	3440	3138	3302	3740	3740	3740	4750
Die PSI	N/A	N/A	N/A	N/A	1270	1270	1270	N/A
Melt Temp	414	402	390	350	430	430	430	425
Up Width	21	21	21	24	22	22	22	10
Down Width	83	77	82	89	N/A	63	63	N/A
FPM	181	195	186	140	340	340	340	25
MD Drawn	1:3	1:3	1:3	1:3	N/A	N/A	1:3	N/A
Material	LLDPE		CaCO ₃		EVA		SBS	
A	63%		37%					
B	50%		50%					
C	40%		40%		8%		12%	
D	35%		35%		12%		18%	
E	30%		30%		16%		24%	
F	40%		40%		20%			
G	55%		45%					
H	53%		47%					

TABLE 5

BASIS WEIGHT (Grams/Square Meter)										
PROPERTIES BEFORE ACTIVATION						PROPERTIES AFTER ACTIVATION				
						Type 2	Type 3	Type 4		
Example	Mat. Comp.**	Mfg. Meth.*	Weight g/m ²	WVTR	Air Porosity sec/100 cm ³	Type 1 Manual Stretch	Ring-Roll 0.400 DOE	Ring-Roll 0.175 DOE	Ring-Roll 0.100 DOE	Type 5 Tooth Pattern
1	A	AA	22	1318	>10000		Destroyed	Destroyed	21	N/A
2	B	BB	79	<100	N/A		23	N/A	N/A	N/A
3	B	BB	86	<100	N/A		25	N/A	N/A	N/A
4	B	BB	108	<100	N/A		29	N/A	N/A	N/A
5	C	CC	53	<100	N/A			N/A	N/A	
6	D	CC		<100	N/A			N/A	N/A	
7	E	CC	49	<100	N/A		21	N/A	N/A	
8	F	CC	54	<100	N/A			N/A	N/A	
9	G	DD	18	8000	190		Destroyed		N/A	N/A
10	B	DD	25	7000	300		Destroyed		N/A	N/A
11	H	DD	20	6100	642		Destroyed		N/A	N/A
12	B	DD	36	7100	898		Destroyed		N/A	N/A
13	B	BB	73	<100	N/A	29				
14	B	AA	23	7900	210					
15	B	DD	21	8000	263	22				
16	B	CC	22	<100	N/A	11				

*Compositions of Raw Materials

	LLDPE	CaCO ₃	EVA	SBS
A	63%	37%		
B	50%	50%		
C	40%	40%	8%	12%
D	35%	35%	12%	18%
E	30%	30%	16%	24%
F	40%	40%	20%	
G	55%	45%		
H	53%	47%		

**Manufacturing Methods

AA CAST/TD

BB CAST

CC BLOWN

DD

CAST/TD/MD/DRAWN

TABLE 6

WATER VAPOR TRANSMISSION RATE (g/square meter/24 hours)										
BASIS WEIGHT (Grams/Square Meter)										
PROPERTIES BEFORE ACTIVATION						PROPERTIES AFTER ACTIVATION				
						Type 2	Type 3	Type 4		
Example	Mat. Comp.**	Mfg. Meth.*	Weight g/m ²	WVTR	Air Porosity sec/100 cm ³	Type 1 Manual Stretch	Ring-Roll 0.400 DOE	Ring-Roll 0.175 DOE	Ring-Roll 0.100 DOE	Type 5 Tooth Pattern
1	A	AA	22	1318	>10000		Destroyed	Destroyed	750	N/A
2	B	BB	79	<100	N/A		1300	N/A	N/A	N/A
3	B	BB	86	<100	N/A		1300	N/A	N/A	N/A
4	B	BB	108	<100	N/A	1600	1100	N/A	N/A	N/A
5	C	CC	53	<100	N/A	400	360	N/A	N/A	800
6	D	CC		<100	N/A	200	350	N/A	N/A	400
7	E	CC	49	<100	N/A	200	290	N/A	N/A	200
8	F	CC	54	<100	N/A	200	240	N/A	N/A	450
9	G	DD	18	8000	190		Destroyed	7100	N/A	N/A
10	B	DD	25	7000	300		Destroyed	9200	N/A	N/A
11	H	DD	20	6100	642		Destroyed	9000	N/A	N/A
12	B	DD	36	7100	898	6900	Destroyed	7850	N/A	N/A
13	B	BB	73	<100	N/A	1400				
14	B	AA	23	7900	210	6400				
15	B	DD	21	8000	263	7350				

TABLE 6-continued

16	B	CC	22	<100	N/A	2600
*Compositions of Raw Materials						
		LLDPE		CaCO ₃	EVA	SBS
	A	63%		37%		
	A	63%		37%		
	B	50%		50%		
	C	40%		40%	8%	12%
	D	35%		35%	12%	18%
	E	30%		30%	16%	24%
	F	40%		40%	20%	
	G	55%		45%		
	H	53%		47%		

**Manufacturing Methods

AA CAST/TD

BB CAST

CC BLOWN

DD CAST/TD/MD/DRAWN

TABLE 7

AIR POROSITY (second/100 cm ³ /Square inch) BASIS WEIGHT (Grams/Square Meter)										
PROPERTIES BEFORE ACTIVATION						PROPERTIES AFTER ACTIVATION				
Example	Mat. Comp.**	Mfg. Meth.*	Weight g/m ²	WVTR	Air Porosity sec/100 cm ³	Type 1 Manual Stretch	Type 2 Ring-Roll DOE	Type 3 Ring-Roll DOE	Type 4 Ring-Roll DOE	Type 5 Tooth Pattern
1	A	AA	22	1318	>10000		Destroyed	Destroyed	>1000	N/A
2	B	BB	79	<100	N/A		4165	N/A	N/A	N/A
3	B	BB	86	<100	N/A		9966	N/A	N/A	N/A
4	B	BB	108	<100	N/A		5685	N/A	N/A	N/A
5	C	CC	53	<100	N/A		>10000	N/A	N/A	890
6	D	CC		<100	N/A		>10000	N/A	N/A	6320
7	E	CC	49	<100	N/A		>10000	N/A	N/A	>10000
8	F	CC	54	<100	N/A		>10000	N/A	N/A	640
9	G	DD	18	8000	190		Destroyed	33	N/A	N/A
10	B	DD	25	7000	300		Destroyed	48	N/A	N/A
11	H	DD	20	6100	642		Destroyed	5	N/A	N/A
12	B	DD	36	7100	898		Destroyed	17	N/A	N/A
13	B	BB	73	<100	N/A					
14	B	AA	23	7900	210					
15	B	DD	21	8000	263	258				
16	B	CC	22	<100	N/A					
*Compositions of Raw Materials										
		LLDPE		CaCO ₃	EVA	SBS				
	A	63%		37%						
	A	63%		37%						
	13	50%		50%						
	C	40%		40%	8%	12%				
	D	35%		35%	12%	18%				
	E	30%		30%	16%	24%				
	F	40%		40%	20%					
	G	55%		45%						
	H	53%		47%						

** Manufacturing Methods

AA CAST/TD

BB CAST

CC BLOWN

DD CAST/TD/MD/DRAWN

Example 17

A blend of 57% ECC FilmLink 400 CaCO₃ was combined with 33% Exxon PD 7623 Impact Copolymer, 2% Exxon LD-200.48, and 8% Exxon Exact 313 1 oriented in inter-

digitating rollers of 0.080" pitch. The MD depth of engagement was 0.020", and the TD depth of engagement was 0.040". The temperature of the interdigitating grooved rollers was 140° F.

23

Example 18

A blend of 57% ECC FilmLink 400 CaCO₃ was combined with 33% Exxon PD 7623 Impact Copolymer, 2% Exxon LD-200.48, and 8% Exxon Exact 3131 oriented in interdigitating rollers of 0.080" pitch. The MD depth of engagement was 0.020", and the TD depth of engagement was 0.040". The temperature of the interdigitating grooved rollers was 110° F.

Example 19

A blend of 57% ECC FilmLink 400 CaCO₃ was combined with 33% Exxon PD 7623 Impact Copolymer, 2% Exxon LD-200.48, and 8% Exxon Exact 3131 oriented in interdigitating rollers of 0.080" pitch. The MD depth of engagement was 0.020", and the TD depth of engagement was 0.040". The temperature of the interdigitating grooved rollers was 70° F.

As can be seen from Table 8, the WVTR rise from a roller temperature of 70° F. (considered ambient temperature) to 110° F. then 140° F. is dramatic, unexpected and surprising. It would be expected that heating the film would soften it and the polymer would not tear away from the filler as easily. Such a result would likely cause fewer or smaller pores, and thereby reduced WVTR. Accordingly, the significant increase in WVTR produced by using heated rollers is both surprising and unexpected.

TABLE 8

	Example 17	Example 18	Example 19
Roller Temperature (° F.)	140	110	70
Basis Weight (g/m ²)	43	40	39
WVTR (g/m ² /day)	4100	3000	1900
Dart Impact (g)	240	300	300
MD Ultimate (g/in)	1585	1532	1453
MD Elongation (%)	408	431	442
TD @ 5% (g/in)	457	389	388
TD Ultimate (g/in)	785	1166	1049
TD Elongation (%)	351	358	357
MD Elmendorf Tear (g)	166	208	205

A linear regression analysis reveals that with the above fixed formulation, depth of activation water vapor transmission rate is predicted by the following equation:

$$WVTR = 329.73 + 31.2162 \times \text{Roller Temperature (° F.)}$$

Example 20

A blend of 52% ECC FilmLink 400 CaCO₃ was combined with 48% Exxon PD 7623 Impact Copolymer Polypropylene. Film was oriented off line with interdigitating rolls of 0.100" pitch. The MD depth of engagement was 0.030" and the TD depth of engagement was 0.019".

Example 21

A blend of 52% ECC FilmLink 400 CaCO₃ was combined with 40% Exxon PD 7623 Impact Copolymer, 2% Exxon LD-202.48, and 6% Exxon SLX9101. Film was oriented in interdigitating rolls of 0.080" pitch. The MD depth of engagement was 0.028", and the TD depth of engagement was 0.034".

Example 22

A blend of 55% ECC FilmLink 400 CaCO₃ was combined with 31% Exxon PD 7623 Impact Copolymer, 4% Exxon LD-202.48, 2% Ampacet 110131 TiO₂ concentrate, and 8%

24

Exxon Exact 3131. Film was oriented in interdigitating rolls of 0.080" pitch. The MD depth of engagement was 0.021", and the TD depth of engagement was 0.037".

Table 9 demonstrates the high absolute values of tear and impact strength relative to known polypropylene breathable films. Also shown is the further property improvement made by the addition of minority amounts of other polyolefins.

TABLE 9

Film Properties			
	Example 20	Example 21	Example 22
Basis Weight (g/m ²)	41.0	40.6	40.3
WVTR(g/m ² /day)	1457	1462	1400
Dart Impact (g)	210	315	315
MD Ultimate (g/cm)	625	609	604
MD Elongation (%)	423	482	448
TD @ 5% (g/cm)	231	151	140
TD Ultimate (g/cm)	367	504	440
TD Elongation (%)	410	464	398
Light Transmission (%)	45	43	39
MD Elmendorf Tear (g)	79	195	198

While the present invention has been described and illustrated by reference to particular embodiments thereof, it will be appreciated by those of ordinary skill in the art that the invention lends itself to variations not necessarily illustrated herein. For example, it is not beyond the scope of this invention to include additives with the claimed improved, high WVTR film process. For this reason, then, reference should be made to the appended claims and the remainder of the specification for purposes of determining the true scope of the present invention.

What is claimed is:

1. A process for producing a breathable film composite, comprising the steps of:

providing a film composite having at least a first layer and a second layer, the first layer comprising a polyolefin film, the polyolefin film comprising a polyolefin composition and a filler, the filler concentration in a range of from about 16.5 wt % to about 71.5 wt % of the polyolefin composition; and

simultaneously passing the first layer and second layer between at least one pair of interdigitating grooved rollers having a surface temperature of from 95° F. to 159° F. to produce a film composite having a WVTR greater than 200 g/m²/day at 38° C. and 90% relative humidity.

2. The process of claim 1 wherein the step of passing the layers between at least one pair of interdigitating grooved rollers further comprises contacting the composite with the surface of one of the interdigitating grooved rollers that has been heated in the range of from 95° F. to 159° F. for at least one-fourth of a revolution before entering the nip between the pair of interdigitating grooved rollers providing for heating of the precursor film before entering the nip of the rollers.

3. The process of claim 1 wherein the initial basis weight (weight/area) of the precursor film is from 1.5 to 3 times the basis weight of the film after stretching.

4. The process of claim 1 further comprising the step of ensuring that the film composite is at least 110° F. as it enters a nip of the at least one pair of interdigitating grooved rollers.

5. The process of claim 1 further comprising the step of preheating the film composite to at least 110° F. before passing it through the at least one pair of interdigitating grooved rollers.

25

6. The process of claim 1 wherein the WVTR of the composite is greater than 1000 g/m²/day at 38° C. and 90% relative humidity.

7. The process of claim 1 wherein in the step of providing a film composite, at least the first layer is embossed to impose thereon a pattern of multiple film thickness.

8. The process of claim 1 wherein at least the second layer is embossed to impose thereon a pattern of multiple film thickness.

9. A process for producing a breathable film composite, comprising the steps of:

providing a film composite having at least a first layer and a second layer, the first layer comprising a polyolefin film, the polyolefin film comprising a polyolefin composition with a filler concentration in a range of from about 16.5 wt % to about 71.5 wt % of the polyolefin composition, the second layer comprising a material selected from the group consisting of non-woven fabric, woven fabric, knit fabric, and combinations thereof; and

simultaneously passing the first layer and the second layer between at least one pair of interdigitating grooved rollers having a surface temperature of from 95° F. to 159° F. to produce a film composite having a WVTR greater than 200 g/m²/day at 38° C. and 90% relative humidity.

10. The process of claim 9 wherein the step of passing the layers between at least one pair of interdigitating grooved rollers further comprises contacting the composite with the surface of one of the interdigitating grooved rollers that has been heated in the range of from 95° F. to 159° F. for at least one-fourth of a revolution before entering the nip between the pair of interdigitating grooved rollers providing for heating of the precursor film before entering the nip of the rollers.

11. The process of claim 9 wherein the initial basis weight (weight/area) of the precursor film is from 1.5 to 3 times the basis weight of the film after stretching.

12. The process of claim 9 further comprising the step of ensuring that the film composite is at least 110° F. as it enters a nip of the at least one pair of interdigitating grooved rollers.

13. The process of claim 9 further comprising the step of preheating the film composite to at least 110° F. before passing it through the at least one pair of interdigitating grooved rollers.

14. The process of claim 9 wherein the WVTR of the composite is greater than 1000 g/m²/day at 38° C. and 90% relative humidity.

26

15. The process of claim 9 wherein in the step of providing a film composite, at least the first layer is embossed to impose thereon a pattern of multiple film thickness.

16. A process for producing a breathable film composite, comprising the steps of:

providing a film composite having at least a first layer and a second layer, the first layer comprising a polyolefin film, the polyolefin film comprising a polyolefin composition with a filler concentration in a range of from about 16.5 wt % to about 71.5 wt % of the polyolefin composition, the second layer comprising a material selected from the group consisting of apertured film, three-dimensional formed film, film laminates, a second polyolefin film, and combinations thereof; and

simultaneously passing the first layer and the second layer between at least one pair of interdigitating grooved rollers having a surface temperature of from 95° F. to 159° F. to produce a film composite having a WVTR greater than 200 g/m²/day at 38° C. and 90% relative humidity.

17. The process of claim 16 wherein the step of passing the layers between at least one pair of interdigitating grooved rollers further comprises contacting the composite with the surface of one of the interdigitating grooved rollers that has been heated in the range of from 95° F. to 159° F. for at least one-fourth of a revolution before entering the nip between the pair of interdigitating grooved rollers providing for heating of the precursor film before entering the nip of the rollers.

18. The process of claim 16 wherein the initial basis weight (weight/area) of the precursor film is from 1.5 to 3 times the basis weight of the film after stretching.

19. The process of claim 16 further comprising the step of ensuring that the film composite is at least 110° F. as it enters a nip of the at least one pair of interdigitating grooved rollers.

20. The process of claim 16 further comprising the step of preheating the film composite to at least 110° F. before passing it through the at least one pair of interdigitating grooved rollers.

21. The process of claim 16 wherein the WVTR of the composite is greater than 1000 g/m²/day at 38° C. and 90% relative humidity.

22. The process of claim 16 wherein in the step of providing a film composite, at least the first layer is embossed to impose thereon a pattern of multiple film thickness.

* * * * *