



(19) **United States**

(12) **Patent Application Publication**

Yong et al.

(10) **Pub. No.: US 2003/0173667 A1**

(43) **Pub. Date: Sep. 18, 2003**

(54) **SEMICONDUCTOR DEVICE HAVING A BOND PAD AND METHOD THEREFOR**

(52) **U.S. Cl. 257/748**

(76) Inventors: **Lois E. Yong**, Austin, TX (US); **Peter R. Harper**, Round Rock, TX (US); **Tu Anh Tran**, Austin, TX (US); **Jeffrey W. Metz**, Round Rock, TX (US); **George R. Leal**, Cedar Park, TX (US); **Dieu Van Dinh**, Austin, TX (US)

Correspondence Address:
MOTOROLA INC
AUSTIN INTELLECTUAL PROPERTY
LAW SECTION
7700 WEST PARMER LANE MD: TX32/PL02
AUSTIN, TX 78729


(21) Appl. No.: **10/097,036**
(22) Filed: **Mar. 13, 2002**

Publication Classification

(51) **Int. Cl.⁷ H02J 7/00**

(57) **ABSTRACT**

A bond pad (10) has a probe region (14) and a wire bond region (12) that are substantially non-overlapping. In one embodiment, the bond pad (10) is connected to a final metal layer pad (16) and extends over an interconnect region (24). The bond pad (10) is formed from aluminum and the final metal layer pad (16) is formed from copper. Separating the probe region (14) from the wire bond region (12) prevents the final metal layer pad (16) from being damaged by probe testing, allowing for more reliable wire bonds. In an application requiring very fine pitch between bond pads, the probe regions (14) and active regions (12) of a plurality of bond pads formed in a line may be staggered to increase the distance between the probe regions (14). In addition, forming the bond pads (10) over the interconnect region (24) reduces the size of the integrated circuit.

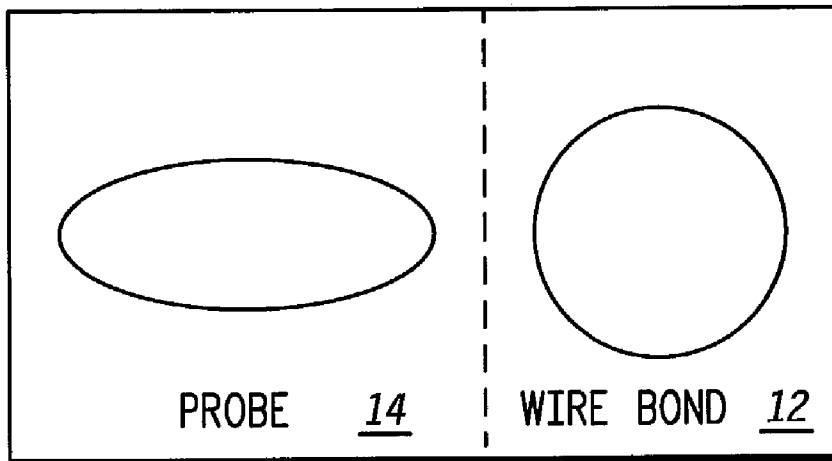

10

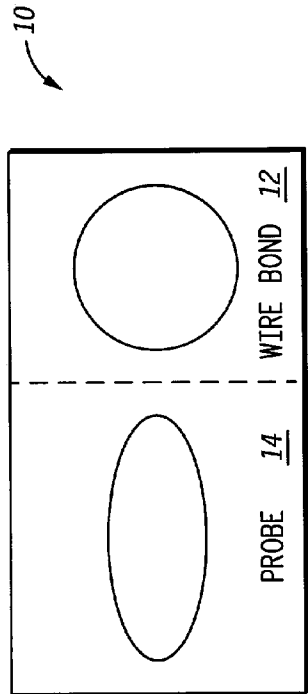


FIG. 1

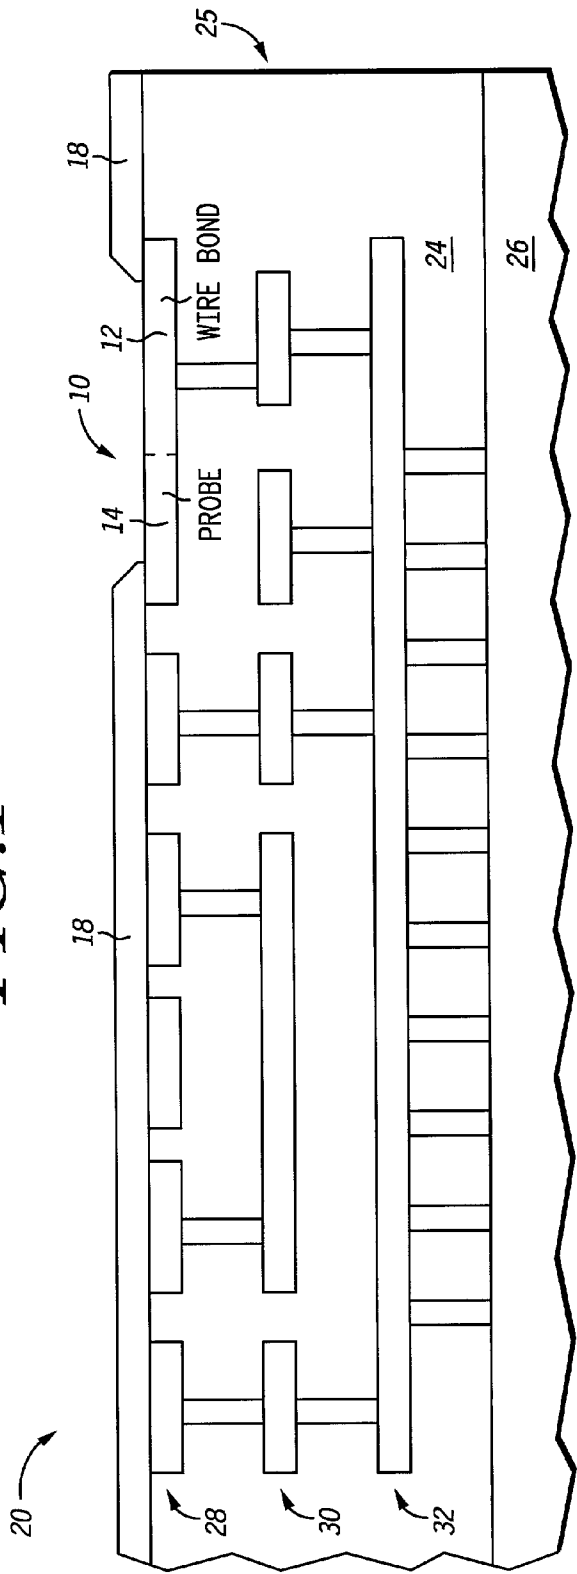


FIG. 2

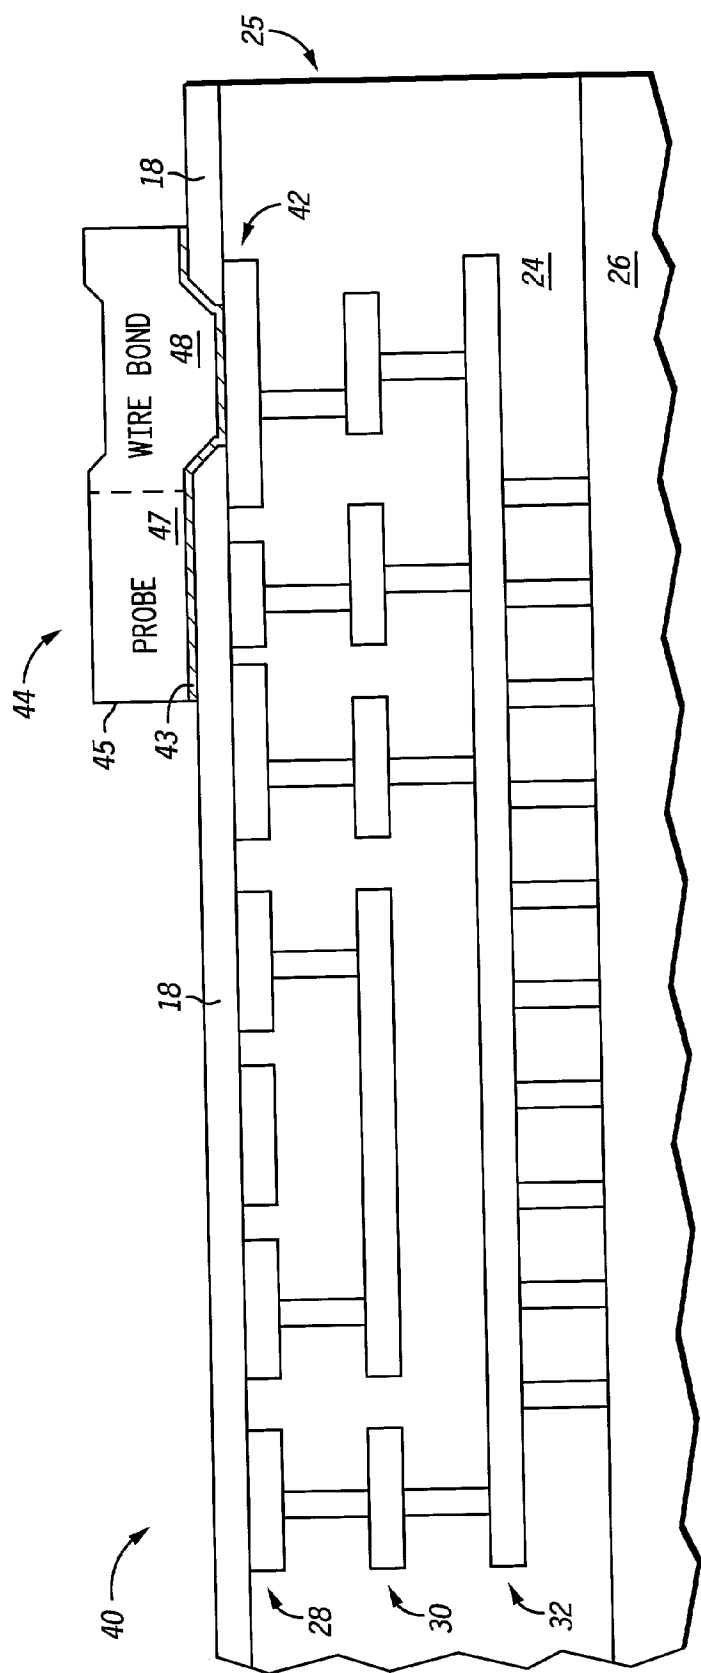


FIG. 4

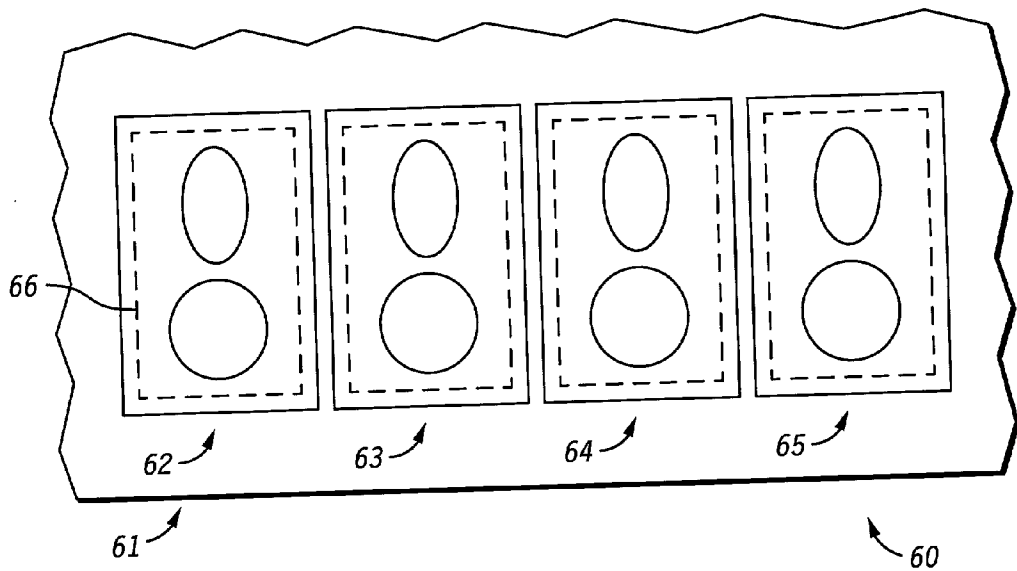


FIG. 5

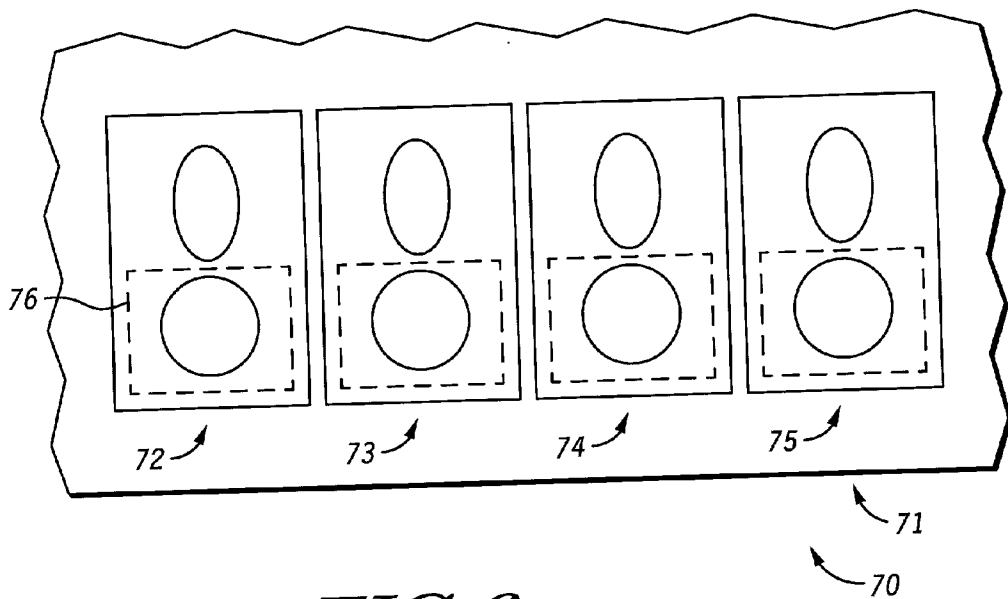


FIG. 6

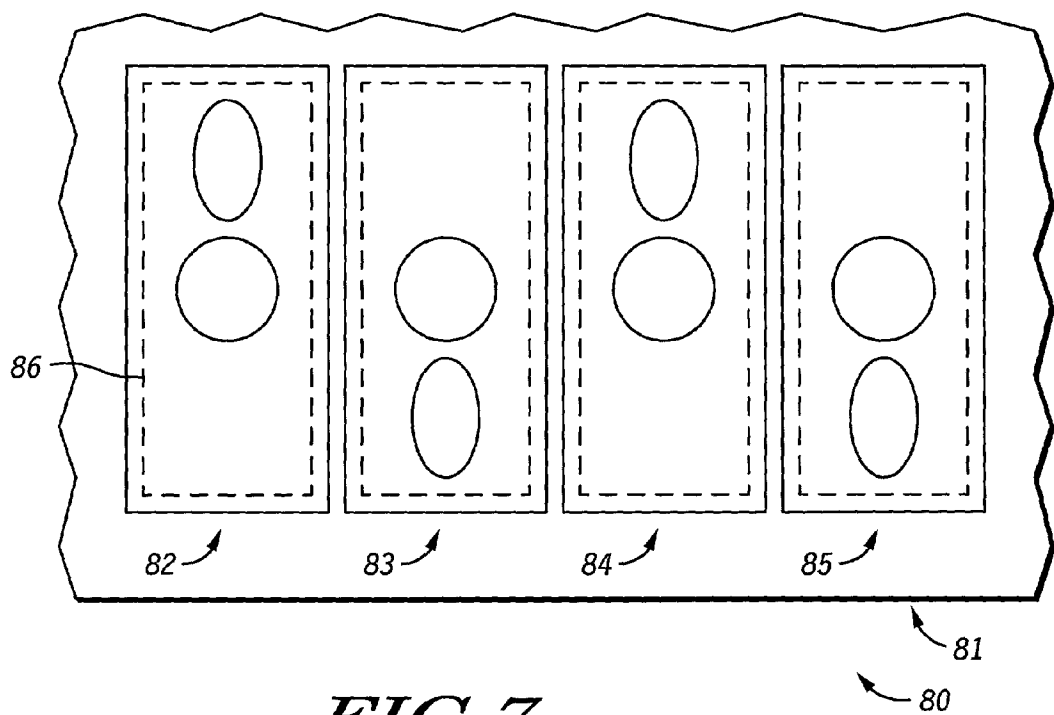


FIG. 7

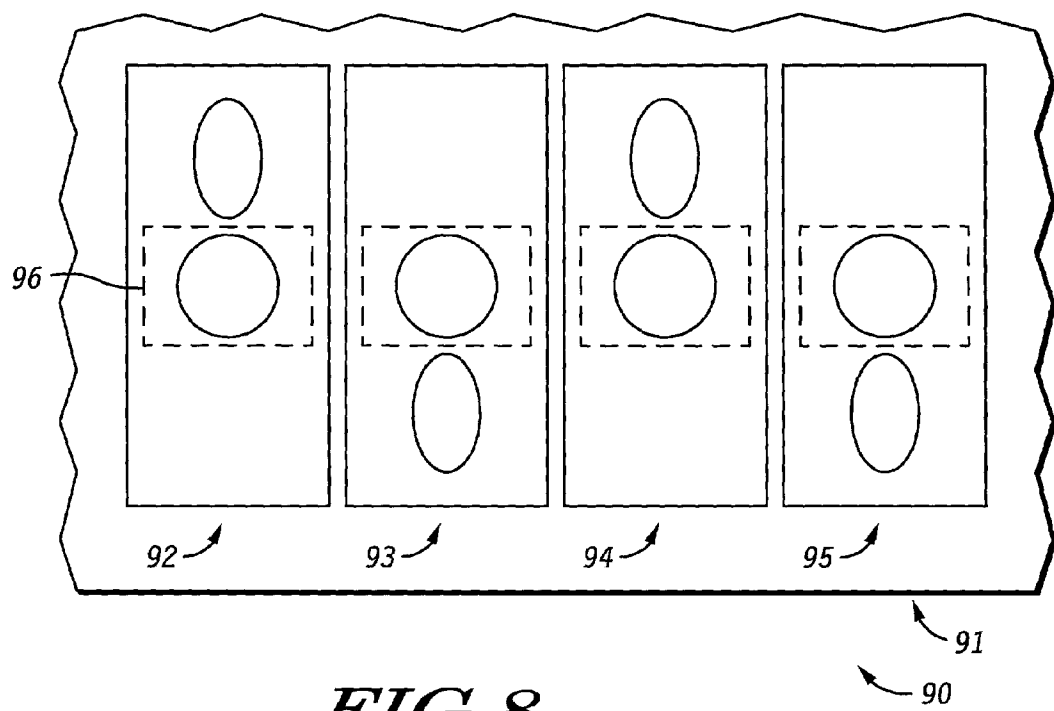


FIG. 8

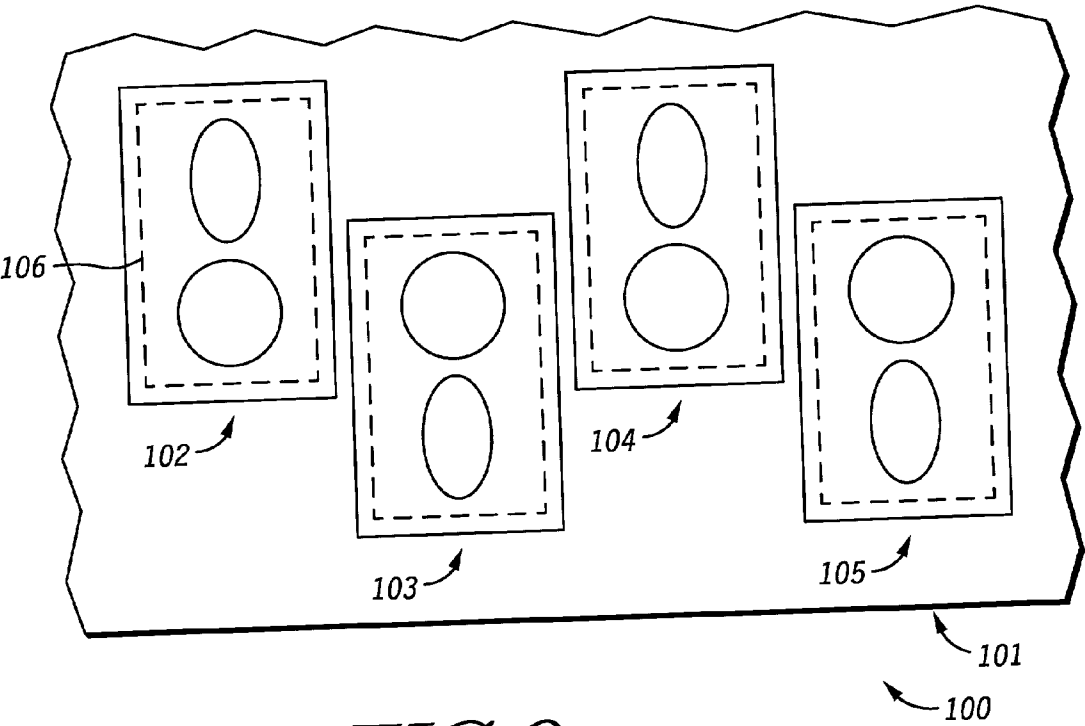


FIG. 9

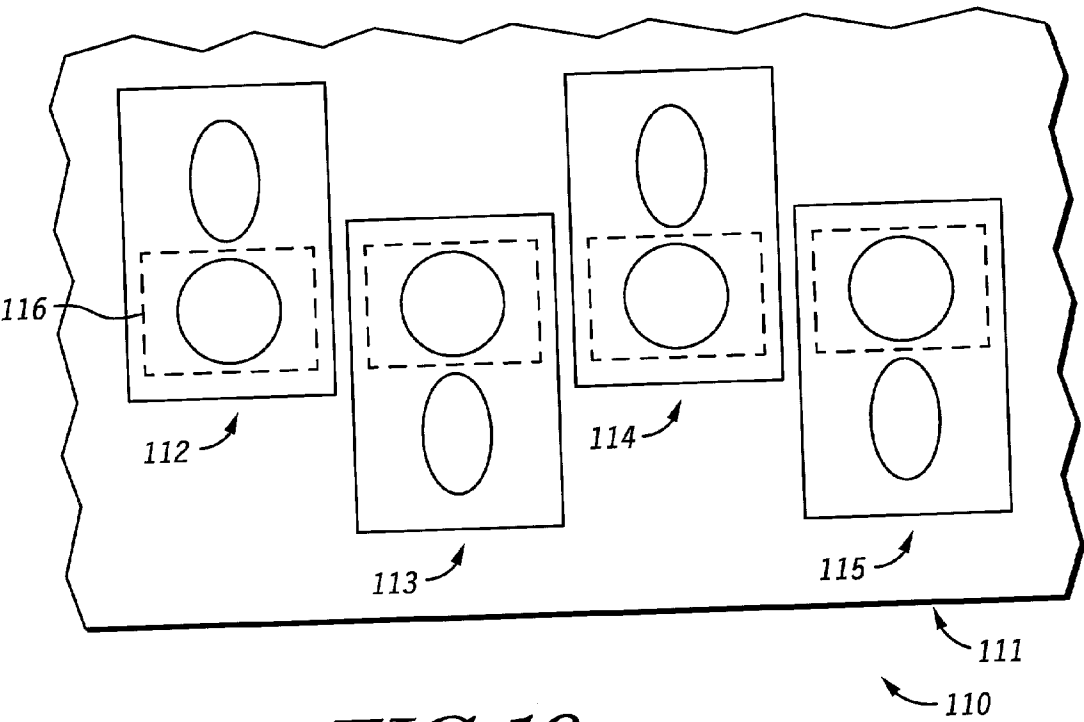


FIG. 10

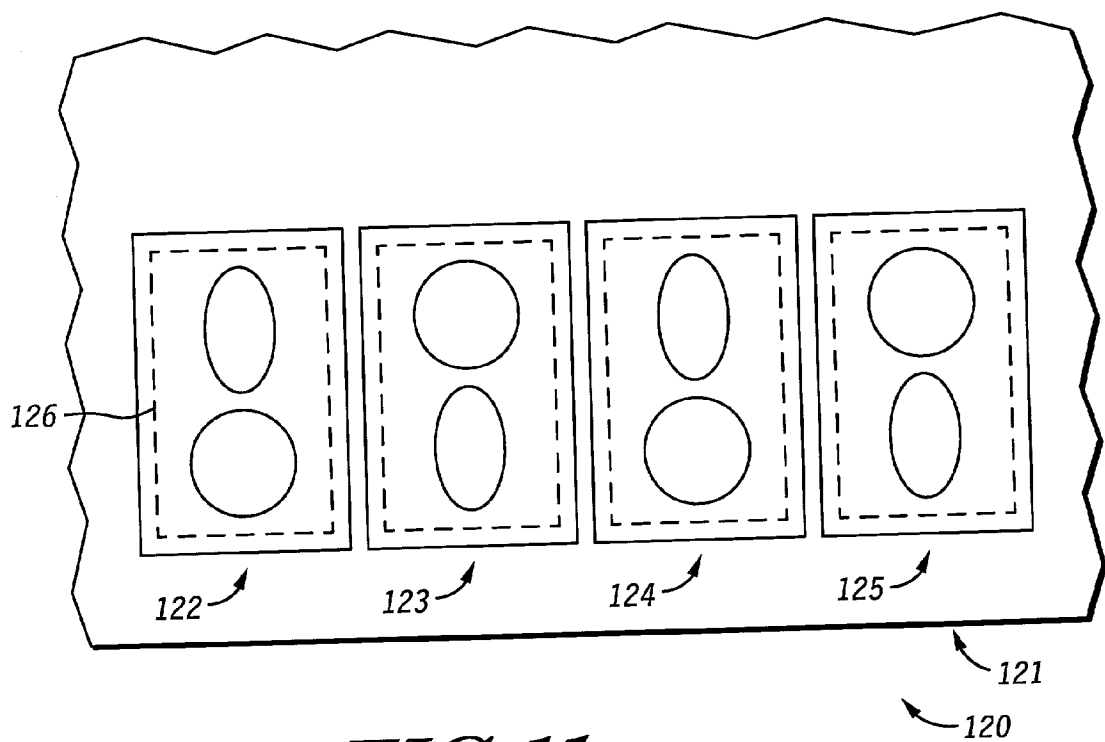


FIG. 11

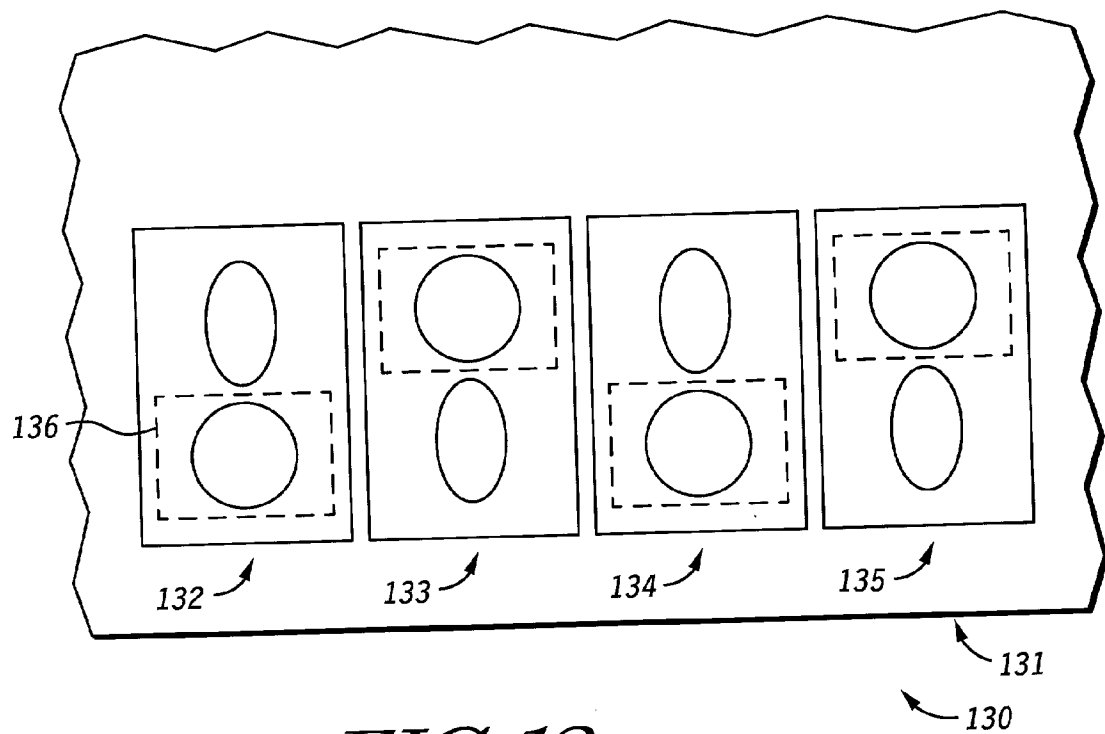


FIG. 12

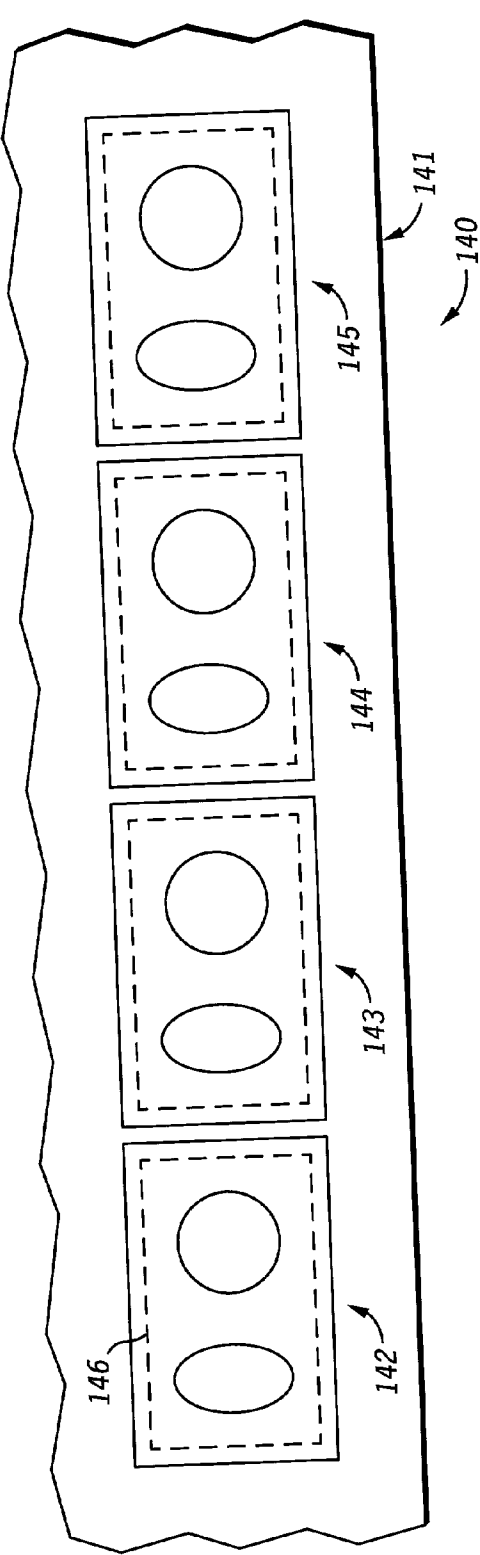


FIG. 13

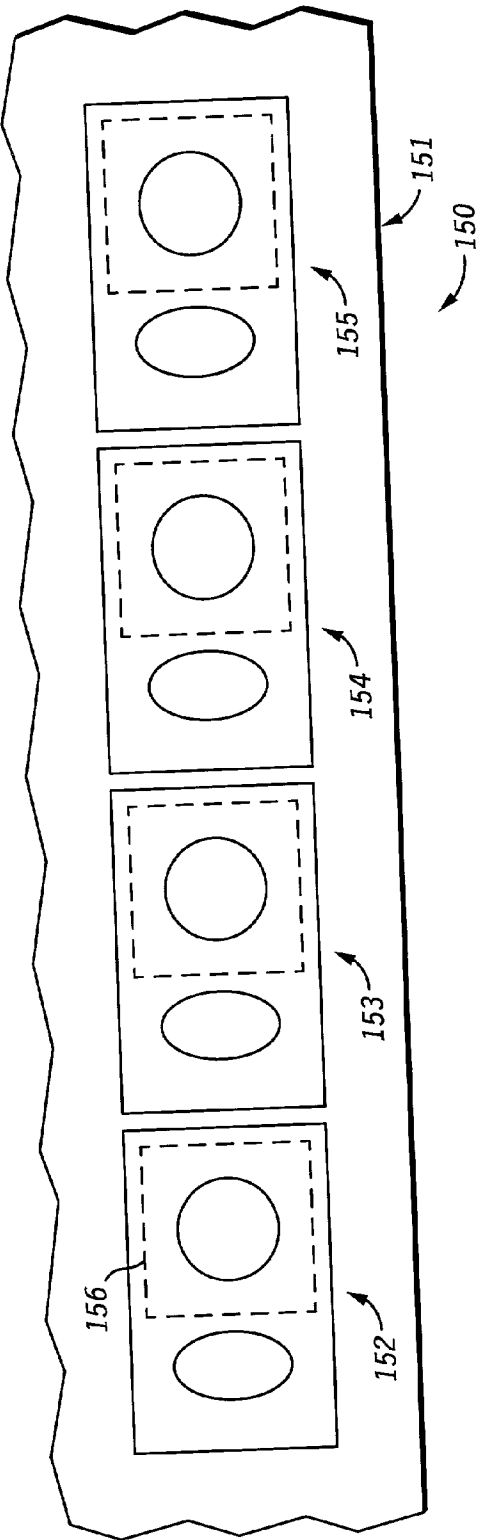


FIG. 14

SEMICONDUCTOR DEVICE HAVING A BOND PAD AND METHOD THEREFOR

FIELD OF THE INVENTION

[0001] The present invention relates generally to semiconductor devices, and more particularly, to a semiconductor device having a bond pad for probe and wire bond isolation and method therefor.

BACKGROUND OF THE INVENTION

[0002] In integrated circuit manufacturing, wire bonding is a well proven method used to connect a semiconductor die having electrical circuitry to a pin on a component package. Within integrated circuit manufacturing it is also a common practice to test the functionality of the semiconductor die before completing component assembly. "Probe test" is one such method used to test a semiconductor where a probe contact is commonly used as a mechanical and electrical interface to bond pads on the die.

[0003] One problem with using a mechanical interface, for example, a probe needle, is that the bond pads may be damaged or contaminated, preventing a reliable electrical connection between the bond pad and the package pin when the die is wire bonded. This problem is made worse by the decreasing bond pad geometries characteristic of modern deep sub-micron semiconductor technology. Decreasing bond pad geometries include smaller bond pads on which smaller wire bonds are formed. This increases quality and reliability concerns for bond pads that have been damaged by a probe contact. As the bond pad size decreases, the ratio of the damage caused by a probe contact to the bond pad area increases. Another problem with the shrinking bond pad geometries is that the spacing between the bond pads can be too small for robust probe testing using traditional methods such as cantilever probe needles.

[0004] Thus, there is a need for the ability to probe test a die without causing unreliable wire bond connections, and to ensure a robust probe test on die with small bond pads and fine pitch spacing of the bond pads. And in many cases, there is a need to meet the preceding criteria without affecting die size significantly to keep costs down.

BRIEF DESCRIPTION OF THE DRAWINGS

[0005] FIG. 1 illustrates a top down view of a wire bond pad in accordance with the present invention.

[0006] FIG. 2 illustrates a cross-sectional view of a semiconductor device having the wire bond pad of FIG. 1 in accordance with the present invention.

[0007] FIG. 3 illustrates a cross-sectional view of a semiconductor device in accordance with another embodiment of the present invention.

[0008] FIG. 4 illustrates a cross-sectional view of a semiconductor device in accordance with another embodiment of the present invention.

[0009] FIGS. 5 through 14 illustrate top down views of alternative embodiments of an integrated circuit having a plurality of wire bond pads in accordance with the present invention.

DETAILED DESCRIPTION

[0010] Generally, the present invention provides an integrated circuit having a plurality of bond pads. Each of the plurality of bond pads has a probe region and a wire bond region that are substantially non-overlapping and contiguous. In one embodiment, a bond pad extends over active circuitry and/or electrical interconnect layers of the integrated circuit. A portion of, or all, of the bond pad extends over the interconnect layers and a portion of the pad may be formed over a passivation layer and connected to a final metal layer pad. In one embodiment, the bond pad is formed from aluminum and the final metal layer pad is formed from copper.

[0011] Separating the probe region from the wire bond region and forming the bond pad over active circuitry has several advantages. In an application requiring very fine pitch between the bond pads, the probe regions and active regions may be staggered to effectively increase the distance between probe regions. By separating the probe region from the wire bond region, the wire bond region is not damaged by probe testing, allowing for more reliable wire bonds. Also, forming the bond pad over active circuitry, including metal interconnect layers, allows the integrated circuit to be smaller.

[0012] FIG. 1 illustrates a top down view of a bond pad 10 in accordance with the present invention. Bond pad 10 is separated into a wire bond region 12 and a probe region 14 as indicated by the dashed line. Bond region 12 and probe region 14 are laid out and sized as needed to accommodate the size and accuracy of the wire bonding and probing tools. In the illustrated embodiment, wire bond region 12 is shown smaller than probe region 14. In other embodiments, the regions may be sized differently.

[0013] Bond pad 10 can be designed in different semiconductor devices with cross-sectional views illustrated in FIG. 2, FIG. 3, FIG. 4, and FIG. 5. Note that like or similar elements are given the same reference number throughout the figures. Also note the figures are not drawn to scale. FIG. 2 illustrates a cross-sectional view of a semiconductor device 20 in accordance with the present invention. Semiconductor device 20 has an edge, or perimeter 25, passivation layer 18, bond pad 10, interconnect region 24, and active region, or substrate 26. The bond pad 10 has wire bond region 12 and probe region 14 (see FIG. 1) and is positioned relative to perimeter 25. Interconnect region 24 includes metal layers 28, 30, and 32 for routing power, ground, signal, and other lines between various components of semiconductor device 20. As illustrated in FIG. 2, metal layer 28, hereinafter referred to as final metal layer 28 is positioned closed to the surface of semiconductor device 20 also includes bond pad 10 where probe and wire bond are applied for making a connection to a device (not shown) located external to semiconductor device 20. The metal layers of interconnect region 24 may be interconnected between each other using vias. Interconnect metal layer 32 is electrically connected to active region 26 with contacts.

[0014] Semiconductor device 20 is subjected to conventional fabrication techniques for forming electrical circuits in active region 26, or substrate. The electrical circuits may be for various integrated circuit applications, such as for example, communications, transportation, general computation, or entertainment. In the illustrated embodiment, metal

layers **28**, **30**, and **32** are formed in conductive materials, for example, aluminum, copper, or gold. In other embodiments, there may be more or less metal layers. Bond pad **10** is formed as part of final metal layer **28**. After metal layer **28** is formed, passivation layer **18** is deposited over the surface of the semiconductor device. Openings are provided in passivation layer **18**, such as shown over bond pad **10**, to allow for electrical contacts, such as between semiconductor device **20** to a pin on a package.

[0015] Bond pad **10** is formed from a relatively thick layer of copper. Tests have shown that bond pad **10** is strong enough to withstand the impact of a wire bonding tool and can be formed over interconnect layer **24** without damage to interconnect layer **24** and any underlying circuits of active region **26** as illustrated in **FIG. 2**.

[0016] **FIG. 3** illustrates a cross-sectional view of a semiconductor device **34** in accordance with the present invention. Semiconductor device **34** has an edge, or perimeter **25**, passivation layer **18**, interconnect region **24**, active region **26**, and a bond pad **36**. Bond pad **36** includes final metal layer pad **16** and aluminum pad layer **35**. Aluminum pad layer **35** includes wire bond region **38** and probe region **37**. Bond pad **36** is positioned relative to the perimeter **25** of semiconductor device **34** and is separated from the final metal layer pad **16** by a barrier layer **22**. Bond pad **36** is laid out and sized to accommodate probe region **37** and wire bond region **38**.

[0017] Semiconductor device **34** is subjected to fabrication techniques and materials as described for semiconductor device **20** of **FIG. 2**. In addition, barrier layer **22** is formed over passivation layer **18** to provide a diffusion barrier and adhesion layer between final metal layer pad **16** and bond pad **36**, and between bond pad **10** and passivation layer **18**. After barrier layer **22** is deposited, aluminum pad layer **35** is deposited over barrier layer **22**. Barrier layer **22** and aluminum pad layer **35** are then patterned to form the final shape and size required for probe and wire bond regions. In the illustrated embodiment, aluminum pad layer **35** is formed from aluminum, but in other embodiments, aluminum pad layer **35** may be formed from other electrically conductive materials. Also, metal layers **28**, **30**, and **32** of the interconnect region **24**, and final metal layer pad **16** are formed from copper. In other embodiments, other conductive materials may be used for bond pad **36**, final metal layer pad **16**, and metal layers **28**, **30**, and **32**. For example, metal layers **28**, **30**, and **32**, and final metal layer pad **16** may be fabricated from aluminum, or gold, and final metal layer pad **16** may include gold. Also, barrier layer **22** is formed from tantalum in the illustrated embodiment. But in other embodiments barrier layer **22** may be any material for forming a diffusion barrier and adhesion layer between dissimilar and adjacent materials. Examples of diffusion and barrier materials are tantalum nitride, titanium, titanium nitride, nickel, tungsten, titanium tungsten alloy, and tantalum silicon nitride.

[0018] Aluminum layer pad **35** and final metal pad **16** of bond pad **36** are formed from relatively thick layers of aluminum and copper, respectively. Therefore, bond pad **36** is strong enough to withstand the impact of a wire bonding tool and can be formed over interconnect layer **24** without damage to interconnect layer **24** and any underlying circuits of active region **26** as illustrated in **FIG. 3**.

[0019] **FIG. 4** illustrates a cross-sectional view of a semiconductor device **40** in accordance with another embodiment of the present invention. Semiconductor device **40** has an edge, or perimeter **25**, passivation layer **18**, interconnect region **24**, active region **26**, and bond pad **44**. Bond pad **44** includes aluminum pad **45** and final metal pad **42**. Final metal pad **42** is formed as a portion of final metal layer **28**. Bond pad **44** is positioned relative to the perimeter **25** of semiconductor device **40** and is separated into a probe region and a wire bond region is illustrated in **FIG. 4** by a vertical dashed line. Aluminum pad **45** is separated from the final metal layer pad **42** by a barrier layer **43**.

[0020] Semiconductor device **40** is subjected to fabrication techniques and materials as described in **FIG. 2** and **FIG. 3**. However, in the device of **FIG. 4**, one portion of the bond pad **44** extends over passivation layer **18** and underlying active circuitry **26** and/or interconnect region **24**, and the remaining portion is connected to the final metal layer pad **42** at an opening in passivation layer **18**. As described above, bond pad **44** is separated into a wire bond region and a probe region. The probe region is on the portion of bond pad **10** that extends onto passivation layer **18** and over the electrical interconnect layers **28**, **30**, and **32** of interconnect region **24**. The wire bond region is formed on the portion of bond pad **44** that is connected to the final metal layer pad **42**. The wire bond region is strong enough to withstand the impact of a wire bonding tool without damage or deformation to the underlying circuits and may also be formed over the metal layers of interconnect region **24**.

[0021] By extending the probe region over passivation layer **18**, the size of final metal layer pad **42** is not affected, and the size of bond pad **44** can be increased without increasing the overall size of the semiconductor device. Also, because final metal layer pad **42** is not used for probe test or wire bonding, the size and shape of final metal layer pad **42**, and the size and shape of opening in passivation layer **18**, are only constrained by the area needed to provide an electrical connection to bond pad **44**. In other embodiments, there may be a plurality of smaller final metal layer pads and corresponding passivation openings that together provide sufficient electrical connection to bond pad **44**. Since bond pad **44** is extended over passivation layer **18** and the size of final metal layer pad **42** is not affected, there is more flexibility in laying out probe and wire bond regions. For an example, the probe region and wire bond region are not necessarily contiguous in other embodiments.

[0022] Bond pad **44** may be formed from aluminum and the final metal layer pad **42** may be formed from copper. In addition to separating the probe region from the wire bond region for more reliable wire bonds, probing over the passivation layer **18** eliminates the risk of inadvertently exposing the copper of the final metal layer pad **42**. Exposed copper is readily oxidized and creates an unreliable surface for wire bonding.

[0023] **FIG. 5** illustrates a top down view of a semiconductor device **60** in accordance with one embodiment of the present invention. Integrated circuit **60** includes a plurality of bond pads similar to the bond pad illustrated in **FIG. 1** and can be constructed in accordance with the embodiments illustrated in **FIG. 2** or **FIG. 3**. Integrated circuit **60** includes a plurality of bond pads **62-65**, formed along an edge **61** of the integrated circuit **60**. The dashed line on each of the

plurality of bond pads indicates an opening **66** formed in a passivation layer. Each of the bond pads is separated into probe regions and wire bond regions as discussed in **FIG. 1**. The area on each bond pad bounded by an oval is the area designated generally for probe testing and the area on each bond pad bounded by a circle is the area designated generally for wire bonding. The plurality of bond pads are arranged relative to perimeter **61**. The wire bond regions are closer to perimeter **61** than the probe regions of each bond pad. The wire bond regions of adjacent bond pads are maintained in a line an equal distance from edge **61**. Likewise, the probe regions of adjacent bond pads are maintained in a line an equal distance from edge **61**. In other embodiments, probe regions and wire bond regions may be interchanged.

[0024] **FIG. 6** illustrates a top down view of a semiconductor device **70** in accordance with another embodiment of the present invention. Integrated circuit **70** includes a plurality of bond pads similar to the bond pad illustrated in **FIG. 1** and can be constructed in accordance with the embodiments illustrated in **FIG. 4**. Integrated circuit **70** includes a plurality of bond pads **72-75**, formed along an edge **71** of the integrated circuit **70**. The dashed line on each of the plurality of bond pads indicates an opening **76** formed in a passivation layer. Each of the bond pads is separated into probe regions and wire bond regions as discussed in **FIG. 1**. The area on each bond pad bounded by an oval is the area designated generally for probe testing and the area on each bond pad bounded by a circle is the area designated generally for wire bonding. The plurality of bond pads are arranged relative to perimeter **71**. The wire bond regions are closer to perimeter **71** than the probe regions of each bond pad. The wire bond regions of adjacent bond pads are maintained in a line an equal distance from edge **71**. Likewise, the probe regions of adjacent bond pads are maintained in a line an equal distance from edge **71**. In other embodiments, probe regions and wire bond regions may be interchanged.

[0025] A portion of the bond pads **72-75** are formed over the passivation layer, and a portion of the bond pads are formed over the final metal layer pad as illustrated in **FIG. 4**.

[0026] **FIG. 7** illustrates a top down view of a semiconductor device **80** in accordance with another embodiment of the present invention. Integrated circuit **80** includes a plurality of bond pads similar to the bond pad illustrated in **FIG. 1** and can be constructed in accordance with the embodiments illustrated in **FIG. 2** or **FIG. 3**. Integrated circuit **80** includes a plurality of bond pads **82-85**, formed along an edge **81** of the integrated circuit **80**. The dashed line on each of the plurality of bond pads indicates an opening **86** formed in a passivation layer. Each of the bond pads is separated into probe regions and wire bond regions as discussed in **FIG. 1**. The area on each bond pad bounded by an oval is the area designated generally for probe testing and the area on each bond pad bounded by a circle is the area designated generally for wire bonding. The plurality of bond pads are generally the same size and are arranged generally an equal distance from perimeter **81**.

[0027] The probe regions (indicated with an oval) are formed in a staggered, alternating manner on opposite sides of the wire bond regions (circles), while the wire bond regions are maintained in a line an equal distance from an

edge **81** of integrated circuit **80**. Also, the center of each bond pad is maintained in a line an equal distance from edge **81**. Substantially all of each of the bond pads **82-85** are formed over the final metal layer pad, as illustrated in **FIG. 2** and **FIG. 3**.

[0028] By staggering or alternating the probe regions, the distance between probe regions is increased, allowing for more robust probe testing of very fine pitch devices, and flexibility to use various probe technologies such as for example, cantilever and vertical probe technologies. The current probe technology cannot support a pad pitch below a specified minimum pitch, where pitch refers to a distance between the pads. By elongating the bond pads and staggering the probe regions, current probe technology can be extended to pads having smaller pitch. Maintaining the wire bond regions in a line may make programming of the wire bonding equipment simpler. Note that in other embodiments, the probe regions and the wire bond regions may be interchanged.

[0029] **FIG. 8** illustrates a top down view of a semiconductor device **90** in accordance with another embodiment of the present invention. Integrated circuit **90** includes a plurality of bond pads similar to the bond pad illustrated in **FIG. 1** and can be constructed in accordance with the embodiments illustrated in **FIG. 4**. Integrated circuit **90** includes a plurality of bond pads **92-95**, formed along an edge **91** of the integrated circuit **90**. The dashed line on each of the plurality of bond pads indicates an opening **96** formed in a passivation layer.

[0030] The bond pad arrangement of **FIG. 8** is the same as the bond pad arrangement of **FIG. 7** except that opening **96** in the passivation layer is smaller and only surrounds each of the wire bond regions indicated generally with a circle. The probe regions are indicated with an oval and are staggered as described above for **FIG. 7**. Also, the probe regions are extended over the passivation layer of semiconductor device **90**.

[0031] **FIG. 9** illustrates a top down view of a semiconductor device **100** in accordance with another embodiment of the present invention. Integrated circuit **100** includes a plurality of bond pads similar to the bond pad illustrated in **FIG. 1** and can be constructed in accordance with the embodiments illustrated in **FIG. 2** or **FIG. 3**. Integrated circuit **100** includes a plurality of bond pads **102-105**, formed along an edge **101** of the integrated circuit **100**. The dashed line on each of the plurality of bond pads indicates an opening **106** formed in a passivation layer.

[0032] Opening **96** in the passivation layer surrounds the wire bond region (circle) and the probe region (oval) of each of the bond pads **102-105**. The bond pads are arranged in a staggered manner, where bond pads **102** and **104** are located farther away from perimeter **101** than bond pads **103** and **105**. Also, the probe regions of each of the bond pads are staggered as described above for **FIG. 7** and **FIG. 8**. In addition, the wire bond region of each pad is arranged an equal distance from perimeter **101**.

[0033] The bond pads of **FIG. 9** are shorter than the bond pads of **FIG. 8** because the area not used for probe test or wire bonding has been removed. The space provided by the removed portions of the bond pads may provide more surface area on the semiconductor device for more features or bond pads on the integrated circuit.

[0034] FIG. 10 illustrates a top down view of a semiconductor device 110 in accordance with another embodiment of the present invention. Integrated circuit 110 includes a plurality of bond pads similar to the bond pad illustrated in FIG. 1 and can be constructed in accordance with the embodiments illustrated in FIG. 4. Integrated circuit 110 includes a plurality of bond pads 112-115, formed along an edge 111 of the integrated circuit 110. The dashed line on each of the plurality of bond pads indicates an opening 106 formed in a passivation layer.

[0035] Bond pads 112-115 are arranged in a staggered manner, where bond pads 112 and 114 are located farther away from perimeter 111 than bond pads 113 and 115. Also, the probe regions of each of the bond pads are staggered as described above for FIG. 7, FIG. 8, and FIG. 9. In addition, the wire bond region of each pad is arranged an equal distance from perimeter 111.

[0036] Opening 116 in the passivation layer is smaller and only surrounds each of the wire bond regions indicated generally with a circle. The probe regions are extended over the passivation layer of semiconductor device 110.

[0037] FIG. 11 illustrates a top down view of a semiconductor device 120 in accordance with another embodiment of the present invention. Integrated circuit 120 includes a plurality of bond pads similar to the bond pad illustrated in FIG. 1 and can be constructed in accordance with the embodiments illustrated in FIG. 2 or FIG. 3. Integrated circuit 120 includes a plurality of bond pads 122-125, formed along an edge 121 of the integrated circuit 120. The dashed line on each of the plurality of bond pads indicates an opening 126 formed in a passivation layer. Each of the bond pads is separated into probe regions and wire bond regions as discussed in FIG. 1. The area on each bond pad bounded by an oval is the area designated generally for probe testing and the area on each bond pad bounded by a circle is the area designated generally for wire bonding. The plurality of bond pads are arranged relative to perimeter 121. In the embodiment of FIG. 11, both the probe regions and the wire bond regions are staggered.

[0038] FIG. 12 illustrates a top down view of a semiconductor device 130 in accordance with another embodiment of the present invention. Integrated circuit 130 includes a plurality of bond pads similar to the bond pad illustrated in FIG. 1 and can be constructed in accordance with the embodiments illustrated in FIG. 4. Integrated circuit 130 includes a plurality of bond pads 132-135, formed along an edge 131 of the integrated circuit 130. The dashed line on each of the plurality of bond pads indicates an opening 136 formed in a passivation layer. Each of the bond pads is separated into probe regions and wire bond regions as discussed in FIG. 1. The area on each bond pad bounded by an oval is the area designated generally for probe testing and the area on each bond pad bounded by a circle is the area designated generally for wire bonding. The plurality of bond pads are arranged relative to perimeter 131. In the embodiment of FIG. 12, both the probe regions and the wire bond regions are staggered. Also, the probe regions are formed over the passivation layer.

[0039] FIG. 13 illustrates a top down view of a semiconductor device 140 in accordance with another embodiment of the present invention. Integrated circuit 140 includes a plurality of bond pads similar to the bond pad illustrated in

FIG. 1 and can be constructed in accordance with the embodiments illustrated in FIG. 2 and FIG. 3. Integrated circuit 140 includes a plurality of bond pads 142-145, formed along an edge 141 of the integrated circuit 140. The dashed line on each of the plurality of bond pads indicates an opening 146 formed in a passivation layer. The area on each bond pad bounded by an oval is the area designated generally for probe testing and the area on each bond pad bounded by a circle is the area designated generally for wire bonding. The long axis of the bond pads are oriented parallel to the edge 141. The wire bond regions and probe regions of adjacent bond pads are maintained in a line an equal distance from edge 141. Because the long axis of the bond pads are oriented parallel to the edge 141 the overall height of the bond pads are reduced while maintaining separate wire bond regions and probe regions for integrated circuits that are not pad limited.

[0040] FIG. 14 illustrates a top down view of a semiconductor device 150 in accordance with another embodiment of the present invention. Integrated circuit 150 includes a plurality of bond pads similar to the bond pad illustrated in FIG. 1 and can be constructed in accordance with the embodiments illustrated in FIG. 4. Integrated circuit 150 includes a plurality of bond pads 152-155, formed along an edge 151 of the integrated circuit 150. The dashed line on each of the plurality of bond pads indicates an opening 146 formed in a passivation layer. The area on each bond pad bounded by an oval is the area designated generally for probe testing and the area on each bond pad bounded by a circle is the area designated generally for wire bonding. The long axis of the bond pads are oriented parallel to the edge 151. The wire bond regions and probe regions of adjacent bond pads are maintained in a line an equal distance from edge 151. Because the long axis of the bond pads are oriented parallel to the edge 151 the overall height of the bond pads are reduced while maintaining separate wire bond regions and probe regions for integrated circuits that are not pad limited. In FIG. 14, the probe regions are formed over the passivation layer.

[0041] In the foregoing specification, the invention has been described with reference to specific embodiments. However, one of ordinary skill in the art will appreciate that various modifications and changes can be made without departing from the scope of the present invention as set forth in the claims below. Accordingly, the specification and figures are to be regarded in an illustrative rather than a restrictive sense, and all such modifications are intended to be included within the scope of present invention.

[0042] Benefits, other advantages, and solutions to problems have been described above with regard to specific embodiments. However, the benefits, advantages, solutions to problems, and any element(s) that may cause any benefit, advantage, or solution to occur or become more pronounced are not to be construed as a critical, required, or essential feature or element of any or all the claims. As used herein, the terms "comprises," "comprising," or any other variations thereof, are intended to cover a non-exclusive inclusion, such that a process, method, article, or apparatus that comprises a list of elements does not include only those elements but may include other elements not expressly listed or inherent to such process, method, article, or apparatus.

What is claimed is:

1. An integrated circuit comprising:
 - a substrate having active circuitry and a perimeter;
 - a plurality of layers of interconnect over the substrate;
 - a final layer of interconnect over the plurality of layers of interconnect having a final layer pad and a plurality of interconnect lines;
 - a layer of passivation over the final layer of interconnect having an opening over the final layer pad; and
 - a bond pad over and electrically contacting the final layer pad having a first region and a second region, wherein the first region is between the second region and the perimeter, the first and second regions are substantially non-overlapping and contiguous, and the first region performs a function of one of a probe region and a wire bond region and the second region performs the function of one of probe region and wire bond region not performed by the first region.
2. The integrated circuit of claim 1, wherein the opening has a first width and the bond pad extends over the surface of the passivation past the opening in at least one direction by an amount greater than the first width.
3. The integrated circuit structure of claim 1 wherein the opening is filled with tantalum and aluminum.
4. The integrated circuit of claim 1, wherein the final layer pad is copper.
5. The integrated circuit of claim 1 wherein the bond pad comprises a layer of barrier conductor on the layer of passivation and in the opening and a layer of pad metal over the barrier conductor.
6. The integrated circuit of claim 5, wherein the barrier conductor comprises tantalum and the pad metal layer comprises aluminum.
7. The integrated circuit of claim 5, wherein the barrier conductor is tantalum nitride.
8. The integrated circuit of claim 5, wherein the barrier conductor is selected from one or more of tantalum, titanium nitride, tantalum nitride, and titanium.
9. The integrated circuit of claim 5, wherein the barrier conductor comprises means for providing electrical conduction and adhesion between the final layer pad and the bond pad.
10. The integrated circuit of claim 5, wherein the pad metal is gold.
11. An integrated circuit, comprising:
 - a substrate having active circuitry;
 - a plurality of layers of interconnect over the substrate;
 - a final layer of interconnect over the plurality of layers of interconnect having a plurality of final layer pads around a perimeter of the substrate and having a plurality of interconnect lines;
 - a layer of passivation over the final layer of interconnect having a plurality openings, wherein each of the plurality of openings corresponds to a final layer pad of the plurality of final layer pads and each of the plurality of openings is over the final layer pad to which it corresponds; and
 - a plurality bond pads, wherein each bond pad of the plurality of bond pads corresponds to an opening of the plurality of openings, each bond pad is over the opening to which it corresponds, each bond pad has a first region and a second region, wherein the first region of each bond pad is closer to the perimeter of the substrate than the second region of each bond pad, and wherein first regions of adjacent bond pads alternate between probe regions and wire bond regions.
12. The integrated circuit 11, wherein the first region and second region of each bond pad is one of the probe region and the wire bond region.
13. The integrated circuit of claim 12, wherein a distance between centers of probe regions of the adjacent bond pads is greater than between centers of the adjacent pads.
14. The integrated circuit of claim 12, wherein second regions of the adjacent bond pads alternate between wire bond regions and probe regions.
15. The integrated circuit of claim 14, wherein each of the plurality of openings has a first width and each of the plurality of bond pads extend over the surface of the passivation past the opening to which it corresponds in at least one direction by an amount greater than the first width.
16. The integrated circuit of claim 15, wherein each of the plurality of bond pads extends over the active circuitry.
17. An integrated circuit, comprising:
 - a substrate having active circuitry and a perimeter;
 - a first plurality of interconnect layers over the substrate;
 - a plurality of final layer pads over the first plurality of interconnect layers;
 - a passivation layer having a plurality of openings corresponding to the final layer pads; and
 - a plurality of bond pads, coupled to the final layer pads through the openings, having first portions over the openings and second portions over the passivation layer, wherein the second portion is greater in area than the first portion.
18. The integrated circuit of claim 17, wherein the plurality of bond pads each have first and second regions, wherein one of the first and second regions is for receiving a probe and the other of the first and second regions is for receiving a wire bond, wherein the first and second regions are substantially non-overlapping.
19. The integrated circuit of claim 18, wherein the first regions are nearer the perimeter of the substrate than the second regions, and a first bond pad and a second bond pad of the plurality of bond pads are adjacent to each other, and the first region of the first bond pad and the second region of the second bond pad are for receiving the probe.
20. The integrated circuit of claim 17, wherein the plurality of bond pads extend over the active circuitry and the second portion is significantly greater than the first portion.
21. The integrated circuit of claim 19, wherein the first regions of the first and second bond pads are mostly in the second portions.
22. A method of forming an integrated circuit comprising:
 - providing a substrate having active circuitry;
 - forming a plurality of layers of interconnect over the substrate;
 - forming a final layer of interconnect over the plurality of layers of interconnect having a plurality of final layer

pads around a perimeter of the substrate and having a plurality of interconnect lines;

forming a layer of passivation over the final layer of interconnect having a plurality openings, wherein each of the plurality of openings corresponds to a final layer pad of the plurality of final layer pads and each of the plurality of openings is over the final layer pad to which it corresponds; and

forming a plurality of bond pads coupled to the final layer pads through the openings, wherein each bond pad of the plurality of bond pads:

corresponds to an opening of the plurality of openings;

has a first portion over the opening to which it corresponds and a second portion over the passivation layer, wherein the second portion is greater in area than the first portion; and

has a first region and a second region that are substantially non-overlapping, wherein the first region of each bond pad is closer to the perimeter of the substrate than the second region of each bond pad, and wherein first regions of adjacent bond pads alternate between probe regions and wire bond regions.

23. A method of forming an integrated circuit having:

a substrate having active circuitry and a perimeter;

a plurality of layers of interconnect over the substrate;

a final layer of interconnect over the plurality of layers of interconnect having a first final layer pad, a second final layer pad, and a plurality of interconnect lines;

a layer of passivation over the final layer of interconnect having a first opening over the first final layer pad and a second opening over the second final layer pad;

a first bond pad over and electrically contacting the first final layer pad having a first region and a second region, wherein the first region is closer to the perimeter than the second region, and the first and second region are substantially non-overlapping;

a second bond pad over and electrically contacting the second final layer pad having a first region and a second region, wherein the first region is closer to the perimeter than the second region, and the first and second region are substantially non-overlapping;

the method comprising:

applying a first test probe to the first region of the first bond pad;

applying a second test probe to the second region of the second bond pad;

forming a wire bond on the second region of the first bond pad; and

forming a wire bond on the first region of the second bond pad.

24. An integrated circuit, comprising:

a substrate having active circuitry and a perimeter;

a plurality of interconnect layers formed over the substrate, the plurality of interconnect layers having a final interconnect layer;

a plurality of wire bond pads formed over the final interconnect layer, wherein each of the plurality of wire bond pads having a first region and a second region, the first region being used only as a probe region, and the second region being used only as a wire bond region, and wherein the plurality of interconnect layers and active circuitry underlying the plurality of wire bond pads; and

a passivation layer formed over the final interconnect layer and having a plurality of openings, each of the plurality of openings corresponding to one of the plurality of wire bond pads.

25. The integrated circuit of claim 24, wherein the plurality of interconnect layers and the plurality of wire bond pads comprise copper.

26. The integrated circuit of claim 25, further comprising a plurality of aluminum pads, each of the plurality of aluminum pads formed on one of the plurality of wire bond pads.

27. The integrated circuit claim 24, wherein the plurality of wire bond pads are formed in a line along the perimeter, and wherein the second region of each bond pad is closer to the perimeter of the substrate than the first region of each bond pad.

28. The integrated circuit of claim 24, wherein the plurality of wire bond pads are formed in a line along the perimeter, and wherein second regions of adjacent bond pads are substantially an equal distance from the perimeter, and the first region of adjacent wire bond pads alternate from a side of the second region relatively closer to the perimeter to another side of the second region relatively farther from the perimeter.

29. The integrated circuit of claim 24, wherein the plurality of wire bond pads are formed in a line along the perimeter, and wherein the first regions of odd numbered wire bond pads of the plurality of wire bond pads are located a first distance from the perimeter and the first regions of even numbered wire bond pads of the plurality of wire bond pads are located a second distance from the perimeter, the first distance being farther from the perimeter than the second distance.

30. The integrated circuit of claim 29, wherein second regions of the odd numbered wire bond pads are located the second distance from the perimeter and second regions of the even numbered wire bond pads are located the first distance from the perimeter.

31. The integrated circuit of claim 24, wherein the plurality of wire bond pads are formed in a line along the perimeter, and wherein the first and second regions of each of the plurality of wire bond pads are formed substantially an equal distance from the perimeter.

* * * * *