

(12) **United States Patent**
Wassel

(10) **Patent No.:** **US 9,699,854 B2**
(45) **Date of Patent:** ***Jul. 4, 2017**

(54) **LIGHTING FIXTURE**

(56) **References Cited**

(71) Applicant: **Appalachian Lighting Systems, Inc.**,
Ellwood City, PA (US)

U.S. PATENT DOCUMENTS

(72) Inventor: **James J. Wassel**, Fombell, PA (US)

5,580,156 A 12/1996 Suzuki et al.
5,723,868 A 3/1998 Hammond, Jr. et al.
(Continued)

(73) Assignee: **APPALACHIAN LIGHTING
SYSTEMS, INC.**, Ellwood City, PA
(US)

FOREIGN PATENT DOCUMENTS

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

CN 101101096 A 1/2008
CN 101191591 A 6/2008
(Continued)

This patent is subject to a terminal dis-
claimer.

OTHER PUBLICATIONS

"Power light source: LUXEON® Rebel", Technical Datasheet
DS56, Philips, 2007.

(21) Appl. No.: **13/692,402**

(Continued)

(22) Filed: **Dec. 3, 2012**

Primary Examiner — Robert May

Assistant Examiner — Leah S Macchiarolo

(65) **Prior Publication Data**

(74) *Attorney, Agent, or Firm* — Arent Fox LLP

US 2013/0155675 A1 Jun. 20, 2013

Related U.S. Application Data

(63) Continuation of application No. 12/341,798, filed on
Dec. 22, 2008, now Pat. No. 8,322,881.
(Continued)

(51) **Int. Cl.**
F21V 7/04 (2006.01)
H05B 33/08 (2006.01)
(Continued)


(52) **U.S. Cl.**
CPC **H05B 33/0854** (2013.01); **F21S 8/026**
(2013.01); **F21S 8/086** (2013.01);
(Continued)

(58) **Field of Classification Search**
CPC H05B 33/0854; F21V 29/74; F21V 7/048;
F21V 7/22; F21V 7/05; F21S 8/026;
F21S 8/086
(Continued)

(57) **ABSTRACT**

A light emitting diode (LED) lighting arrangement for a
lighting fixture includes: a lighting strip comprising a plu-
rality of light emitting diodes (LEDs) arranged along a
length of the lighting strip; a first multi-faceted side wall
reflector extending from a first side of the lighting strip at an
angle such that the first multi-faceted side wall reflector
extends along an entire length of the lighting strip and away
from a bottom portion of a light emitting portion of each of
the light emitting diodes (LEDs); and a second multi-faceted
side wall reflector extending from a second, opposite side of
the lighting strip at an angle such that the second multi-
faceted side wall reflector extends along an entire length of
the lighting strip away from the bottom portion of the light
emitting portion of each of the light emitting diodes (LEDs).
The first and second multi-faceted side wall reflectors cause
light produced by the plurality of light emitting diodes
(LEDs) to be amplified and formed into a uniform beam.

24 Claims, 24 Drawing Sheets

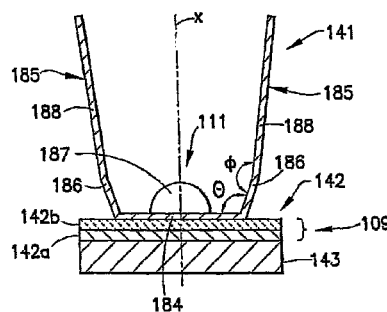

Related U.S. Application Data

- (60) Provisional application No. 61/094,571, filed on Sep. 5, 2008, provisional application No. 61/094,558, filed on Sep. 5, 2008, provisional application No. 61/015,713, filed on Dec. 21, 2007.

(51) Int. Cl.

F21V 7/00 (2006.01)
F21V 17/16 (2006.01)
F21V 29/74 (2015.01)
F21S 8/02 (2006.01)
F21S 8/08 (2006.01)
F21V 7/22 (2006.01)
F21V 23/04 (2006.01)
H05B 37/02 (2006.01)
F21Y 113/00 (2016.01)
F21Y 101/00 (2016.01)
F21Y 105/10 (2016.01)
F21Y 103/10 (2016.01)
F21Y 115/10 (2016.01)
F21W 131/103 (2006.01)
F21Y 101/02 (2006.01)
F21Y 103/00 (2016.01)

(52) U.S. Cl.

CPC **F21V 7/00** (2013.01); **F21V 7/005** (2013.01); **F21V 7/048** (2013.01); **F21V 7/22** (2013.01); **F21V 17/164** (2013.01); **F21V 23/04** (2013.01); **F21V 29/74** (2015.01); **H05B 37/0218** (2013.01); **H05B 37/0272** (2013.01); **H05B 37/0281** (2013.01); **F21W 2131/103** (2013.01); **F21Y 2101/00** (2013.01); **F21Y 2101/02** (2013.01); **F21Y 2103/003** (2013.01); **F21Y 2103/10** (2016.08); **F21Y 2105/10** (2016.08); **F21Y 2113/00** (2013.01); **F21Y 2115/10** (2016.08)

(58) Field of Classification Search

USPC 362/247, 249.02, 346, 347–349, 297, 362/296.05, 296.02, 217.05
 See application file for complete search history.

(56) References Cited**U.S. PATENT DOCUMENTS**

6,547,416 B2 4/2003 Pashley et al.
 6,577,512 B2 6/2003 Tripathi et al.
 6,586,890 B2 7/2003 Min et al.
 6,644,841 B2 11/2003 Martineau
 6,648,490 B2 11/2003 Klose
 6,784,357 B1 8/2004 Wang
 6,942,361 B1 9/2005 Kishimura et al.
 6,971,781 B2 12/2005 Guy
 7,067,992 B2 6/2006 Leong et al.
 7,090,370 B2 8/2006 Clark et al.
 7,114,832 B2 10/2006 Holder et al.
 7,119,498 B2 10/2006 Baldwin et al.
 7,172,319 B2 2/2007 Holder et al.
 7,202,608 B2 4/2007 Robinson et al.
 7,217,009 B2 5/2007 Klose
 7,233,115 B2 6/2007 Lys
 7,275,841 B2 10/2007 Kelly

7,278,761 B2 10/2007 Kuan
 7,347,706 B1 3/2008 Wu et al.
 D574,548 S 8/2008 Wilcox et al.
 D574,549 S 8/2008 Kinnune et al.
 7,407,307 B2 8/2008 Hiratsuka
 D576,330 S 9/2008 Ruud et al.
 D576,331 S 9/2008 Ruud et al.
 D576,332 S 9/2008 Ruud et al.
 D577,847 S 9/2008 Ruud et al.
 7,420,811 B2 9/2008 Chan
 D578,695 S 10/2008 Zheng et al.
 D578,696 S 10/2008 Wang et al.
 D578,697 S 10/2008 Zheng et al.
 D578,698 S 10/2008 Zheng
 7,438,447 B2 10/2008 Holder et al.
 7,802,902 B2 9/2010 Moss et al.
 7,963,664 B2 6/2011 Bertram et al.
 8,011,804 B2 * 9/2011 Han G02F 1/133603
 8,322,881 B1 * 12/2012 Wassel 362/217.05
 2005/0111220 A1 5/2005 Smith 362/247
 2006/0056169 A1 3/2006 Loddie et al.
 2006/0237738 A1 10/2006 Salam
 2007/0076427 A1 * 4/2007 Reo et al. 362/555
 2007/0081339 A1 4/2007 Chung et al.
 2007/0153526 A1 7/2007 Lim
 2007/0195527 A1 8/2007 Russell
 2007/0201225 A1 8/2007 Holder et al.
 2007/0211463 A1 9/2007 Chevalier et al.
 2007/0230171 A1 10/2007 Hiratsuka
 2007/0247856 A1 10/2007 Wang et al.
 2007/0263388 A1 11/2007 Lai et al.
 2007/0285927 A1 12/2007 Chen
 2008/0002399 A1 1/2008 Villard et al.
 2008/0055908 A1 3/2008 Wu et al.
 2008/0062689 A1 3/2008 Villard
 2008/0062691 A1 3/2008 Villard et al.
 2008/0078524 A1 4/2008 Wilcox et al.
 2008/0080162 A1 4/2008 Wilcox et al.
 2008/0080196 A1 4/2008 Ruud et al.
 2008/0089069 A1 4/2008 Medendorp
 2008/0089070 A1 4/2008 Wang
 2008/0123340 A1 5/2008 McClellan
 2008/0136661 A1 6/2008 Pederson et al.
 2008/0192476 A1 8/2008 Hiratsuka
 2008/0198572 A1 8/2008 Medendorp
 2008/0212329 A1 9/2008 Duguay et al.
 2008/0219001 A1 9/2008 Russell
 2008/0231201 A1 9/2008 Higley et al.
 2008/0239722 A1 10/2008 Wilcox
 2008/0239750 A1 10/2008 Chang
 2008/0239751 A1 10/2008 Chang
 2008/0247170 A1 10/2008 Peck
 2008/0253122 A1 10/2008 Hancock et al.
 2008/0253125 A1 10/2008 Kang et al.
 2009/0168395 A1 7/2009 Mrakovich et al.

FOREIGN PATENT DOCUMENTS

JP 2004200102 A 7/2004
 WO 2007088665 A1 8/2007

OTHER PUBLICATIONS

“Cree® XLamp® XR-E LED Data Sheet”, Cree LED Light, 2006-2007.
 Bibee, Greg, “‘Lighting Class’ LED Design Basics”, 2008.

* cited by examiner

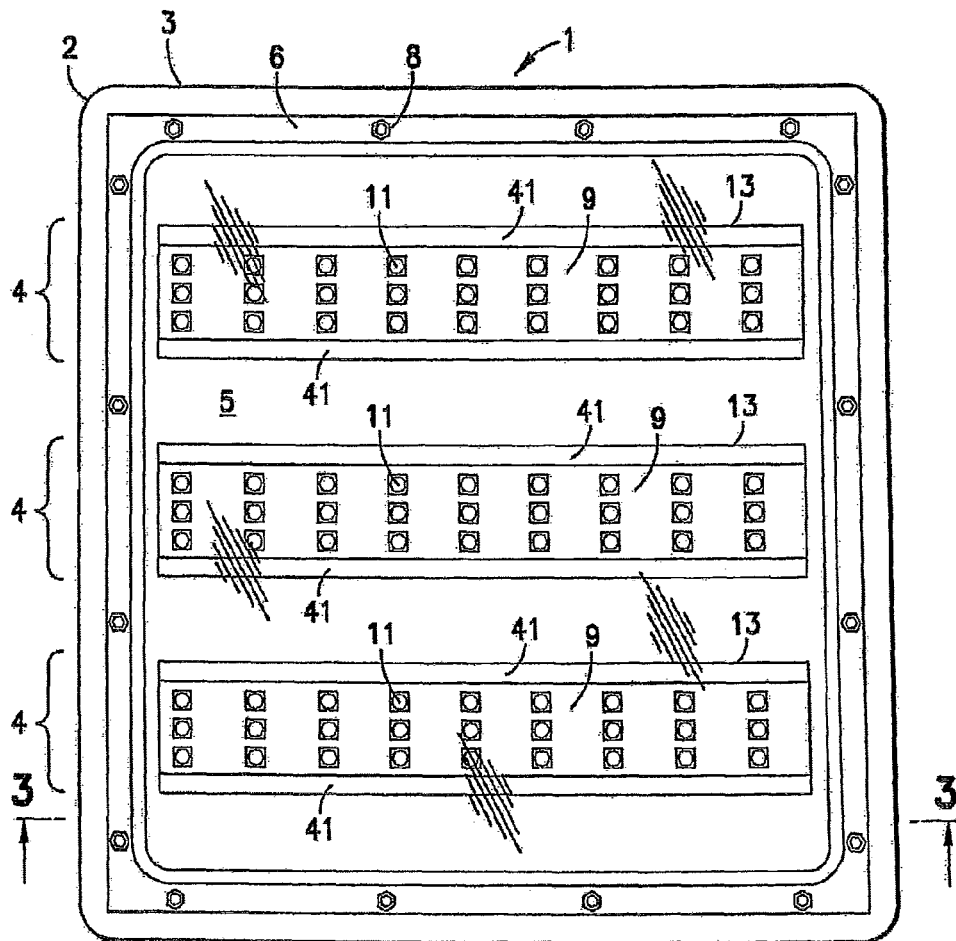


FIG.1

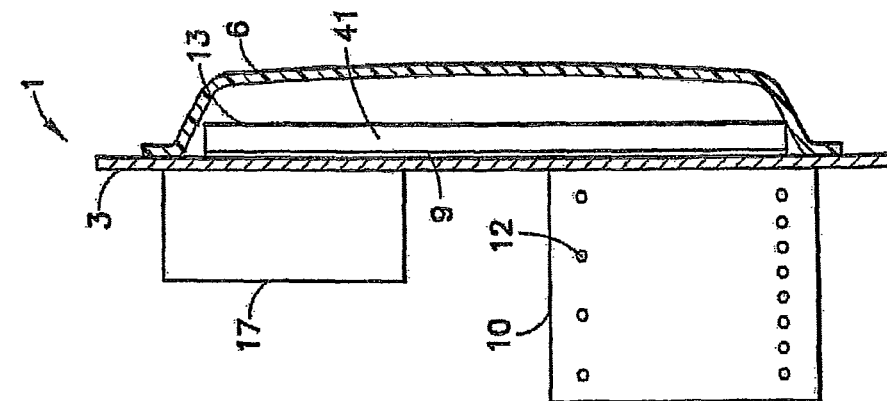


FIG. 3

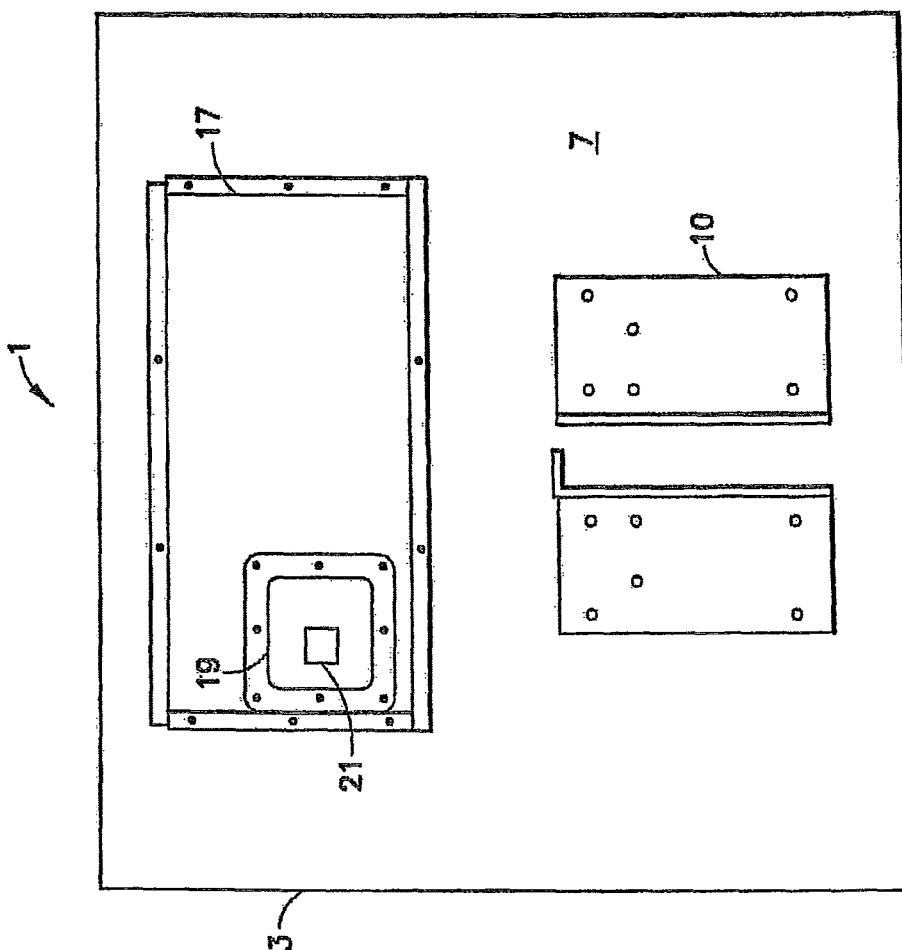


FIG. 2

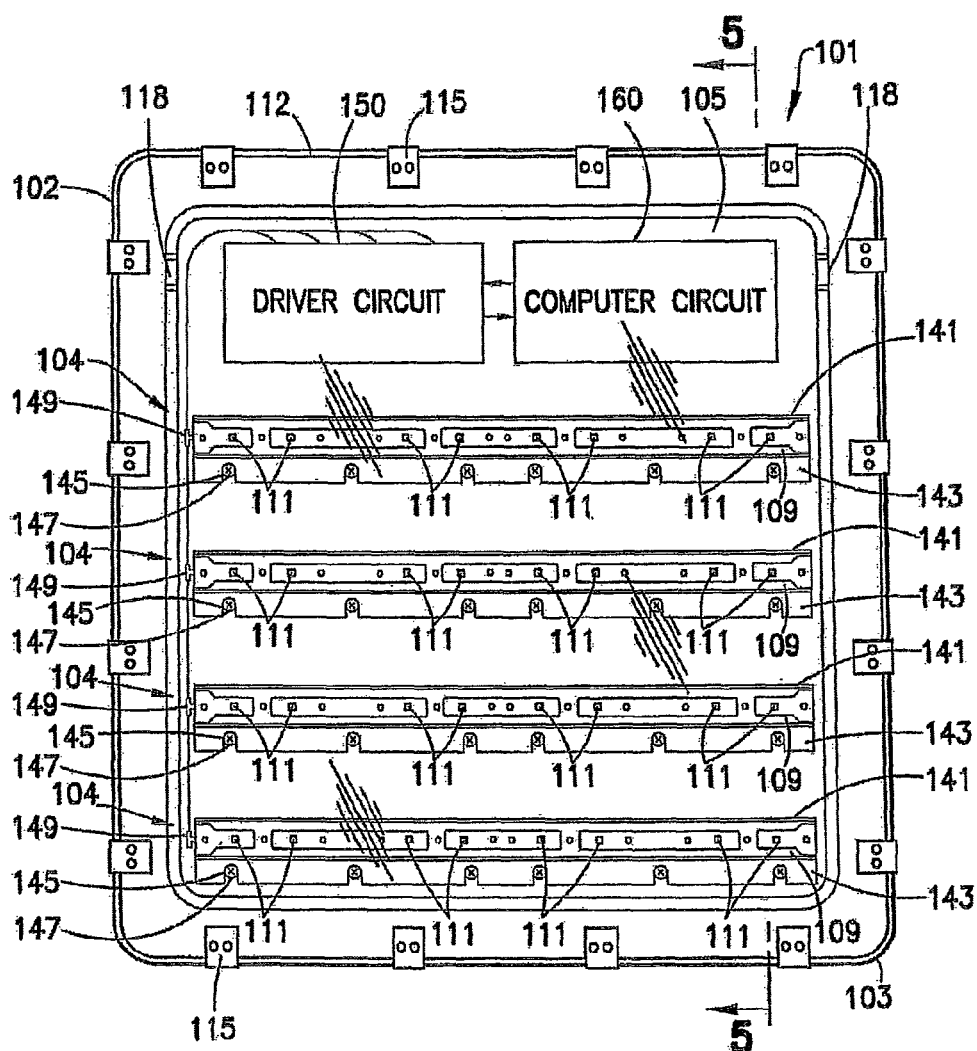
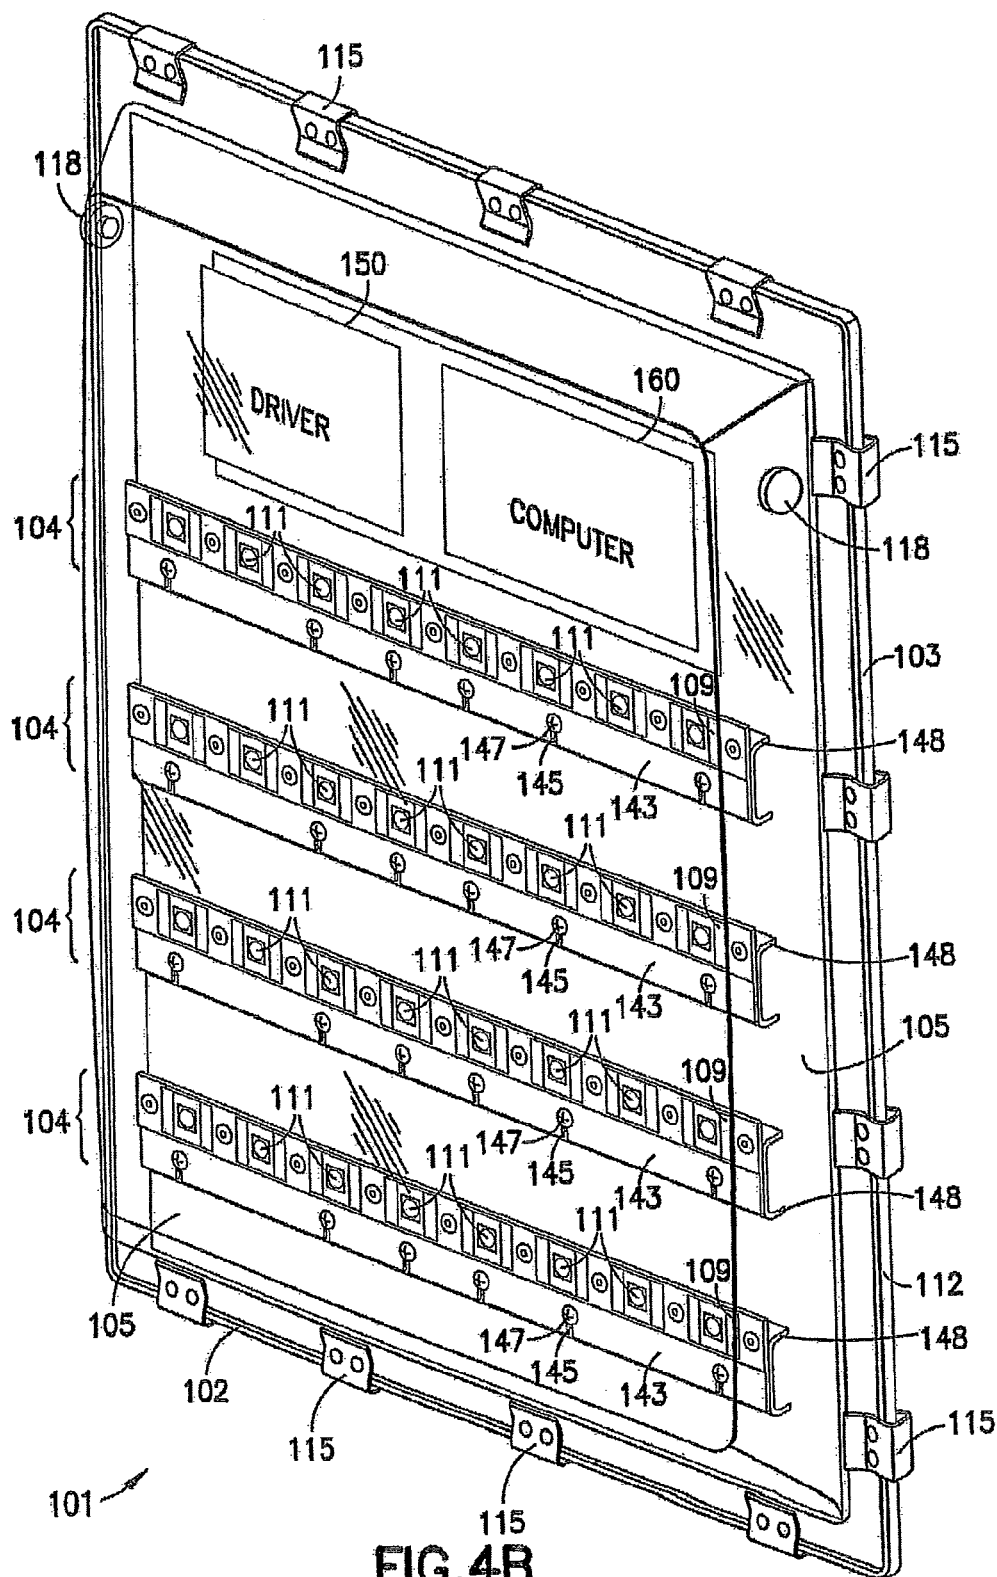


FIG. 4A



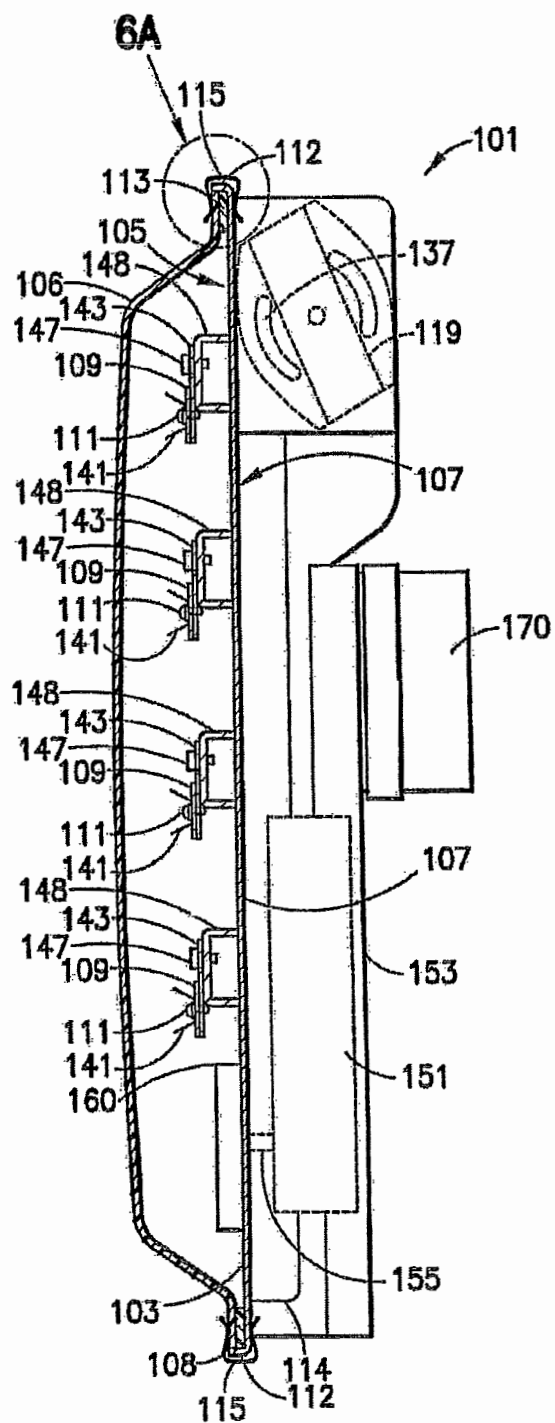


FIG.5

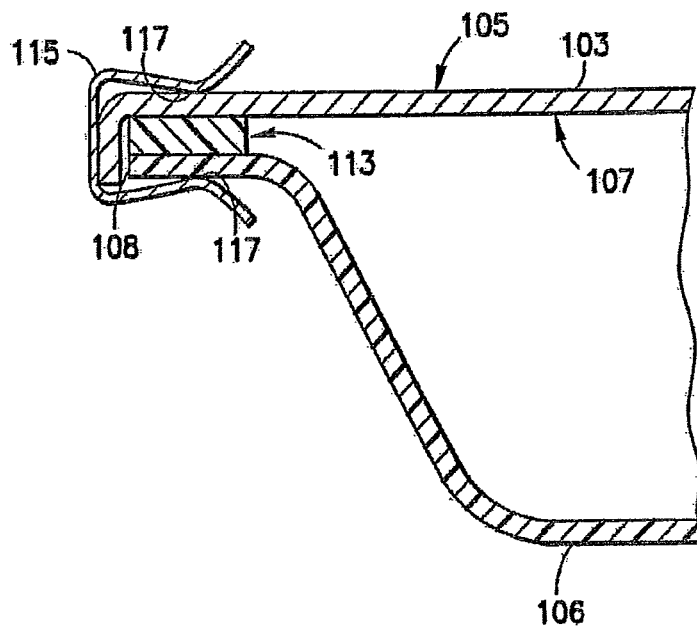


FIG. 6A




FIG. 6B

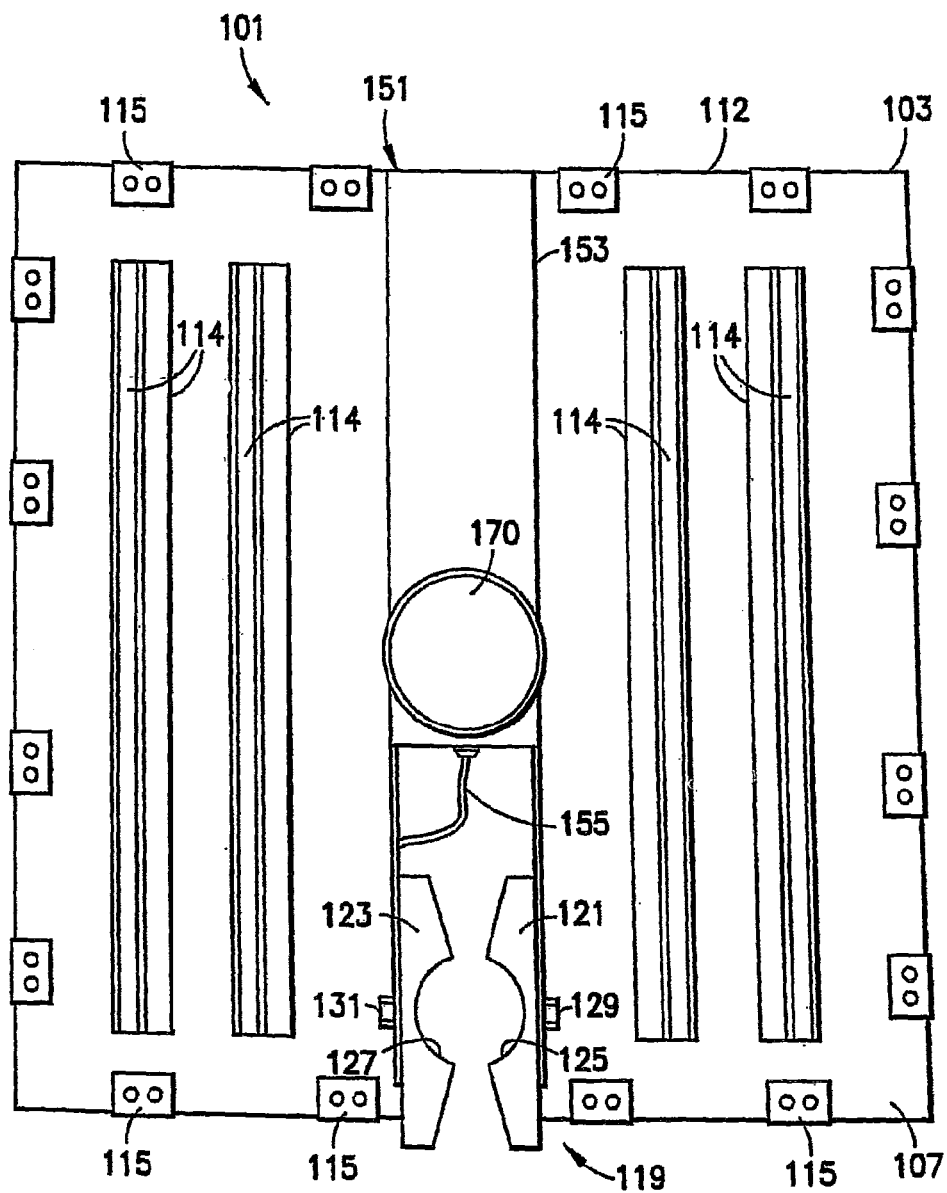


FIG. 7A

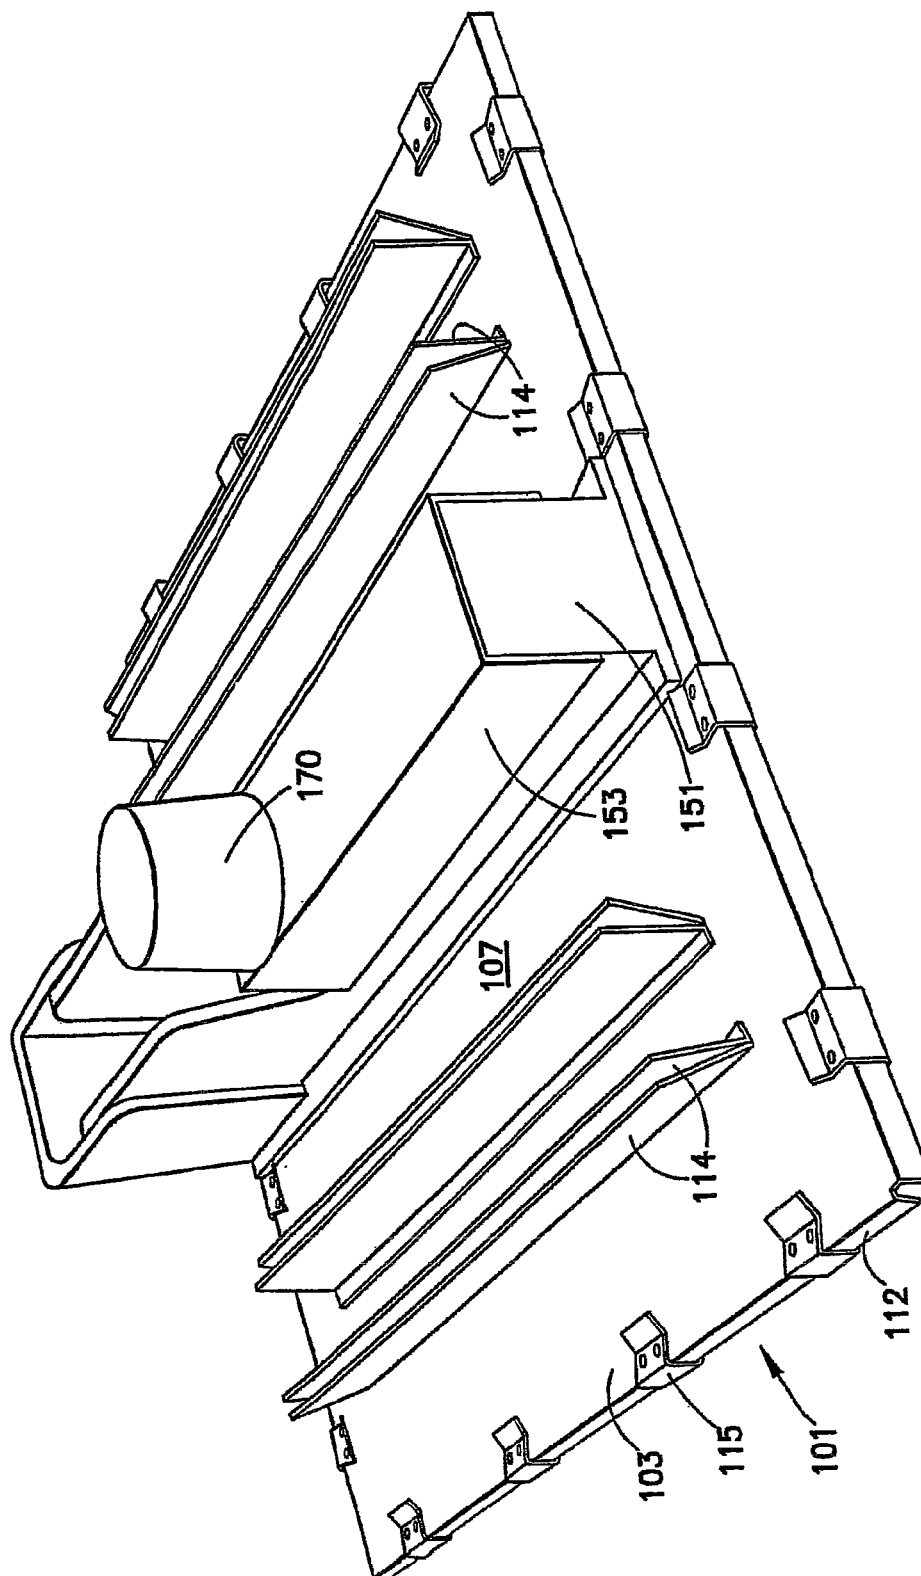


FIG. 7B

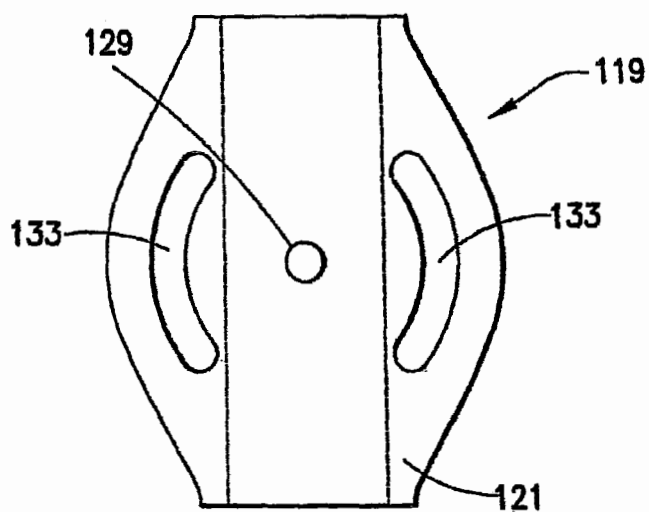


FIG. 8

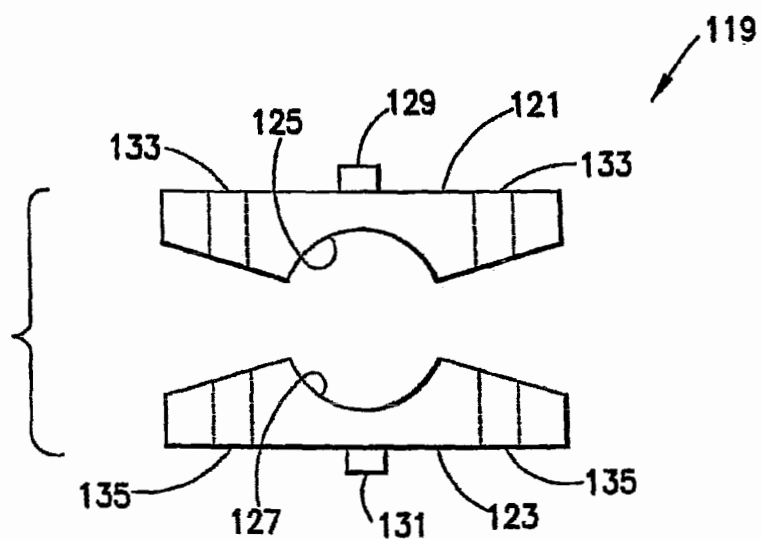


FIG. 9

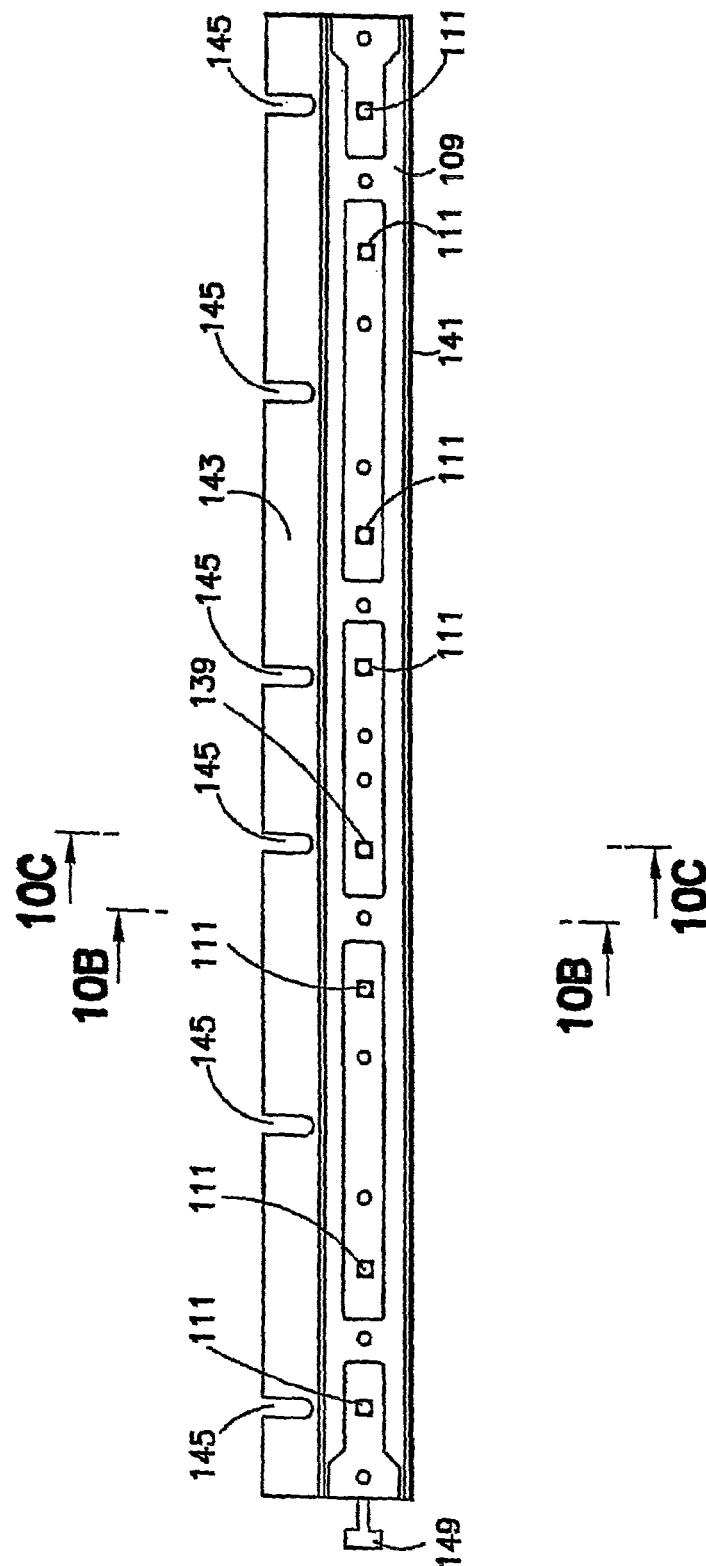


FIG. 10A

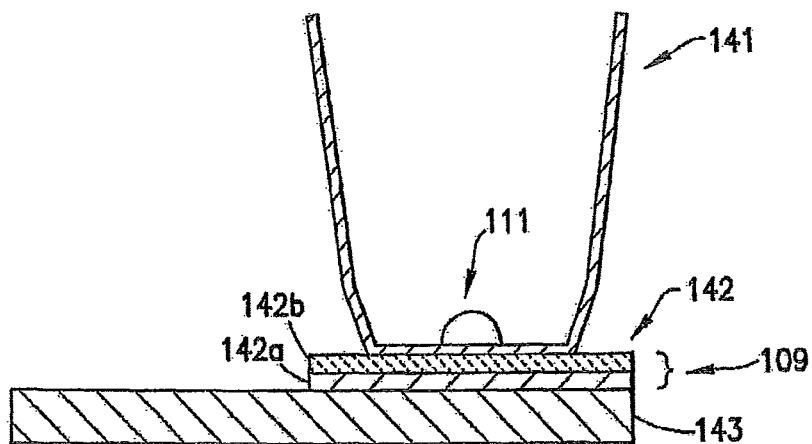


FIG. 10B

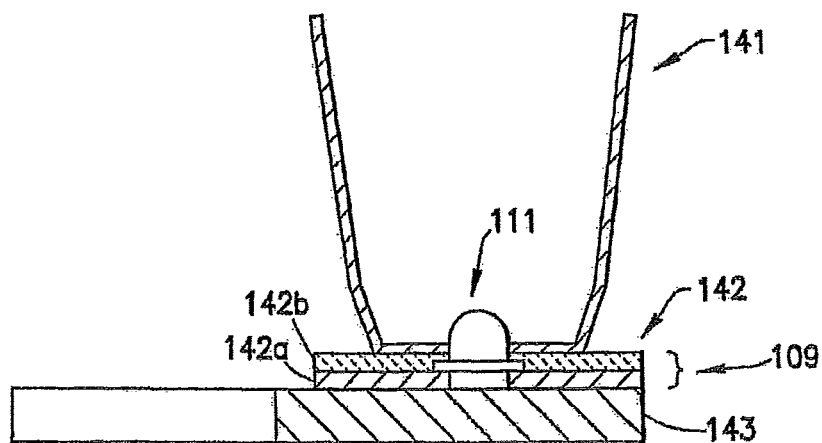
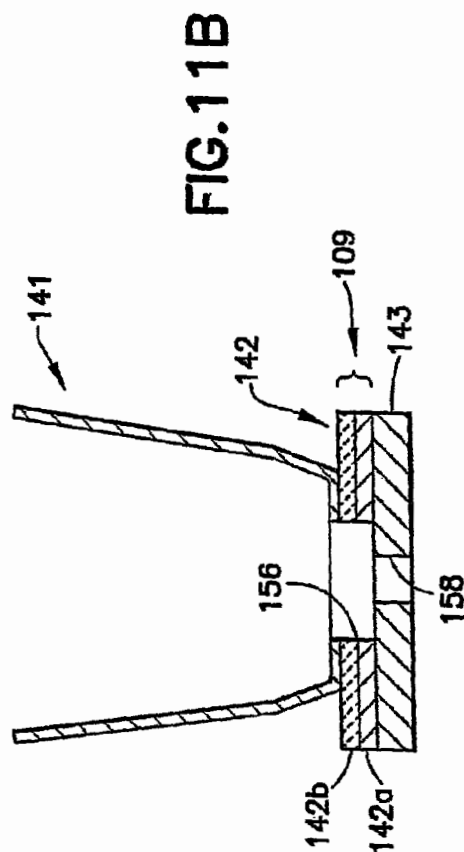
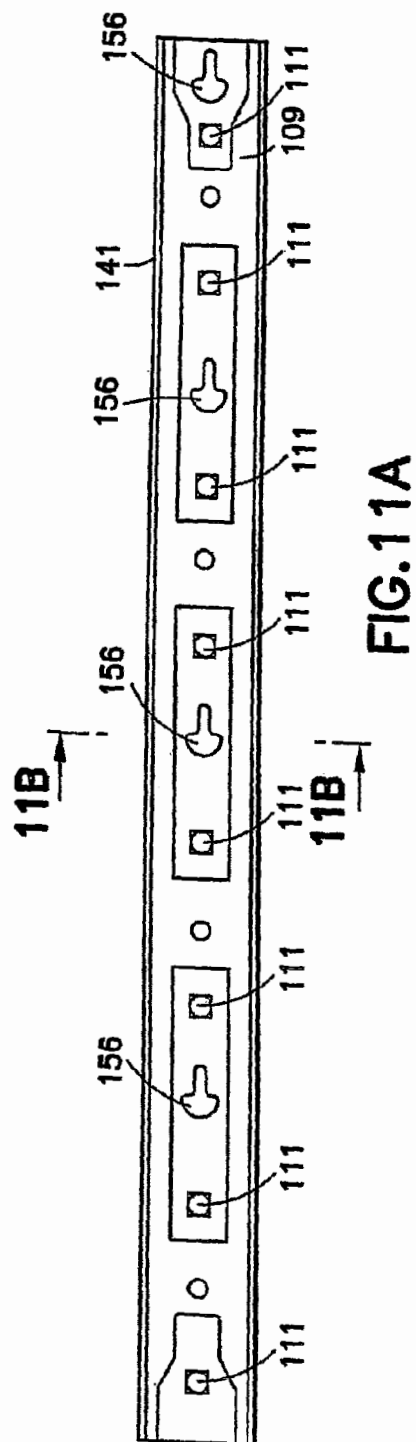


FIG. 10C



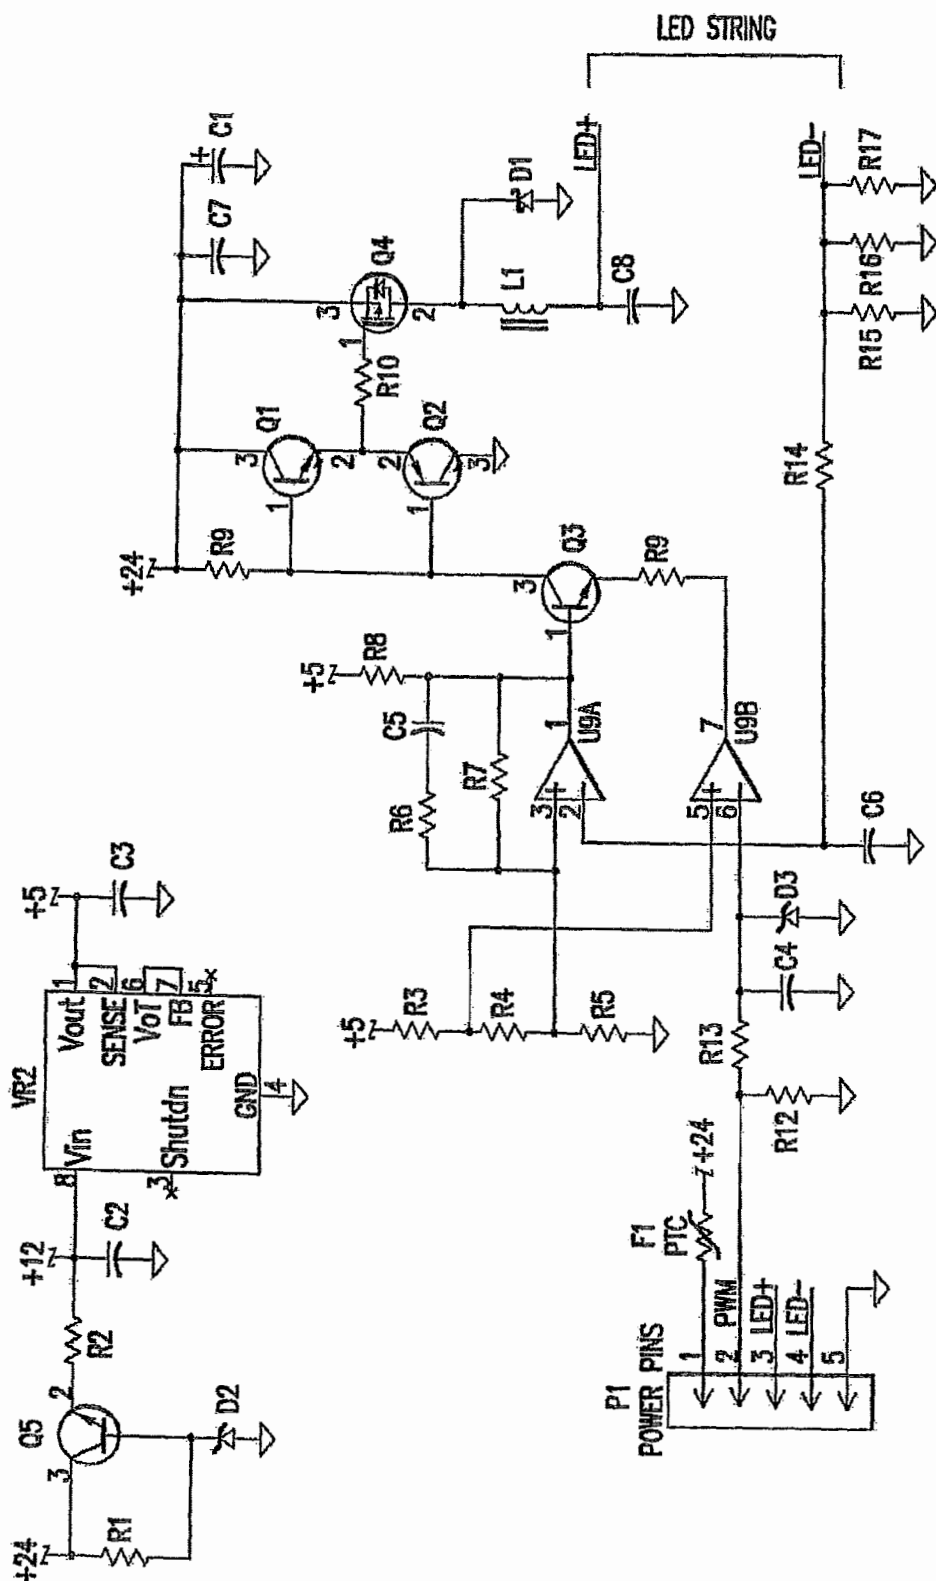
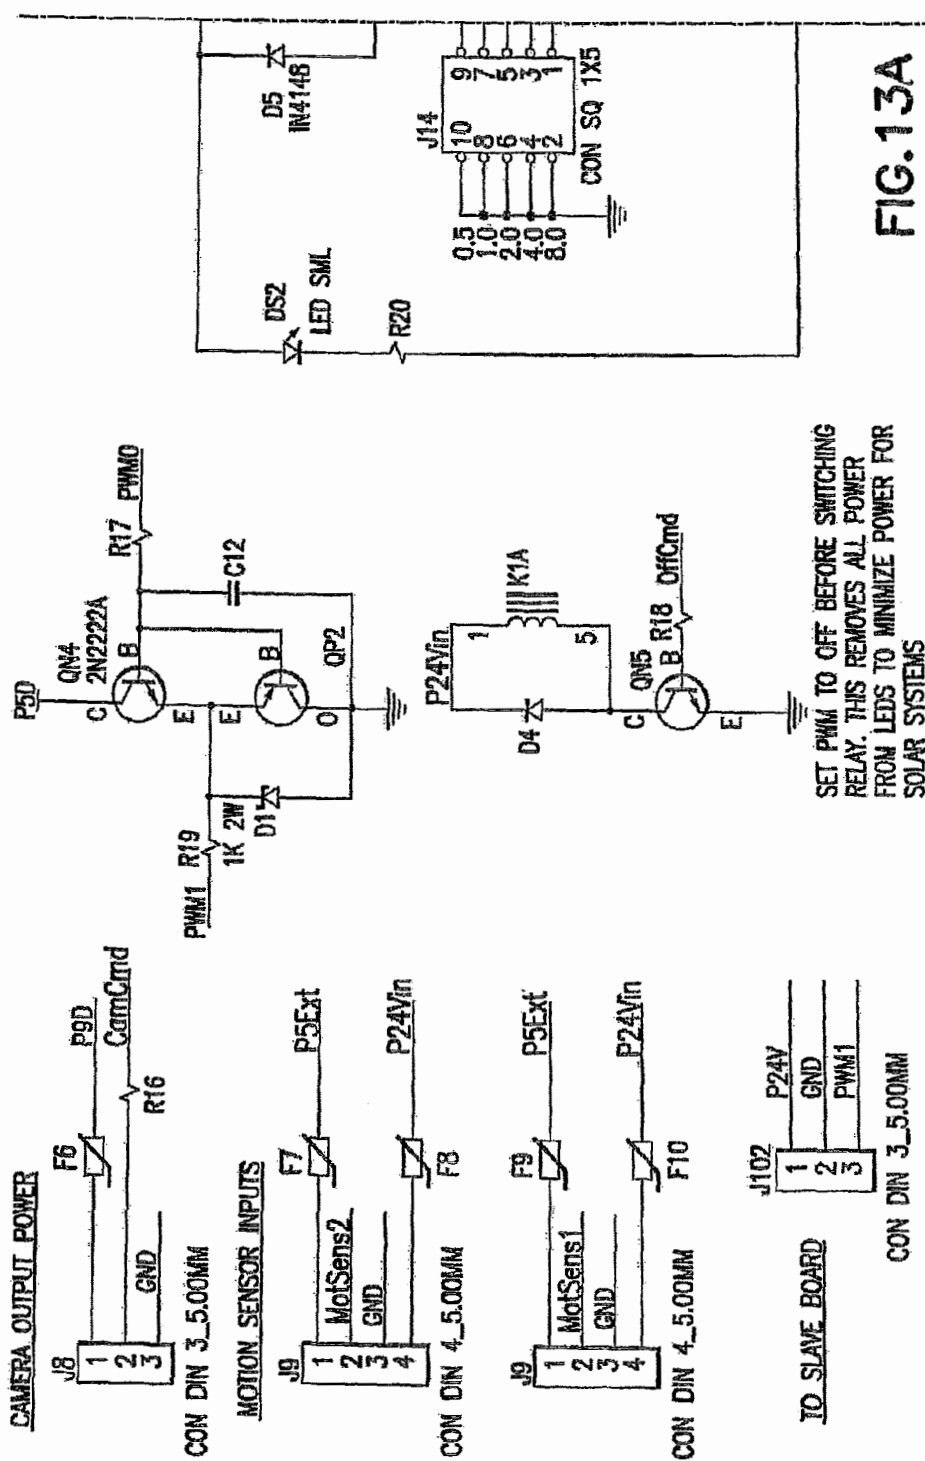


FIG. 12





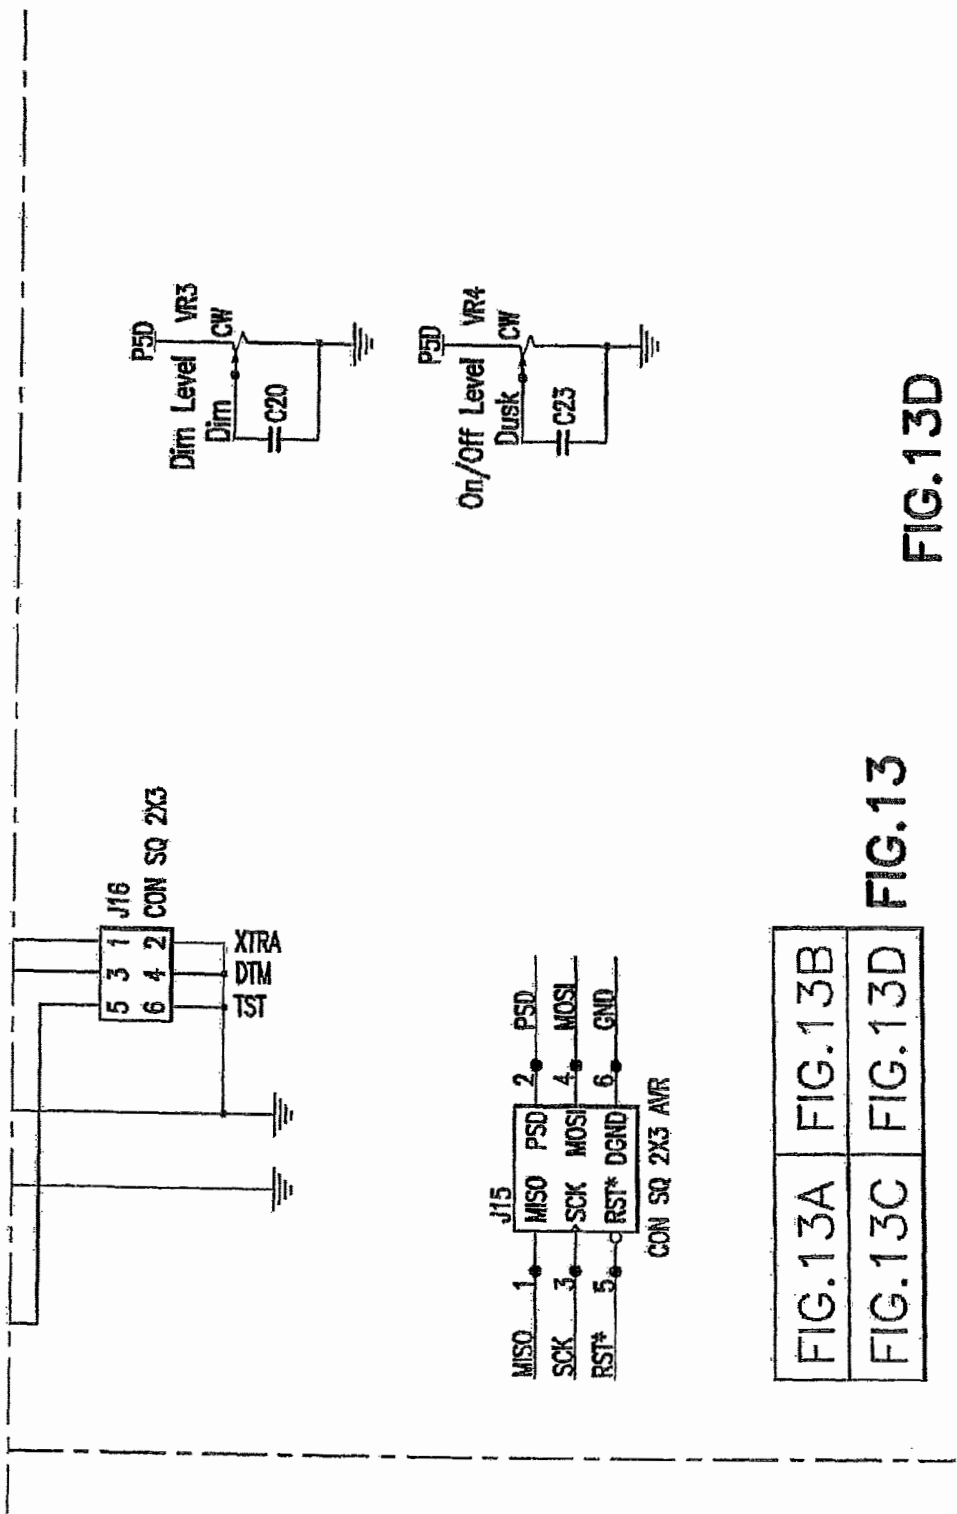


FIG.13D

FIG.13

FIG.13A	FIG.13B
FIG.13C	FIG.13D

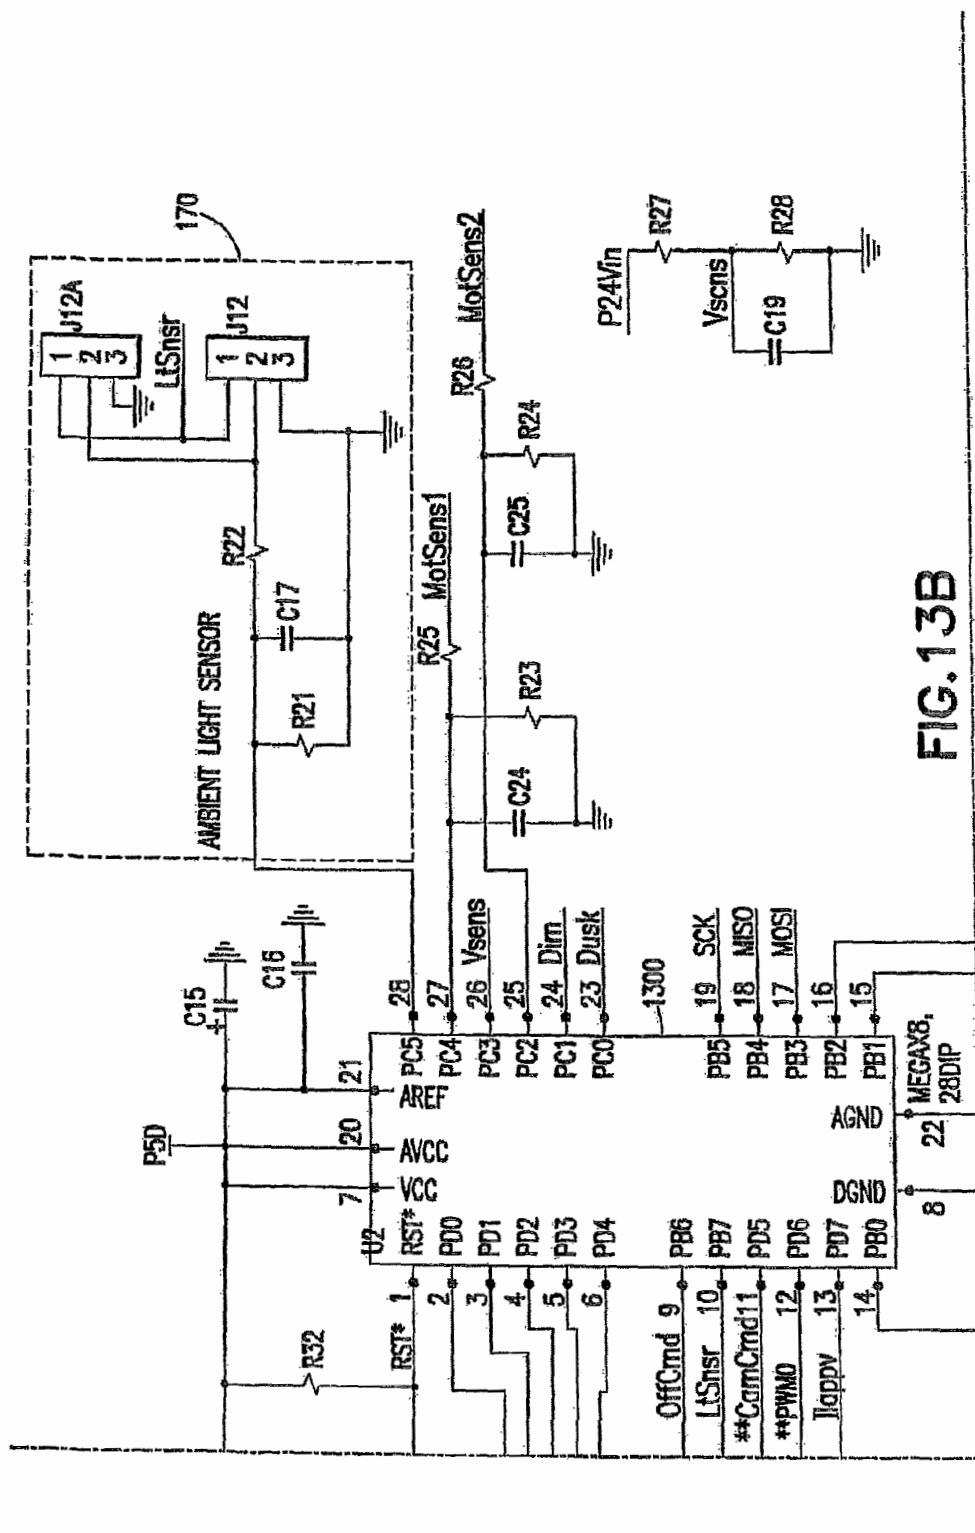

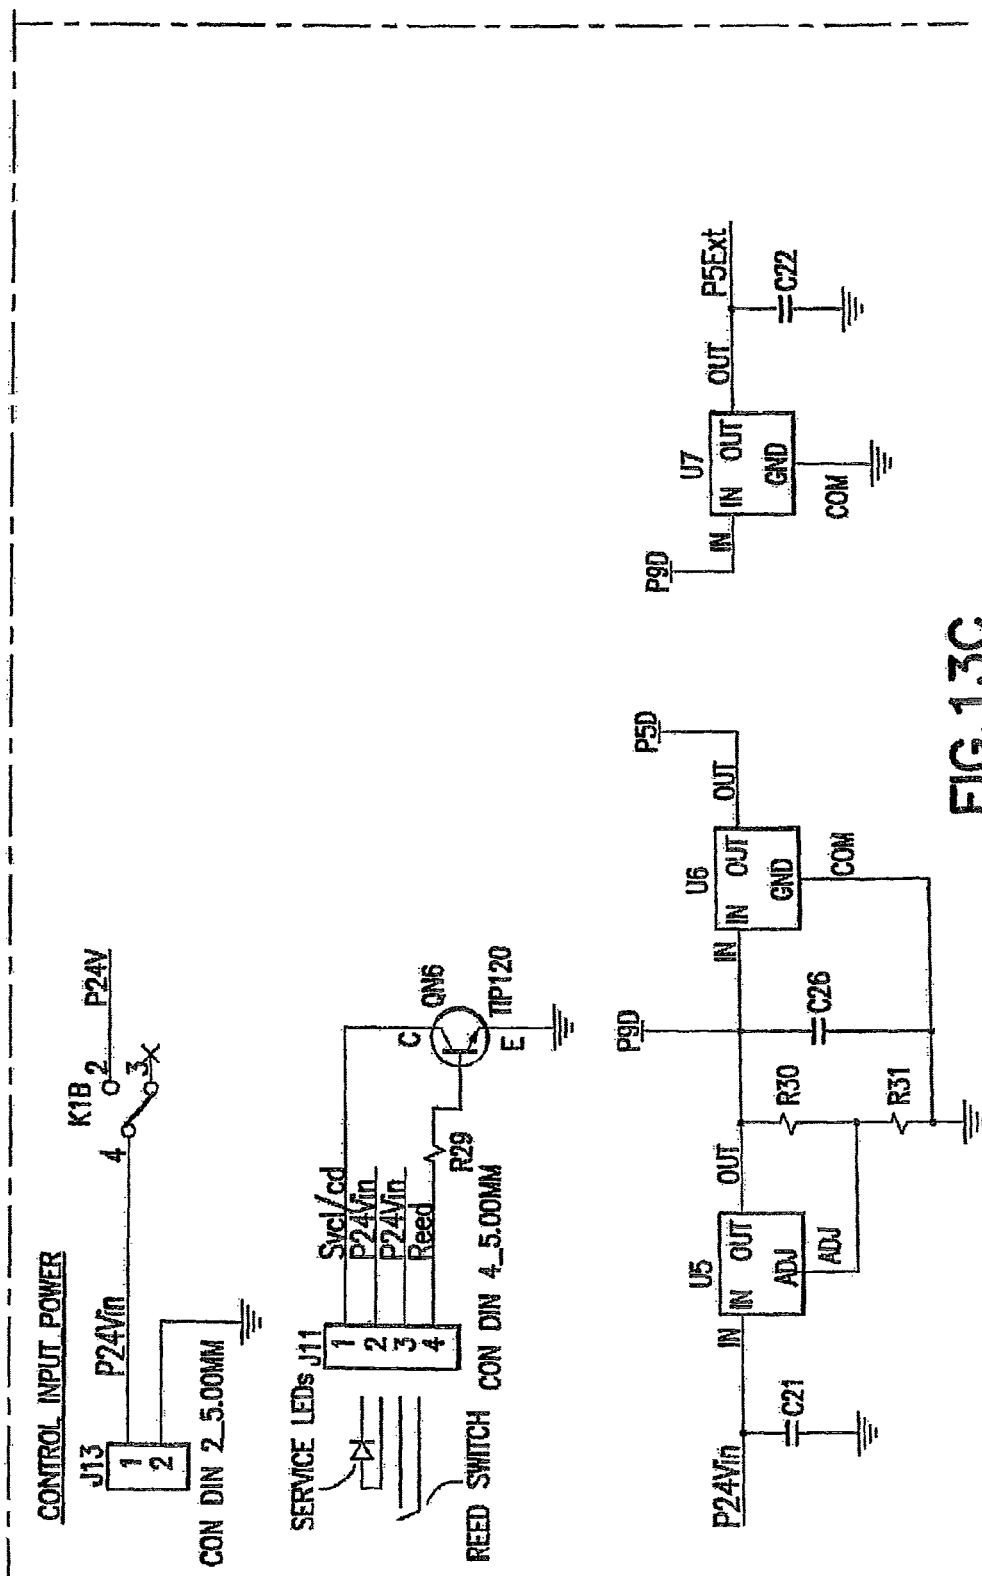

COMPLE

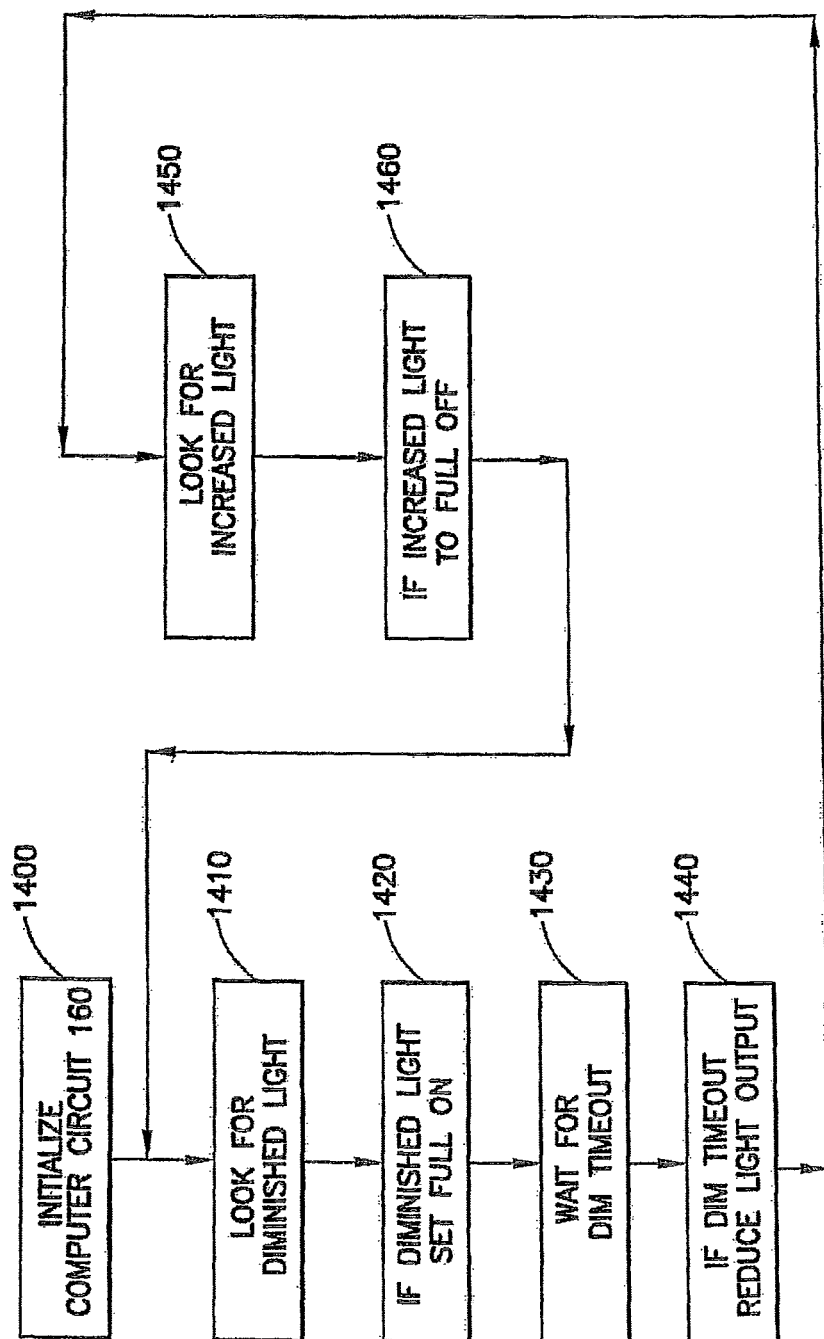


FIG. 14

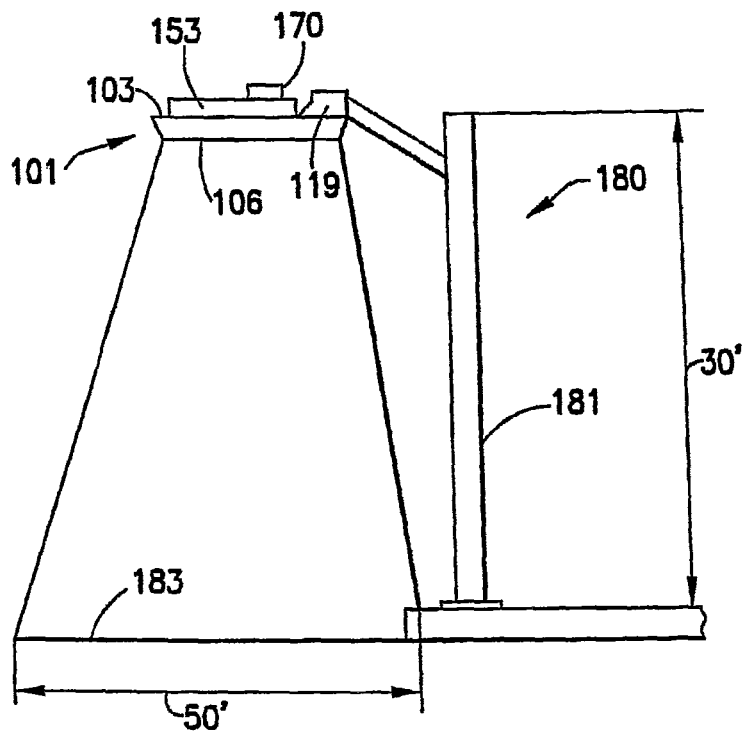


FIG. 15

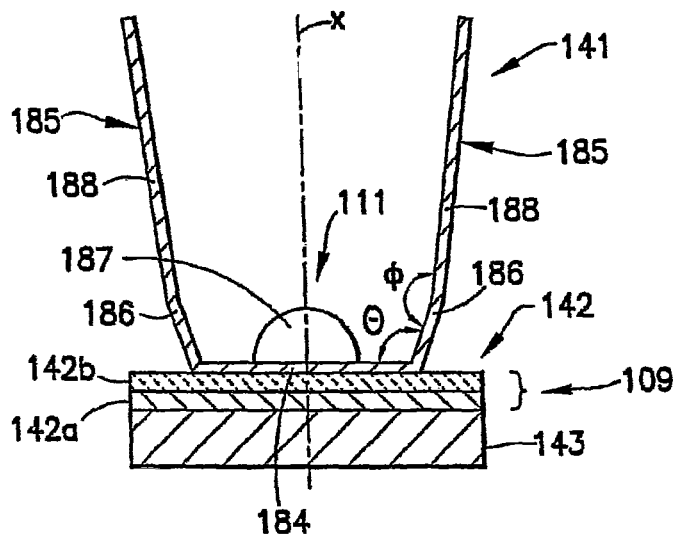


FIG. 16

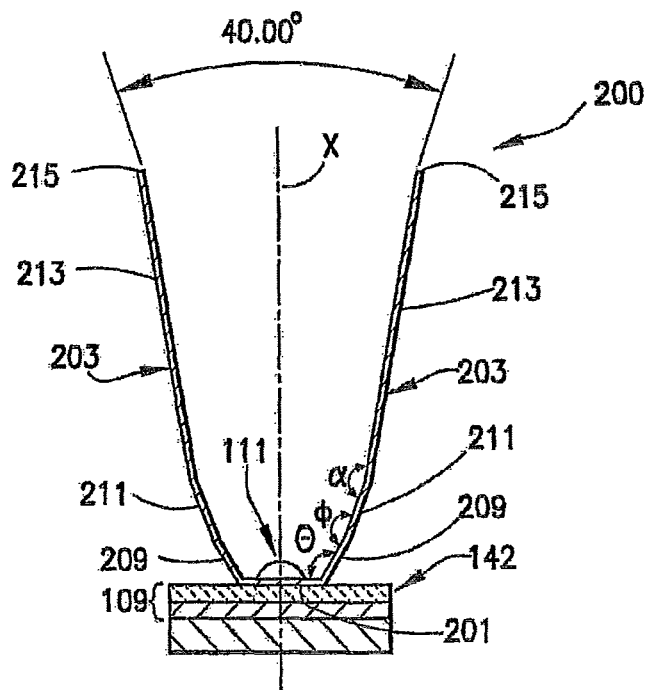


FIG. 17

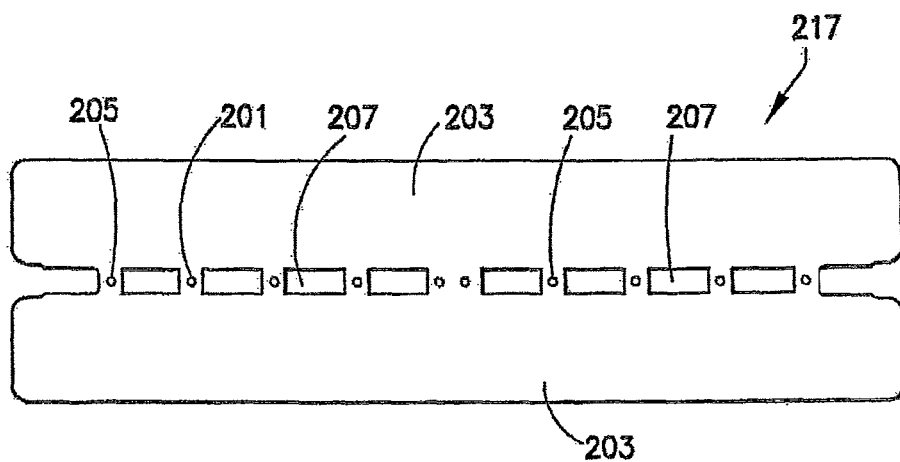


FIG. 18

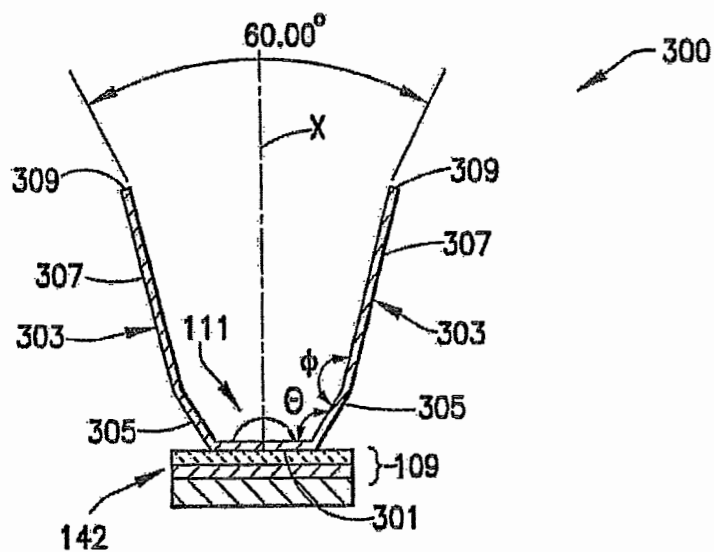


FIG. 19

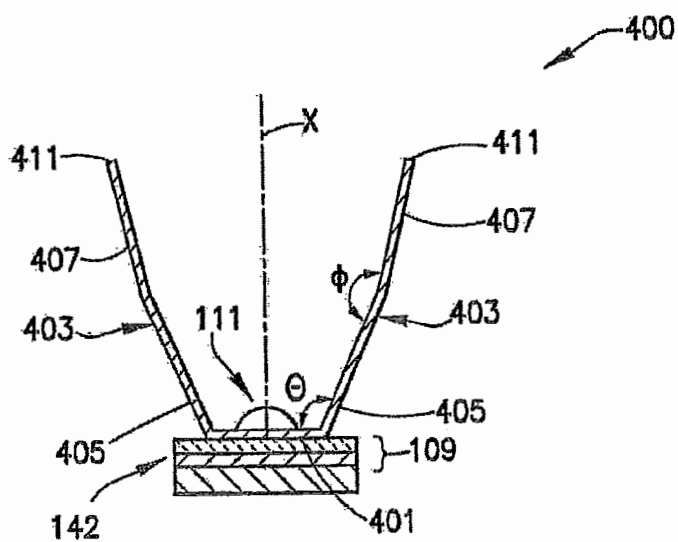


FIG. 20

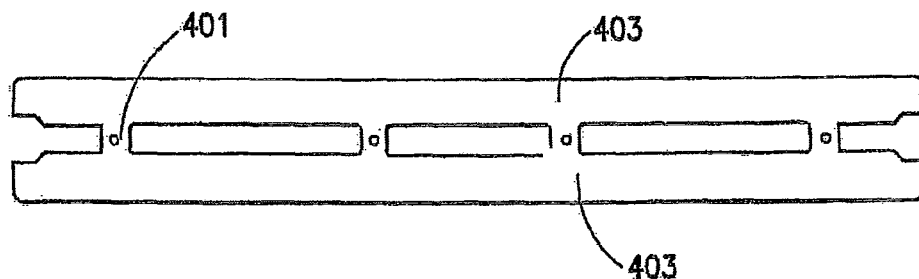


FIG. 21

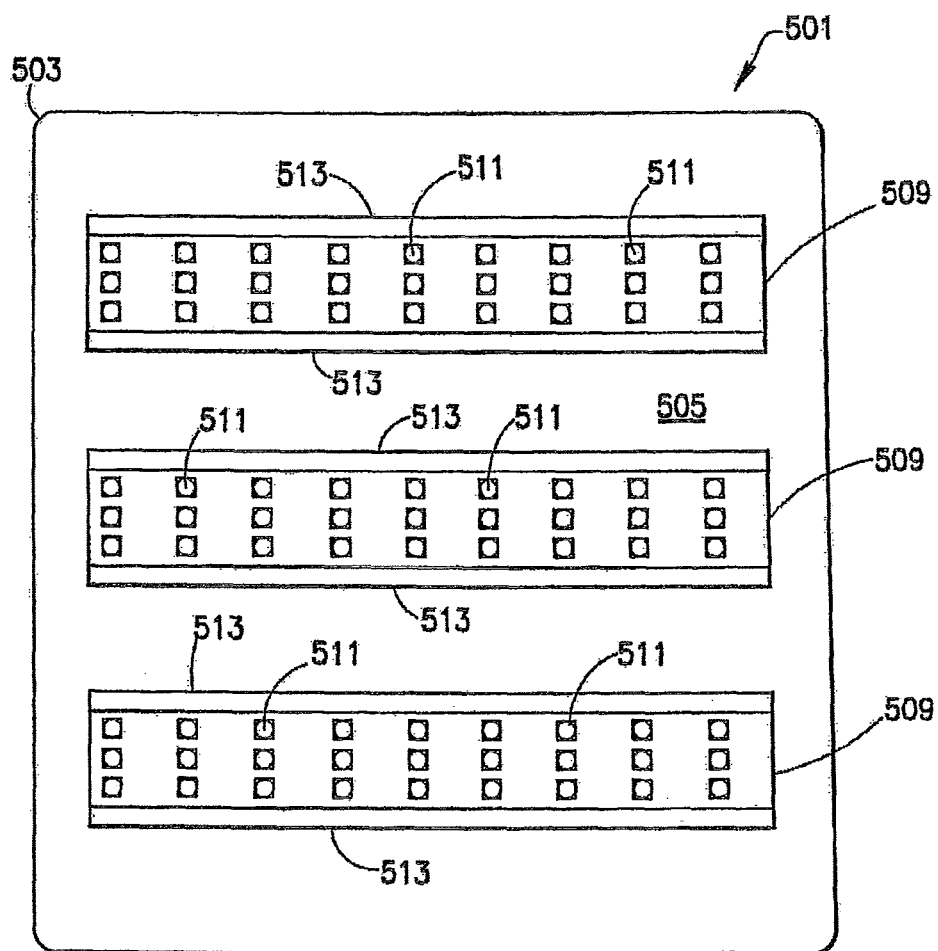


FIG. 22

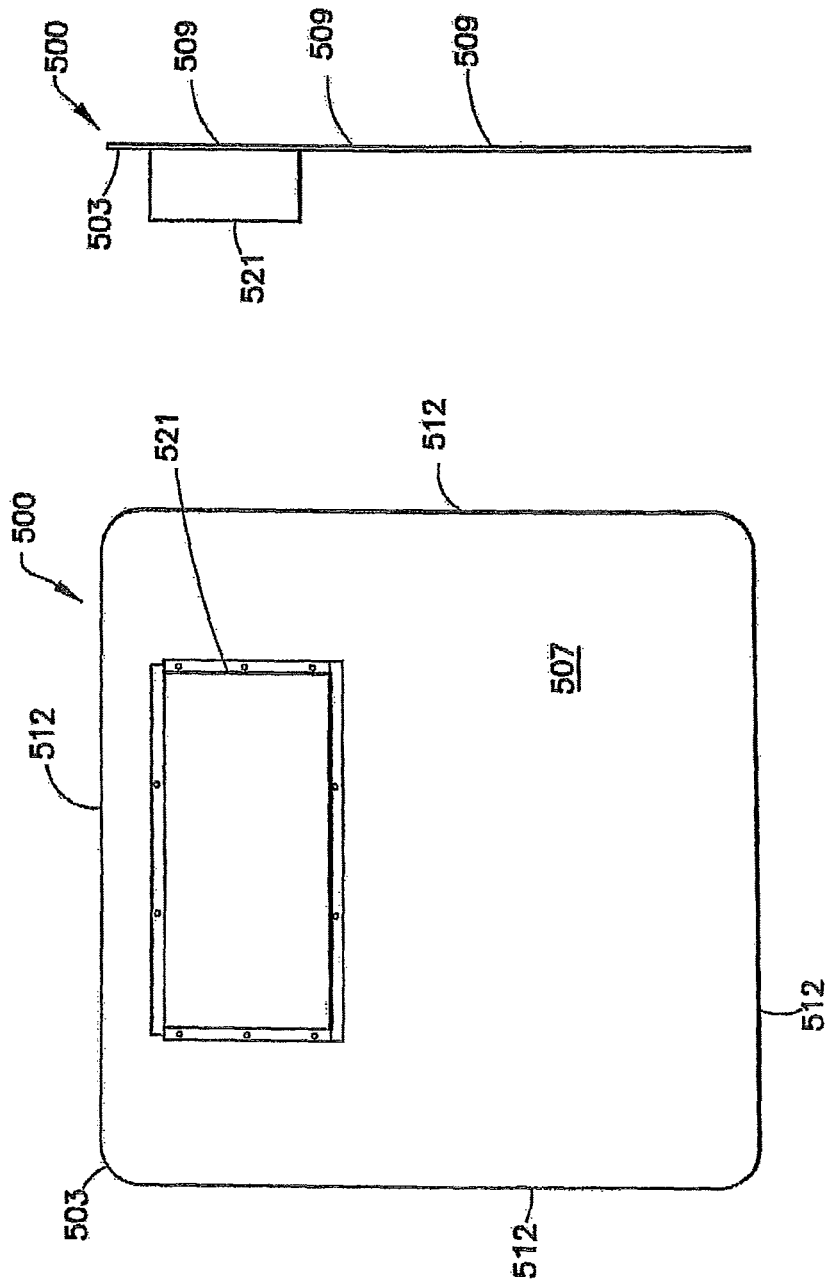


FIG.24

FIG.23

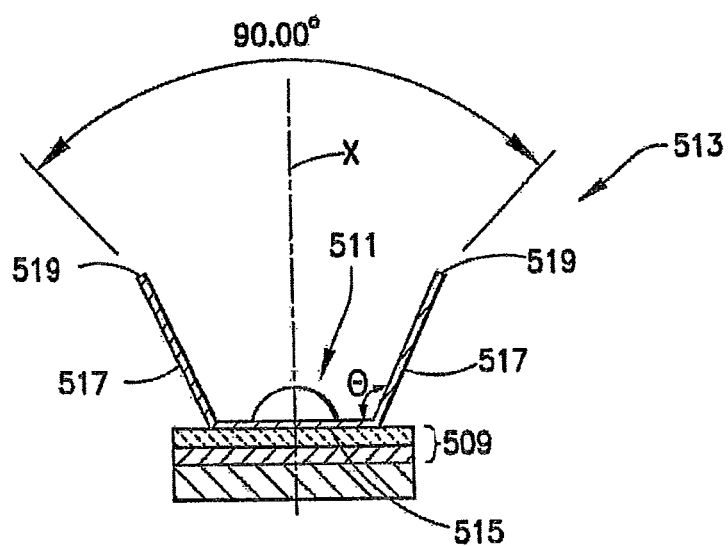


FIG. 25

1

LIGHTING FIXTURE

CROSS REFERENCE TO RELATED APPLICATIONS

This application is a continuation of U.S. patent application Ser. No. 12/341,798, filed Dec. 22, 2008, which claims the benefit of U.S. Provisional Patent Application No. 61/015,713 entitled "Lighting Fixture" filed Dec. 21, 2007, U.S. Provisional Patent Application No. 61/094,558 entitled "Lighting Fixture with Improved Cover and Mounting Assembly" filed Sep. 5, 2008 and U.S. Provisional Patent Application No. 61/094,571 entitled "Reflectors for Use with a Lighting Fixture" filed Sep. 5, 2008, which are all hereby incorporated by reference in their entirety.

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates, in general, to lighting fixtures (luminaires) that utilize light emitting diodes (LEDs) as a light source and, more particularly, to lighting fixtures incorporating LEDs configured in a manner to amplify and direct light produced by such lighting fixtures.

Description of Related Art

Conventional lighting fixtures such as streetlights and office lights have typically utilized incandescent, halogen, or fluorescent bulbs to provide light. The use of incandescent and halogen bulbs has been problematic in a number of ways. First, incandescent light bulbs are very energy inefficient. A large percentage of the energy incandescent light bulbs consume is released as heat, rather than light. Although fluorescent bulbs are more efficient than incandescent light bulbs, fluorescent bulbs raise environmental concerns, and are still very inefficient when compared to LEDs or other similar solid state light emitters.

Additionally, incandescent and fluorescent light bulbs have short life spans when compared to solid state emitters. This requires lighting devices to be replaced more frequently. Such short life spans are particularly more problematic when used in overhead lighting in office buildings or in streetlights, where access may be difficult. Replacement is not only time consuming, but can be dangerous.

Furthermore, the unwanted heat produced in these lighting systems adds not only to additional energy costs but may also require additional air conditioning to lower the temperature of the area lit by the system. For example, in large buildings, overhead lighting is typically provided by lights placed near the ceiling and directed downward. These buildings often require additional air conditioning to compensate for this energy produced as heat.

Although solid state emitters, such as LEDs, are known to be more energy efficient, LEDs have not been considered in the past as an option for providing quality light in many applications, such as streetlights and office lighting systems, because LEDs do not provide enough useful light at a distance. Moreover, LEDs are a new technology, and therefore are more expensive. Accordingly, extending the use of LEDs is a particularly desirable goal. More recently, high-powered LEDs have been developed, thereby providing useful light output for incorporating LEDs into lighting fixtures for use as streetlights and office lights. However, the use of LEDs in such lighting fixtures typically requires a large number of LEDs clustered closely together to provide useful light output. Accordingly, lighting fixtures incorporating LEDs in this manner generate a large amount of heat energy when the LEDs emit light. This heat energy has to be

2

dissipated. If this heat energy is not effectively removed, the high temperature caused by the heat energy will reduce the luminance and life span of the LEDs. Therefore, each of the foregoing-described lighting fixtures requires a complex heat dissipating mechanism to adequately remove the heat energy produced by the large number of LEDs.

In view of the foregoing, a need exists for a lighting fixture for use, for example, as a streetlight or an office light that utilizes a minimal number of LEDs to produce useful light at a distance without creating excessive heat within the lighting fixture. A further need exists for an LED lighting fixture having a relatively simple heat dissipating mechanism. A need also exists for an LED lighting fixture that accomplishes amplified lighting with the use of a minimal number of LEDs.

SUMMARY OF THE INVENTION

As described in detail herein, a lighting fixture for use, for example, as a streetlight or an office light is disclosed and which provides useful light at a distance using only a small number of LEDs. Such a light fixture incorporates a relatively simple heat dissipating mechanism in accordance with this disclosure. In one embodiment, a light emitting diode (LED) lighting arrangement for a lighting fixture is provided. The LED arrangement includes a lighting strip having a plurality of light emitting diodes (LEDs) and a reflector that can be mounted to the lighting strip comprising multi-faceted side walls extending away from the light strip. Each of the light emitting diodes desirably has a diode base and a light emitting portion. The multi-faceted side walls of the reflector cause light produced by the plurality of light emitting diodes (LEDs) to be amplified and formed into a uniform beam.

The lighting strip may also include an electrical connector that allows the lighting strip to be operatively connected to a power supply, such as through driver circuitry and control circuitry. The reflector may be constructed from silver-coated aluminum with a protective polymer coating. The plurality of light emitting diodes (LEDs) may be arranged in a linear row.

The side walls of the reflector may be configured to extend away from a base member that defines a plurality of openings receiving at least the light emitting portion of the plurality of light emitting diodes (LEDs), respectively. The side walls may be formed integral with the base member. The multi-faceted side walls may comprise multi-angle side walls. As an example, the side walls may include a first portion defining a first angle with the light emitting portion of the plurality of light emitting diodes (LEDs) and a second portion defining a second angle with the first portion. The first angle and second angle may be different angles.

Alternatively, the side walls of the reflector may extend away from a base member and may be symmetrical about an axis of symmetry that runs through a center of the base member. In addition, the side walls may extend away from a base member and each have a plurality of angles formed therein. The side walls may each comprise a first portion defining a first angle with the base member and a second portion defining a second angle with the first portion. The first angle and second angle may be different angles. The multi-faceted side walls may include multi-angle side walls.

Another embodiment is directed to a light emitting diode (LED) lighting fixture. The lighting fixture includes a base plate having a front side and a rear side. A plurality of lighting strips is mounted on the front side of the base plate. A reflector is mounted to each of the lighting strips and

3

comprises multi-faceted side walls extending away from the light strip. The lighting strips are interconnected with a power supply through driver circuitry and control circuitry. For example, the power supply may be mounted to the rear side of the base plate within an enclosure, and may be connected to control circuitry, which is connected to driver circuitry, which is electrically coupled to the plurality of light emitting diodes (LEDs). Each of the lighting strips includes a plurality of light emitting diodes (LEDs), and each of the light emitting diodes desirably has a diode base and a light emitting portion. The multi-faceted side walls cause light produced by the plurality of light emitting diodes (LEDs) to be amplified and formed into a uniform beam. The plurality of light emitting diodes (LEDs) in each of the lighting strips may be arranged in a linear row.

The reflector may be constructed from silver-coated aluminum with a protective polymer coating. The side walls may be configured to extend away from a base member defining a plurality of openings receiving at least the light emitting portion of the plurality of light emitting diodes (LEDs), respectively. The side walls may include a first portion defining a first angle with the light emitting portion of the plurality of LEDs and a second portion defining a second angle with the first portion. The first angle and second angle may be different angles.

Alternatively, the side walls may extend away from a base member and may be symmetrical about an axis of symmetry that runs through a center of the base member. The side walls may extend away from the base member and each have a plurality of angles formed therein. The side walls may each comprise a first portion defining a first angle with the base member and a second portion defining a second angle with the first portion. The first angle and second angle may be different angles, and the multi-faceted side walls may be multi-angle side walls.

The lighting strips are connected to the base plate so as to permit at least conductive heat transfer from the lighting strips to the base plate. Heat transfer fins may be provided on at least one side of the base plate to conduct heat to the ambient environment. The base plate may be formed of anodized aluminum comprising an enhanced conductive non-uniform heat-transferring surface texture. The lighting strips may be connected to the base plate such that inter-contacting surfaces between the lighting strips and base plate are separated by less than ten hundredth of an inch (0.01 inches). Desirably, the inter-contacting surfaces between the lighting strips and base plate may be separated by less than about one thousandth of an inch (0.001 inches). The lighting strips may be mounted to mounting stages upstanding from the base plate.

In addition, a method of manufacturing a light emitting diode (LED) lighting arrangement for a lighting fixture is disclosed and detailed herein. The method generally includes the steps of providing a lighting strip having a plurality of light emitting diodes (LEDs), each desirably comprising a diode base and a light emitting portion; providing a reflector blank; forming a plurality of linearly arranged openings in the base member; bending the reflector blank to form a base member and multi-faceted side walls extending away from the base member to form a reflector; and associating the lighting strip with the reflector such that the plurality of openings respectively receive at least the light emitting portion of the plurality of light emitting diodes (LEDs).

4

The reflector blank may be manufactured from silver-coated aluminum with a protective polymer coating. The multi-faceted side walls may be formed as multi-angle side walls.

The side walls may be formed to have a first portion defining a first angle with the light emitting portion of the plurality of LEDs and a second portion defining a second angle with the first portion. The first angle and second angle may be different angles. Alternatively, the side walls may be formed to be symmetrical about an axis of symmetry that runs through a center of the base member.

The foregoing and other features and characteristics, as well as the methods of operation and functions of the related elements of structures and the combination of parts and economies of manufacture will become more apparent upon consideration of the following description with reference to the accompanying drawings, all of which form a part of this specification, wherein like reference numerals designate corresponding parts in the various figures.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a front view of a first embodiment of a lighting fixture for exemplary use as a streetlight.

FIG. 2 is a rear view of the lighting fixture of FIG. 1.

FIG. 3 is a transverse cross-sectional view of the lighting fixture of FIG. 1.

FIG. 4A is a front view of a second embodiment of a lighting fixture for exemplary use as a streetlight.

FIG. 4B is a front perspective view of the second embodiment of a lighting fixture for exemplary use as a streetlight shown in FIG. 4A.

FIG. 5 is a cross-sectional view of the lighting fixture of FIGS. 4A-4B taken along line 5-5 in FIG. 4A.

FIG. 6A is a portion of the cross-sectional view of FIG. 5 enlarged for viewing.

FIG. 6B is an enlarged view of a mounting clip in one embodiment.

FIG. 7A is a rear view of the lighting fixture of FIGS. 4A-4B.

FIG. 7B is a rear perspective view of the lighting fixture of FIGS. 4A-4B.

FIG. 8 is a side view of a pole mounting assembly for use with the lighting fixture of FIGS. 4A-4B.

FIG. 9 is an exploded top view of the pole mounting assembly of FIG. 8.

FIG. 10A is a top view of a light emitting diode (LED) lighting strip for use in the lighting fixture of FIGS. 4A-4B.

FIG. 10B is a cross-sectional view of the light emitting diode (LED) lighting strip of FIG. 10A taken along line 10B-10B in FIG. 10A.

FIG. 10C is a cross-sectional view of the light emitting diode (LED) lighting strip of FIG. 10A taken along line 10C-10C in FIG. 10A.

FIG. 11A is a top view of another embodiment of a light emitting diode (LED) lighting strip for use in the lighting fixture of FIGS. 4A-4B.

FIG. 11B is a cross-sectional view of the light emitting diode (LED) lighting strip of FIG. 11A taken along line 11B-11B in FIG. 11A.

FIG. 12 is a schematic diagram of an exemplary embodiment of a driver circuit for use with the lighting fixture of FIGS. 4A-4B.

FIGS. 13A-13D are schematic diagrams of an exemplary computer circuit for use with the lighting fixture of FIGS. 4A-4B.

5

FIG. 14 is an exemplary flow diagram illustrating a possible control sequence for controlling operation of the lighting fixture of FIGS. 4A-4B.

FIG. 15 is a side perspective view of the lighting fixture FIGS. 4A-4B used as a streetlight.

FIG. 16 is cross-sectional view of the lighting emitting diode (LED) lighting strip adapted for use with the lighting fixture of FIGS. 4A-4B illustrating details of a reflector associated with the lighting strip.

FIG. 17 is a cross-sectional view of another embodiment of the lighting emitting diode (LED) lighting strip adapted for use with the lighting fixture of FIGS. 4A-4B and comprising an alternative reflector.

FIG. 18 is a top view of a blank used to manufacture the reflector of FIG. 17.

FIG. 19 is a cross-sectional view of additional embodiment of the lighting emitting diode (LED) lighting strip adapted for use with the lighting fixture of FIGS. 4A-4B and comprising an additional embodiment of the reflector.

FIG. 20 is a cross-sectional view of a further embodiment of the lighting emitting diode (LED) lighting strip adapted for use with the lighting fixture of FIGS. 4A-4B and comprising a further embodiment of the reflector.

FIG. 21 is a top view of a blank used to manufacture the reflector of FIG. 20.

FIG. 22 is a front view of a lighting fixture in accordance with an embodiment adapted for use as an office lighting fixture.

FIG. 23 is a rear view of the office lighting fixture of FIG. 22.

FIG. 24 is a side view of the office lighting fixture of FIG. 22.

FIG. 25 is a cross-sectional view of a reflector adapted for used with a light emitting diode (LED) lighting strip used in lighting fixture of FIG. 22.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

For purposes of the description hereinafter, spatial orientation terms, as used, shall relate to the referenced embodiment as it is oriented in the accompanying drawing figures or otherwise described in the following detailed description. However, it is to be understood that the embodiments described hereinafter may assume many alternative variations and configurations. It is also to be understood that the specific devices, features, and components illustrated in the accompanying drawing figures and described herein are simply exemplary and should not be considered as limiting.

Generally speaking, an embodiment of the present invention involves a lighting arrangement incorporating one or more lighting strips comprising a plurality of light emitting diodes LEDs to provide a light emitting sub-assembly or device. A lighting fixture may be provided that incorporates the LED lighting strips and desirably utilizes a shell or housing assembly of the lighting fixture as an integrated heat transfer device, often described herein as a thermal radiator, thereby effectively dissipating any heat created by the LEDs so as to prevent heat buildup within the lighting fixture and, thereby, permitting the LEDs to operate more efficiently for a longer life span. Additional embodiments are directed to amplifying reflectors that may be associated with the lighting strips so that light produced by the plurality of light emitting diodes (LEDs) may be amplified and formed into a uniform beam which may be a focused beam useful, for example, as a spotlight, or a diffused beam useful, for example, as an overhead streetlight or possibly as an over-

6

head office light. The combination of reflectors for amplifying or intensifying the light and the heat dissipation provided through the thermal radiation properties of the housing provides for a lighting fixture adapted to provide effective light output for use as a street light, while not overheating and reducing the life span or safety of the street light.

With reference generally to FIGS. 1-3, features of the invention are described herein with reference to a lighting fixture 1 in accordance with one embodiment of the invention. In the following example, lighting fixture 1 is described in the context of an overhead streetlight for exemplary purposes. Lighting fixture 1 generally includes a housing 2 comprising a base plate 3 having a front side 5 and a rear side 7. Base plate 3 includes at least one and, preferably, a plurality of light emitting sub-assemblies 4, also referred to herein as a lighting arrangement, particularly an LED lighting arrangement. Each light emitting sub-assembly 4 is comprised of a lighting strip 9, each including one or more surface-mounted LEDs 11 mounted thereto, and each light emitting sub-assembly may further include a reflector 13 mounted in a manner extending away from the lighting strip 9, as will be described in more detail herein.

In the embodiment depicted in FIGS. 1-3, three lighting strips 9 are mounted to front side 5 of base plate 3. Lighting strips 9 may be mounted directly on front side 5 of base plate 3, or may be mounted to a separate u-shaped channel or mounting stage that is directly mounted to base plate 3, as described in more detail in connection with the embodiment of FIGS. 4-7. Each lighting strip 9 includes a plurality of surface-mount LEDs 11 mounted thereto, and may be constructed from any suitable material for mounting LEDs and associated circuitry, and is desirably constructed from aluminum. Base plate 3 and the base of lighting strip 9 may be constructed from any suitable material adapted for radiating and transferring thermal energy. Desirably, base plate 3 and lighting strip 9 are constructed of aluminum or an aluminum alloy, such as aluminum alloy 1100 or aluminum alloy 3003 and, in particular, aluminum alloys subjected to an anodizing treatment. Lighting strip 9 may have an exemplary overall thickness of about 1/8 inch thick, and base plate 3 may have an exemplary thickness about 1/8 to 1/4 inch thick. Base plate 3 may also be formed in a representative iconic shape, such as a football, baseball glove, hockey stick, and the like to provide a decorative beam of light.

LEDs 11 are desirably high-power LEDs such as the LUXEON® REBEL manufactured by Phillips Lumileds Lighting Company or the CREE® XLAMP® XR-E LED manufactured by Cree, Inc. Alternatively, plasma emitter bulbs may be used instead of LEDs 11. Plasma emitter bulbs are typically the size of a dime. Each bulb is filled with a gas and metal halide materials. In operation, an electric field is applied to the bulb, which ionizes the gas molecules to create a gas plasma. The metal halides then completely join the gas plasma which emits a powerful white light. Such plasma emitter bulbs are currently manufactured by Luxim® Corporation.

Desirably, lighting fixture 1 also includes a transparent cover 6 coupled to front side 5 of base plate 3. Cover 6 may be constructed of any suitable transparent material for passing light emitted by LEDs 11 therethrough, and is desirably selected from a polymeric material such as acrylic, ballistic acrylic, thermoplastic, polycarbonate, and the like. One particularly suitable material is LEXAN. The material forming cover 6 is desirably shatterproof and otherwise weatherproof so as to prevent damage when exposed to the exterior environment.

7

Transparent cover **6** may be coupled to base plate **3** using any suitable fastening mechanism, such as using bolts **8**, so long as a generally airtight seal is maintained about the perimeter of housing **2**, thereby maintaining the interior portion of lighting fixture **1** as a sealed internal environment. In the illustrated exemplary embodiment of FIGS. 1-3, a mounting bracket in the form of mounting member **10** is coupled to rear side **7** of base plate **3** for mounting of lighting fixture **1** to an appropriate surface. Mounting member **10** may comprise any general form for mounting to a particular surface, such as a plurality of mounting holes **12** for receiving a fastening member (not shown) which allows the lighting fixture **1** to be adjustably mounted to a pole. In the illustrated exemplary embodiment, lighting fixture **1** is configured to be mounted at a height sufficient to provide adequate lighting to a street or surface below. For instance, if lighting fixture **1** is mounted on a pole at a height of 30 feet above a street, lighting fixture **1** provides a lighting pattern that extends about 50 feet from the base of the pole and about 65 feet on either side of the pole.

Each sub-assembly **4** further includes a reflector **13** mounted so as to extend from the front side **5** of base plate **3** such that side walls **41** of reflector **13** extend at an angle from each of lighting strips **9**. Each reflector **13** desirably includes a base portion (discussed in more detail herein) with a pair of side walls **41** extending from opposite sides thereof at an angle. Desirably, side walls **41** are integral with the base portion of reflector **13**. Reflector **13** may be constructed of any reflective material, and may include a protective polymer coating thereon. Desirably, the material forming each reflector **13** has a reflectivity that is on the order of 95% to 98% reflective. Additionally, the polymer coating prevents corrosion on reflector **13**. An exemplary reflective material is silver-coated aluminum, which is not to be construed as limiting, and any highly-reflective material may be used to construct the reflector assemblies.

With specific reference to FIGS. 2 and 3, lighting fixture **1** further includes a power supply and control circuitry (not shown) positioned within a rear housing **17** mounted on rear side **7** of base plate **3**. The power supply and control circuitry are electrically coupled to the plurality of LEDs **11** to provide effective lighting control, as described in more detail with respect to the embodiment of FIGS. 4-7. Housing **17** may also include a window **19** with a light detector in the form of a photoelectric eye **21** positioned thereunder. In order to efficiently transfer light from window **19** to photoelectric eye **21**, an acrylic rod or fiber optic array (not shown) may be positioned between window **19** and photoelectric eye **21**. In the present non-limiting embodiment, photoelectric eye **21** provides electronic signal(s) to the control circuitry which causes LEDs **11** to turn on when surrounding ambient light has dropped below a predetermined level as will be described hereinafter.

An LED light (not shown) may also be mounted on rear side **7** of base plate **3** and be coupled to the power supply and control circuitry for when, for example, utility workers are working on the pole where light fixture **1** is mounted. Such a separate, rear-mounted LED provides utility workers with appropriate lighting above lighting fixture **1**. This additional LED light may be turned on manually through the use of a magnetic switch, by an infrared sensor or by an ultrasonic sensor, as examples.

With reference to FIGS. 4-7, an alternative embodiment of a lighting fixture **101** is illustrated. Lighting fixture **101** generally includes a housing **102** defined by a base plate **103** having a front side **105** forming a generally interior housing surface and a rear side **107** forming a generally outer

8

housing surface for the lighting fixture. Lighting fixture **101** includes at least one and, preferably, a plurality of light emitting sub-assemblies **104**, again also referred to herein as a lighting arrangement, particularly an LED lighting arrangement. Each light emitting sub-assembly **104** includes a lighting strip **109** comprised of one or more surface-mounted LEDs **111** mounted to a circuit board substrate or base member **142** and each light emitting sub-assembly **104** may further include a reflector **141** mounted in a manner extending away from the lighting strip **109**, as will be described in more detail herein. Each lighting strip **109** is mounted either directly or indirectly to base plate **103** in a manner permitting effective and efficient heat transfer between the LEDs **111** mounted to base member **142** and base plate **103**, as will be described in further detail herein. It is desirable for the LEDs **111** to be mounted in a linear row or arrangement so that reflector **141** may effectively reflect light emitted by the LEDs **111**, amplify this light and direct the light in a manner effective for the intended purpose of the lighting fixture **101**, for example, as use as streetlight in the instant example or for other applications such as a spotlight, office overhead light, and other applications. The reflector **141** may be configured to reflect and amplify the light from the LEDs **111** to achieve the light characteristics that are desired for the lighting fixture **101**.

While it is noted that the number of lighting strips **109** may be dependent upon the intended use of the lighting fixture, the embodiment of FIGS. 4-7 includes four lighting strips **109**, shown to be effective in the intended use of the present lighting fixture as a streetlight. Moreover, each lighting strip **109** includes a plurality of linearly-arranged, surface-mount LEDs **111** mounted to base member **142**. Base member **142** is desirably constructed, at least in part, of a similar material as base plate **103**, such as aluminum or aluminum alloy, preferably an anodized aluminum alloy. In the illustrated embodiment, each lighting strip **109** includes eight linearly-arranged LEDs **111** mounted to base member **142**. However, this is not to be construed as limiting, as any suitable number of LEDs **111** may be mounted to each lighting strip **109**. As with the previous embodiment, LEDs **111** are desirably high-power LEDs such as the LUXEON® REBEL manufactured by Phillips Lumileds Lighting Company or the CREE® XLAMP® XR-E LED manufactured by Cree, Inc. Alternatively, plasma emitter bulbs may be used instead of LEDs **111**. Such plasma emitter bulbs are currently manufactured by Luxim® Corporation, as noted previously.

Base plate **103** along with transparent cover **106** essentially forms the complete housing **102** of lighting fixture **101**. Base plate **103** is typically constructed of a suitable material to structurally support lighting fixture **101** and to provide effective protection for the components and circuitry within lighting fixture **101**. Moreover, base plate **103** serves at least another purpose in that it also acts as a material for effectively and efficiently transferring thermal energy from LEDs **111** to dissipate heat therefrom, as will be further detailed herein. Briefly, it is envisioned that the interaction of base plate **103** and base member **142** effectively and efficiently conducts heat away from LEDs **111** and base plate **103** is desirably adapted to transfer the heat energy to the ambient environment using any one or more of conductive, convective, and radiation heat transfer modes to the ambient environment. To achieve effective and efficient heat transfer, base plate **103** may be constructed from any structurally supportive material that is adapted for transferring thermal energy. Base plate **103** is desirably constructed of aluminum or an aluminum alloy, such as aluminum alloy 1100 or

9

aluminum alloy 3003 and, in particular, aluminum alloys subjected to an anodizing treatment. Base plate **103** may have an exemplary thickness about $\frac{1}{8}$ to $\frac{1}{4}$ inch thick. By anodizing the aluminum used to construct base plate **103**, the base plate **103** is provided with a heat-transferring surface texture, typically a non-uniform or non-smooth, somewhat roughened surface texture that increases the ability of the base plate **103** to transfer heat energy to the ambient environment and, accordingly, the anodizing process enhances the heat dissipating properties of base plate **103**, thereby allowing it to function as a particularly effective and efficient heat transfer device or mechanism, also termed herein as a “thermal radiator”. Moreover, base plate **103** may further include a plurality of thermal radiating fins **114** on rear side **107** to provide additional surface area for convective heat transfer and dissipation to the ambient environment, such that the LEDs **111** stay cool regardless of the outdoor temperature. Additionally, base plate **103** has an outer peripheral edge **112** that is curved away from a body of the base plate **103** at an angle of approximately 90°.

Desirably, lighting fixture **101** includes a transparent cover **106**. Transparent cover **106** may be manufactured from any suitable material such as, but not limited to, a polymeric material, such as acrylic, ballistic acrylic, thermoplastic, polycarbonate, and the like. Cover **106** is coupled with base plate **103** using any suitable mechanical fastening arrangement, so long as a generally airtight seal is maintained about the perimeter of housing **102**, thereby maintaining the interior portion of lighting fixture **101** as a sealed interior environment.

With specific reference to FIGS. **6A-6B**, and with continuing reference to FIGS. **4A-4B**, **5** and **7A-7B**, transparent cover **106** may be fitted such that an outer edge **108** is positioned adjacent to outer peripheral edge **112** of base plate **103**. Desirably, a gasket **113** is positioned between outer edge **108** of transparent cover **106** and outer peripheral edge **112** of base plate **103** to provide a generally fluid-tight seal therebetween. Transparent cover **106** may also include at least one protective vent **118**. Protective vent **118** provides an effective barrier against harsh weather conditions (e.g., rain, snow, high winds), while allowing water vapor to exit effectively from within transparent cover **106**, thereby reducing the likelihood of condensation accumulating beneath transparent cover **106**. Protective vent **118** equalizes pressure between the transparent cover and the ambient environment and is desirably able to vent moisture that becomes trapped within the interior enclosure of housing **102** generally defined by transparent cover **106** and base plate **103**, while allowing only dry air to enter into the enclosure created by transparent cover **106**. An example of such a protective vent **118** is the GORE™ Protective Vent manufactured by W.L. Gore & Associates, Inc.

Once transparent cover **106** is fitted to base plate **103**, a suitable clamp arrangement, such as a plurality of spring clips **115**, is positioned over outer edge **108** of transparent cover **106** and outer peripheral edge **111** of base plate **103** to fixedly hold transparent cover **106** to base plate **103**. Spring clips **115** are desirably formed with securing structure **117**, such as teeth, positioned on an inner surface thereof. Spring clips **115** are desirably adapted to allow for transparent cover **106** to be quickly and easily removed. For example, a special tool may be provided for use with spring clips **115** to open and remove spring clips **115** from association with transparent cover **106** and base plate **103**. It is desirable that, if this specialized tool is not used, securing structure **117** on spring clips **115** will scratch and otherwise damage transparent cover **106** when removal of spring clip **115** is

10

attempted. This visible damage to transparent cover **106** can provide clear evidence to an authorized repair technician that someone has tampered with lighting fixture **101**.

With reference to FIGS. **8** and **9** and with continuing reference to FIGS. **4-7**, a further embodiment of a mounting bracket in the form of pole mounting member **119** is coupled to rear side **107** of base plate **103**. Pole mounting member **119** includes a first clamp member **121** and a second clamp member **123**. First clamp member defines a first arcuate surface **125** and second clamp member defines a second, opposing arcuate surface **127**. First arcuate surface **125** and second arcuate surface **127** are configured to face one another and capture a pole (not shown) therebetween. Once the pole is captured between first clamp member **121** and second clamp member **123**, a first bolt **129** and a second bolt **131** may be inserted and tightened thereby securing the pole between first clamp member **121** and second clamp member **123**. First clamp member **121** and second clamp member **123** desirably each have an inside surface having a waffle pattern thereon. This waffle-pattern grips the pole when it is positioned between first clamp member **121** and second clamp member **123** thereby preventing rotation of the lighting fixture **101** relative to the pole. First clamp member **121** and second clamp member **123** each also define a pair of arcuate slots **133**, **135**. Arcuate slots **133**, **135** are configured to receive respective bars **137**. Mounting bars **137** are designed to move within arcuate slots **133**, **135** to allow lighting fixture **101** to be angularly adjusted for use in directing light output from lighting fixture **101**. In a typical mounting scenario, lighting fixture **101** is mounted to an extension pole extending from an upstanding pole (such as a telephone-style pole) and it is desired that lighting fixture **101** be positioned with the transparent cover **106** thereof facing downward and generally parallel to the ground surface, thereby directing light output directly downwardly. The arrangement of mounting bars **137** and arcuate slots **133**, **135** provide lighting fixture to be mounted in such a manner regardless of the angle that the extension pole extends from the upstanding pole, as will be appreciated by those skilled in the art. It is also contemplated that alternative mounting clamps may be utilized with the present lighting fixture, depending upon the particular installation application.

With reference to FIGS. **10** and **11**, and with continuing reference to FIGS. **4-7**, lighting fixture **101** includes a plurality of light emitting sub-assemblies **104** including LED lighting strips **109** on front side **105** of base plate **103**. Each lighting strip **109** includes a plurality of surface-mount LEDs **111** mounted onto circuit board or base member **142** in electrical contact/connection therewith and a reflector **141** mounted thereto. In the present embodiment, reflector **141** defines multiple facets formed therein that amplify the light provided by LEDs **111** as will be discussed in greater detail hereinafter. Such facets may be angled formations in the body of the reflector **141** but reflector **141** is not intended to be limited to such facets. Facets should be read broadly in connection with this disclosure as a formation(s) in the body of reflector **141** that amplify the light output of the LEDs **111** and direct the amplified and desirably uniform light outward from the light fixture **101** for any desirable application. This sets forth certain exemplary and non-limiting applications for light fixture **101** such as street-lighting or office overhead lighting, as mentioned previously. It is noted that in FIG. **4B**, reflectors **141** are omitted for clarity purposes.

The incorporation of LEDs into conventional lighting fixtures can be problematic due to excessive heat build-up within the lighting fixture, which can deleteriously affect

11

performance and lifespan of the LEDs. Lighting fixtures **1**, **101** in accordance with this disclosure exhibit effective and efficient dissipation of the heat generated by LEDs **11**, **111**. In particular, this heat dissipation is accomplished utilizing the entire housing of the lighting fixture **1**, **101** as a heat transfer device which effectively transfers heat energy generated LEDs **1**, **111** to the external environment. In the foregoing, it was noted that base plate **103** may be formed of specific materials having suitable heat transfer characteristics and this material may be anodized and coated to provide a surface texture on the base plate **103** having enhanced heat transferring properties. Heat-transfer fins **114** are also provided on base plate **103** for improving heat transferring attributes of base plate **103**. A further aspect of the heat transferring ability of light fixture **101** in particular is the arrangement of LEDs **111** with circuit board base member **142** and the mounting of the base member **142** to the base plate **103**. As described next herein, this arrangement enhances the heat transfer from LEDs **111** to base plate **103**.

More particularly, as noted previously, each lighting strip **109** includes a singular line of LEDs **111** mounted onto base member **142**. Base member **142** is desirably constructed of the same material as base plate **103**. As shown in FIGS. **10A-10C**, base member **142** represents a circuit substrate for LEDs **111**, including a metallic base supporting substrate layer **142a**, such as anodized aluminum oxide, with a non-conductive layer **142b** on a surface thereof, such as a ceramic layer or enamel layer. Electronic circuitry is then printed onto the non-conductive layer **142b**, with a second non-conductive layer positioned over the circuitry. Such a configuration is generally known in the semi-conductor art and the illustration of metallic base supporting substrate layer **142a** and non-conductive layer **142b** is for explanatory purposes only. If desired, a fiberglass layer may also be provided between the circuitry and the second non-conductive layer. The LEDs **111** are mounted to the surface of base member **142** in electrical contact with the circuitry therein, thereby forming each lighting strip **109**.

Reflector **141** is further mounted on the surface of base member **142**, with LEDs **111** extending through openings **144** through the base portion of reflector **141**. In particular, each reflector **141** comprises opposed side walls defining facets, as mentioned previously; various embodiments of reflector **141** are described herein but each such embodiment is generally in the form of an elongated channel structure having a base portion or member and side walls defining said facets. The base portion or member is desirably positioned flush with the top surface of base member **142** of lighting strip **109** and is mounted thereon using suitable fastening means, such as an adhesive, bolts, rivets, and the like. As noted, reflector **141** defines openings **144** through the base portion such that when reflector **141** is mounted to base member **142**, light from LEDs **111** can reflect off the interior surfaces of the side walls of the reflector **141**, as will be described in greater detail with reference to the reflector embodiments depicted in FIGS. **16-21**. Each lighting strip **109** with reflector **141** mounted thereto thereby forms each light emitting sub-assembly **104**. Each lighting strip **109** also includes an electrical connector **149** that allows the lighting strip **109** of the light emitting sub-assembly **104** to be operatively connected to a driver circuit **150**. As will be discussed in greater detail hereinafter, driver circuit **150** divides the power output from a power supply **151** equally among the plurality of lighting strips **109**, such as four lighting strips **109** in the instant embodiment, with little to

12

no variation in amperage between the respective lighting strips **109**. This division is effective in extending the lifespan of LEDs **111**.

Returning to the heat transfer attributes of lighting fixture **101**, base plate **103** of entire housing **102** forms a mechanism for dissipating thermal energy to the ambient environment, essentially creating a heat transfer mechanism for dissipating heat generated by the LEDs **111** in each lighting strip **109**. An aspect of the mounting of LEDs **111** on lighting strip **109** is that there is significant physical contact between the bottom surface of lighting strip **109** and base plate **103** which provides robust heat transfer between the lighting strip **109** and base plate **103** and heat produced the LEDs **111** on the lighting strip **109** is effectively conducted to base plate **103** for transfer to the ambient environment. Accordingly, in summary, the housing **102** of lighting fixture **101** acts as a thermal radiating mechanism or device in accordance with this disclosure. To further explain the foregoing, direct physical contact between the portion of lighting strip **109** and base plate **103** generally comprises base member **142** being in significant surface area contact with base plate **103** such that any gap between the inter-contacting surfaces is less than one hundredth of an inch (0.01 inches), and preferably less than about one thousandth of an inch (0.001 inches). This inter-contacting surface engagement is effective in achieving the desired heat transfer from the respective lighting strips **109** to base plate **103**. Accordingly, this disclosure contemplates the foregoing-described engagement of each lighting strip **109** with base plate **103** to achieve the desired cooling of LEDs **111**. As noted, base member **142** for each lighting strip **109** may be mounted directly to base plate **103** or indirectly to base plate **103** by some intervening structure. Any such intervening structure is desirably connected to base plate **103** so as not to inhibit substantially the heat transfer between base member **142** and base plate **103** of housing **102**.

In order to secure and maintain the substantial surface area contact between each lighting strip **109** and base plate **103** for each of the light emitting sub-assemblies **104**, conventional fastening methods may be used to mount the respective lighting strips **109** to the front side **105** of base plate **103**. Such conventional fastening methods include, for example, using mechanical fasteners such as screws, bolts or rivets, conductive adhesives, welding, or other known attachment means. In certain embodiments, portions of light emitting sub-assembly **104** may be interconnected using mechanical fasteners that extend below the bottom surface of the sub-assembly **104**, such that the bottom surface of the thus-prepared light emitting sub-assembly **104** includes a discontinuous surface. For example, reflector **141** may be attached to lighting strip **109** through a rivet, which extends through respective holes in base member **142** of lighting strip **109** below the bottom thereof creating a protrusion, thereby preventing the bottom surface of lighting strip **109** from providing a smooth surface for direct contact with a separate surface, such as base plate **103**. In such embodiments, it is contemplated that a separate mounting bracket may be used to support the lighting strips **109** on base plate **103** so as to maintain effective contact for heat transfer, and such intervening structure should not inhibit heat transfer from the lighting strips **109** to the base plate **103** in accordance with this disclosure. For example, as depicted in FIGS. **4-5**, lighting strips **109** may be mounted to a separate mounting stage **148**, such as in the form of a u-shaped channel, which is directly mounted to base plate **103**. In particular, base plate **103** may include a series of mounting stages **148** as a u-shaped channel that is unitarily formed

13

with base plate 103 or otherwise connected thereto, such as through welding, for providing effective heat transfer therebetween. Mounting stages 148 desirably conduct heat energy effectively and efficiently from lighting strips 109 to the main body of base plate 103.

Moreover, each lighting strip 109 may further be mounted onto a separate mounting member 143. In particular, each light emitting sub-assembly 104 may further include a mounting member 143 acting as a support plate for mounting base member 142 of lighting strip 109 (including electrically connected LEDs 111) thereto. Mounting member 143 may be formed of any suitable material adapted for providing structural support to lighting strip 109, and is desirably formed of the same material as base member 142 of lighting strip 109, such as an anodized aluminum alloy, having the desirable heat transfer characteristics described previously. Mounting member 143 generally has the same thickness as base member 142, and is desirably of the same general length as base member 142 and desirably has a width greater than 1.5 times that of base member 142 and, more desirably, a width equal to or greater than two times that of base member 142. In this manner, any protrusion formed from a fastening member extending through base member 142 will be offset from the attachment between mounting member 143 and stage 148. Thus, light emitting sub-assembly 104 may be effectively attached to base plate 103 via stage 148 with substantially the entire bottom surface of lighting strip 109 contacting mounting member 143, and with mounting member 143 effectively contacting the entire upper surface of stage 148. Accordingly, stage 148 provides a mechanism for offset attachment of light emitting sub-assembly 104 so as to provide for sufficient contact between mounting member 143 and the upper surface of stage 148 for effect thermal transfer.

In addition, the general shape of stage 148 (shown as a general u-shape) can further provide a mechanism for additional surface area for heat transfer so as to further dissipate heat generated by LEDs 111 through mounting member 143. In such embodiments, mounting member 143 (including lighting strip 109 attached thereto) may be connected to stage 148 in any known manner. In one particular embodiment as shown in FIGS. 4 and 10A, mounting member 143 defines a plurality of spaced grooves 145 formed along one longitudinal end thereof. Each of the grooves 145 is configured to receive a fastening member 147 to mount lighting strip 109 to stage 148 and, thereby, to the front side 105 of base plate 103. By providing a plurality of grooves in a spaced manner, a plurality of fastening members can be used to mount lighting strip 109, thereby ensuring proper contact between the bottom surface area of mounting member 143 and stage 148 to provide effective heat transfer therebetween, which is effectively accomplished by limiting the gap between the bottom surface of mounting member 143 and the top surface of stage 148 to less than about 0.01 inches.

It will be appreciated from, for example, FIG. 5 that each of the lighting strips 109 is mounted to an individual stages 148 provided on the front side 105 of base plate 103. By mounting lighting strips 109 to such individual stages 148, the individual lighting strips 109 can easily be mounted or removed from base plate 103 expediting replacement of a defective and/or damaged lighting strip 109. Accordingly, in addition to providing effective heat transfer between LED lighting strips 109 to base plate 103, the foregoing mounting configuration allows for a quick and easy change of LED lighting strips 109, for example, if one of LED lighting strips 109 is damaged or defective. It is known that in conventional incandescent lighting fixtures, replacement of a worn out or

14

defective lamp involves mere replacement of the bulb unit. LED lights, however, represent circuit chips that are electrically mounted onto a circuit board. Accordingly, replacement of a worn or defective LED chip involves replacement of the entire LED board. The attachment and mounting configuration contemplated through the various embodiments in this disclosure provides a mechanism for quick and easy replacement of one or more LED lighting strips 109, without requiring significant modification or rebuilding of the lighting fixture. Moreover, by providing multiple strips of LEDs in a single fixture, if one LED light or strip fails, the fixture will still be able to provide light output through the remaining functional lighting strips, albeit at a reduced level, until such time that the malfunctioning lighting strip or individual lighting assembly can be replaced.

In particular, in order to gain access to the interior of the lighting fixture, 101, transparent cover 106 is removed by removal of clamps 115. Fastening members 147 positioned in grooves 145 can then be loosened and removed using an appropriate tool. Next, the defective or damaged LED lighting strip 109 is removed from front side 105 of base plate 103. Then, electrical connector 149 is disconnected from driver circuit 150. Finally, a new LED lighting strip 109 is supplanted for the defective or damaged LED lighting strip 109. Transparent cover 106 is then reassembled to base plate 103.

In a variation shown in FIGS. 11A and 11B, lighting strips 109 may be configured to be mounted to stages 148 in a slightly different manner. Lighting strip 109 of FIGS. 11A-11B is identical to that disclosed in previous embodiments, with the exception that "keyhole" shaped openings 156 extend through the surface of lighting strip 109. Such keyhole openings 156 provide a mechanism for attachment of lighting strip 109 to base plate 103 of housing 102. In particular, in such an embodiment, mechanical fasteners, such as screws, may be inserted into keyhole openings 156 and extend through corresponding openings 158 in underlying mounting member 143 to engage a stage 148 on base plate 103. The mechanical engagement is desirably sufficient to enable effective and efficient heat transfer between the lighting strip 109 and base plate 103. The keyhole openings 156 allow lateral adjustment of lighting strip 109 relative to mounting member 143 to allow for proper attachment of a reflector 141 to the lighting strip 109. Moreover, a plurality of spaced fasteners are desirably used so as to provide for effective surface contacting engagement between the bottom surface of lighting strip 109 and the top surface of stage 148 on base plate 103 for effective heat transfer therebetween, as discussed previously. It will be clear that the use of individual stages 148 for mounting the respective lighting strips 109 to base plate 103 may be eliminated such that the lighting strips 109 are mounted directly to base plate 103.

With reference to FIGS. 12 and 13, and with continuing reference to FIGS. 4-7, lighting fixture 101 includes a power supply 151, driver circuit 150 and computer circuit 160. Power supply 151 is desirably positioned within a housing 153 mounted on rear side 107 of base plate 103. Driver circuit 150 and computer circuit 160 are desirably mounted on front side 105 of base plate 103 beneath transparent cover 106, thereby providing effective protection from the environment. Power supply 151 is electrically coupled to a control board in the form of computer circuit 160 via a wire 155 extending through base plate 103. Computer circuit 160 is, in turn, coupled to a driver circuit board 150. Driver circuit 150 is electrically coupled to each lighting strip 109 via individual electrical connectors 149. Driver circuit 150 divides the power output from a power supply 151 equally

15

among the four lighting strips **109** in the present embodiment. Driver circuit **150** is electrically coupled to and controlled by computer circuit **160** to control operation of the individual lighting strips **109**.

Each individual LED **111** is electrically connected in series on each respective lighting strip **109**. Moreover, each respective lighting strip is connected in parallel to driver circuit **150**. Such an arrangement provides the driver circuit **150** with the ability to maintain the amperage constant even in the event that one or more LEDs **111** in any of the respective lighting strips **109** should fail. Such an arrangement also prevents an overload of power to any of the lighting strips **109** or other LEDs **111** thereon in the event of such a failure of one or more LEDs, thereby preventing premature burn out and failure of the remaining working LEDs, such as to prior to replacement of and individual lighting strip **109**.

When lighting fixture **101** is used as a street lighting fixture, as an example, a light detector is desirably provided in association with the light fixture **101**. In one exemplary form, the light detector comprises a photoelectric eye **170** that is mounted on housing **153** of power supply **151** and is electrically coupled to computer circuit **160**. Photoelectric eye **170** is provided to turn on the LEDs **111** when surrounding ambient light has dropped below a predetermined level as will be described hereinafter. An exemplary embodiment of computer circuit **160** is illustrated in FIG. **13**. Computer circuit **160** utilizes a microcontroller chip **1300** as the primary means for controlling the light output by lighting fixture **101**. However, this is not to be construed as limiting as the use of other circuitry configurations, microprocessors, and microcontrollers may be substituted. Likewise an exemplary embodiment of driver circuit **150** is illustrated in FIG. **12**.

As may be inferred from the foregoing, computer circuit **160** is provided for automated control of various functions of lighting fixture **101**. For example, computer circuit **160** may include circuitry for controlling a remote camera (not shown) that may be provided with lighting fixture **101**. Additionally, computer circuit **160** may include circuitry for interaction with a separate wireless device that is adapted for programming the control board for operation of the lighting fixture. For example, computer circuit **160** may include circuitry to communicate with a separate remote control device via two-way radio-frequency (RF) so as to program the lighting fixture **101**. Other communication vehicles for communication with computer circuit **160**, such as via infrared (IR) light, are intended to be encompassed by this disclosure. Moreover, lighting fixture **101** may include a solar-power capability for powering computer circuit **160** and lighting strips **109**.

Desirably, computer circuit **160** works in conjunction with photoelectric eye **170** to automatically turn exemplary street lighting fixture **101** on and off based on ambient light conditions, and to adjust the lighting at predetermined time periods. With reference to FIG. **14**, the on-off and power adjustment features of lighting fixture **101** are schematically illustrated. First, power is supplied to computer circuit **160** thereby initializing the computer circuit **160** at block **1400**. Next, at block **1410**, photoelectric eye **170** looks for diminished ambient light, signaling, for example, the arrival of dusk, if the lighting fixture **101** is intended for use as a street lamp, and this information is provided as an input to computer circuit **160**. Once sufficiently diminished light (such as at dusk), as detected by photoelectric eye **170**, is determined by computer circuit **160**, the computer circuit **160** turns lighting fixture **101** on at full power at block **1420**.

16

As an option, at blocks **1430** and **1440**, after a predetermined period of time, the power of the light output may be reduced by a predetermined amount for further energy conservation, for example, in the middle of the night when fewer people are likely to be in the vicinity of street lighting fixture **101**. For example, if computer circuit **160** turns on the lighting fixture **101** at, for example, dusk, a counter in the computer circuit **160** may begin counting. After a preprogrammed period of time has elapsed, such as six hours, the computer circuit **160** may reduce power to the LEDs **111** to save power. As another alternative, computer circuit **160** may be programmed to turn on the lighting fixture **109** at a scheduled time, such as at 6:00 PM. Then, after a preprogrammed period of time has elapsed, power to the LEDs is reduced by a certain amount, thereby providing for reduced light output and reducing power consumption. The amount of power reduction may be programmed in advance, for example, by reducing power consumption to about 25% to 75% of the full power output at selected point in time after the counting has begun. With the present lighting fixture **101**, it has been discovered that the power reduction to light output ratio is not a 1:1 ratio, such that, for example, a 50% reduction in power output continues to provide for an overall light output of the lighting fixture of about 75% of the normal light output, thereby resulting in only about a 25% reduction in light output with a 50% reduction in power.

Thereafter, at block **1450**, photoelectric eye **170** looks for increased ambient light signaling, for example, the arrival of dawn. Once sufficient ambient light (such as at dawn) is detected by photoelectric eye **170** at block **1460**, LEDs **111** of lighting fixture **101** are turned off by the computer circuit **160** and the process returns to block **1410**. In accordance with the foregoing, by reducing power by 25% to 75% after lighting fixture **101** has been on for a predetermined period of time, a savings of up to 90% of power over a current mercury vapor streetlight or high pressure sodium streetlight can be achieved. Additionally, this process extends the life of LEDs **111**.

In addition, the controller of computer circuit **160** also provides a safety start feature. The safety start feature allows the LEDs **111** to turn on slowly over a predetermined time interval. The LEDs **111** start at an off position. Once the computer circuit **160** sends a signal to turn on the LEDs **111**, the LEDs are turned on at a low power and the power is gradually increased over a predetermined period, such as a 2 to 3 second interval, until full power is reached. The purpose of this safety start feature is to protect the human eye from sudden brightness created when the LEDs **111** are turned on at full power. This feature also prevents "welder's flash" when the LEDs **111** are turned on.

With reference to FIG. **15**, and continuing reference to FIGS. **4-7**, an exemplary use of lighting fixture **101** is as a streetlight **180**. Lighting fixture **101** is configured to be mounted by pole mounting member **119** to a pole **181** at a height sufficient to provide adequate lighting to a street **183** or surface below. For instance, if lighting fixture **101** is mounted on a pole at a height of about 30 feet above a street, lighting fixture **101** provides a lighting pattern that extends about 50 feet from the base of the pole and about 65 feet on either side of the pole. It is further contemplated that lighting fixture **101** can be adapted for other attachment mechanisms, such as a rectangular pole, a surface mount, etc.

In the foregoing use of lighting fixture **101** as a streetlight, the inventors have determined that for providing effective light output at a conventional distance for a streetlight (such as about 25-40 feet from the ground surface), four lighting strips **109** including 8 separate LED chips mounted thereon

17

is particularly useful, with each LED chip rated at 80-120 lumens. For example, the light output with such an arrangement having individual LED chips rated at 107 lumens each represents about 2.5 foot-candles at a distance of 32 feet without any reflectors attached to the lighting strips. When the reflectors are attached to the lighting strips, a similar arrangement with individual LED chips rated at 107 lumens each represents about 6.7 foot-candles at a distance of 32 feet. Accordingly, the reflector arrangement significantly amplifies and intensifies the light output for the lighting fixture 101.

Lighting fixture 101 may be assembled by the following general and non-limiting procedure. First, driver circuit 150 and control circuit 160 are mounted to base plate 103 and electrically interconnected. Then, lighting strips 109 are mounted to base plate 103 via the individual mounting members 143 and/or stages 148 and using suitable fastening means such as mechanical fasteners and the like. Next, each lighting strip 109 is electrically coupled to driver circuit 150 by individual electrical connectors 149. Next, individual reflectors 141 are mounted onto lighting strips 109 as discussed hereinafter with reference to FIG. 16. Transparent cover 106 may then be positioned over base plate 103 and secured thereto with spring clips 115. Pole mounting member 119 is mounted to rear side 107 of base plate 103, and is adapted to cooperate with pole 181 as shown in FIG. 15. Power supply 151 is installed within housing 153 and is electrically connected to control circuit 160 through base plate 103, and light detector 170 is attached to housing 153 and electrically connected to control circuit 160.

With reference to FIG. 16, a cross-sectional view of an exemplary lighting strip 109 having LEDs 111 mounted thereon and a reflector assembly 141 extending therefrom is illustrated. In this exemplary embodiment, the reflector assembly includes a base member 184 and a pair of desirably integral side walls 185 extend from opposite sides of the base member 184 at an angle. Each LED 111 includes a light emitting portion 187. Reflector assembly 141 is mounted to lighting strip 109 such that a bottom edge of each side wall 185 extends from a bottom portion of light emitting portion 187 of LED 111. Each side wall 185 of reflector assembly 141 includes a first facet or first portion 186 defining a first angle θ with the base portion 184 of reflector 141 adjacent the bottom portion of light emitting portion 187 of LED 111, and a second facet or second portion 188 that defines a second angle Φ with first portion 186. The combination of these angles creates facets in side walls 185, thereby creating a multi-faceted side wall which amplifies the light provided by LEDs 111. It is contemplated that the multiple facets reflect the light that is output from the LEDs back toward other facets of the walls of reflector 141, thereby amplifying the light. However, this is not to be construed as limiting as this definition of a multi-faceted reflector may also include reflectors having a parabolic shape. In addition, the arrangement of reflector 141 extending from base member 184 allows all of the light produced by LEDs 111 to be reflected and amplified by reflector 141. The angles in side walls 185 of reflector 141 along with the arrangement of reflector 141 such that it extends from the bottom portion of light emitting portion 187 of LED 111 allows lighting fixture 101 to produce useable light while using a small number of LEDs 111 (e.g., the exemplary embodiment illustrated in FIG. 4 has eight LEDs 111 per lighting strip 109 and four lighting strips 109 for a total of thirty-two LEDs 111).

With reference to FIGS. 17 through 21, exemplary alternative reflectors for use with lighting fixture 1 and lighting fixture 101 are illustrated. FIG. 17 provides a cross-sectional

18

view of a first reflector, generally denoted as reference numeral 200 that is also desirably used when lighting fixture 1 or lighting fixture 101 is used as a streetlight but provides a different effect from the previously discussed embodiment.

Reflector 200 includes a base portion or member 201 with a pair of integral side walls 203 extending from opposite sides thereof at an angle. Base member 201 includes a plurality of holes 205 used to fasten reflector 200 to lighting strip 9 or lighting strip 109 using any suitable fastening means. Base member 201 also defines a plurality of gaps or openings 207 formed therein. Base member 201 of reflector 200 is mounted over one of the lighting strips 9 or lighting strips 109 such that surface-mount LEDs 11 or LEDs 111 positioned on lighting strips 9 or strips 109 extend through gaps 207 and side walls 203 of reflector 200 extend at an angle from lighting strip 9 or strip 109.

Each of side walls 203 of reflector 200 has several angles therein as shown in FIG. 17. Each side wall 203 of reflector 200 includes a first portion 209 that extends from base member 201 at a first angle θ of, for example, about 115° to about 130°, such as about 123°. Side walls 203 further include a second portion 211 that defines a second angle Φ with the first portion 209; this angle is approximately between 160° to about 180°, such as about 170°. Finally, side walls 203, in the present configuration, include a third portion 213 that defines a third angle α with the second portion 211; this angle is again about 160° to about 180°, such as about 170°. This configuration creates an overall angle of about 40° between ends 215 of each of side walls 203 of reflector 200. The combination of these angles creates facets in the reflector which amplify the light provided by LEDs 11 or LEDs 111. In addition, side walls 203 of reflector assemblies 200 amplifies the light from each of the plurality of strips 9 or strips 109 of LEDs 11 or LEDs 111 and spreads the light into what appears to be a wash or bath of light.

Reflector 200 is desirably constructed from a sheet of silver-coated aluminum with a protective polymer coating. Such a material has a reflectivity that is from about 95% to 98% reflective. Additionally, the polymer coating prevents corrosion on reflector 200. However, the use of silver-coated aluminum reflectors is not to be construed as limiting as any highly-reflective material may be used to construct the reflector assemblies. Once the sheet of silver-coated aluminum is obtained, each reflector 200 is cut from the sheet desirably using a laser thereby forming a reflector blank, denoted generally as reference numeral 217. Reflector blank 217 is a flat sheet that that shaped to form side walls 203 extending from base member 201, and a plurality of holes 205 and a plurality of gaps 207 are cut in the reflector blank 217 using, for example, a laser. Reflector blank 217 is then bent into the shape discussed hereinabove using a brake press.

With reference to FIG. 19, another possible configuration for a reflector is shown. This reflector 300 includes a base portion or member 301 with a pair of integral side walls 303 extending from opposite sides thereof at an angle. Each of side walls 303 of reflector 300 has several angles therein as shown in FIG. 19. Each side wall 303 of reflector 300 includes a first portion 305 that extends from lighting strip 9 or strip 109 at an initial or first angle θ of, for example, about 115° to about 130°, such as about 121°. Side walls 305 of reflector 300 further include a second portion 307 that defines a second angle Φ with the first portion 305; this angle is approximately between 160° to about 180°, such as

19

about 170°. This configuration creates an overall angle of about 60° between ends 309 of each side wall 303 of reflector 300.

The combination of these angles creates facets in side walls 303 of reflector 300 which amplify the light provided by LEDs 11 or LEDs 111. In addition, side walls 303 of reflector 300 direct the light from each of the plurality of lighting strips 9 of LEDs 11 or strips 109 of LEDs 111 and focus the light into what outwardly appears to be a uniform beam of light. Reflector assemblies 300 are constructed from silver-coated aluminum with a protective polymer coating as described previously.

With reference to FIGS. 20 and 21, yet another possible configuration for a reflector is shown and is denoted generally as reference numeral 400. This reflector 400 includes a base portion or member 401 with a pair of integral side walls 403 extending from opposite sides thereof at an angle. Each side wall 403 of reflector 400 has several angles therein as shown in FIG. 20. Each side wall 403 of reflector 400 includes a first portion 405 that extends from base member 401 at a first angle θ of, for example, about 110° to about 120°, such as about 115°. Side walls 403 further include a second portion 407 that defines a second angle Φ with the first portion 405; this angle is, for example, about 170° to about 180°, such as about 177°. The combination of the foregoing angles creates facets in the reflector 400 that amplify the light provided by LEDs 11 or LEDs 111. In addition, side walls 403 of reflector assemblies 400 direct the light from each of the plurality of lighting strips 9 of LEDs 11 or strips 109 of LEDs 111 and focus the light into what outwardly appears to be a uniform beam of light. Reflector assemblies 400 are also constructed from silver-coated aluminum with a protective polymer coating in like manner to previous embodiments.

While FIGS. 17-21 illustrate possible configurations of the reflector assemblies, this is not to be construed as limiting the present invention as other suitable configurations may be constructed. Various other types of reflectors for use in LED lighting fixtures have been envisioned. For instance, the reflectors may be of a rounded-type with multiple facet angles.

With reference to FIGS. 22-24, a lighting fixture 501, for use as office lighting, includes a base plate 503 having a front side 505 and a rear side 507 defined by a periphery 512. Three strips 509 are mounted on front side 505 of base plate 503. Each strip 509 includes a plurality of surface-mount LEDs 511 mounted thereto. Base plate 503 functions as a heat sink for LEDs 511 and is oversized compared to lighting strips 509 to ensure that LEDs 511 stay cool; base plate 503 has the same heat cooling attributes of base plate 103 discussed previously and the previous discussion of base plate 103 is equally applicable to base plate 503. Base plate 503 provides surface area for cooling LEDs 511 which extends LED life. Lighting fixture 500 is typically intended for indoor use. Accordingly, a sealed cover is not required. A housing 521 is mounted to front side 501 of base plate 503, which also houses a power supply and driver circuitry and a lens cover (not shown). The housing itself is used for installing the fixture in office ceilings and the like.

With reference to FIG. 25, and with continuing reference to FIGS. 22-24, reflectors 513 is mounted to front side 505 of base plate 503 such that side walls 517 extend from each of the lighting strips 509. Each reflector 513 includes a base portion or member 515 with a pair of integral side walls 517 extending from opposite sides thereof at an angle. Base member 515 of reflector 513 is mounted on front side 505 of base plate 503 over one of the strips 509 such that surface-

20

mount LEDs 511 positioned on strips 509 extend through gaps or openings formed in base 515, and side walls 517 of reflector 513 extend at an angle from each of the lighting strips 519. Each side wall 517 of reflector 513 extends from base member 515 at an angle θ of, for example, about 115°. This configuration creates an overall angle of about, for example, 90° between ends 519 of each side wall 517 of reflector 513. Side walls 517 of reflector 513 amplify the light provided by LEDs 511. In addition, side walls 517 of reflector 513 direct the light from each of the three strips 509 of LEDs 511 and focus the light into what appears to be a uniform beam of light. Reflectors 513 are desirably constructed from silver-coated aluminum with a protective polymer coating in like manner to previous embodiments.

Although the invention has been described in detail for the purpose of illustration based on what is currently considered to be the most practical and preferred embodiments, it is to be understood that such detail is solely for that purpose and that the invention is not limited to the disclosed embodiments, but, on the contrary, is intended to cover modifications and equivalent arrangements. Furthermore, it is to be understood that this disclosure contemplates that, to the extent possible, one or more features of any embodiment can be combined with one or more features of any other embodiment.

The invention claimed is:

1. A light emitting diode (LED) lighting arrangement for a lighting fixture, comprising:
 - a base plate;
 - a lighting strip coupled to the base plate, the lighting strip comprising a plurality of light emitting diodes (LEDs) arranged along a substantially planar surface of the lighting strip;
 - at least one reflector sheet comprising:
 - a first multi-faceted side wall of the at least one reflector sheet extending along the lighting arrangement along an entire length of the lighting strip with a first edge adjacent a first side of the lighting strip and extending at an angle along an entire length of the lighting strip; and
 - a second multi-faceted side wall of the at least one reflector sheet extending along the lighting arrangement along an entire length of the lighting strip, the second side wall having a first edge adjacent a second, opposite side of the lighting strip at an angle that extends along an entire length of the lighting strip,
 - wherein the first and second multi-faceted side walls extend away from the lighting strip at an angle and are configured to cause light produced by the plurality of light emitting diodes (LEDs) to be amplified and formed into a uniform beam, and
 - wherein the coupling between the lighting strips and the base plate provides heat transfer between the lighting strips and the base plate such that heat produced by the plurality of LEDs comprised in the lighting strip is conducted to the base plate for transfer to the ambient environment.
2. The light emitting diode (LED) lighting arrangement for a lighting fixture as claimed in claim 1, wherein the light emitting diodes (LEDs) are arranged in a linear row along the length of the lighting strip.
3. The light emitting diode (LED) lighting arrangement for a lighting fixture as claimed in claim 1, wherein the first and second multi-faceted side walls extend away from a

21

base member defining a plurality of openings receiving at least a light emitting portion of the plurality of light emitting diodes (LEDs), respectively.

4. The light emitting diode (LED) lighting arrangement for a lighting fixture as claimed in claim 3, wherein the first and second multi-faceted side walls are formed integral with the base member.

5. The light emitting diode (LED) lighting arrangement for a lighting fixture as claimed in claim 3, wherein the first and second multi-faceted side walls comprise multi-angle side walls.

6. The light emitting diode (LED) lighting arrangement for a lighting fixture as claimed in claim 1, wherein the first and second multi-faceted side walls extend away from a base member and are symmetrical about an axis of symmetry that runs through a center of the base member.

7. The light emitting diode (LED) lighting arrangement for a lighting fixture as claimed in claim 6, wherein the first and second multi-faceted side walls each comprise a first portion defining a first angle with the base member and a second portion defining a second angle with the first portion.

8. The light emitting diode (LED) lighting arrangement for a lighting fixture as claimed in claim 7, wherein the first angle and second angle are different angles.

9. The light emitting diode (LED) lighting arrangement for a lighting fixture as claimed in claim 1, wherein the first and second multi-faceted side walls comprise multi-angle side walls.

10. The LED lighting arrangement of claim 1, wherein the first multi-faceted side wall adjacent the lighting strip extends along the entire length of the lighting strip from a position level with a bottom portion of a light emitting portion of each of the LEDs, and

wherein the second multi-faceted side wall adjacent the lighting strip extends along the entire length of the lighting strip on a side opposite the first multi-faceted side wall from a position level with a bottom portion of a light emitting portion of each of the LEDs.

11. The LED lighting arrangement of claim 1, wherein the first multi-faceted side wall and the second multi-faceted side wall are separately coupled to the lighting arrangement.

12. The LED lighting arrangement of claim 1, wherein the first multi-faceted side wall comprises a first reflector sheet bent to form first facets, and wherein the second multi-faceted side wall comprises a second reflector sheet bent to form second facets.

13. The LED lighting arrangement of claim 1, wherein the first side wall and second side wall each are formed by a single reflector sheet.

14. The LED lighting arrangement of claim 1, wherein the first and second multi-faceted side walls begin at a level of the lighting strip and extend away from the lighting strip.

15. A light emitting diode (LED) lighting fixture, comprising:

a base plate having a front side and a rear side;

a plurality of lighting strips mounted on the front side of the base plate, each of the lighting strips comprising a plurality of light emitting diodes (LEDs) arranged along a length of the lighting strip; and

driver circuitry and control circuitry electrically coupled to the plurality of light emitting diodes (LEDs) for providing power to the light emitting diodes (LEDs), wherein each of the lighting strips includes at least one reflector sheet comprising:

22

a first multi-faceted side wall of the at least one reflector sheet extending at an angle from a first side of the lighting strip along an entire length of the lighting strip, the first side wall comprising a sheet bent to form the angle;

a second multi-faceted side wall of the at least one reflector sheet extending along the lighting arrangement adjacent a second, opposite side of the lighting strip along an entire length of the lighting strip, and wherein the first and second multi-faceted side walls extend away from the lighting strip at an angle and are configured to cause light produced by the plurality of light emitting diodes (LEDs) to be amplified and formed into a uniform beam, and

wherein contact between the lighting strips and the base plate provides heat transfer between the lighting strips and the base plate such that heat produced by the plurality of LEDs comprised in the lighting strip is conducted to the base plate for transfer to the ambient environment.

16. The light emitting diode (LED) lighting fixture as claimed in claim 15, wherein the driver circuitry and control circuitry are mounted on the front side of the base plate, and further comprising a power supply mounted on the rear side of the base plate.

17. The light emitting diode (LED) lighting fixture as claimed in claim 16, wherein the power supply is electrically connected to the control circuitry, the control circuitry is electrically connected to the driver circuitry, and the driver circuitry is electrically connected to each of the plurality of lighting strips.

18. The light emitting diode (LED) lighting fixture as claimed in claim 15, wherein each light emitting diode (LED) of each lighting strip is electrically connected in series, and each lighting strip is electrically connected to the driver circuitry in parallel.

19. The light emitting diode (LED) lighting fixture as claimed in claim 15, wherein each plurality of lighting strips is individually removably mounted to the base plate, so as to permit individual replacement of each lighting strip irrespective of the other lighting strips.

20. The light emitting diode (LED) lighting fixture as claimed in claim 15, wherein the light emitting diodes (LEDs) in each of the lighting strips are arranged in a linear row along the length of the lighting strip.

21. A light emitting diode (LED) lighting fixture, comprising:

a substantially planar and flat base plate formed of anodized aluminum comprising an enhanced conductive non-uniform heat-transferring surface texture, the base plate having a front side and a rear side;

at least four lighting strips comprising a substantially planar base member; and a plurality of light emitting diodes (LEDs) arranged along a length of the base member, the base member connected in direct physical contact to the base plate so as to permit at least conductive heat transfer from the lighting strips to the base plate; and

a reflector sheet mounted to each of the lighting strips and comprising multi-faceted side walls extending away from the lighting strip such that the multi-faceted side walls cause light produced by the plurality of light emitting diodes (LEDs) to be amplified and formed into a uniform beam, wherein the reflector comprises a first edge adjacent the lighting strip and a second edge opposite the first edge toward a light emission side of the lighting fixture, wherein the multi-faceted side

23

walls of the reflector extend along an entire length of the lighting strip at an angle, wherein physical contact between the bottom surface of the lighting strips and the base plate provides heat transfer between the lighting strips and the base plate such that heat produced by the plurality of light emitting diodes (LEDs) on the lighting strip to be conducted to the base plate for transfer to the ambient environment.

22. The light emitting diode (LED) lighting fixture as claimed in claim **21**, further comprising heat transfer fins on at least one side of the base plate to conduct heat to the ambient environment.

23. The light emitting diode (LED) lighting fixture as claimed in claim **21**, wherein inter-contacting surfaces between the lighting strips and base plate are separated by less than about one hundredth of an inch (0.01 inches).

24. The LED lighting fixture of claim **21**, wherein the multi-faceted side walls are formed as bends in the sheet-like reflector.

24

* * * * *

20