



US005849027A

# United States Patent [19]

Gart et al.

[11] Patent Number: 5,849,027  
[45] Date of Patent: Dec. 15, 1998

[54] **PHOTODYNAMIC THERAPY METHOD AND APPARATUS**

5,157,750 10/1992 Grace et al. .... 606/10  
5,441,531 8/1995 Zarate et al. .... 607/90

[75] Inventors: **Mark B. Gart**, Newport Beach, Calif.;  
**Claudio Cesati**, Como, Italy

[73] Assignee: **MBG Technologies, Inc.**, Newport  
Beach, Calif.

## FOREIGN PATENT DOCUMENTS

601946 6/1994 European Pat. Off. .... 607/93  
2340928 5/1975 Germany .... 607/90  
2272278 5/1994 United Kingdom .... F21V 9/00  
9000420 1/1990 WIPO .... 607/88  
9409850 5/1994 WIPO .... 607/88

[21] Appl. No.: 697,957

[22] Filed: Sep. 4, 1996

[51] Int. Cl.<sup>6</sup> ..... A61N 5/00

[52] U.S. Cl. .... 607/93; 606/16

[58] Field of Search ..... 607/90, 88, 93,  
607/89, 92; 606/10, 3, 16, 15

## [56] References Cited

### U.S. PATENT DOCUMENTS

4,576,160 3/1986 Tanaka .... 606/10  
4,782,818 11/1988 Mori .... 607/93  
5,010,452 4/1991 Krebsner et al. .... 362/19




Primary Examiner—Mark S. Graham

Attorney, Agent, or Firm—George W. Wasson

## [57] ABSTRACT

An apparatus and method for photodynamic treatment of diseases using a source of noncoherent light energy with filtering and focusing means for producing radiant energy in a broad bandwidth, the radiant energy is transported to an area for disease treatment through a flexible fiber optic light guide. The light guide includes filtering and focusing means for selecting radiant energy of a particular wavelength for therapeutically treating diseases.

17 Claims, 2 Drawing Sheets

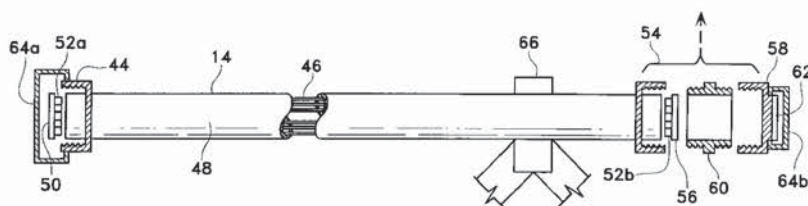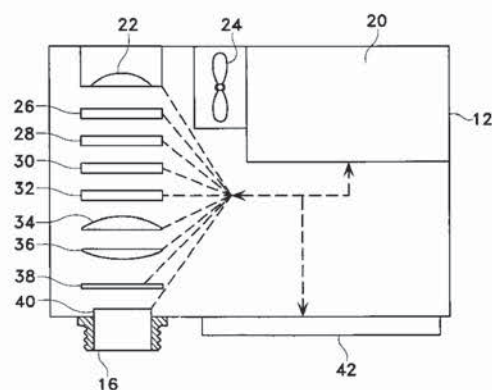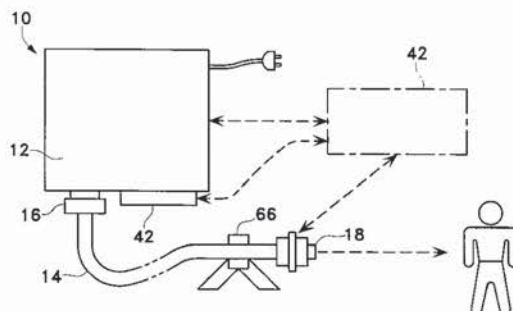

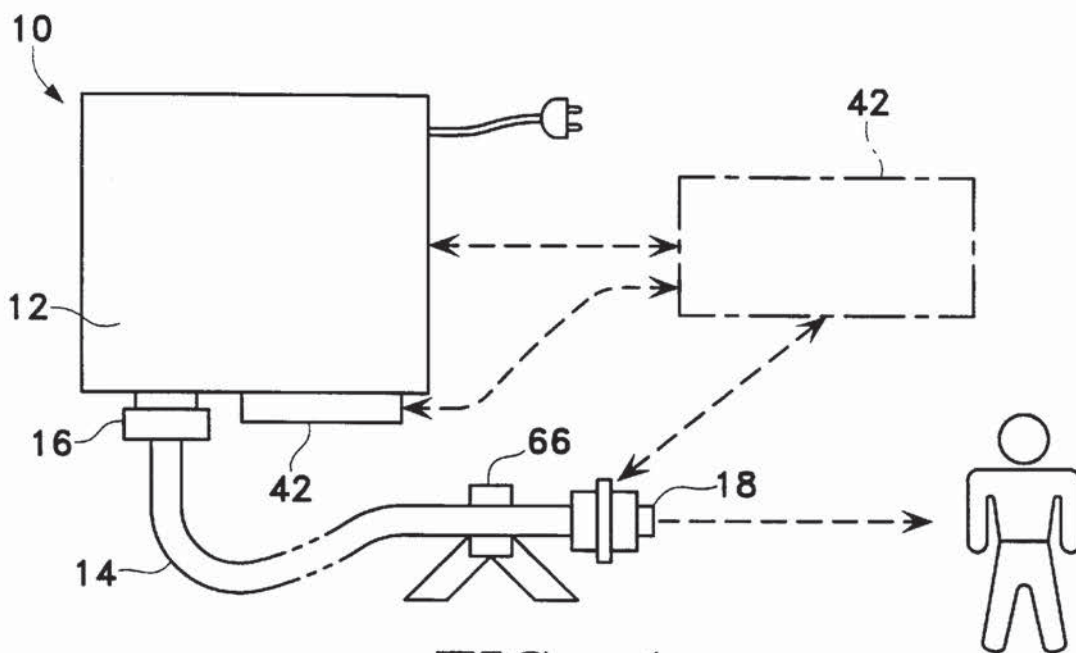


FIG. 1

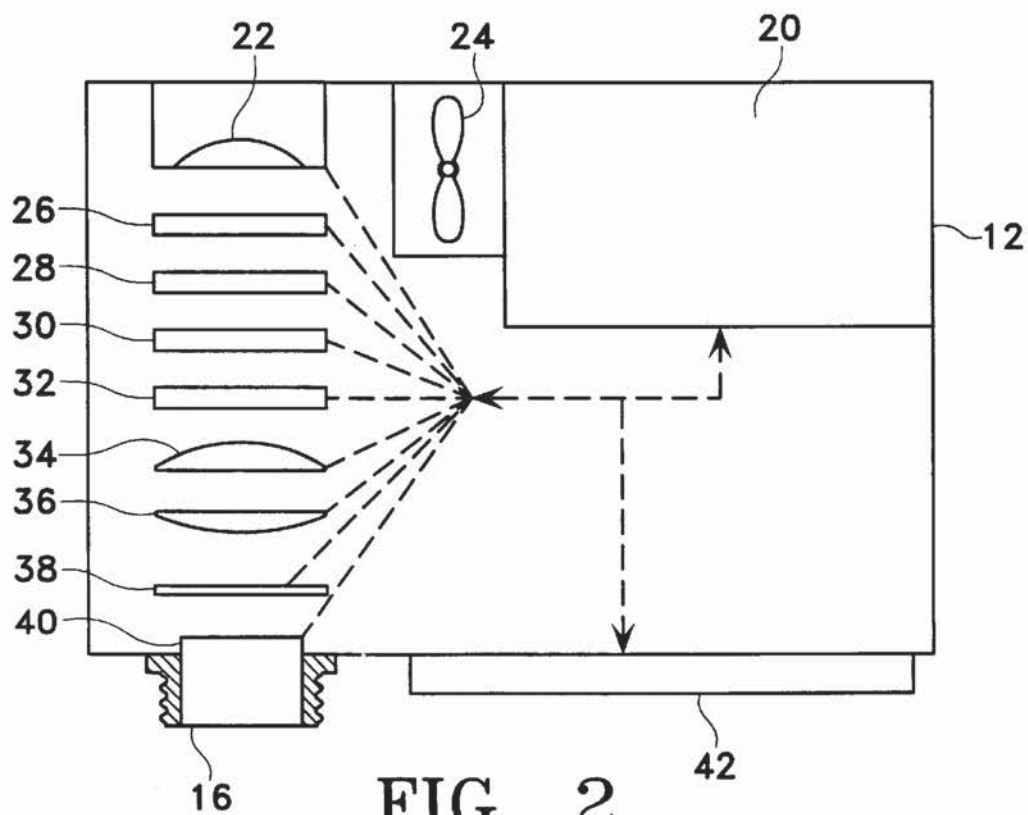


FIG. 2

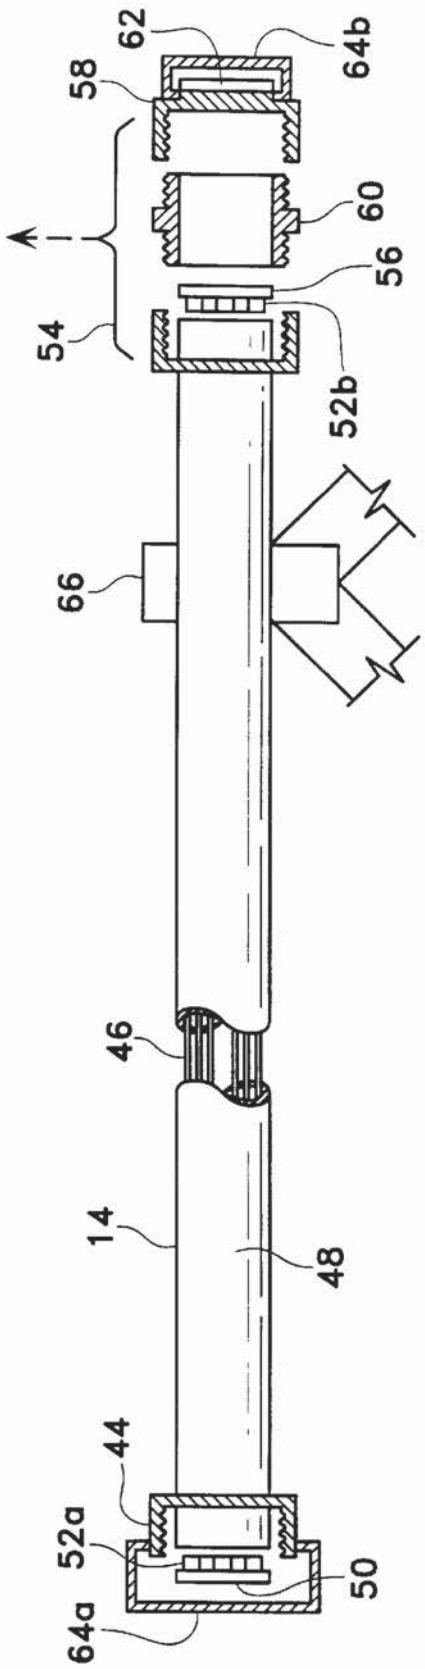


FIG. 3



## PHOTODYNAMIC THERAPY METHOD AND APPARATUS

This invention relates to a method and apparatus for delivering photodynamic therapy treatments to body parts and surfaces. More particularly, the invention relates to methods and apparatus for producing and delivering optical light energy in controlled frequency and intensity for therapeutic treatment of various dermatological and internal diseases in a convenient manner and with a convenient delivery apparatus.

### FIELD OF THE INVENTION

The medical community has long investigated the increased healing effects of the sun on dermatological diseases. The advent of modern medicine continues this investigation and numerous research facilities are now documenting these healing effects. As most medical conditions require a unique light source the rush to implement these procedures has been impeded. It is also known that therapeutic creams and ointments have enhanced effects when combined with light activation, but each disease and its photo therapeutic cream or ointment may require a specific light source. The dedication of a light source to a specific treatment could require the unnecessary duplication of equipment and consume large areas of space just for accommodating the equipment. Physicians, hospitals and clinics might have the required space but presently lack the required funding for the duplicative required equipment. One solution to this problem is the use of one base unit with electromagnetic spectrum adapters which control, regulate and administer the correct exposure as directed by the attending physician.

It has become known that some medications are more effective or only operative when activated by certain controlled light energy applications. Numerous drug companies are experimenting with the possibilities of medicines which can be activated by external light sources. Also, several Universities are researching the healing effects of various light frequencies on human tissue. All these programs require different frequencies within the electromagnetic spectrum. It is apparent that there is a need for one device which can operate at many frequencies with suitable controls that will allow doctors, clinic and home treatment with therapeutic light for the diseases and the types of medicants that can produce the desired treatments when properly combined.

Many medical suggestions have been made for using laser light to treat or control diseases; however, laser light sources are expensive to construct and control and the delivery of the benefits of laser light can become lost if the cost of delivery becomes prohibitive. The use of controlled noncoherent light for medical treatments at much less expense than laser light has introduced the need for a useful and reasonably inexpensive means for controlling and delivering light energy to an area where medical treatment is to be effected.

Therapeutic lamp equipment is shown in U.S. Pat. No. 5,010,452, Krebs et al where an apparatus is disclosed for delivering polarized light for biostimulation. U.S. Pat. No. 5,441,531, Zarate et al discloses an apparatus for delivering photodynamic therapy light to a patient. United Kingdom application 2 272 278 of Colin Whitehurst discloses an incoherent or non-laser light source employing a high intensity lamp, filters and focusing means arranged to yield a light beam having a desired output intensity over a desired area and in a desired bandwidth. Each of these patents illustrates the need for generating preferred light energy in selected frequencies or bandwidths for the medical treatment of a patient.

Missing from these disclosures is an economical and convenient apparatus for controlling the intensity, power and frequencies of the light energy to be delivered and an economical and convenient apparatus for safely delivering and further controlling the light energy in directing and applying the light energy to the desired area on a patient to be treated.

### SUMMARY OF THE INVENTION

The present invention includes a photo therapeutic light device in which numerous electromagnetic radiated frequencies can be generated, transported, filtered, focused and power output controlled using the apparatus disclosed. Photodynamic therapeutic treatment light energies range from near ultraviolet (about 400 nanometers) to extreme infrared (about 800 nanometers) and, as contemplated here, the range of light energies is about 300 nanometers to about 800 nanometers. The present invention includes a light source with power supply, cooling system, light filament bulb or other suitable source, lenses and filters and a transport mechanism which incorporates fiber optic materials for filtration, focusing light source sizing, and control for intensity of emitted light energies through a mechanically flexible system for delivery of the therapeutic light.

An object of the present invention is a convenient combination of a light generating source including filtering, focusing, and power control elements for producing a desired light energy and the addition of a convenient means for transporting, filtering, focusing and power controlling the light energy to deliver the energy to an area to be treated.

Another object of the present invention in accord with the preceding object is the provision of an economical means for developing and delivering photodynamic therapy light energy for therapeutic treatment of diseases.

Another object in accord with the preceding object is the use of a fiber optic light transporting device for the delivery of the light energy to the area to be treated.

Another object in accord with the preceding objects is the use of a flexible fiber optic light transporting device in delivering the light energy.

Another object in accord with the preceding objects is a means for coordinating the generating source and the transporting device for particular and designated light energy bandwidths or frequencies to prevent inadvertent connection and delivery of improper therapeutic light.

Further objects and features of the present invention will be readily apparent to those skilled in the art from the appended drawings and specification illustrating a preferred embodiment wherein:

### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an assembly drawing showing the light generating source and the transporting means.

FIG. 2 is a representation of the elements within the generating source of FIG. 1.

FIG. 3 is a plan view partially in section of the transporting means of FIG. 1.

### DETAILED DESCRIPTION OF THE DRAWINGS

The present invention is an assembly 10 as illustrated in FIG. 1 including a light generating source 12 and a transporting means 14. The source 12 and transporting means are attached to each other at connector 16. The transporting means is flexible and terminates in an exit end at 18 where



photo therapeutic light energy is radiated. The light generating source **12** will contain the electronic or mechanical systems and components required to provide regulated power for the source, electronic controls and circuitry for controlling the source, light source monitoring and feedback safety circuitry for control of the generated light energy and mechanical interconnect elements for passing the light energies to the transporting means **14**.

FIG. 2 is a representation, partially schematic, of the elements that are included within the light generating source **12**; those elements including focusing, filtering and power regulating means for the light energy generated within the source with sensing and feedback means for control of the elements. The source includes a power supply **20** and a means for generating noncoherent light energy **22** powered by the supply. The means for generating noncoherent light energy may be a vacuum rare gas filament bulb or bulb of other conventional design and may include multiple bulbs if greater power is needed. The multiple bulb light source can have the several bulbs arranged in a arc around a reflector that will direct the accumulated light to the filtering and focusing means or other suitable means for focusing the light onto a lens which would collimate the light into one beam. The bulb should be large enough to generate output power in the range of 300 to 400 watts, or higher if needed. A suitable cooling fan and heat extractor **24** is provided to remove excess heat. The bulb should be capable of generating radiant energy in the visible and near visible range and be capable of delivering the photodynamic radiant energy in desired wavelengths for therapeutic treatment purposes. The power generated by the bulb as measured in watts is determined by the medical requirements and can be increased or decreased as required to meet the medical needs.

Between the bulb **22** and the connector **16** there are a group of elements that are used to shutter, filter, focus and power control the generated light energy. An outer shutter dump **26** having a function of controlling the aperture through which the light energy will pass thus controlling the beam size of the generated light energy. At this point heat may have to be extracted from the beam and the dump portion of this element accomplishes that purpose. An infrared filter **28** is adapted to extract the light energy in the infrared range to permit the generated and transported light energy to be in the visible and near visible range without the heat rays of infrared. A broad range band pass filter **30** then permits the transmission of the desired photo therapeutic energy light rays in the range of 300 nm to 800 nm wavelength. A second band pass filter **32** is provided for fine filtering the transmitted light into speciality frequency ranges for particular therapeutic treatments. The filtered transmitted light is then focused first in a gross focusing lens **34** and then, optionally, in a final focusing lens **36**. The filtered and focused transmitted light is then passed through a conditioning and density control filter **38** for preparing the transmitted light for exit from the source **12**. The conditioned and density controlled transmitted light is then passed to an interconnection system **40** for interconnecting the light to a fiber optic interface at the connector **16**. The connector **16** includes a suitable heat sink to withdraw heat from the transmitted light to prevent damage to the fiber optic system, patient or practioner from excessive heat.

The source **12** includes a control panel **42** with the usual and conventional controls that would be used to control the power to the bulb and the monitoring of the filtering, focusing and power control of the generated and transmitted light energy. The monitoring devices for connection to the control panel are shown in dotted lines; the controls are

conventional elements well known in the control arts for sensing the frequency, intensity and spot size of the focused, filtered and power controlled light energy. The controls can be for preliminary or gross adjustments of the light beam with final adjustments made in the transporting means **14** as will be further described hereinafter.

The generated, filtered and focused light energy available at the connector **16** is then to be used for the therapeutic treatment of diseases either external or internal on a patient, but that light energy has to be delivered in some convenient manner to the area to be treated. For that purpose, the electromagnetic energy transporting means or light guide **14** of FIG. 3 is provided with this invention. The transporting means **14** is provided with a connector **44** adapted to be mated with the connector **16** on the light generating source **12**. As will be further described later, the connector **44** is preferably constructed and coded to be used for selected light energy transmission and is adapted to be used only with a selected light energy or power to avoid incorrect or improper uses. The transporting means **14** is preferably constructed of fiber optic elements **46** assembled in a bundle within the transporting means and the entire bundle is encased within a sheilding exterior cover **48** in a manner to be completely flexible. It should be understood that the transporting means **14** and its interior bundle of optical fibers can be of a wide variety of outer diameter sizes so as to be adapted to be used internally or externally in therapeutic treatment programs. The total fiber bundle can range from 0.01 mm to larger than 1.0 cm if the treatment mandates such requirements in deliverable energies or larger spot sizes. Each fiber within the bundle can range from about 0.001 mm to 1.0 mm or larger.

At the input end of the transporting means **14** the connector **44** is provided with a narrow band pass filter **50** which may be selected for a number of separate desired applications; the band pass of this filter will be related to the desired therapeutic treatment to be provided. Inside of the filter **50** and between the filter and the fiber bundle a fiber bundle and filter interface **52a** is provided to couple the light energy from the generating element **12** to the transporting means **14**.

At the exit end **18** of the transporting means **14** the fiber bundle terminates in another fiber bundle and filter interface **52b** for coupling the fiber bundle to a final focusing and filter assembly **54** to finish the adjustment of the optical energy if that becomes necessary. The filter assembly includes a final narrow band pass filter **56** which may be optional and used to adjust the output energy in about  $\pm 25$  mn, a focusing iris **58** for final beam size, a conditioning filter and focusing lens adapter **60**. The adapter **60** terminates in an output lens or window **62**. These elements at the exit end of the transporting means are provided to permit the user to produce the final adjustment of the spot size, intensity and frequency of the therapeutic light energy transmitted along the fiber bundle.

Both the input end of the fiber bundle and the exit end **18** may be provided with end caps **64a** and **64b**, respectively, to protect the optical portions of the transmitting means when not in use or when disconnected from the light source **12**.

As shown in FIGS. 2 and 3, the input end of the fiber bundle **14** at connector **44** is provided with a threaded female adapter for connection to the male threads at the output connector **16** of the light source. These two elements can be provided with additional adapters that will be fitted to the fiber bundle or the generator for selected light frequencies or power and can be color coded, or otherwise distinctly identifiable, for the selected uses. With that adaptation of the



connectors, the user of the therapeutic apparatus can be visually or sensibly alerted to making the proper connection of fiber bundle and light source.

The fiber bundle 14 can be designed for many different uses both in diameter of the bundle and its length. Limitations on the length and size are mostly economic in that smaller individual optical fibers can be more costly. The total length of the entire fiber bundle and the distance from the light generating source to the patient is one of customer's needs. The fiber bundles can range from several inches (about 10 inches) to several feet (3 feet to 10 feet or more). Smaller diameter bundles will be needed for interior therapeutic treatments and larger bundles may be desirable for external treatments.

The fiber bundle may also be provided with a support means 66 as shown in FIGS. 1 and 3. This support means, or others suitably adapted, can support the fiber bundle for holding, aiming and targeting an area that is to be treated while allowing the user of the apparatus to have hands free for other uses.

The drawings show, by dotted lines, a feedback and control connection between the control panel 42 and the filtering, focusing and power control elements of the apparatus. In FIG. 1 the control panel 42 is shown in phantom lines as separated from the light generating source 12 for the purpose of illustrating the placement of the control panel nearer to the user or the patient or the target area or at some other remote area away from the source. It is intended that these feedback and control connections should include monitoring means for spot size, frequencies, intensities, and other conditions such as temperature. The individual elements of the filtering, focusing and power control elements will include appropriate adjustment means, mechanical or electrical, for adjusting the conditions being controlled. The user of the apparatus can also control those elements from the control panel to produce the desired output light energies or the elements within the source 12 can be changed to produce a desired output condition. The control of the filtering and focusing can be done in a broad sense within the light generating source 12 prior to exiting the source at connector 16. The fine tuning and final adjustment of the light beam for spot size, intensity and wavelength can be accomplished, mechanically or electrically, at the filtering and focusing means in the fiber bundle transmission means 14. The final beam exiting from the fiber bundle can be monitored, either internally in the fiber bundle or by a portable meter to measure beam dynamics prior to exposing the patient to the treatment, and the results of that monitoring can be sent to the control panel as represented by the dotted line from the bracket at 54 to the control panel, or the monitoring results can be returned to the control panel through an optical fiber connection. It is also contemplated that a particular setting of filters and focusing means can be "keyed" into the control panel for a particular treatment protocol and those settings could then be accomplished in the light source unit or in the fiber bundle transmission means when it is connected to the light generating source. In that way a single source can be used and a desired therapeutic treatment may be more successfully accomplished by transmission tuning. One source can be used to provide a variety of treatments.

It is believed that the present apparatus can be adapted for the treatment of internal and external diseases in humans and other animals. The combination of the controlled photodynamic therapy light energy with selected medications that will be either activated by or enhanced in their effectiveness by the light energy and the ease of directing the light energy

to the treatment area makes the present invention economically attractive. It is possible to have a single light energy generating source 12 with broad filtering and focusing adjustments and a plurality of separate transmission means 14 adapted to fine tune the light energy and to direct it to the treatment area. Each of the individual elements such as shutters, filters, focusing means and couplers are intended to be easily changed or replaced as needed to meet additional light energies which future treatments might require. One source can serve several fields of use by adjusting the light source and by attaching the appropriate transmission means. Special connectors can be used to prevent the attachment of an incorrect transmission means to the light source.

Another feature of the transmission means light guide of the present invention is that it can be sterilized easily by the presently known sterilizing processes. In many cases, if an element of a disease treatment apparatus is to be reused by the same or different patients, it is a necessity that the apparatus be sterile or the apparatus cannot be reused. In the case of the present invention, it would be cost prohibitive to consider the transmission means as a disposable item. In that regard, the fiber bundle light guide of the present invention can be sterilized by being autoclaved, irradiated or chemically treated to produce the sterile condition needed for reuse.

Disclosed herein is an apparatus and method for delivering radiant energy for therapeutically treating diseases in a combination of a source of noncoherent radiant light, means for focusing, filtering and power controlling the light to produce a first level of control of the light, a flexible transmission means connected to the light source for transporting the light to a treatment area, means for filtering and focusing the transported light to produce the desired frequency, power and spot size in the radiant energy, means for directing the radiant energy to a desired treatment area, and a control system for monitoring the focusing, filtering, power level and spot size of the radiant energy. The transmission means includes a flexible fiber optic bundle connected to the light source and the connection may be adapted to code individual transmission means to particular treatment protocols with means for preventing incorrect interconnections of the source and transmission means.

The source contemplated herein is a non laser source of electromagnetic energy including radiant and light energy generated by a vacuum rare gas or other suitable bulb, for example a halogen bulb, capable of producing energies in about 300 to 800 nonometer wavelength. The source generates a broad band of energies and the transporting means light guide may then narrow that bandwidth to the desired photodynamic energies for therapeutic treatment of disease. It should be understood that the fiber optic light guide can include adjustable elements, replaceable elements or could be preset with elements for developing a desired wavelength of energy.

While certain preferred embodiments of the invention have been specifically disclosed, it should be understood that the invention is not limited thereto as many variations will be readily apparent to those skilled in the art and the invention is to be given its broadest possible interpretation within the terms of the following claims.

We claim:

1. An apparatus for delivering electromagnetic radiant energy for therapeutically treating diseases in accord with predetermined medical protocols including pharmaceuticals which respond to radiant energy of a prescribed wave length and of a prescribed power range, said apparatus comprising:
  - a) a source of noncoherent electromagnetic energy comprising a radiant energy source, said radiant energy



source being at least one source capable of generating about 300 to 400 watts of broad wave length radiant energy,

- b) radiant energy filtering and focusing means in said source,
- c) said filtering and focusing means comprising means for providing controlled radiant energy in a broad wave length range and broad power range at an output connection,
- d) a plurality of selectable, removable and changeable flexible radiant energy transporting means,
- e) means for removably connecting said selectable transporting means individually to said focused and filtered radiant energy source at said output connection,
- f) means within said transporting means for controlling output radiant energy from said transporting means, said means comprising means in said transporting means for focusing, filtering and power regulation of input radiant energy from said source to provide output controlled radiant energy from said transporting means, said plurality of selectable transporting means including individual transporting means for supplying output radiant energy in the range of about 10 mw to about 500 mw per square centimeter in a wave length range of about 300 to 800 nm over a spot size of about 1 to 100 square centimeters,
- g) each of said plurality of separate transporting means-being distinctly designed for a preselected distinctly different narrow radiant energy output range of wave length and power,
- h) said output connection of said source and said means for connecting said separate transporting means to said source being designed to correlate with said predetermined medical protocols and to prevent the connection of incorrect distinctly designed radiant energy transporting means.

2. The apparatus of claim 1 wherein said electromagnetic energy source is a plurality of sources collectively capable of generating said electromagnetic energy.

3. The apparatus of claim 1 wherein said electromagnetic energy source is a light energy source.

4. The apparatus of claim 1 wherein said focusing and filtering of said radiant energy in said source and said transporting means is selected to provide controlled therapeutic radiant energy from said transporting means.

5. The apparatus of claim 1 wherein said transporting means for delivering radiant energy is a plurality of separate light guides, each of said plurality being adapted to be separately connected to said output connection of said source, and each of said plurality of light guides being designed for particular photodynamic therapeutic treatment of diseases in accord with said predetermined medical protocols.

6. The apparatus of claim 5 wherein each of said light guides is one or more individual fibers.

7. The apparatus of claim 5 wherein each of said light guides is a fiber bundle.

8. The apparatus of claim 5 wherein each of said light guides is a light pipe.

9. The apparatus of claim 5 wherein said plurality of separate light guides is distinctly designed for a separate light energy wave length and power range.

10. The apparatus of claim 5 wherein said separate light guides and said source for generating said radiant energy are adapted for providing only said distinctly designed radiant energy in prescribed wave length and power range.

11. The apparatus of claim 5 wherein said connecting means and said light guides are color coded to identify distinctly designed radiant energy ranges.

12. The apparatus of claim 1 wherein said transporting means for delivering said radiant energy may be separately sterilized by any of the group of sterilizing techniques including chemical, radiation, or heat sterilization.

13. The apparatus of claim 1 wherein said transporting means for delivering said radiant energy may be autoclaved.

14. The apparatus of claim 1 wherein said radiant energy source means and said means for transporting radiant energy includes:

- a) power supply regulators,
  - b) electronic controls and circuitry,
  - c) radiant energy monitoring means,
  - d) and feedback circuitry between said source and the output from said means for transporting,
- whereby output radiant energy for therapeutically treating diseases is controlled.

15. In an apparatus for delivering electromagnetic radiant energy for therapeutically treating diseases in accord with predetermined medical protocols including pharmaceuticals which respond to light energy of a prescribed wave length and of a prescribed power range, said apparatus including, a source of noncoherent electromagnetic energy comprising a radiant energy source, said radiant energy source being at least one source capable of generating about 300 to 400 watts of broad wave length radiant energy, radiant energy filtering and focusing means in said source, said filtering and focusing means comprising means for providing controlled radiant energy of a broad wave length range and broad power range at an output connection, the improvement comprising:

- a) a plurality of selectable, removable and changeable flexible radiant energy transporting means,
- b) means for removably connecting said selectable transporting means individually to said focused and filtered radiant energy source at said output connection,
- c) means within said transporting means for controlling output radiant energy from said transporting means, said means comprising means in said transporting means for focusing, filtering and power regulation of input radiant energy from said source to provide output controlled radiant energy from said transporting means, said plurality of selectable transporting means including individual transporting means for supplying output radiant energy in the range of about 10 mw to about 500 mw per square centimeter in a wave length range of about 300 to 800 nm over a spot size of about 1 to 100 square centimeters,
- d) each of said plurality of separate transporting means being distinctly designed for a preselected distinctly different narrow radiant energy output range of wave length and power,
- e) said output connection of said source and said means for connecting said separate transporting means to said source being designed to correlate with said predetermined medical protocols and to prevent the connection of incorrect distinctly designed radiant energy transporting means.

16. A means for transporting electromagnetic energy for use in an apparatus for delivering electromagnetic radiant energy for therapeutically treating diseases in accord with predetermined medical protocols including pharmaceuticals which respond to light energy in a prescribed wave length



and of a prescribed power range, said apparatus including, a source of noncoherent electromagnetic energy comprising a radiant energy source, said radiant energy source being at least one lamp capable of generating about 300 to 400 watts of broad wave length light energy, electromagnetic radiant energy filtering and focusing means in said source, said filtering and focusing means comprising means for providing controlled electromagnetic radiant energy of a broad wave length range and broad power range at an output connection, said means for transporting comprising:

- a) a plurality of selectable, removable and changeable flexible electromagnetic radiant energy transporting means,
- b) means for removably connecting said selectable transporting means individually to said focused and filtered electromagnetic radiant energy source at said output connection,
- c) means within said transporting means for controlling output electromagnetic radiant energy from said transporting means, said means comprising means in said transporting means for focusing, filtering and power regulation of input electromagnetic radiant energy from said source to provide output controlled electromagnetic radiant energy from said transporting means, said selectable transporting means including individual transporting means for supplying output electromagnetic radiant energy in the range of about 10 mw to about 500 mw per square centimeter in a wave length range of about 300 to 800 nm over a spot size of about 1 to 100 square centimeters,
- d) each of said plurality of separate transporting means being distinctly designed for a preselected distinctly different narrow electromagnetic radiant energy output range of wave length and power,
- e) said output connection of said source and said means for connecting said separate transporting means to said source being designed to correlate with said predetermined medical protocols and to prevent the connection of incorrect distinctly designed electromagnetic radiant energy transporting means.

17. A method for delivering electromagnetic radiant energy for therapeutically treating diseases in accord with predetermined medical protocols including pharmaceuticals which respond to radiant energy of a prescribed wave length and of a prescribed power range and employing an apparatus comprising:

- a) a source of noncoherent electromagnetic energy comprising a radiant energy source, said radiant energy source being at least one source capable of generating about 300 to 400 watts of broad wave length radiant energy,
- b) radiant energy filtering and focusing means in said source,
- c) said filtering and focusing means comprising means for providing controlled radiant energy in a broad wave length range and broad power range at an output connection,
- d) a plurality of selectable, removable and changeable flexible radiant energy transporting means,

- e) means for removably connecting said selectable transporting means individually to said focused and filtered radiant energy source at said output connection,
- f) means within said transporting means for controlling output radiant energy from said transporting means, said means comprising means in said transporting means for focusing, filtering and power regulation of input radiant energy from said source to provide output controlled radiant energy from said transporting means, said plurality of selectable transporting means including individual transporting means for supplying output radiant energy in the range of about 10 mw to about 500 mw per square centimeter in a wave length range of about 300 to 800 nm over a spot size of about 1 to 100 square centimeters,
- g) each of said plurality of separate transporting means being distinctly designed for a preselected distinctly different narrow radiant energy output range of wave length and power,
- h) said output connection of said source and said means for connecting said separate transporting means to said source being designed to correlate with said predetermined medical protocols and to prevent the connection of incorrect distinctly designed radiant energy transporting means,

the method steps comprising:

- A) generating said noncoherent radiant light energy in said source, said generated light energy being about 300 to 400 watts and a broad wave length,
- B) focusing, filtering and power controlling said generated radiant light energy in said source to produce light energy in a wave length within said broad wave length range and broad power range that will include a desired radiant light energy for said therapeutic treatment of diseases,
- C) selecting from said plurality of flexible radiant energy transporting means the transporting means that is identified with a predetermined medical protocol, and connecting said selected transporting means to said source at said output connection,
- D) passing said focused, filtered and power controlled radiant light energy to said selected flexible radiant energy transporting means at said output connection,
- E) in said radiant energy transporting means focusing, filtering and treating said transported radiant light energy to produce radiant light energy in the range of about 10 mw to about 500 mw per square centimeter and a wave length of about 300 to 800 nm and including substantially the exact light energy wave length and power range needed for said predetermined medical protocol for a specific therapeutic disease treatment,
- F) and directing said substantially exact radiant light energy by said transporting means to a diseased area in a spot size of about 1 to about 100 square centimeters to perform said photodynamic therapeutic treatment of said disease.

\* \* \* \* \*