



US00RE47494E

(19) **United States**
(12) **Reissued Patent**
Catalano

(10) **Patent Number:** **US RE47,494 E**
(45) **Date of Reissued Patent:** **Jul. 9, 2019**

(54) **ELECTROLYSIS PREVENTION DEVICE
AND METHOD OF USE**

4,776,392 A * 10/1988 Loyd 204/196.16
5,292,595 A * 3/1994 Yamauchi et al.
5,649,591 A * 7/1997 Green 165/134.1
5,910,236 A * 6/1999 Iossel et al. 204/280
6,109,987 A * 8/2000 Watanabe F01P 3/205
134/166 R

(71) Applicant: **Frank Amidio Catalano**, Concord, NC
(US)

(72) Inventor: **Frank Amidio Catalano**, Concord, NC
(US)

(21) Appl. No.: **14/452,339**

(22) Filed: **Aug. 5, 2014**

Related U.S. Patent Documents

Reissue of:

(64) Patent No.: **8,236,145**
Issued: **Aug. 7, 2012**
Appl. No.: **12/631,903**
Filed: **Dec. 7, 2009**

(51) **Int. Cl.**
C23F 13/10 (2006.01)
C23F 13/18 (2006.01)

(52) **U.S. Cl.**
CPC **C23F 13/18** (2013.01); **C23F 2201/02**
(2013.01); **Y10T 29/4935** (2015.01); **Y10T**
428/23 (2015.01)

(58) **Field of Classification Search**
None
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

1,506,307 A * 8/1924 Kirkaldy 204/196.31
1,514,903 A * 11/1924 Gush 204/196.31
3,012,959 A * 12/1961 Barnard 204/196.11
3,196,101 A * 7/1965 Hosford, Jr. 204/196.34
3,497,444 A * 2/1970 Paiton 204/196.32
4,056,142 A * 11/1977 Baumann et al. 165/133

FOREIGN PATENT DOCUMENTS

CN 1225998 A * 8/1999 F28D 1/03
JP 01217196 * 8/1989
JP H10246595 A * 9/1998 F28D 9/0043
KR 20090112853 * 10/2009
WO 2005/061393 A1 * 7/2005

OTHER PUBLICATIONS

Notification of Reason for Refusal, Korean Intellectual Property
Office, application 10-2008-0038583, 4 pages, dated Apr. 2011.*
Fahnestock, Murray; "Radiator Repairs"; Ford Care and Home
Repair, How to Enjoy Your Ford Car, 1922 Edition; Trade Press
Publishing Co., Milwaukee, Wis., 1922. pp. 2-8. (Year: 1922).*

* cited by examiner


Primary Examiner — Sean E Vincent

(74) Attorney, Agent, or Firm — Vinson & Elkins L.L.P.

(57) **ABSTRACT**

An electrolysis prevention device, for preventing corrosion
caused by electrolysis, includes a sacrificial anode made of
an active metal and an anode holder supporting the sacrifi-
cial anode. The holder is adapted to fit around the inlet
connection of an engine heat exchange component, such as
a radiator or heater core, in such a way as to allow for a hose
to be attached overtop the device. The device may be
included in an originally-manufactured engine heat
exchange component or may be installed later.

47 Claims, 27 Drawing Sheets

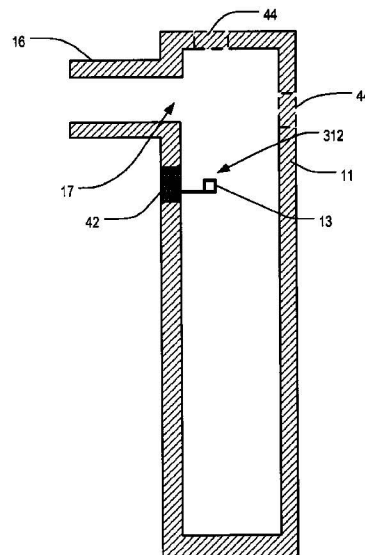

EX1001
MAHLE Behr
IPR2023-00861

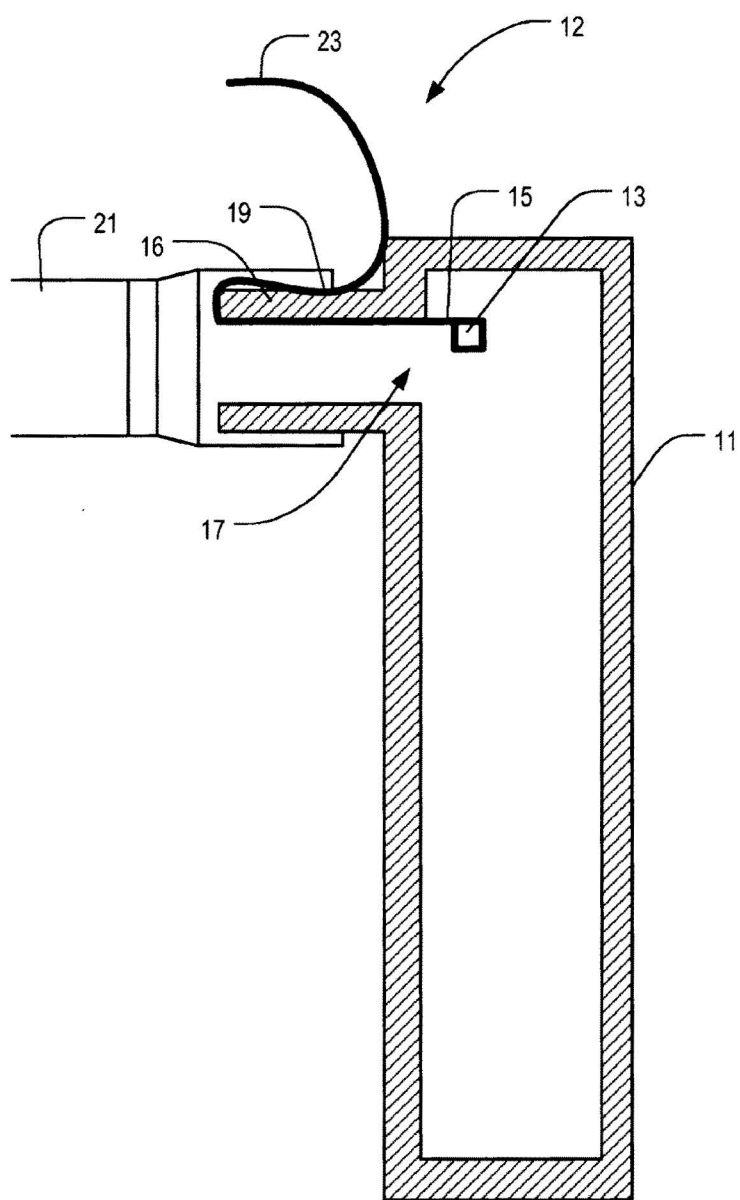


FIG. 1A

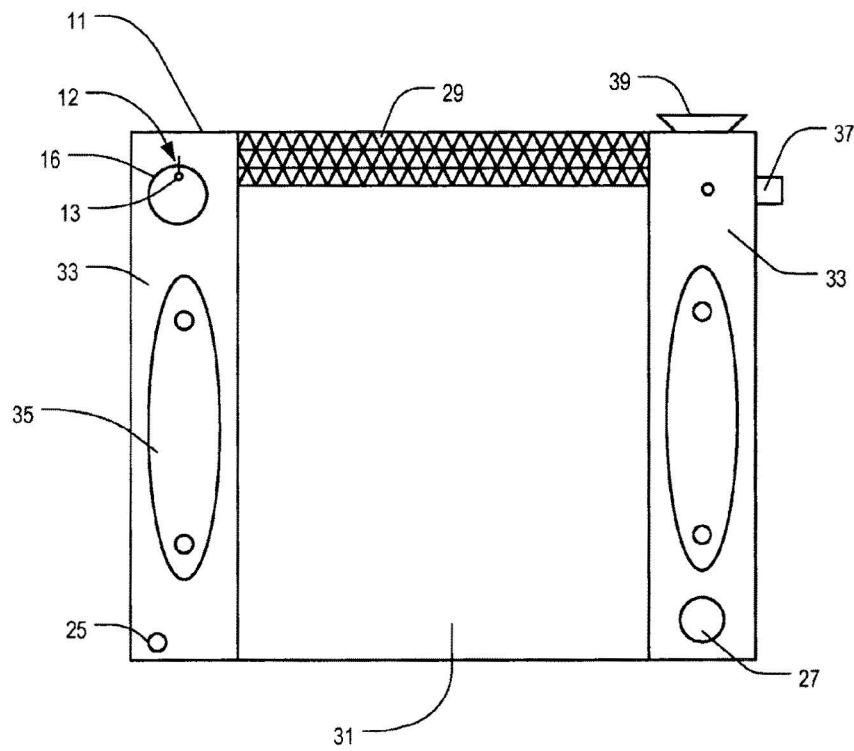


FIG. 1B

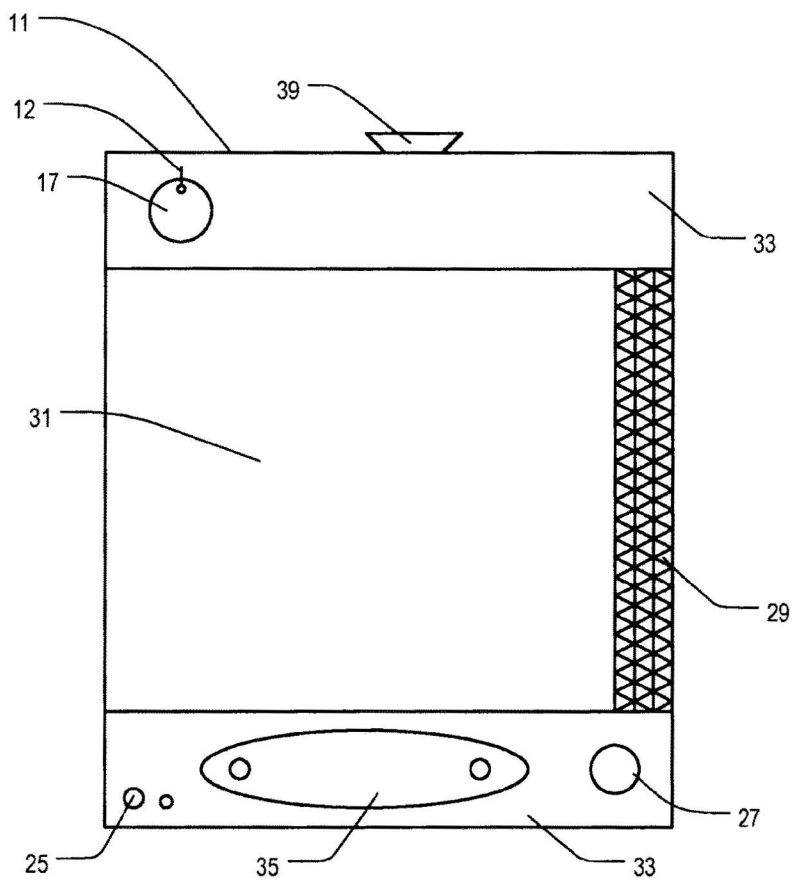


FIG. 1C

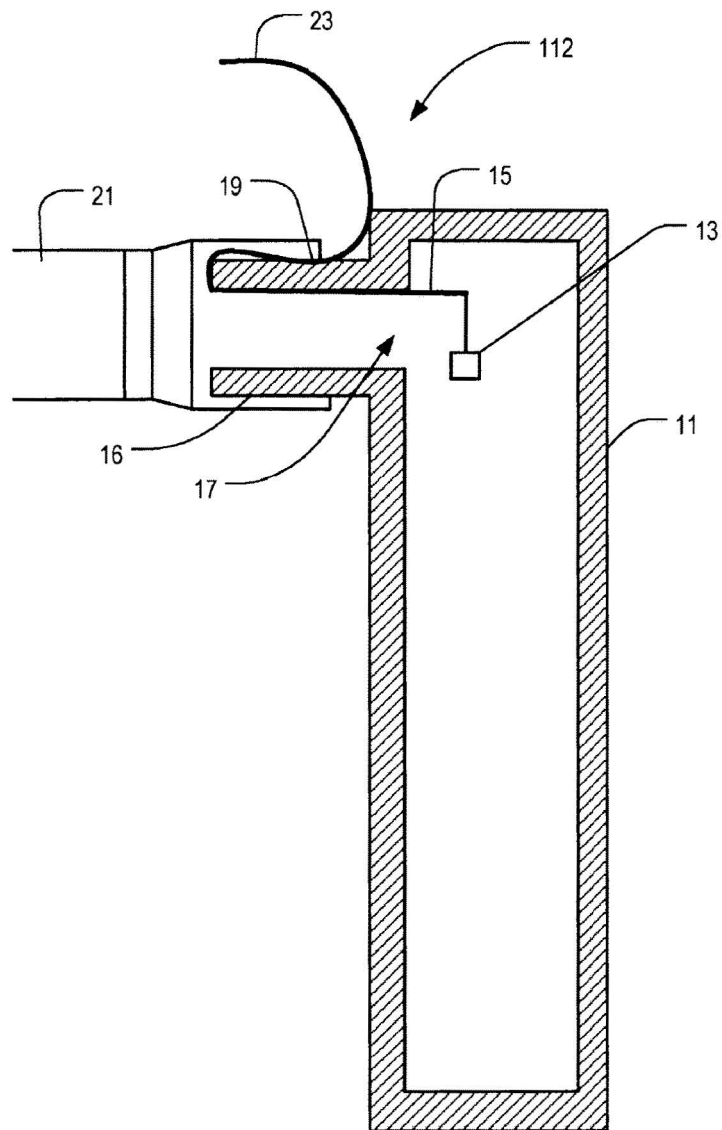


FIG. 2A

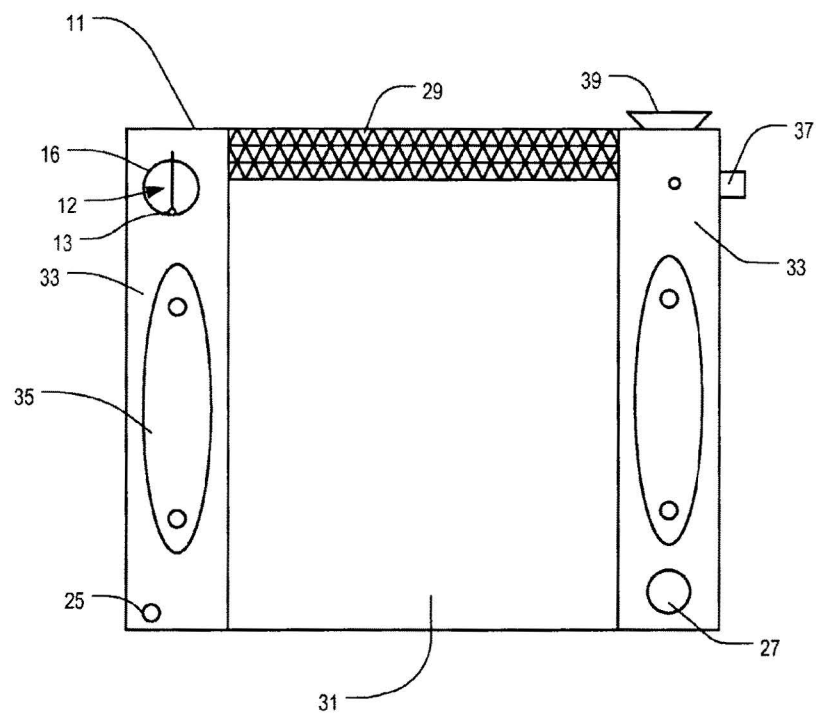


FIG. 2B

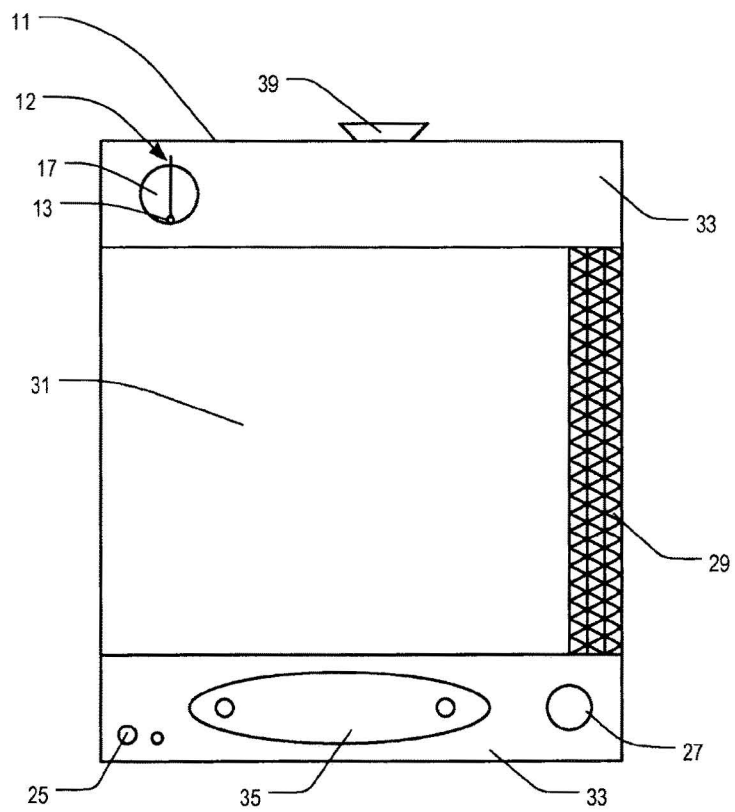
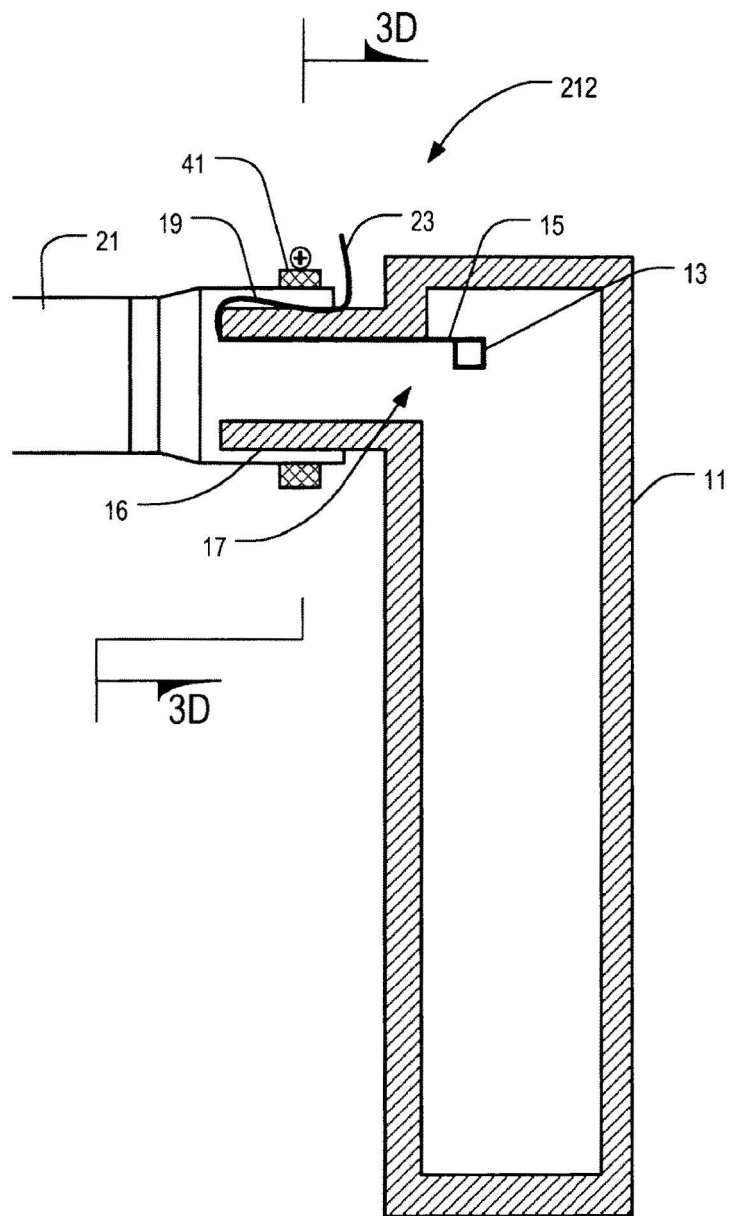


FIG. 2C

**FIG. 3A**

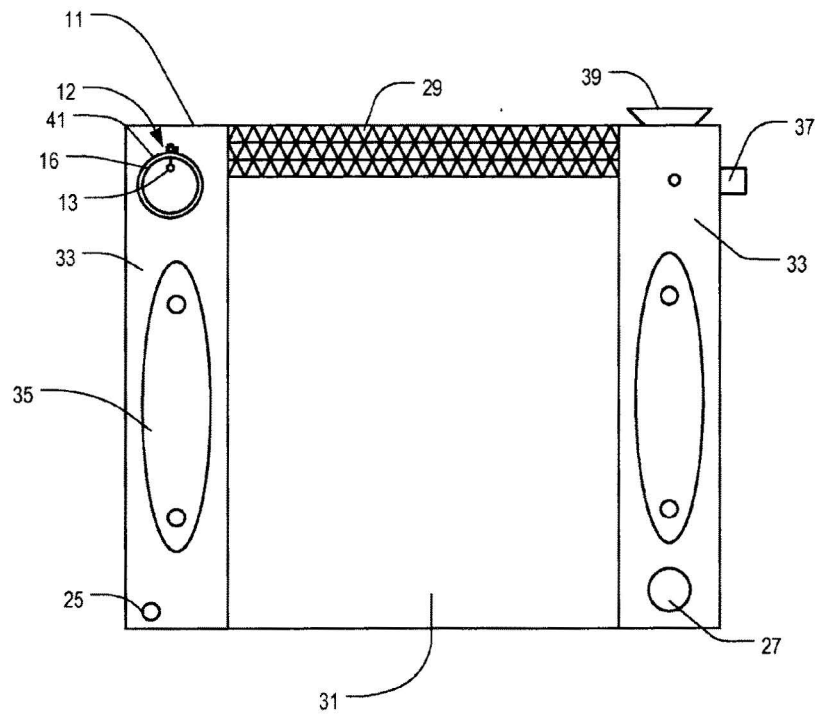


FIG. 3B

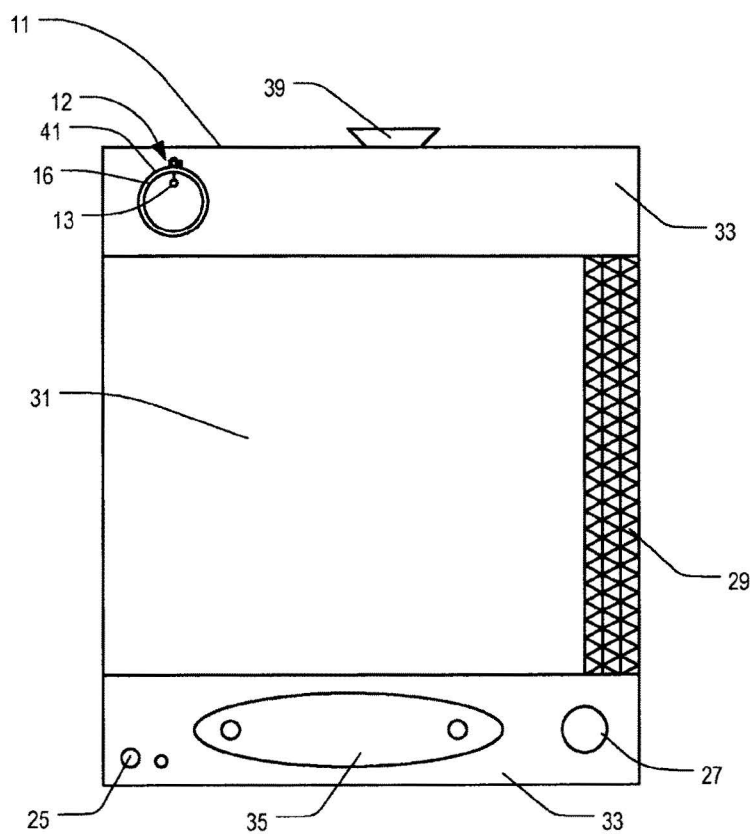


FIG. 3C

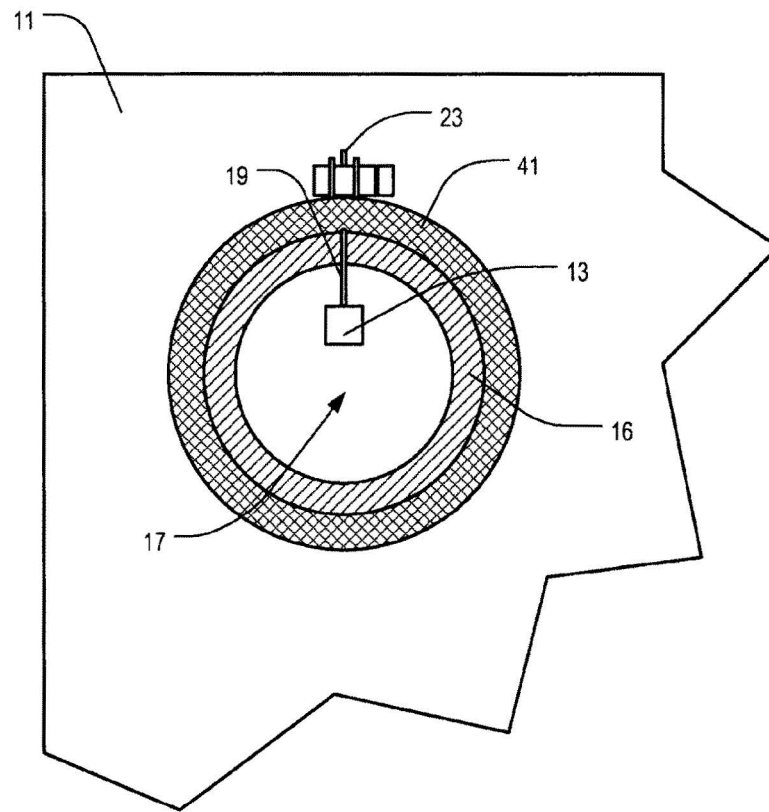


FIG. 3D

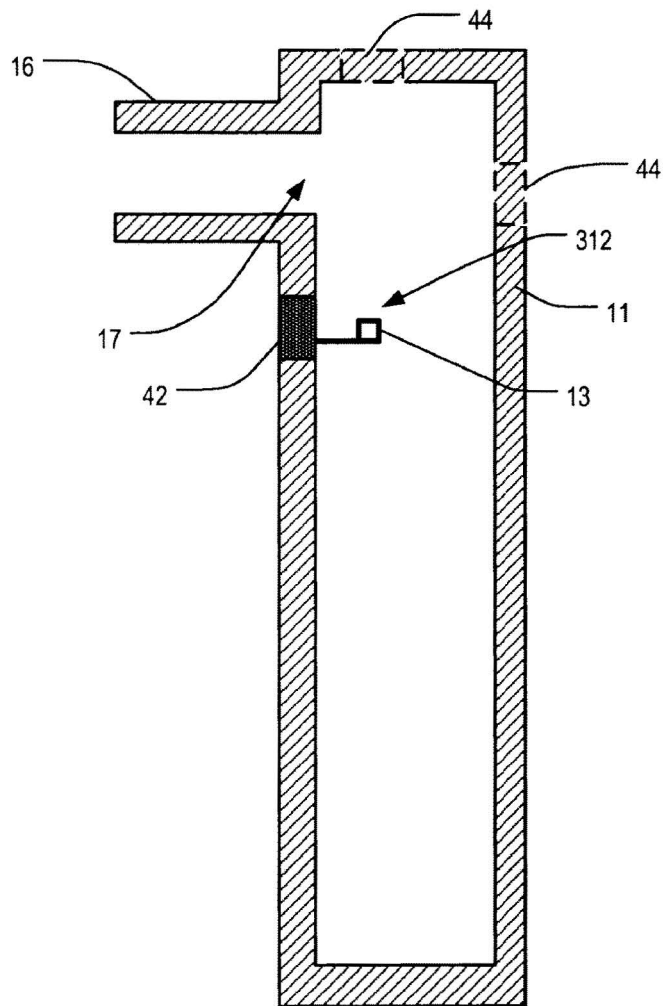


FIG. 4A

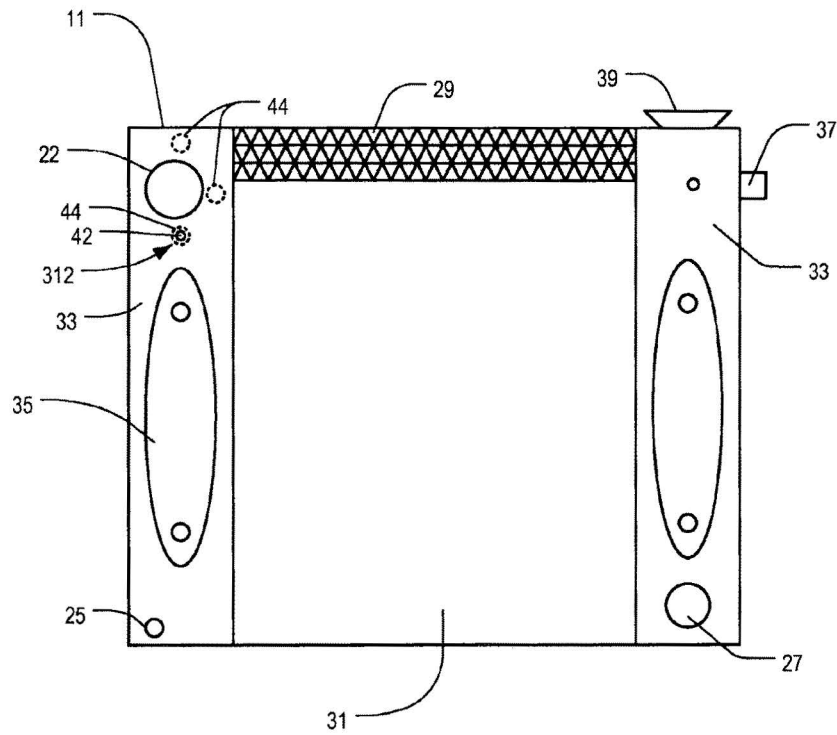


FIG. 4B

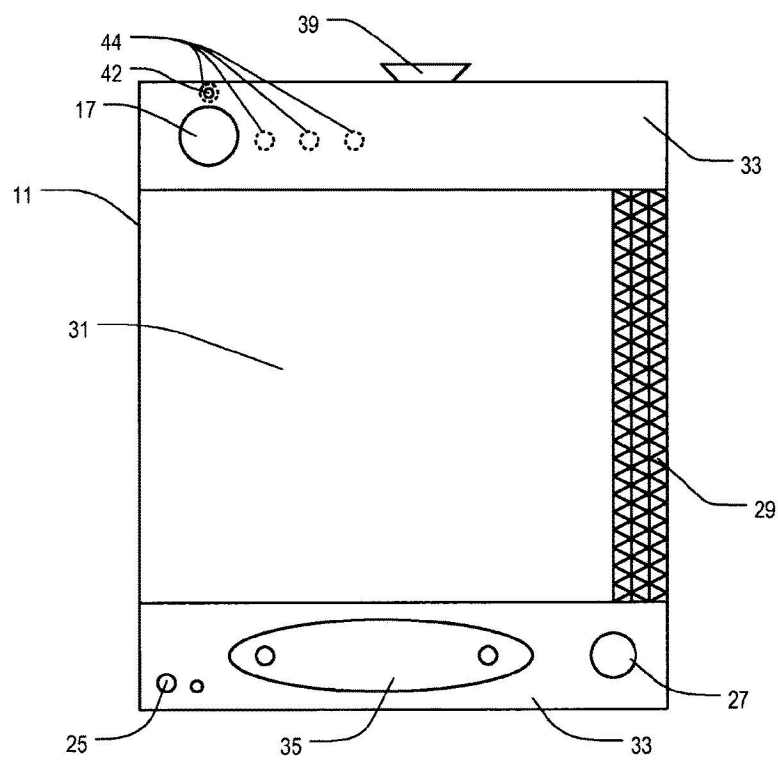


FIG. 4C

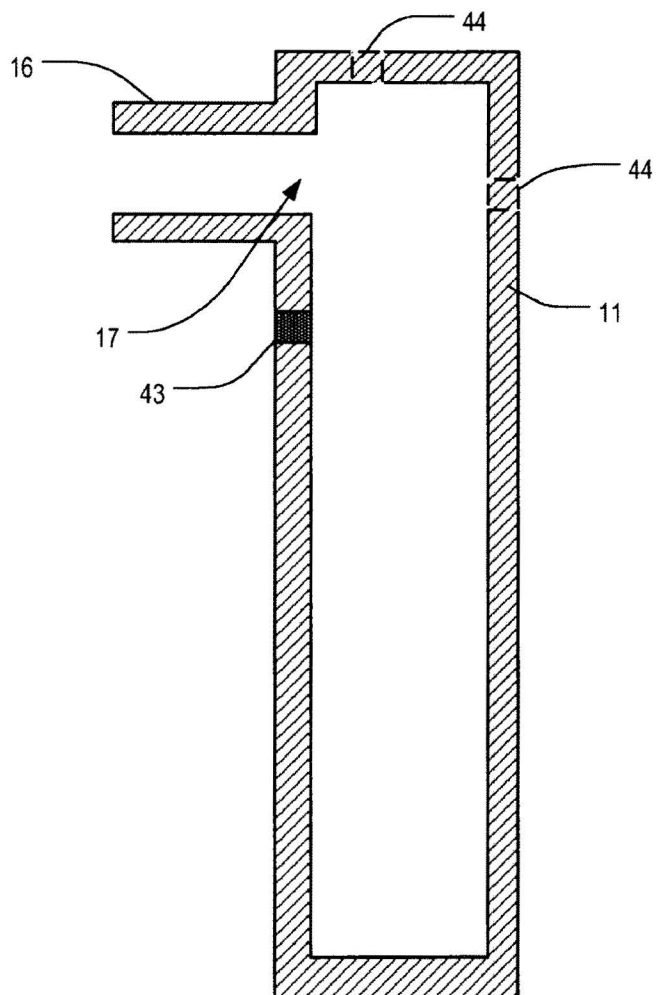


FIG. 5A

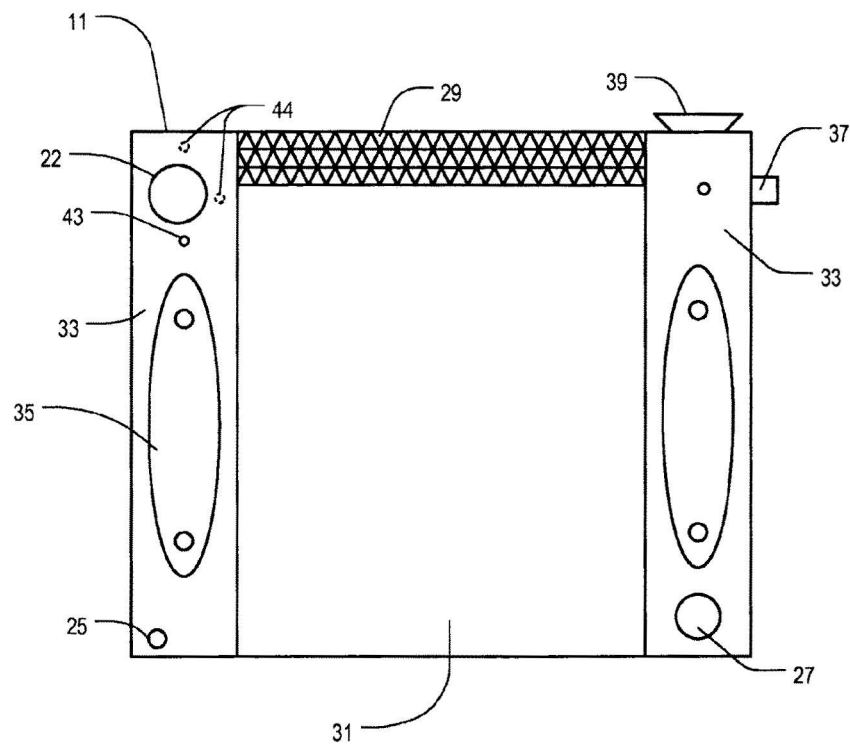


FIG. 5B

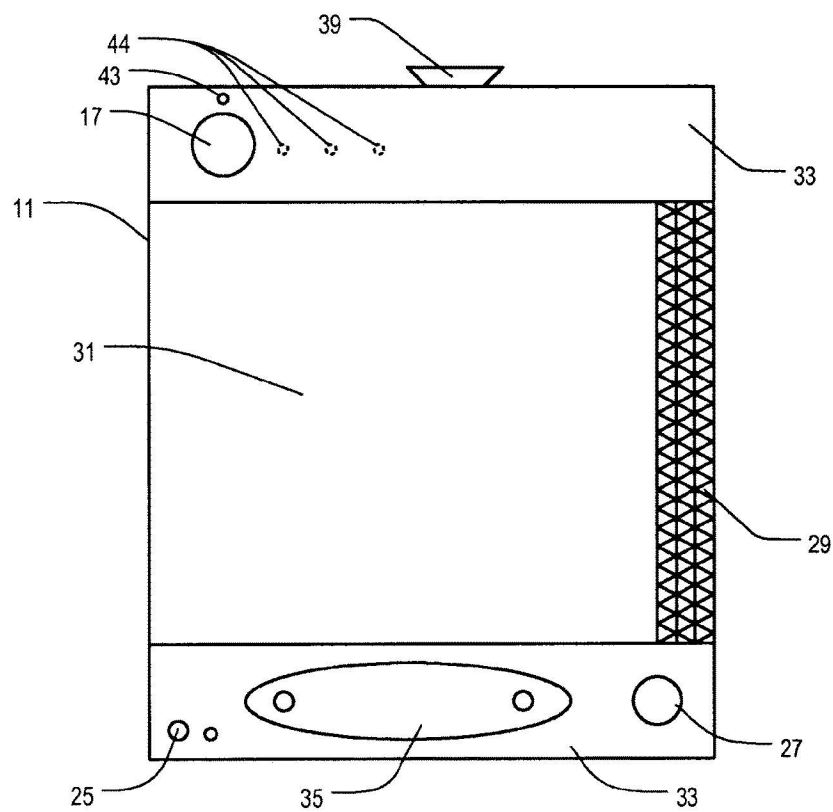
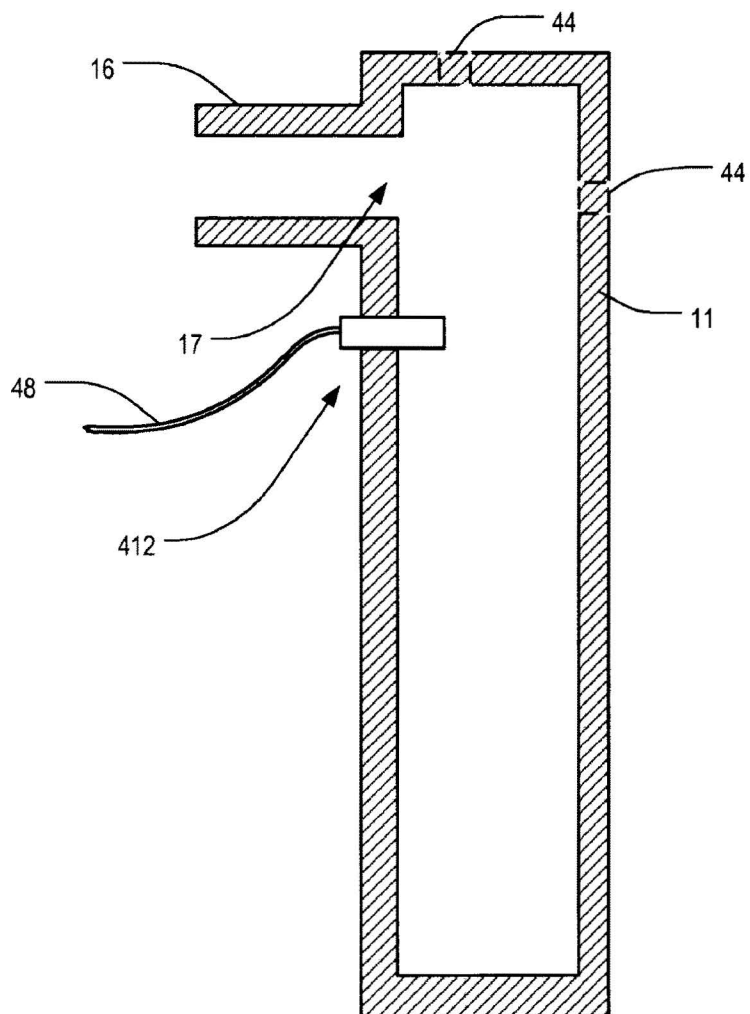


FIG. 5C

**FIG. 6A**

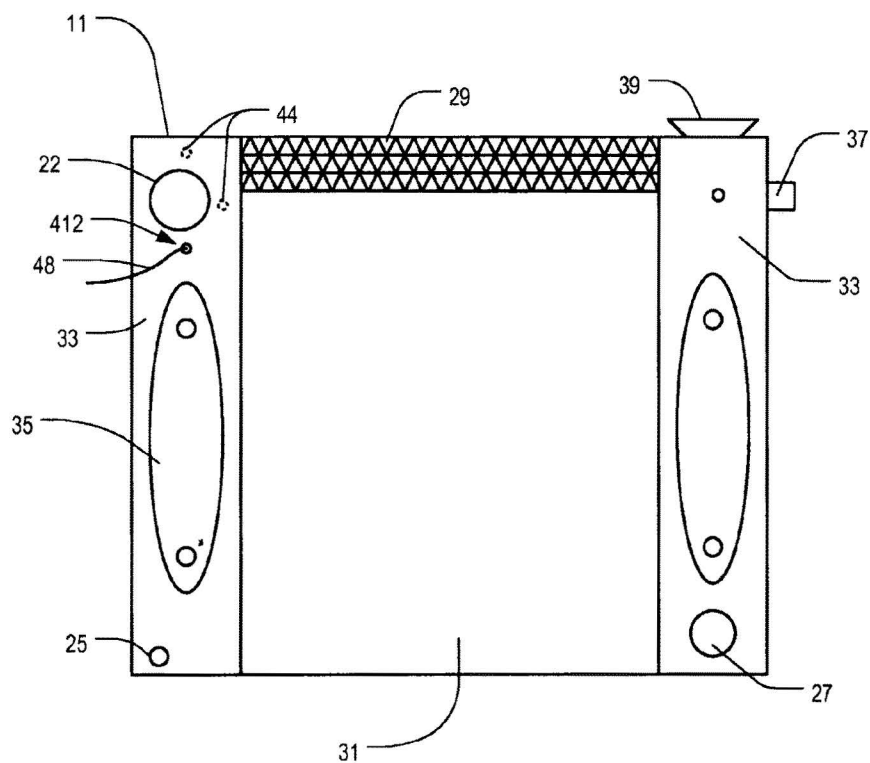


FIG. 6B

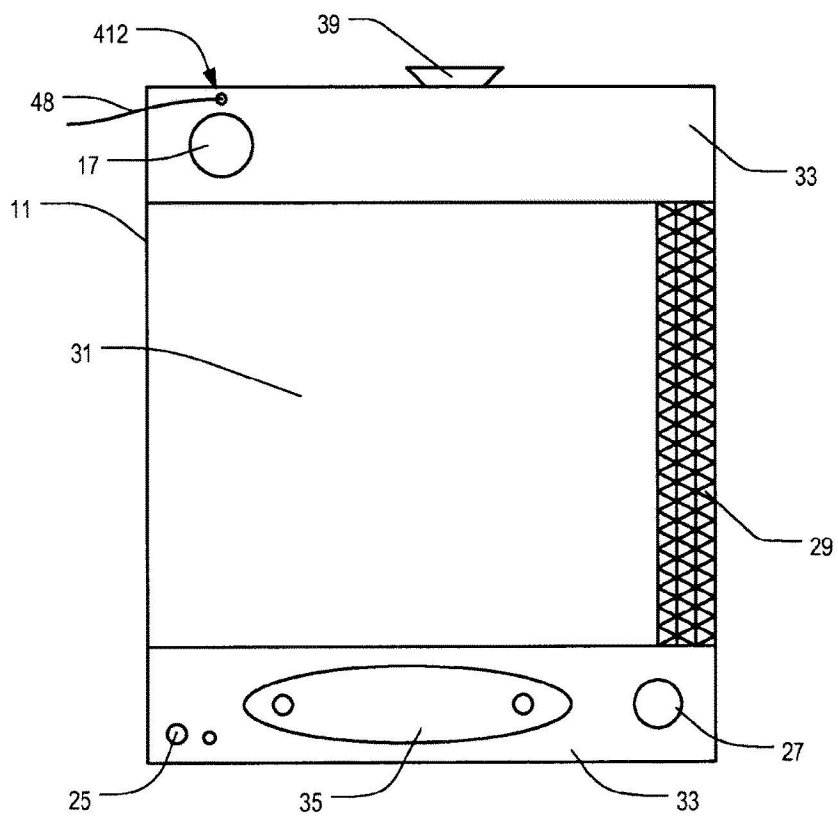


FIG. 6C

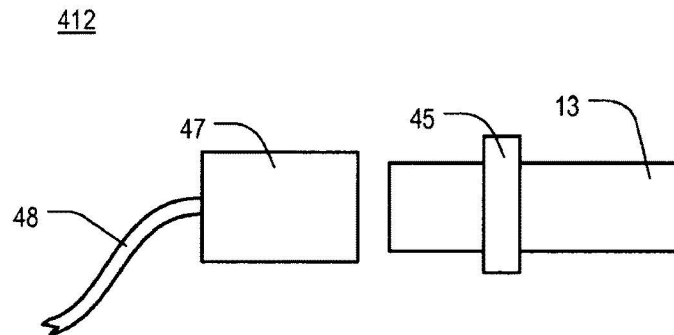


FIG. 7A

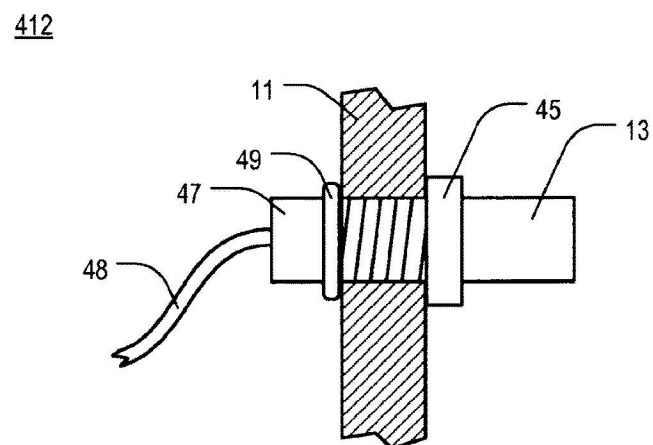


FIG. 7B

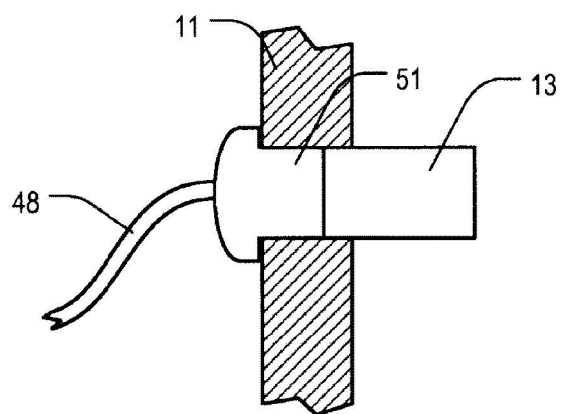


FIG. 7C

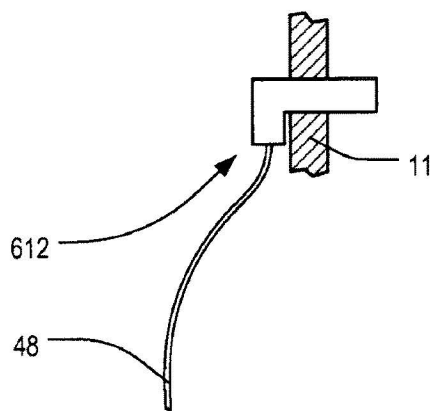


FIG. 8A

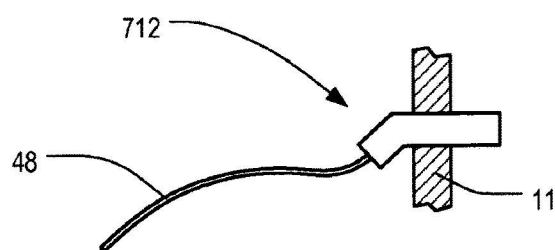


FIG. 8B

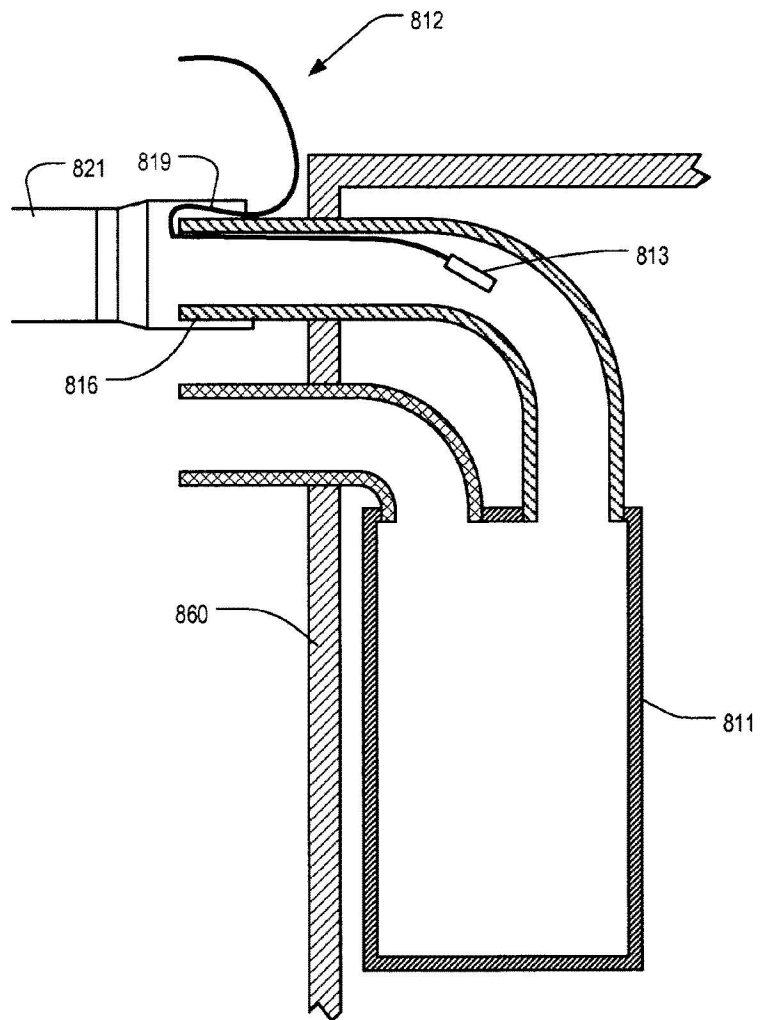


FIG. 9A

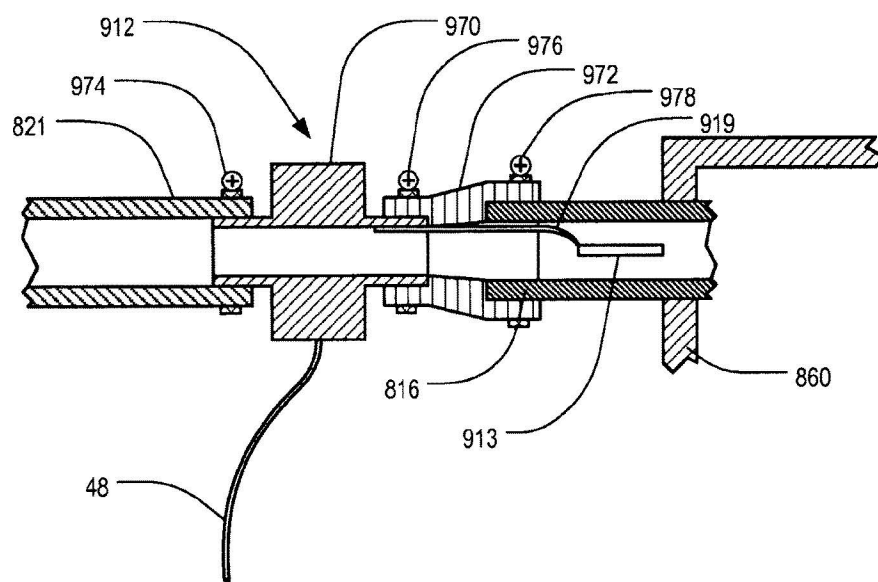


FIG. 9B

211

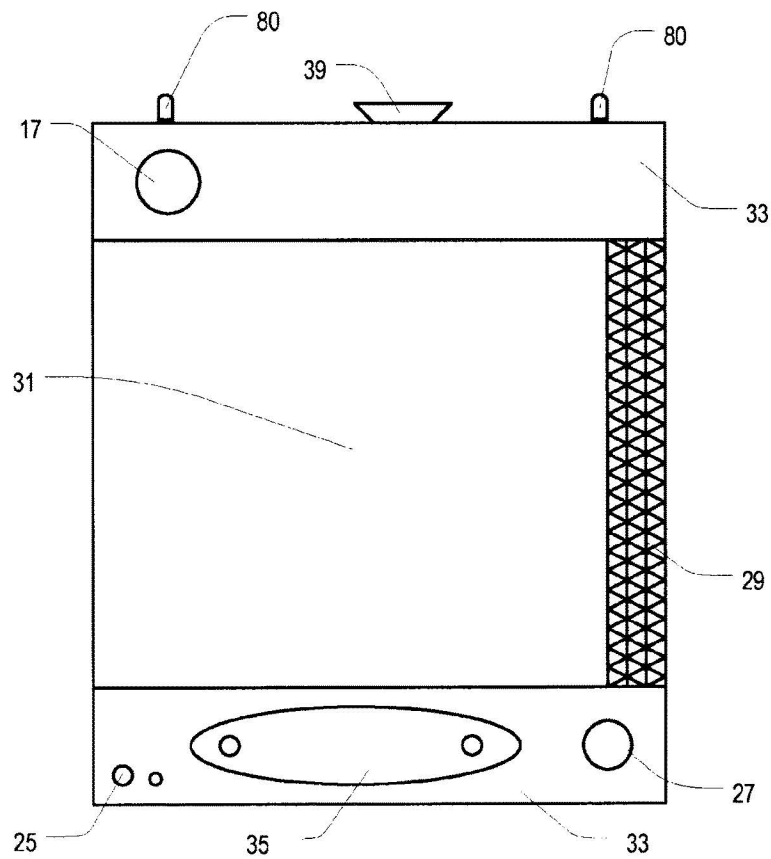


FIG. 10A

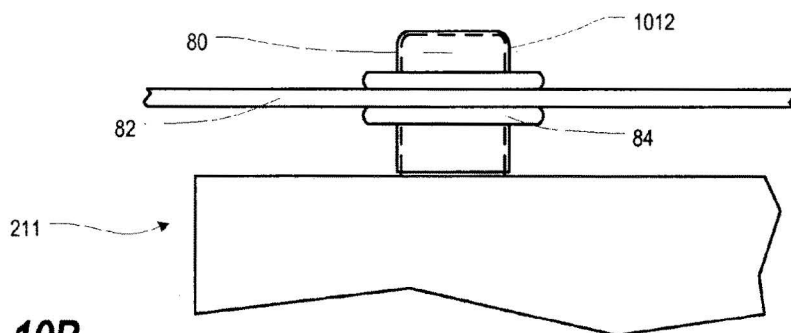


FIG. 10B

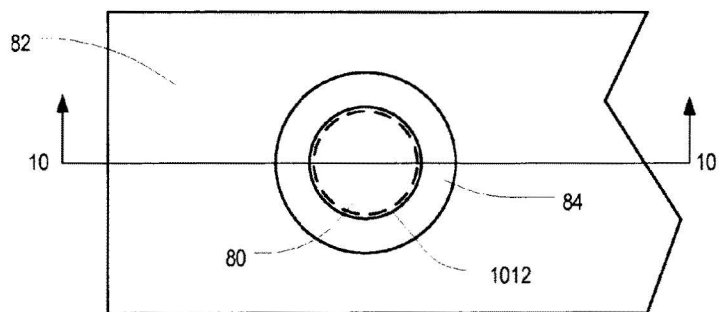


FIG. 10C

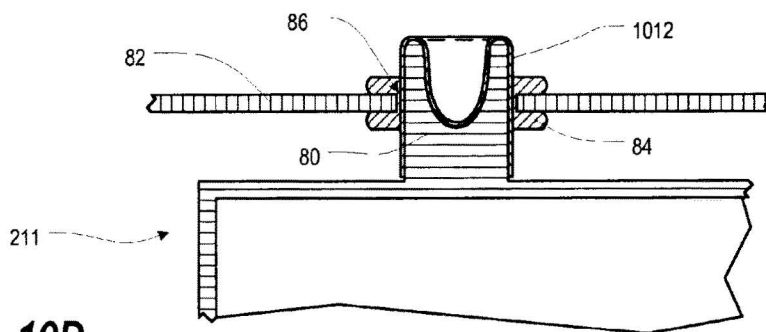


FIG. 10D

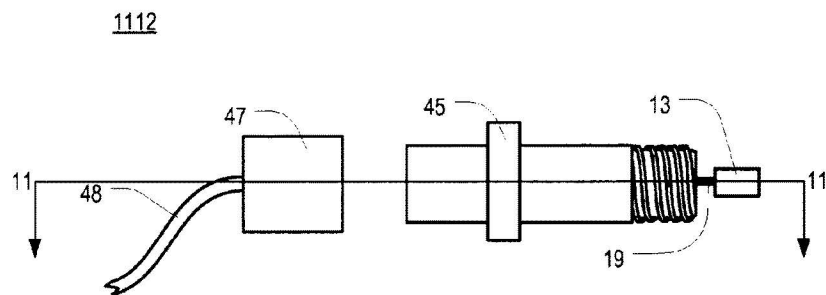


FIG. 11A

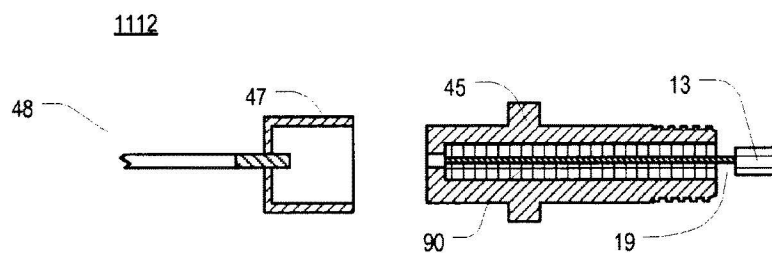


FIG. 11B

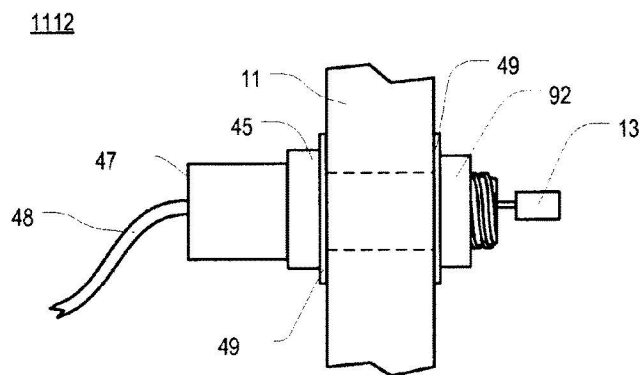


FIG. 11C

ELECTROLYSIS PREVENTION DEVICE AND METHOD OF USE

Matter enclosed in heavy brackets [] appears in the original patent but forms no part of this reissue specification; matter printed in italics indicates the additions made by reissue; a claim printed with strikethrough indicates that the claim was canceled, disclaimed, or held invalid by a prior post-patent action or proceeding.

CROSS-REFERENCE TO RELATED APPLICATION

The present application is a U.S. nonprovisional patent application of, and claims priority under 35 U.S.C. §119(e) to, U.S. provisional patent application Ser. No. 61/120,296, filed Dec. 5, 2008, which provisional patent application is incorporated by reference herein.

COPYRIGHT STATEMENT

All of the material in this patent document is subject to copyright protection under the copyright laws of the United States and other countries. The copyright owner has no objection to the facsimile reproduction by anyone of the patent document or the patent disclosure, as it appears in official governmental records but, otherwise, all other copyright rights whatsoever are reserved.

BACKGROUND OF THE PRESENT INVENTION

1. Field of the Present Invention

This application relates generally to motor vehicles, whether powered by gas, diesel, electric battery, propane, natural gas, or any other like material, and in particular to radiators and engines and preventing corrosion in the cooling system of said vehicles, especially those with components of dissimilar metal construction which present most cooling system corrosion problems.

2. Background

Automobile cooling systems circulate water and coolant liquids through an engine's water jacket, head, and water pump to facilitate heat transfer. After absorbing the heat, the hot liquid is piped back to the radiator/storage tank which is a liquid to air heat exchanger. A typical radiator is made up of a storage tank either above or to the side of the cooling tubes and exchanged cooling fins. This storage tank has an opening to the interior of the storage tank part, a core of cooling tubes, which is where the coolant liquid flows, and fins, connected to these cooling tubes, which transfer heat to the air that is pulled or pushed through the fins and around the tubes for heat transfer from the coolant to the air passing through.

Radiators and engines were historically made of iron, steel, copper, and/or brass, which, as similar metals, have little corrosion caused by electrolytic activity. Over time, however, aluminum parts have been incorporated into engine thermal control devices, such as radiators and heater cores. While the use of aluminum offers several advantages, an unfortunate side effect of using dissimilar metals is an increase in electrolytic activity, leading to increased vulnerability to corrosion. In response to the electrolytic activity, also known as electrolysis, aluminum components corrode and become porous and may begin to leak in as little as two weeks.

During electrolysis, one of the metals in the system acts as an anode and corrodes. The other metal acts as a cathode and does not corrode. Chemical corrosion inhibitors have been developed to inhibit electrolysis, but they are toxic, present problems to the environment, and present problems of disposal. Alternatively, sacrificial anodes, constructed of active metals, that is metals that react with oxygen, such as magnesium, aluminum, zinc or combinations thereof, have also been used as corrosion inhibitors. Sacrificial anodes do not eliminate the flow of electric current, but instead attract the electric current, acting as a "lightning rod" that electricity clings to, thus relieving the anodic metal of the thermal control device from the corrosive damage of electrolysis.

U.S. Pat. No. 5,292,595 describes a sacrificial anode of specified composition bonded to the core metal to prevent the occurrence of pitting corrosion of core material in a heat exchanger such as a radiator or heater core. Unfortunately such an anode is hard to access to check its condition or replace it when it wears out. A need exists for a corrosion-inhibiting sacrificial anode which is easily accessible. Since a sacrificial anode is designed to be consumed, easy accessibility would allow verification of its effective working status and efficient replacement when depleted.

Furthermore, prior attempts at preventing corrosion in heat exchangers have failed due to the sacrificial anode being installed in undesirable locations. U.S. Pat. No. 5,649,591 describes a sacrificial anode built into a radiator cap. Such a solution is imperfect because some radiators lack caps and, for those that do have caps, the position of the cap is too far from the inlet to effectively prevent corrosion from occurring.

Thus, a need continues to exist to prevent corrosion in radiators and other engine thermal control devices. Current sacrificial anode devices are deficient in that they fail to position the anode optimally to allow for maximal corrosion resistance and easy monitoring, removal, and replacement.

SUMMARY OF THE PRESENT INVENTION

In accordance with a preferred embodiment, the present invention comprises a device to prevent corrosion caused by electrolysis comprised of metal, preferably disposed in or near the inlet hose connection of a radiator, heater core, or other such engine thermal control device.

In features of this aspect, the corrosion prevention device is a sacrificial anode comprised of an active metal such as aluminum, magnesium, or zinc. In some preferred embodiments, the sacrificial anode is clipped to the inner wall of the radiator inlet. In different embodiments, the anode will hang at various distances from the upper lip of the radiator inlet. In other preferred embodiments, the sacrificial anode is constructed into the wall of the radiator near the inlet or built as a plug that may be inserted into a radiator plug opening.

Broadly defined, the present invention according to one aspect is an electrolysis prevention device, for preventing corrosion caused by electrolysis, including: a sacrificial anode made of an active metal; and an anode holder supporting the sacrificial anode; wherein the holder is adapted to fit around the inlet connection of an engine heat exchange component in such a way as to allow for a hose to be attached overtop the device.

In features of this aspect, the sacrificial anode is made of aluminum; the sacrificial anode is made of magnesium; the sacrificial anode is made of zinc; the anode holder is grounded to the vehicle; an end of the anode holder is attached to an additional wire positioning the sacrificial anode further down into the flow of the liquid coolant; the

3

anode holder is connected to the radiator by a clamp; the engine heat exchange component is a radiator; and/or the engine heat exchange component is a heater core.

In another aspect, the present invention is a radiator with an internal sacrificial anode in proximity to an inlet connection thereof.

In yet another aspect, the present invention is a heater core with an internal sacrificial anode in proximity to an inlet connection thereof.

In still another aspect, the present invention is a method of preventing corrosion of an engine heat exchange component comprising adding or installing a sacrificial anode assembly within the heat exchange component adjacent an inlet thereof.

In a feature of this aspect, the engine heat exchange component has an inlet connection, and the method further includes: installing a fitting hole into the tank of the engine heat exchange component adjacent the inlet connection; and filling said fitting hole with a sacrificial anode of the sacrificial anode assembly. In another feature of this aspect, the method further includes attaching the sacrificial anode to the engine heat exchange component within 10 inches of a center of the inlet connection. In a further feature, the method further includes comprising grounding the sacrificial anode by means of an attached ground wire. In a still further feature, the attached ground wire is a "pigtail" clip connecting the sacrificial anode to a wiring harness.

In yet another aspect, the present invention is an electrolysis prevention shield for preventing corrosion caused by electrolysis. The electrolysis prevention shield includes a sheathing of durable insulating material wherein the sheathing of durable insulating material is configured to affix to a protrusion of metal. In a feature of this aspect, the durable insulating material is rubber. In an alternative feature, the durable insulating material is plastic.

Further areas of applicability of the present invention will become apparent from the detailed description provided hereinafter. It should be understood that the detailed description and specific examples, while indicating the preferred embodiment of the invention, are intended for purposes of illustration only and are not intended to limit the scope of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

Further features, embodiments, and advantages of the present invention will become apparent from the following detailed description with reference to the drawings, wherein:

FIG. 1A is a left side cross-sectional view of a radiator having an electrolysis prevention device in accordance with a first preferred embodiment of the present invention;

FIG. 1B is a front schematic view of a crossflow radiator having an electrolysis prevention device arranged as shown in FIG. 1A;

FIG. 1C is a front schematic view of a downflow radiator having an electrolysis prevention device arranged as shown in FIG. 1A;

FIG. 2A is a left side cross-sectional view of a radiator having an electrolysis prevention device in accordance with a second preferred embodiment of the present invention;

FIG. 2B is a front schematic view of a crossflow radiator having an electrolysis prevention device arranged as shown in FIG. 2A;

FIG. 2C is a front schematic view of a downflow radiator having an electrolysis prevention device arranged as shown in FIG. 2A;

4

FIG. 3A is a left side cross-sectional view of a radiator having an electrolysis prevention device in accordance with a third preferred embodiment of the present invention;

FIG. 3B is a front schematic view of a crossflow radiator having an electrolysis prevention device arranged as shown in FIG. 3A;

FIG. 3C is a front schematic view of a downflow radiator having an electrolysis prevention device arranged as shown in FIG. 3A;

FIG. 3D is a front cross-sectional view of the inlet connection of FIG. 3A, taken along line 3D-3D and focusing on the inlet and inlet connection;

FIG. 4A is a left side cross-sectional view of a radiator having an electrolysis prevention device in accordance with a fourth preferred embodiment of the present invention;

FIG. 4B is a front schematic view of a crossflow radiator having an electrolysis prevention device arranged as shown in FIG. 4A;

FIG. 4C is a front schematic view of a downflow radiator having an electrolysis prevention device arranged as shown in FIG. 4A;

FIG. 5A is a left side cross-sectional view of a radiator illustrating various locations for a removable plug that may be replaced with an electrolysis prevention device in accordance with a sixth preferred embodiment of the present invention;

FIG. 5B is a front schematic view of a crossflow radiator illustrating various locations for a removable plug that may be replaced with an electrolysis prevention device;

FIG. 5C is a front schematic view of a downflow radiator illustrating various locations for a removable plug that may be replaced with an electrolysis prevention device;

FIG. 6A is a left side cross-sectional view of the radiator of FIG. 5A, shown with an electrolysis prevention device installed in place of the removable plug;

FIG. 6B is a front schematic view of the crossflow radiator of FIG. 5B, shown with an electrolysis prevention device installed in place of the removable plug;

FIG. 6C is a front schematic view of the downflow radiator of FIG. 5C, shown with an electrolysis prevention device installed in place of the removable plug;

FIG. 7A is a side view of an electrolysis prevention device for use in the radiators of FIGS. 5A-5C;

FIG. 7B is a side view of the electrolysis prevention device of FIG. 7A;

FIG. 7C is a side view of another electrolysis prevention device for use in the radiators of FIGS. 5A-5C;

FIG. 8A is a side schematic view of an electrolysis prevention device arranged at a 90-degree angle for easy access;

FIG. 8B is a side schematic view of an electrolysis prevention device arranged at a 45-degree angle for easy access;

FIG. 9A is a side schematic of a heater core having an electrolysis prevention device in accordance with a sixth preferred embodiment of the present invention;

FIG. 9B is an enlarged view of a portion of the inlet hose and inlet pipe of the heater core of FIG. 9A but with an alternative electrolysis prevention device installed therein in accordance with a seventh preferred embodiment of the present invention.

FIG. 10A is a front schematic view of a downflow radiator having an electrolysis prevention shield in accordance with a seventh preferred embodiment of the present invention;

FIG. 10B is an enlarged fragmentary front schematic view of a portion of the radiator of FIG. 10A, detailing a mounting peg covered by the electrolysis prevention shield;

5

FIG. 10C is an enlarged fragmentary top schematic view of the portion of the radiator of FIG. 10A;

FIG. 10D is a front cross-sectional view of the portion of the radiator shown in FIG. 10C, taken along line 10-10;

FIG. 11A is a side view of an electrolysis prevention device for use in the radiators of FIGS. 5A-5C;

FIG. 11B is a top cross-sectional view of the electrolysis prevention device of FIG. 11A, taken along line 11-11; and

FIG. 11C is a side schematic view of the electrolysis prevention device of FIG. 11A, shown installed in a radiator.

DETAILED DESCRIPTION

As a preliminary matter, it will readily be understood by one having ordinary skill in the relevant art ("Ordinary Artisan") that the present invention has broad utility and application. Furthermore, any embodiment discussed and identified as being "preferred" is considered to be part of a best mode contemplated for carrying out the present invention. Other embodiments also may be discussed for additional illustrative purposes in providing a full and enabling disclosure of the present invention. Moreover, many embodiments, such as adaptations, variations, modifications, and equivalent arrangements, will be implicitly disclosed by the embodiments described herein and fall within the scope of the present invention.

Accordingly, while the present invention is described herein in detail in relation to one or more embodiments, it is to be understood that this disclosure is illustrative and exemplary of the present invention, and is made merely for the purposes of providing a full and enabling disclosure of the present invention. The detailed disclosure herein of one or more embodiments is not intended, nor is to be construed, to limit the scope of patent protection afforded the present invention, which scope is to be defined by the claims and the equivalents thereof. It is not intended that the scope of patent protection afforded the present invention be defined by reading into any claim a limitation found herein that does not explicitly appear in the claim itself.

Thus, for example, any sequence(s) and/or temporal order of steps of various processes or methods that are described herein are illustrative and not restrictive. Accordingly, it should be understood that, although steps of various processes or methods may be shown and described as being in a sequence or temporal order, the steps of any such processes or methods are not limited to being carried out in any particular sequence or order, absent an indication otherwise. Indeed, the steps in such processes or methods generally may be carried out in various different sequences and orders while still falling within the scope of the present invention. Accordingly, it is intended that the scope of patent protection afforded the present invention is to be defined by the appended claims rather than the description set forth herein.

Additionally, it is important to note that each term used herein refers to that which the Ordinary Artisan would understand such term to mean based on the contextual use of such term herein. To the extent that the meaning of a term used herein—as understood by the Ordinary Artisan based on the contextual use of such term—differs in any way from any particular dictionary definition of such term, it is intended that the meaning of the term as understood by the Ordinary Artisan should prevail.

Furthermore, it is important to note that, as used herein, "a" and "an" each generally denotes "at least one," but does not exclude a plurality unless the contextual use dictates otherwise. Thus, reference to "a picnic basket having an apple" describes "a picnic basket having at least one apple"

6

as well as "a picnic basket having apples." In contrast, reference to "a picnic basket having a single apple" describes "a picnic basket having only one apple."

When used herein to join a list of items, "or" denotes "at least one of the items," but does not exclude a plurality of items of the list. Thus, reference to "a picnic basket having cheese or crackers" describes "a picnic basket having cheese without crackers," "a picnic basket having crackers without cheese," and "a picnic basket having both cheese and crackers." Finally, when used herein to join a list of items, "and" denotes "all of the items of the list." Thus, reference to "a picnic basket having cheese and crackers" describes "a picnic basket having cheese, wherein the picnic basket further has crackers," as well as describes "a picnic basket having crackers, wherein the picnic basket further has cheese."

As used herein, an "engine heat exchange component" refers to an engine radiator, heater core, or other device for exchanging heat in an engine.

Referring now to the drawings, in which like numerals represent like components throughout the several views, the preferred embodiments of the present invention are next described. The following description of one or more preferred embodiment(s) is merely exemplary in nature and is in no way intended to limit the invention, its application, or uses.

FIG. 1A is a left side cross-sectional view of a radiator 11 having an electrolysis prevention device 12 in accordance with a first preferred embodiment of the present invention. As shown therein, an electrolysis prevention device 12 includes a sacrificial anode 13 supported at the end of a sleeve wire, metal slide, clip 15 or the like such that the anode is disposed adjacent the radiator inlet 17. The anode 13 should be [comprised] *composed* of a metal that reacts strongly with oxygen, also known as an active metal, such as magnesium, aluminum, zinc or combinations thereof. The anode support 19 extends through and out the radiator inlet and is doubled back around the inlet [fitting] *connection* 16. The radiator hose 21 slides over the inlet [fitting] *connection* 16 and is clamped in place. The exposed end 23 of the anode support 19 optionally may be connected via ground wire (not shown) to the wiring harness, a suitable grounded location on the frame or cross member of the vehicle, or the like. However, grounding of the anode is not a necessary aspect of this embodiment, or any embodiment, of the present invention.

Such an assembly 12 can be installed very quickly and can be used in radiators having plastic tanks as well as in radiators having aluminum tanks. Furthermore, a smaller version may be utilized with heater cores (not shown). The radiators 11 can be of any conventional type, including the "crossflow" type, meaning the tanks 33 are on the sides (see FIG. 1B), the "downflow" type, meaning the tanks 33 are on top or bottom (see FIG. 1C), the "double pass" type, meaning that both connections (inlet and outlet) are on one side of the radiator (not shown), or the like. A similar assembly, appropriately adjusted in size, shape or the like, may likewise be utilized in heater cores (not shown). In each of these cases, the sacrificial anode 13 according to this embodiment is preferably disposed in the inlet hose connection of the radiator or heater core. Thus, this arrangement may be particularly useful as a "drop in" for aftermarket—i.e., for radiators and heater cores that are already produced or in service in vehicles already on the road.

FIG. 1B is a front schematic view of a crossflow radiator 11 having an electrolysis prevention device arranged as shown in FIG. 1A, while FIG. 1C is a front schematic view

7

of a downflow radiator **11** having an electrolysis prevention device **12** arranged as shown in FIG. 1A. A typical radiator includes an aluminum core **31** and either plastic or all-aluminum tanks **33**. The specific inlet connection **16** varies by vehicle make, model and model year, but the inlet **17** is generally understood to refer to the vicinity of where hot water coming directly from the engine enters into the radiator **11**. The radiator **11** may include a fill cap **39** as shown in FIG. 1C but is understood to be optional and is not present on many radiators **39**. Further, at least some radiators have a coolant reservoir.

Both downflow and crossflow radiators typically have a petcock **25** for draining fluid from the radiator, an outlet **27**, core fins and tubes **29**, and may optionally have a transmission and engine oil cooler/heater connection **35** and temperature sensor **37**.

FIG. 2A is a left side cross-sectional view of a radiator **11** having an electrolysis prevention device **112** in accordance with a second preferred embodiment of the present invention. The electrolysis prevention device **112** in this embodiment is generally similar to that of FIG. 1A, but the anode **13** itself hangs further down below the center axis of the radiator inlet **17** so as to be placed slightly lower into the flow of the water, coolant, or antifreeze. FIG. 2B is a front schematic view of a crossflow radiator **11** having an electrolysis prevention device **112** arranged as shown in FIG. 2A; and FIG. 2C is a front schematic view of a downflow radiator **11** having an electrolysis prevention device **112** arranged as shown in FIG. 2A. As with previous embodiments, the device **112** optionally may or may not be connected via ground wire to the wiring harness, a suitable grounded location on the frame or cross member of the vehicle, or the like.

FIG. 3A is a left side cross-sectional view of a radiator **11** having an electrolysis prevention device **212** in accordance with a third preferred embodiment of the present invention; FIG. 3B is a front schematic view of a crossflow radiator **11** having a sacrificial anode arranged as shown in FIG. 3A; and FIG. 3C is a front schematic view of a downflow radiator **11** having an electrolysis prevention device **212** arranged as shown in FIG. 3A. FIG. 3D is a front cross-sectional view of the inlet connection of FIG. 3A, taken along line 3D-3D and focusing on the inlet **17** and inlet connection **16**. In this preferred embodiment, the sacrificial anode **13** and support **19** are held in place with a clamp **41**. As with previous embodiments, the device **212** optionally may or may not be connected via ground wire to the wiring harness, a suitable grounded location on the frame or cross member of the vehicle, or the like.

FIG. 4A is a left side cross-sectional view of a radiator having an electrolysis prevention device **312** in accordance with a fourth preferred embodiment of the present invention; FIG. 4B is a front schematic view of a crossflow radiator having an electrolysis prevention device arranged as shown in FIG. 4A; and FIG. 4C is a front schematic view of a downflow radiator having an electrolysis prevention device arranged as shown in FIG. 4A. In this embodiment, the electrolysis prevention device **312** is built into the radiator **11** when the radiator **11** is manufactured. The device **12** may be attached to the interior of the radiator **11** at any of a variety of locations **44** in the vicinity of the inlet **17**. In particular, this allows for an anode **13** to be attached by any way imaginable within **10** inches in any direction of the center axis of the inlet connection **16**. Preferably, attachment is to the aluminum tank **33** or the aluminum core **31** via weld **42**, but other attachment means and connection points may alternatively be used. As with previous embodiments, the

8

device **312** optionally may or may not be connected via ground wire to the wiring harness, a suitable grounded location on the frame or cross member of the vehicle, or the like.

FIG. 5A is a left side cross-sectional view of a radiator illustrating various locations for a removable plug **43** that may be replaced with an electrolysis prevention device **412** in accordance with a fifth preferred embodiment of the present invention; FIG. 5B is a front schematic view of a crossflow radiator illustrating various locations for a removable plug **43** that may be replaced with an electrolysis prevention device; and FIG. 5C is a front schematic view of a downflow radiator illustrating various locations for a removable plug **43** that may be replaced with an electrolysis prevention device **412**. In at least one preferred embodiment, the removable plug may be a threaded pipe plug with a $\frac{3}{8}$ pipe thread. It will be appreciated that although one plug **43** is illustrated, there are other locations **44** where the plug **43** can alternatively be installed. Regardless of where the plug **43** is located, it is installed at time of manufacture (or optionally replaced during a subsequent repair procedure) but can be removed and replaced with an electrolysis prevention device such as one of the devices **412**, **512** shown in FIGS. 7A-7C. In this regard, FIG. 6A is a left side cross-sectional view of the radiator of FIG. 5A, shown with an electrolysis prevention device **412** installed in place of the removable plug **43**; FIG. 6B is a front schematic view of the crossflow radiator of FIG. 5B, shown with an electrolysis prevention device **412** installed in place of the removable plug **43**; and FIG. 6C is a front schematic view of the downflow radiator of FIG. 5C, shown with an electrolysis prevention device **412** installed in place of the removable plug **43**.

Notably, in some embodiments, the radiator manufacturer provides the hole and the plug **43** for the hole, and the electrolysis prevention device **412** is installed by a mechanic in an after-market process, while in other embodiments, the radiator manufacturer installs the electrolysis prevention device **412** at time of manufacture.

FIG. 7A is a side view of the electrolysis prevention device **412** of FIGS. 6A-6C, comprising the sacrificial anode **13** and an anode holder **45** with a "pigtail" connector **47** into which the anode attaches. The "pigtail" connector **47** grounds the device **12** by attaching it to the vehicle's wiring harness, a suitable grounded location on the frame or cross member of the vehicle, or the like, via grounding wire **48**. As with previous embodiments, however, the device **412** optionally may or may not be grounded in this manner. FIG. 7B is a side view of an electrolysis prevention device shown in FIG. 7A wherein the anode **13** is attached into the anode holder **45** inserted in a hole in the wall of the radiator **11**. An o-ring **49** is also installed to protect against leaking. FIG. 7C is a side view of another electrolysis prevention device **512** for use in the radiators **11** of FIGS. 5A-5C, wherein a rubber seal **51** is utilized to hold the anode **13** in place in the hole of the radiator **11**.

FIGS. 11A-11C illustrate an alternative electrolysis prevention device **1112** for use in radiators **11** of FIGS. 5A-5C. FIG. 11A is a side view of the electrolysis prevention device **1112**, comprising a sacrificial anode **13** and a partially threaded anode holder **45** with a "pigtail" connector **47** into which the anode attaches. The sacrificial anode **13** is affixed to an anode support **19** which extends from one end of the anode holder **45**. The "pigtail" connector **47** grounds the device **1112** by attaching it to the vehicle's wiring harness, a suitable grounded location on the frame, or cross member of the vehicle, or the like, via grounding wire **48**. As with

previous embodiments, however, the device **1112** optionally may or may not be grounded in this manner.

FIG. **11B** is a cross-sectional view of the electrolysis prevention device **1112** shown in FIG. **11A**. As shown therein, the anode support **19** extends through the interior of the anode holder **45**, and is separated from the holder **45** by an insulating material **90**. Furthermore, in at least one preferred embodiment, the anode holder **45** has a small opening into which the ground wire **48** can extend, and thus be in electrical connection with the anode support **19**, grounding the device **1112**.

FIG. **11C** is a side view of the electrolysis prevention device **1112** of FIGS. **11A-11B**, wherein the device **1112** has been installed in a hole in a wall of a radiator **11**. An o-ring **49** is also installed on each side to seal the opening, thereby protecting against leakage. It will be appreciated that the dashed lines in FIG. **11C** illustrate where the anode holder passes through the radiator wall. The device **1112** is secured to the wall of the radiator **11** with a threaded nut **92** that has been screwed into the threaded end of the anode holder **45** such that the radiator wall is clamped between the threaded nut **92** and a flange on the anode holder **45**.

FIGS. **8A** and **8B** are side schematic views of two electrolysis prevention devices arranged at different angles to promote easy access. The first drawing depicts an electrolysis prevention device **612** arranged at a 90-degree angle. The second depiction is of an electrolysis prevention device **712** arranged at a 45-degree angle.

It will be appreciated that the various teachings described and illustrated herein may likewise be applied to protect a heater core from corrosion in a similar fashion. In this regard, it will be further appreciated that, because of their generally smaller size, heater cores may require the use of a sacrificial anode of different dimensions, and in particular may require the use of a thinner or slimmer anode and, in at least some cases, produce a correspondingly slimmer electrolysis prevention device. The change in dimension may be necessary to prevent damage to the heater core when mounted therein. FIG. **9A** is a side schematic of a heater core **811** having an electrolysis prevention device **812** in accordance with a sixth preferred embodiment of the present invention. The heater core **811** is typically located near the firewall **860**, with an inlet pipe **816** to which an inlet hose **821** is attached. An outlet hose (not shown) is likewise provided. The heater core **811** may be constructed of aluminum with aluminum tanks or plastic tanks. The sacrificial anode **813** can be clipped in, welded on, clamped on, or fastened by any method to protect against corrosion. The anode support **819** can be constructed from any metal, plastic, or other material that is capable of securing a sacrificial anode and attaching to the inlet pipe **816** of the heater core **811**. The sacrificial anode **813** that is enclosed within the device is allowed to be dropped into the radiator heater core **811**. This device "shortens" the inlet radiator hose and/or heater inlet hose in efforts to replicate all of the before mentioned electrolysis prevention devices in any form. As with previous embodiments, the device **812** optionally may or may not be connected via ground wire to the wiring harness, a suitable grounded location on the frame or cross member of the vehicle, or the like.

FIG. **9B** is an enlarged view of a portion of the inlet hose **821** and inlet pipe **816** of the heater core **811** of FIG. **9A** but with an alternative electrolysis prevention device **912** installed therein in accordance with a seventh preferred embodiment of the present invention. The device **912** includes a short pipe insert **970** connected to the inlet hose **821** and to which one end of an anode holder **919** is attached.

A sacrificial anode **913** is disposed at the opposite end of the anode holder **919**. The pipe insert **970** is connected to the inlet pipe **816** via a short rubber sleeve **972**. Clamps **974, 976, 978** are used to connect the hose **821** to the pipe insert **970** and the sleeve **972** to the pipe insert **970** and to the inlet pipe **816**. This device "shortens" the inlet radiator hose and/or heater inlet hose in efforts to replicate all of the before mentioned sacrificial anodes in any form. It will be appreciated that a similar device may be utilized with radiators **11**. As with previous embodiments, the device **912** optionally may or may not be connected via ground wire to the wiring harness, a suitable grounded location on the frame or cross member of the vehicle, or the like.

FIGS. **10A-10D** illustrate a radiator **211** having an electrolysis prevention shield **1012** in accordance with an eighth preferred embodiment of the present invention. FIG. **10A** is a front schematic view of a downflow aluminum radiator **211** with two vertically extending, metal mounting pegs **80**, each of which is covered by an electrolysis prevention shield **1012**. FIG. **10B** is an enlarged fragmentary front schematic view of a portion of the radiator **211** of FIG. **10A** showing the radiator **211** secured to a vehicle frame **82** via the mounting peg **80**. FIG. **10C** is an enlarged fragmentary top view of the portion of the radiator **211** of FIG. **10B**, further illustrating the radiator **211** secured to the vehicle frame **82**. FIG. **10D** is a front cross-sectional view of the portion of the radiator **211** of FIGS. **10B** and **10C** taken along line **10-10**. The electrolysis prevention shield **1012** comprises a sheathing of durable insulating material, such as rubber or plastic, that can be molded or otherwise affixed to a metal component of a radiator or heater core that is electrically exposed to metal components in the vehicle. The insulating material of the electrolysis prevention device **1012** acts as a barrier to prevent metal-on-metal contact which leads to electrolysis and eventually corrosion of portions of a radiator, thereby causing leaks. In at least one preferred embodiment, the device **1012** is comprised of insulating material, such as polyolefin or other "shrink wrap" polymers, that shrinks tightly over whatever it is covering when heat is applied.

As shown in FIGS. **10B-10D**, the mounting peg **80** secures the radiator **211** to an appropriate vehicle frame **82** by extending through a circular opening **86** in the frame **82** that is slightly larger than the diameter of the mounting peg **80**. In order to insulate the radiator **211** from vibration and other effects, the interface between the mounting peg **80** and the opening **86** is conventionally sealed with an o-ring **84**. However, it is believed that small electrical currents may continue to flow between the metal material of the frame **82** and the metal material of the mounting pegs **80**, and that such currents contribute the electrolysis problems described elsewhere herein. The electrolysis prevention shield **1012** shown herein aids in preventing this by completely surrounding the mounting peg **80**, shielding the mounting peg **80** from direct contact with both the o-ring **84** and the vehicle frame **82** and otherwise preventing current flow between the elements **80, 82**. The electrolysis prevention shield **1012** is perhaps best utilized with one or more of the various electrolysis prevention devices described elsewhere. In this regard, it will be appreciated that the broken lines of FIGS. **10B-10D** illustrate the portion of the mounting peg **80** that may be hidden beneath the electrolysis prevention shield **1012**, and that FIG. **10D** shows a cross-section of the electrolysis prevention shield **1012** "shrink-wrapped" or otherwise molded or assembled to tightly fit the shape and contour of the mounting peg **80**. The tight fit afforded thereby prevents the shield **1012** from becoming separated

11

or disconnected from the mounting peg **80** and thus provides better protection against any direct metal-on-metal contact.

Based on the foregoing information, it will be readily understood by those persons skilled in the art that the present invention is susceptible of broad utility and application. Many embodiments and adaptations of the present invention other than those specifically described herein, as well as many variations, modifications, and equivalent arrangements, will be apparent from or reasonably suggested by the present invention and the foregoing descriptions thereof, without departing from the substance or scope of the present invention.

Accordingly, while the present invention has been described herein in detail in relation to one or more preferred embodiments, it is to be understood that this disclosure is only illustrative and exemplary of the present invention and is made merely for the purpose of providing a full and enabling disclosure of the invention. The foregoing disclosure is not intended to be construed to limit the present invention or otherwise exclude any such other embodiments, adaptations, variations, modifications or equivalent arrangements; the present invention being limited only by the claims appended hereto and the equivalents thereof.

What is claimed is:

1. An electrolysis prevention device, for preventing corrosion caused by electrolysis, comprising:

a sacrificial anode made of an active metal; and
an anode holder supporting the sacrificial anode;
wherein the holder is adapted to fit around the inlet connection of an engine heat exchange component in such a way as to allow for a hose to be attached overtop the device.

2. The electrolysis prevention device of claim **1** wherein the sacrificial anode is made of aluminum.

3. The electrolysis prevention device of claim **1** wherein the sacrificial anode is made of magnesium.

4. The electrolysis prevention device of claim **1** wherein the sacrificial anode is made of zinc.

5. The electrolysis prevention device of claim **1** wherein the anode holder is grounded to a vehicle.

6. The electrolysis prevention device of claim **1** wherein an end of the anode holder is attached to an additional wire positioning the sacrificial anode further down into the flow of liquid coolant within the engine heat exchange component.

7. The electrolysis prevention device of claim **1** wherein the anode holder is connected to the engine heat exchange component by a clamp.

8. The electrolysis prevention device of claim **1** wherein the engine heat exchange component is a radiator.

9. The electrolysis prevention device of claim **1** wherein the engine heat exchange component is a heater core.

10. A radiator with the electrolysis prevention device of claim **1** in proximity to an inlet connection thereof.

11. A heater core with the electrolysis prevention device of claim **1** in proximity to an inlet connection thereof.

12. A method of preventing corrosion of [an engine heat exchange component] *a radiator, the method comprising [adding or]: installing a sacrificial anode assembly including a sacrificial anode within the [heat exchange component adjacent an inlet thereof] radiator, wherein the sacrificial anode is placed within 10 inches of a hot liquid inlet to the radiator.*

13. An electrolysis prevention device, for preventing corrosion caused by electrolysis, comprising:

a sacrificial anode made of an active metal; and
an anode holder supporting the sacrificial anode;

12

wherein the holder is adapted to fit through and around the inlet connection of an engine heat exchange component in such a way as to allow for a hose to be attached to and around the inlet connection without dislodging the holder.

14. A engine heat exchange component with the electrolysis prevention device of claim **13** installed such that the holder of the device extends through, and is doubled back around, the inlet connection and the sacrificial anode is disposed in proximity to the inlet connection.

15. *The method of claim 12, wherein the sacrificial anode consists essentially of an active metal.*

16. *The method of claim 15, wherein the sacrificial anode consists essentially of aluminum, magnesium, or zinc.*

17. *The method of claim 12, wherein installing the sacrificial anode assembly further comprises: installing the sacrificial anode assembly in a fitting hole in the radiator.*

18. *The method of claim 12, wherein the sacrificial anode is grounded.*

19. *The method of claim 12, wherein installing the sacrificial anode assembly further comprises: installing the sacrificial anode assembly within the fluid flow of the radiator.*

20. *The method of claim 12, wherein the radiator comprises aluminum.*

21. *The method of claim 12, wherein the hot liquid is coolant.*

22. *The method of claim 12, wherein the hot liquid is water.*

23. *The method of claim 12, wherein the hot liquid is antifreeze.*

24. *The method of claim 12, further comprising installing a second sacrificial anode assembly within the radiator.*

25. *A radiator for use in a motor vehicle, the radiator further comprising:*

a hot liquid inlet to the radiator from an engine of the motor vehicle, the hot liquid inlet providing fluid communication for fluid flow of hot liquid from the engine; and

a sacrificial anode installed within 10 inches of the hot liquid inlet of the radiator.

26. *The radiator of claim 25, wherein the sacrificial anode consists essentially of an active metal.*

27. *The radiator of claim 26, wherein the active metal is at least one of aluminum, magnesium, and zinc.*

28. *The radiator of claim 25 wherein the sacrificial anode is installed in a fitting hole penetrating the radiator.*

29. *The radiator of claim 25 wherein the sacrificial anode is installed onto a surface of the radiator.*

30. *The radiator of claim 25 wherein the sacrificial anode is grounded to the motor vehicle.*

31. *The radiator of claim 25 wherein the radiator comprises aluminum.*

32. *The radiator of claim 25 wherein the radiator enables air-cooling of the hot liquid.*

33. *The radiator of claim 25, further comprising a second sacrificial anode.*

34. *The radiator of claim 25, wherein the hot liquid is coolant.*

35. *The radiator of claim 25, wherein the hot liquid is water.*

36. *The radiator of claim 25, wherein the hot liquid is antifreeze.*

37. *An electrolysis prevention device for preventing corrosion, the electrolysis prevention device comprising: a sacrificial anode made of an active metal; and*

an anode holder supporting the sacrificial anode, the anode holder adapted for installation in an engine radiator within 10 inches of a hot liquid inlet to the engine radiator.

38. *The electrolysis prevention device of claim 37, 5 wherein the sacrificial anode comprises aluminum.*

39. *The electrolysis prevention device of claim 37, wherein the sacrificial anode comprises magnesium.*

40. *The electrolysis prevention device of claim 37, wherein the sacrificial anode comprises zinc. 10*

41. *The electrolysis prevention device of claim 37, wherein the engine radiator is used in a motor vehicle, and wherein the sacrificial anode is grounded to the motor vehicle.*

42. *The electrolysis prevention device of claim 37, 15 wherein the engine radiator comprises aluminum.*

43. *The electrolysis prevention device of claim 37, wherein the anode holder enables the sacrificial anode to be located within fluid flow of the hot coolant inlet.*

44. *The electrolysis prevention device of claim 37, 20 wherein the anode holder is installed in a fitting hole penetrating the engine radiator.*

45. *The electrolysis prevention device of claim 37, wherein the hot liquid is coolant.*

46. *The electrolysis prevention device of claim 37, 25 wherein the hot liquid is water.*

47. *The electrolysis prevention device of claim 37, wherein the hot liquid is antifreeze.*

* * * * *