


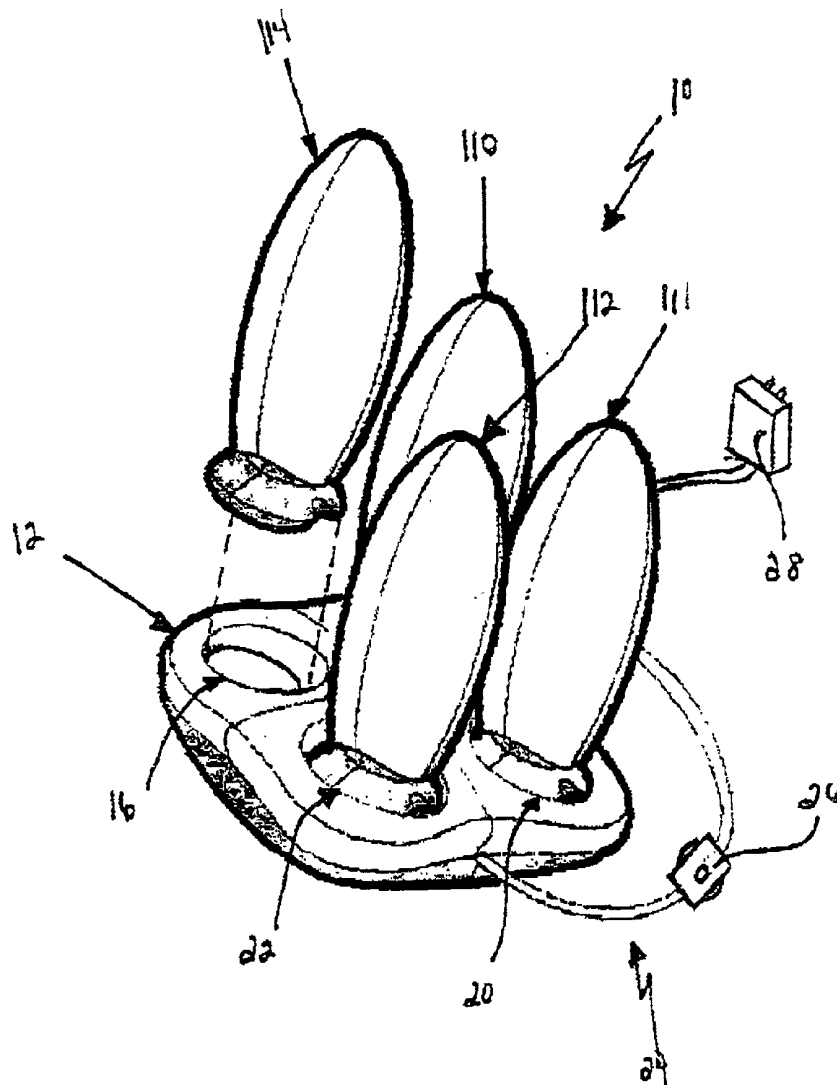

US 20010055207A1

(19) **United States**(12) **Patent Application Publication**
Barbeau et al.(10) **Pub. No.: US 2001/0055207 A1**(43) **Pub. Date: Dec. 27, 2001**(54) **RECHARGEABLE LAMP SYSTEM****Publication Classification**(76) Inventors: **Stefane E. Barbeau**, Roxbury, MA
(US); **Duane B. Smith**, Roxbury, MA
(US); **Donald Drumm**, Billerica, MA
(US)(51) **Int. Cl.⁷** **F21L 4/00**(52) **U.S. Cl.** **362/194**(57) **ABSTRACT**Correspondence Address:
Law Office of A. P. Durigon
20 Eustis Street
Cambridge, MA 02140 (US)(21) Appl. No.: **09/885,848**(22) Filed: **Jun. 20, 2001****Related U.S. Application Data**(63) Non-provisional of provisional application No.
60/214,095, filed on Jun. 26, 2000.

A rechargeable lamp system includes a set of one or more self-standing rechargeable lighting fixtures (luminaries) removably received on a recharging platter. The luminaries each include a light diffuser resembling a candle that turn on when removed from the charging platter. The luminaries also turn on when power to the charging platter is turned off, which allows the set to be used as a table lamp, and has the added benefit of turning the luminaries on automatically during a power failure. The luminaries are each inductively coupled to the recharging platter, which enables to provide an aesthetically pleasing interface free of electrical contacts.



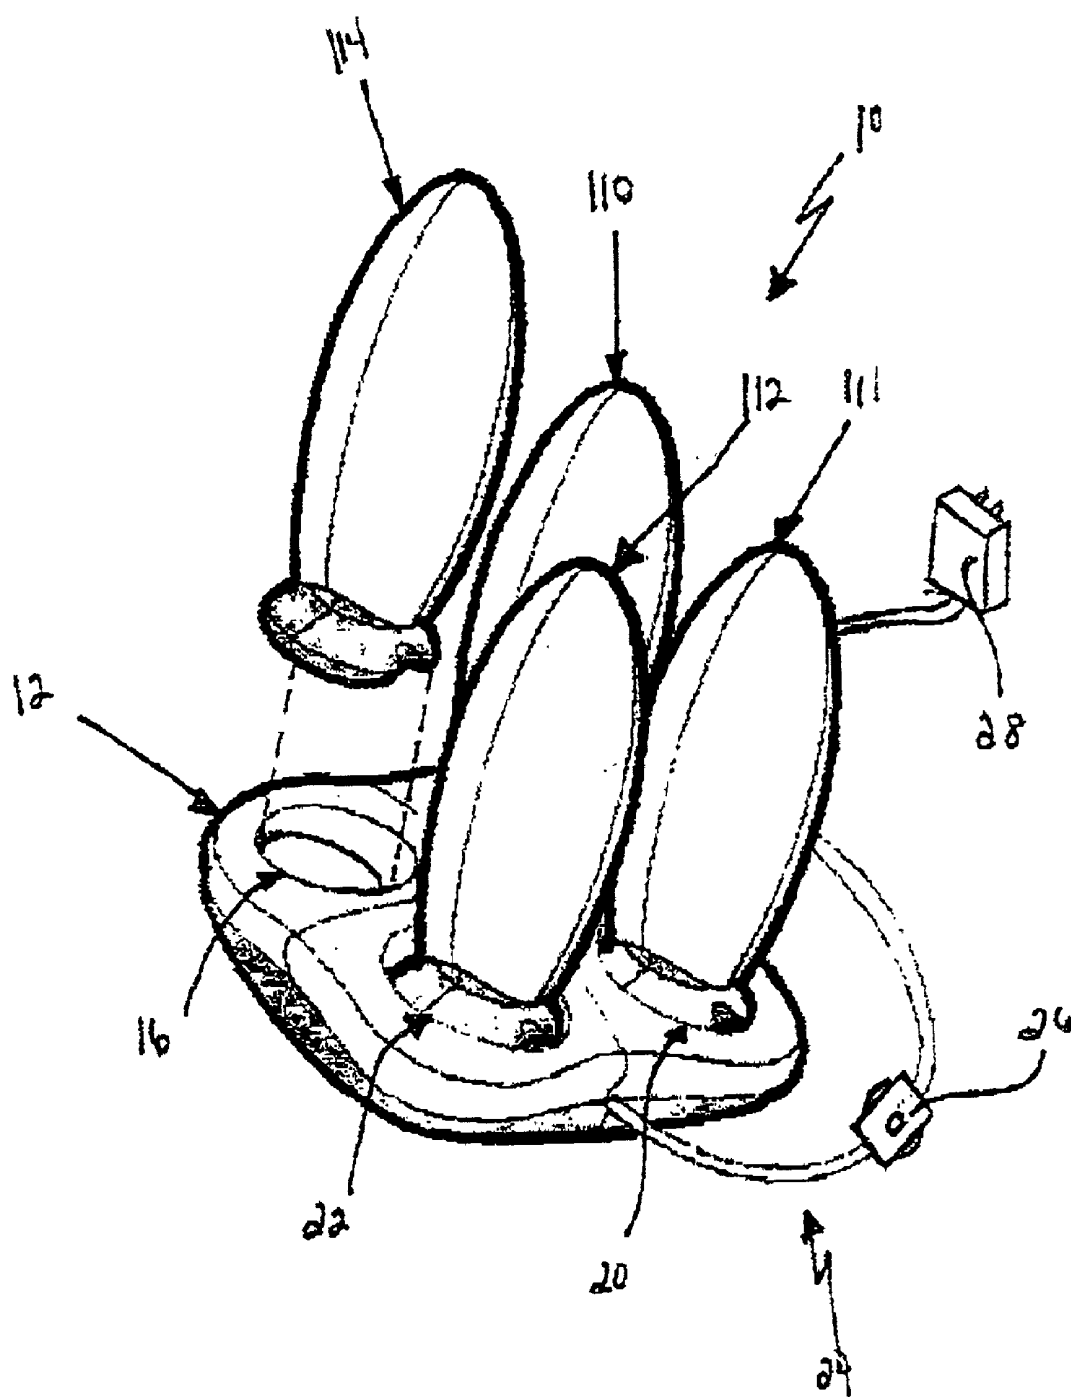


FIG. 1

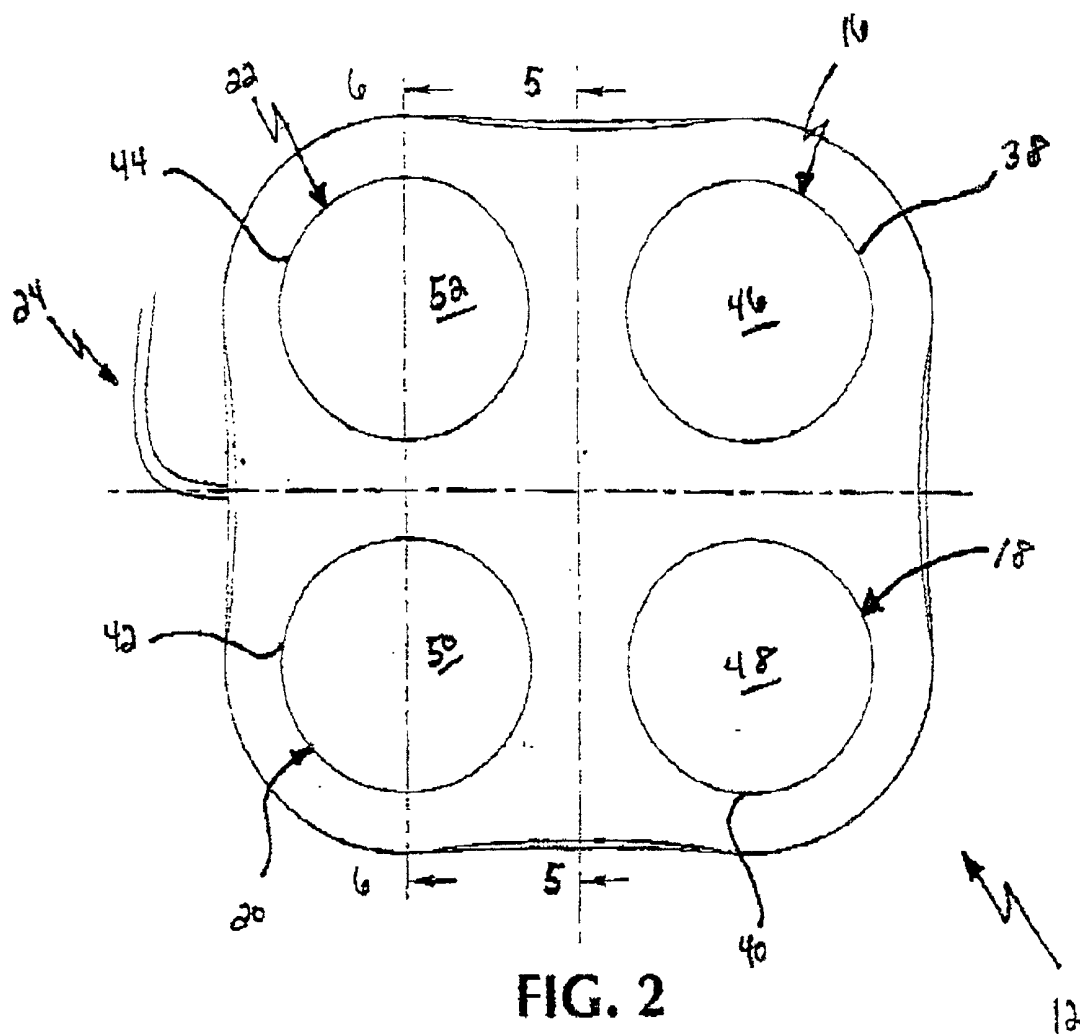


FIG. 2

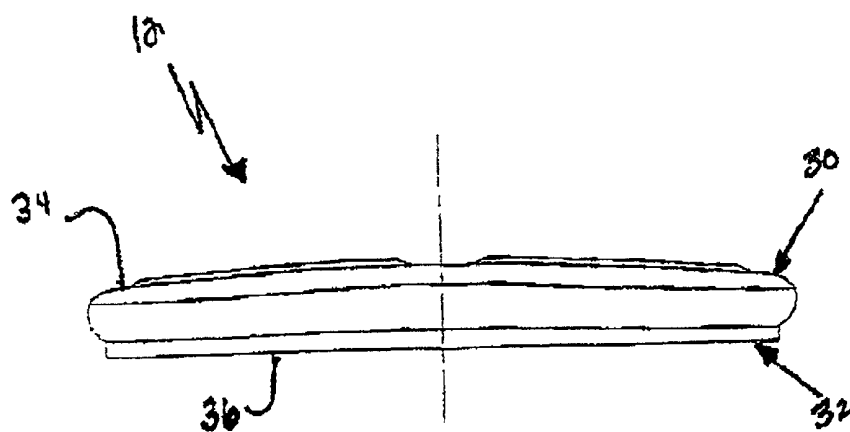


FIG. 3

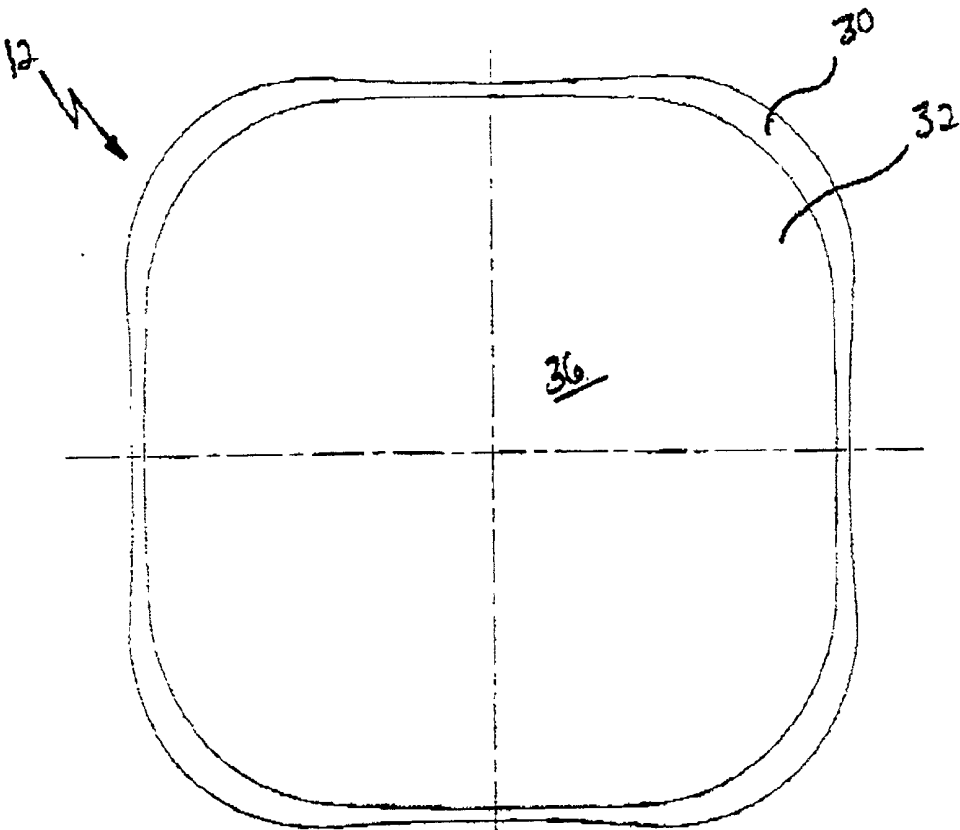


FIG. 4

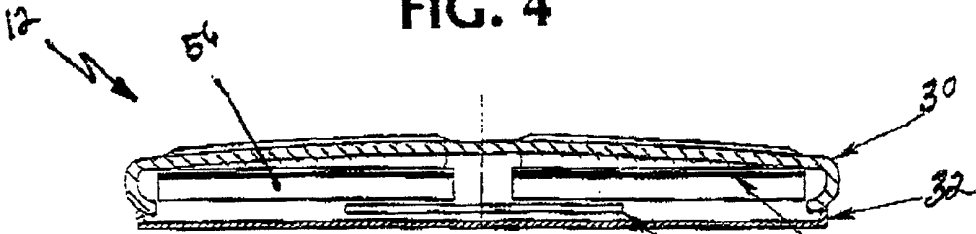


FIG. 5

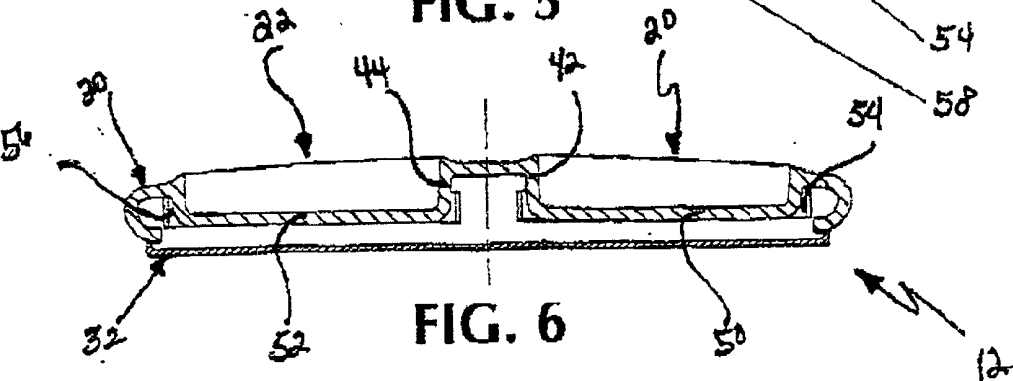


FIG. 6

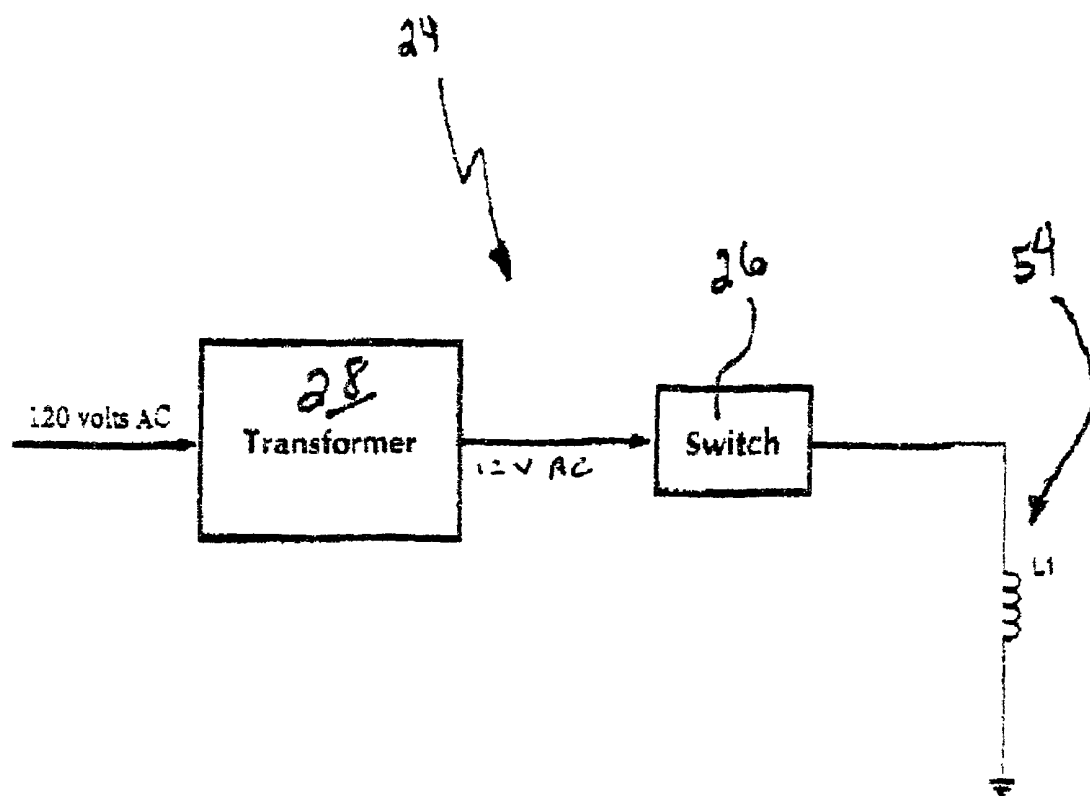


FIG. 7

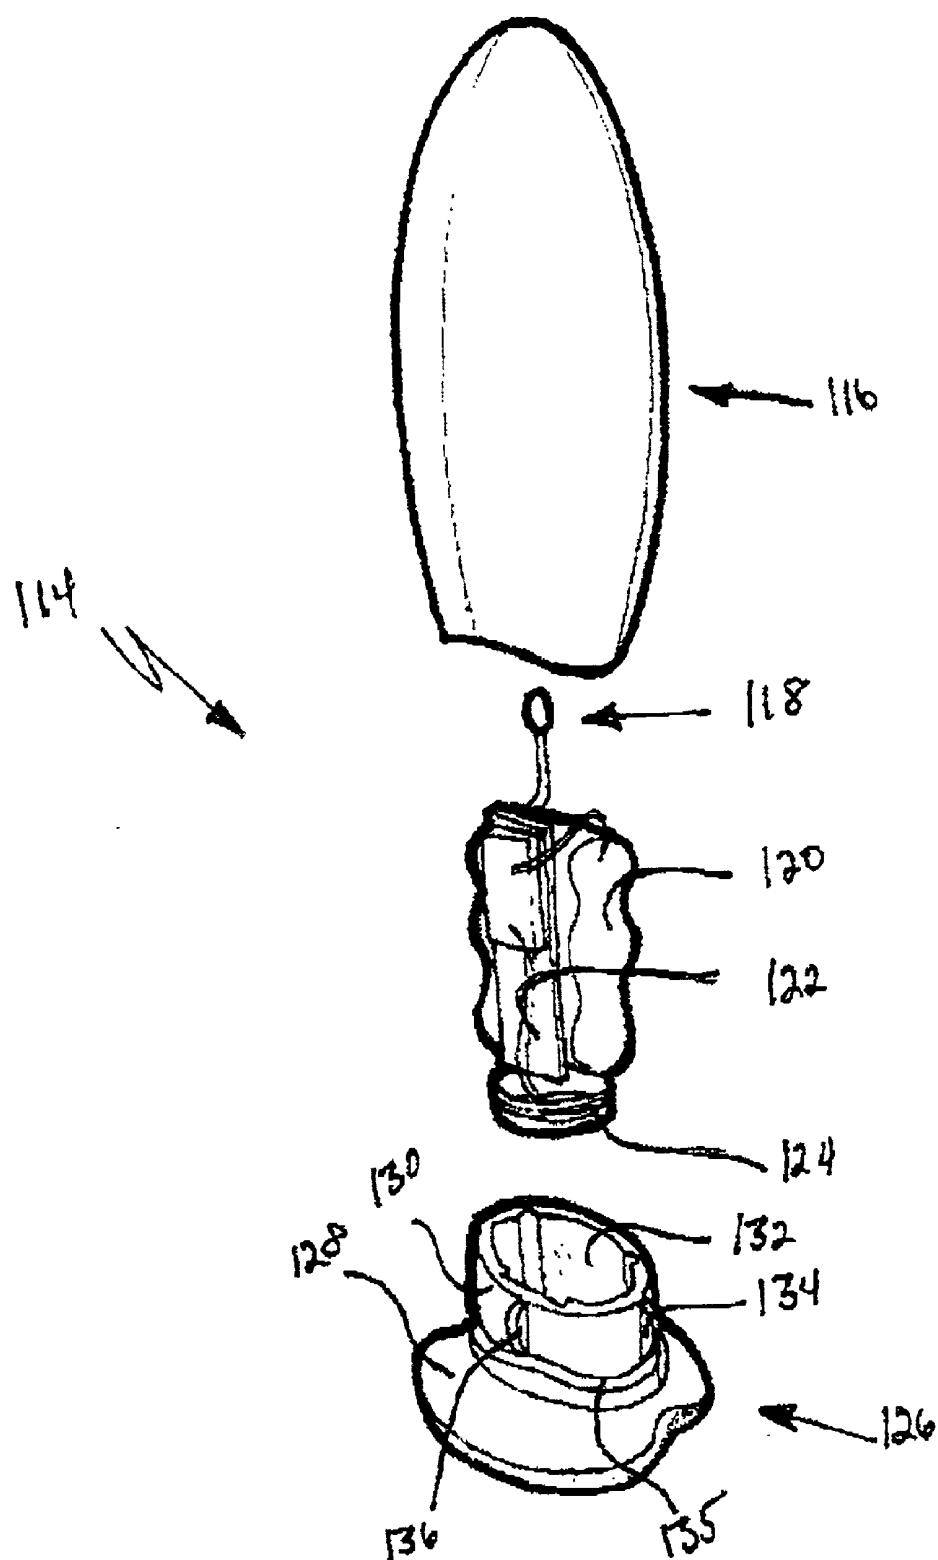


FIG. 8

FIG. 11

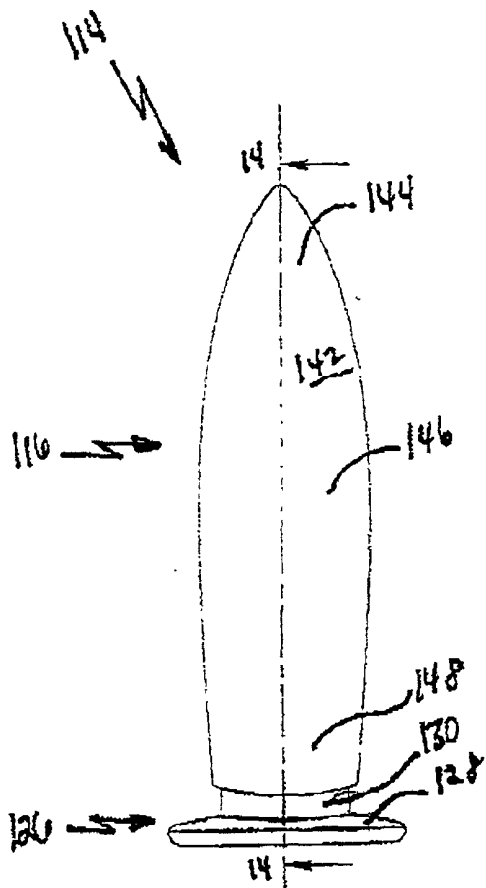
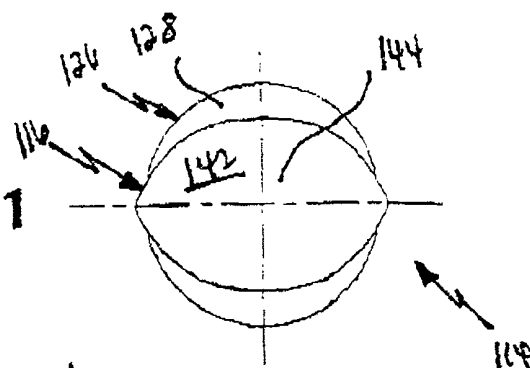


FIG. 10

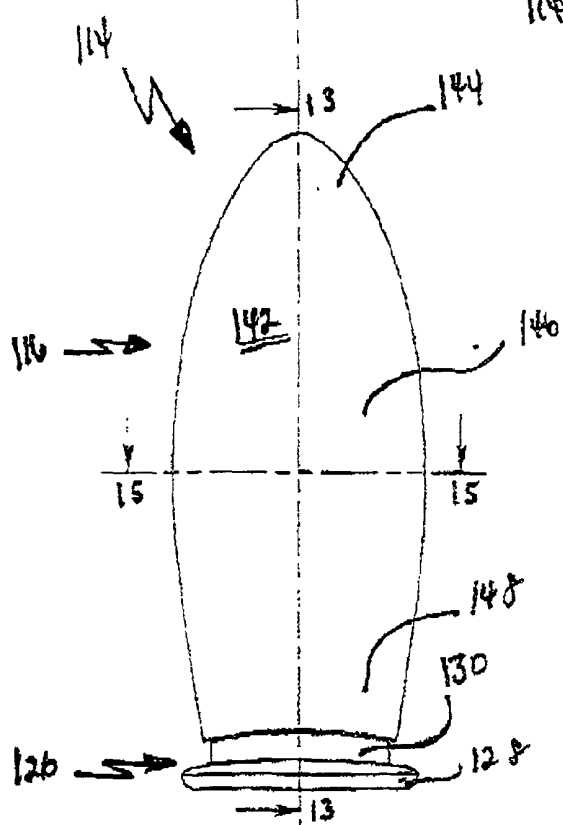
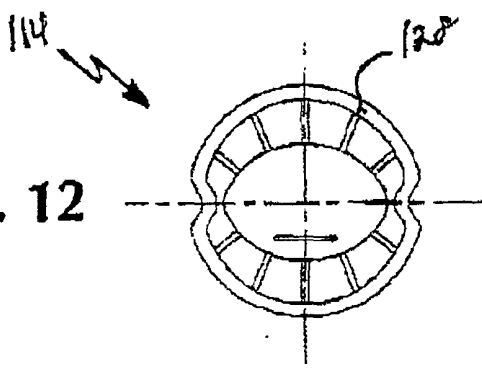


FIG. 9

FIG. 12



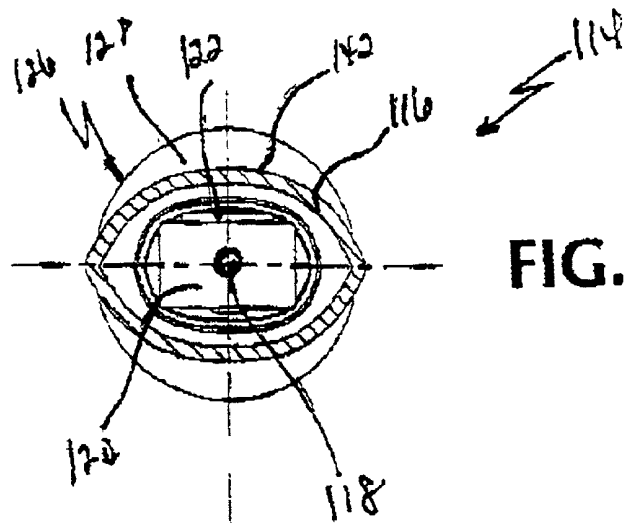


FIG. 15

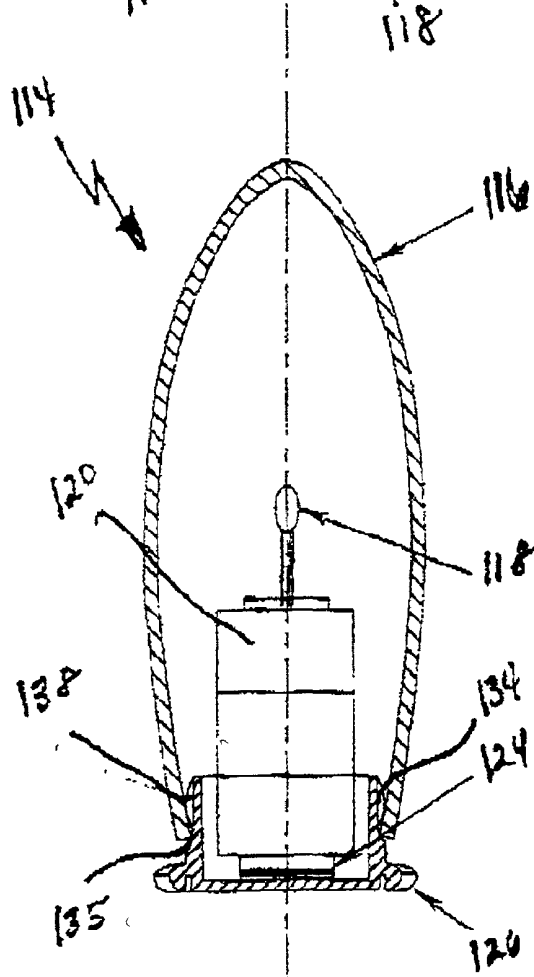


FIG. 14

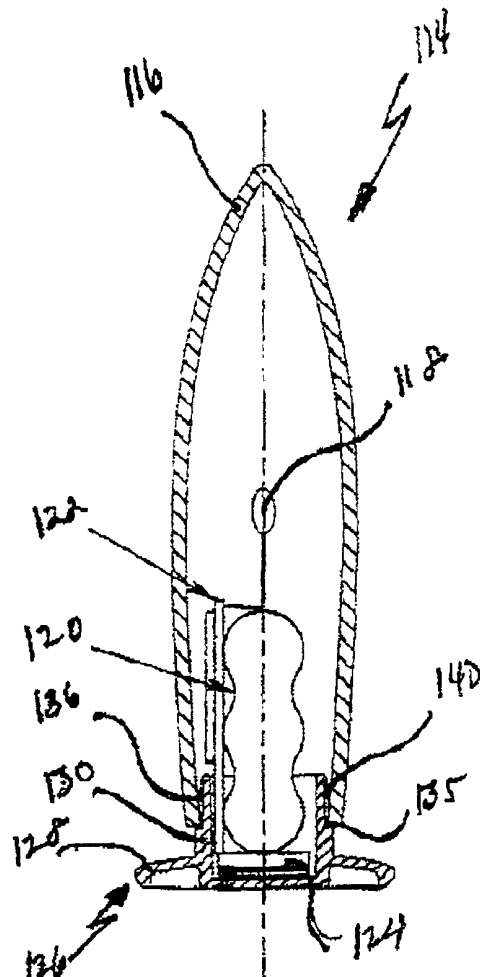


FIG. 13

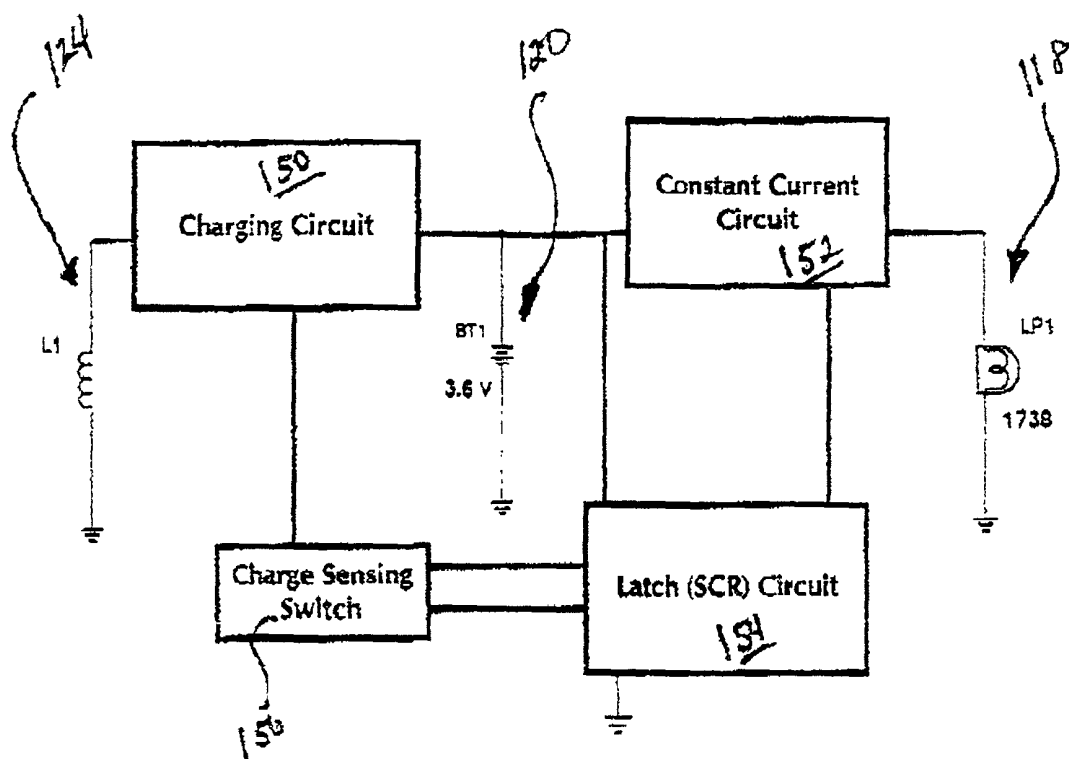


FIG. 16

RECHARGEABLE LAMP SYSTEM

FIELD OF THE INVENTION

[0001] The present invention is drawn to the field of illumination, and more particularly, to a novel rechargeable lamp system.

BACKGROUND OF THE INVENTION

[0002] Candles may be moved and placed to provide illumination and/or ambience. While their utilitarian and aesthetic advantages are well-known, candles suffer from an undesirable self-consumption, needing to be replaced when used-up; produce smoke especially when snuffed, which may foul the air; require vigilant attendance to mitigate an ever-present fire hazard; are susceptible to being extinguished by gusts of air when used outdoors or moved around; and may give rise to undesirable wax build-up, which in many instances needs removed from candle support members or underlying structures.

[0003] There is thus a need to provide a rechargeable lamp system that enjoys the many utilitarian and aesthetic advantages of candles but is not subject to their disadvantages.

SUMMARY OF THE INVENTION

[0004] It is accordingly a general object of the present invention to disclose a rechargeable lamp system that provides candle-like lighting for indoor or outdoor use that avoids the problems associated with candles.

[0005] In accordance therewith, the rechargeable lamp system of the present invention includes a recharging platter adapted to receive a set of luminaries including a first circuit coupled to each luminary of said set of luminaries received thereon operative in response to supplied AC power to provide a charge signal to each luminary of said set of luminaries received thereon; and a set of luminaries each having a light emitting element connected to a rechargeable battery pack via a second circuit operative in one mode to charge said rechargeable battery pack in response to said charge signal when each luminary of said set of luminaries is received on said recharging platter and operative in another mode to activate said light emitting element in response to the absence of said signal, whereby, each said luminary lights if removed from said recharging platter and lights if no AC power is supplied to said recharging platter when received therein.

[0006] In the presently preferred embodiments, the set of luminaries includes one or more luminaries each of which is inductively coupled to the first circuit of the recharging platter. The inductive coupling provides automatic, hands-free recharging of the rechargeable battery pack of a luminary upon its receipt by the recharging platter, and provides automatic, hands-free actuation of a luminary when it is removed therefrom.

[0007] In the presently preferred embodiments, each luminary of the set of luminaries is self-standing and includes a diffusor that may be shaped to resemble a candle releasably mounted to a base member supporting said light emitting element therewithin.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] These and other objects, advantageous features and inventive aspects of the present invention will be more fully

appreciated as the same becomes better understood from the following detailed description of the preferred embodiments when considered in connection with the accompanying drawings, in which:

[0009] FIG. 1 is a perspective view of an exemplary embodiment of the present invention, showing a charging stand and one lamp module;

[0010] FIG. 2 is a top view of the charging stand;

[0011] FIG. 3 is a front view of the charging stand;

[0012] FIG. 4 is a bottom view of the charging stand;

[0013] FIG. 5 is a sectional view of the charging stand, taken along line 5-5 of FIG. 2;

[0014] FIG. 6 is a sectional view of the charging stand, taken along line 6-6 of FIG. 2;

[0015] FIG. 7 is a circuit diagram of the charging stand circuit;

[0016] FIG. 8 is an exploded perspective view of an exemplary embodiment of a lamp module according to the present invention;

[0017] FIG. 9 is a front view of the lamp module;

[0018] FIG. 10 is a right side view of the lamp module;

[0019] FIG. 11 is a top view of the lamp module;

[0020] FIG. 12 is a bottom view of the lamp module;

[0021] FIG. 13 is a sectional view of the lamp module taken along line 13-13 of FIG. 9;

[0022] FIG. 14 is a sectional view of the lamp module taken along line 14-14 of FIG. 10.

[0023] FIG. 15 is a sectional view of the lamp module taken along line 15-15 of FIG. 9; and

[0024] FIG. 16 is an exemplary embodiment of a circuit diagram of the lamp module circuit board according to the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0025] Referring now to FIG. 1, reference numeral 10 generally refers to the rechargeable lamp system of the present invention. Lamp system 10 comprises a charging stand 12 and a plurality of lamp modules 110, 111, 112 and 114.

[0026] As shown in FIGS. 1 and 2, stand 12 comprises slots 16, 18, 20 and 22 which are each adapted to removably receive one of said lamp modules 110, 111, 112 and 114. Slots 16, 18, 20 and 22 each include a respective cylindrical wall 38, 40, 42, and 44 and a substantially planar floor 46, 48, 50 and 52.

[0027] A power cord 24 having an inline power switch 26 and a "wall-block" style transformer provides power to charging stand 12 via ordinary 120-volt household current. In alternate embodiments, the transformer may be dispensed with.

[0028] As will be described in greater detail herein, each of modules 110, 111, 112 and 114 is battery-powered and designed to be charged by magnetic induction when placed

in a respective one of slots **16**, **18**, **20** and **22**. Modules **110**, **111**, **112** and **114** are each designed to illuminate when removed from slots **16**, **18**, **20** and **22**, or when AC power is cut off to charging stand **12**.

[0029] The number of lamp modules (and a corresponding slot for each module) shown in the preferred embodiment is intended to be merely exemplary. It should be understood that the lamp system **10** of the present invention may be constructed with any number of modules.

[0030] Referring now to FIGS. 3-4, stand **12** also includes an upper portion **30** and a lower portion **32**. In an exemplary embodiment, upper portion **30** is ceramic. However, upper portion **30** may be made from other suitable materials, such as wood or plastic. In the interest of economy, lower portion **32** in the exemplary embodiment is formed of injection-molded plastic, but may as well be made of other suitable materials, such as steel or other metal or other material. In the exemplary embodiment, upper portion **30** and lower portion **32** snap together. However, any suitable means, such as bonding, screws, etc. could be used to secure upper portion **30** and lower portion **32**.

[0031] As shown in FIGS. 2, 5 and 6, stand **12** further includes a circuit board **58** which is hardwired to cord **24** and four primary induction coils (wired in parallel), one coil encircling each of walls **38**, **40**, **42** and **44**, respectively. FIG. 5 shows a pair of primary induction coils **54** and **56** that encircle walls **44** and **42**, respectively. Identical primary coils (not shown) encircle walls **38** and **40**.

[0032] FIG. 7 shows the circuit formed by transformer **28**, inline power switch **26**, and primary induction coil **54**. As shown in FIG. 7, transformer **28** converts 120 volts AC to 12 volts AC. The three other primary induction coils, not shown, are preferably wired in parallel with primary induction coil **54**. In other embodiments, the transformer component can be replaced by the inductor coils (on the platter and luminaries), whose turn-ratios are selected to provide a stepped-down voltage to the lamps. As will be appreciated by those of skill in the art, an oscillator providing frequencies higher than line frequency may be employed to improve efficiency (inductor size and attendant cost).

[0033] Modules **110**, **111** and **112** are identical to module **114**. Thus, it will only be necessary to describe module **114** in detail.

[0034] As shown in FIGS. 8-16, module **114** comprises a diffuser **116**, a light bulb **118**, a battery pack **120**, a circuit board **122**, a secondary induction coil **124** and a base **126**.

[0035] Diffuser **116** in the exemplary embodiment is formed of blow-molded plastic (or glass) having a frosted outer surface **142**. It could also be injection-molded plastic with a frosted, translucent finish. In the exemplary embodiment, diffuser **116** is slender and elongated in shape and includes a mid-section **146** that tapers upwardly to a tip **144** and tapers slightly to a tail **148**. This shape is chosen to provide optimal light color and transmission, as well as even diffusion of light from bulb **118**. Obviously, numerous alternative shapes for diffuser **116** are possible. However, the internal volume created by diffuser **116** must be sufficient to envelop bulb **118**, battery pack **120** and circuit board **122**. In addition, because of the heat generated by bulb **118**, it is desirable to provide air space between bulb **118** and diffuser **116** to prevent diffuser **118** from melting or deforming.

[0036] Base **126** comprises a lower portion **128** that provides stable support for module **114** when placed on a level

surface or within slot **16**. Neck **130** is adapted to removably receive diffuser **116** (to enable access to bulb **118** and battery pack **120**). Neck **130** includes tabs **134**, **136**, **138** and **140** and a lip **135** that cooperate to secure tail **148** of module **114** to neck **130** (see FIGS. 8, 13 and 14).

[0037] Battery pack **120** in the exemplary embodiment comprises three "AA" Nickel-Cadmium (Ni-Cad) cells wrapped in PVC shrink-wrap and having a total output of 3.6 Vdc and 500-800 mA. Of course, other types and sizes of rechargeable cells, such as Nickel-Metal-Hydride or Lithium cells, could be substituted for the Ni-Cad cells. Such cells would provide more power, and charge more quickly than Ni-Cads, but are substantially more expensive.

[0038] The power requirements for bulb **118** are, of course, chosen to match the power output of battery pack **120**. In the exemplary embodiment, bulb **118** is a conventional miniature incandescent bulb, such as Chicago Miniature Lamp, Inc. part #CM1738, having an output of 1 candela and having design power requirements of 2.80V and 60 mA and an expected life of 6,000 hours. Of course, other lamps and types of light sources, such as a light-emitting diode (L.E.D.) may be substituted for bulb **118**. The incandescent bulb shown is preferred because of its balance of cost, heat generation, power consumption, expected service life and brightness characteristics.

[0039] As shown in FIGS. 13 and 14, bulb **118** and battery pack **120** are preferably hard-wired to circuit board **122**. As shown in FIG. 16, circuit board **122** comprises four primary circuits that control the charging of battery pack **120** and the lighting of bulb **118**.

[0040] A charging circuit **150** regulates the voltage and current flowing to battery pack **120** from secondary induction coil **124** to prevent damage to battery pack **120**. A latch circuit **154** cuts off current to bulb **118** when the voltage output of battery pack **120** drops below 3.1 volts, thus preventing damage to battery pack **120** which could be caused by fully draining battery pack **120**. A charge-sensing switch **156** works in cooperation with latch circuit **154** to turn off current to bulb **118** when current is detected in charging circuit **150**. A constant current source circuit **152** provides a constant flow of current (65 mA in the exemplary embodiment) to bulb **118**. This enables bulb **118** to shine at a constant brightness despite fluctuations in the output current from battery pack **120**. In alternate embodiments, a constant voltage source could be employed.

[0041] As described above, battery pack **120** is charged by magnetic induction. The magnetic field created by primary induction coil **54** (when current is applied) induces a current in secondary induction coil **124** when secondary induction coil **124** is concentrically located relative to primary induction coil **54**. In the present invention, this occurs when module **114** is placed within slot **16** (see FIG. 1).

[0042] It is preferable to ship battery pack **120** fully charged, as this will increase the shelf life of the Ni-Cad cells. However, shipping battery pack **120** fully charged requires the inclusion of means for electrically isolating battery pack **120** from lamp **118** between the time battery pack **120** is charged and when module **114** is first used by an end consumer. Such means could comprise a Mylar tab (not shown) inserted between two electrical contacts after the initial charging which would be removed by the consumer before first use. Alternatively, such means could comprise a fusible link (not shown). The fusible link would be adapted to close current regulating circuit **152** when current is sensed in charging circuit **150** (i.e., the first time the consumer plugs in charging stand **12**).

[0043] Operation of lamp system 10 is elegantly straightforward. As described above, bulb 118 is designed to illuminate when no current is sensed in charging circuit 150. Thus, bulb 118 will automatically turn on when module 114 is removed from slot 16. Charging stand 12 and module 114 can also function as a table lamp by leaving module 114 in slot 16 and switching off inline power switch 26. Module 114 also functions as an emergency light—automatically turning on during a power failure.

[0044] The present invention in its broader aspects is not limited to the described embodiments, and departures may be made therefrom without departing from the principles of the invention and without sacrificing its primary advantages. Obviously, numerous modifications may be made to the present invention. Thus, the invention may be practiced otherwise than as specifically described herein.

What is claimed is:

1. A rechargeable lamp system, comprising:

a recharging platter adapted to receive a set of luminaries including a first circuit coupled to each luminary of said set of luminaries received thereon operative in response to supplied AC power to provide a charge signal to each luminary of said set of luminaries; and

a set of luminaries each having a light emitting element connected to a rechargeable battery pack via a second circuit operative in one mode to charge said rechargeable battery pack in response to said charge signal when each said luminary of said set of luminaries is received on said recharging platter and operative in another mode to activate said light emitting element in response to the absence of said charge signal, whereby, each said luminary of said set of luminaries lights if removed from said recharging platter and lights if no AC power is supplied to said recharging platter when received therein.

2. The rechargeable lamp system of claim 1, wherein said first circuit includes a manually actuated switch, and wherein each said luminary of said set of luminaries lights if no AC power is supplied in response to turning off said manually actuated switch.

3. The rechargeable lamp system of claim 1, wherein each said luminary of said set of luminaries lights if no AC power is supplied in response to an AC power service failure.

4. The rechargeable lamp system of claim 1, wherein the set of luminaries includes one or more luminaries.

5. The rechargeable lamp system of claim 4, wherein each luminary of said set of luminaries is inductively coupled to said charge signal provided by said first circuit of said recharging platter.

6. The rechargeable lamp system of claim 1, wherein, each luminary of said set of luminaries is self-standing and includes a diffusor.

7. The rechargeable lamp system of claim 6, wherein said diffusor of each luminary of said set of luminaries is mounted to a base member supporting said light emitting element therewithin.

8. The rechargeable lamp system of claim 6, wherein said diffusor is shaped to resemble a candle and is releasably mounted to said base member supporting said light emitting element therewithin.

9. The rechargeable lamp system of claim 1, wherein said first circuit includes an inductor responsive to said supplied AC signal to provide an inductive charge signal.

10. The rechargeable lamp system of claim 9, wherein said second circuit includes a latch controlled by a charge signal sensing switch to interrupt power from the battery pack to said light emitting element when no charge signal is sensed.

11. The rechargeable lamp of claim 10, wherein said second circuit includes an inductor responsive to said inductive charge signal to inductively couple the same to said rechargeable battery pack.

12. A rechargeable lamp system, comprising:

a cradle removably receiving a set of luminaries including a charge circuit providing a charge signal to each luminary of said set of luminaries received on said cradle;

a set of luminaries each including a lamp connected to a rechargeable battery pack; and

means for inductively coupling the rechargeable battery pack of each luminary to said charge signal when received on said cradle.

13. The rechargeable lamp system of claim 12, wherein said set includes at least one luminary.

14. The rechargeable lamp system of claim 13, wherein each said luminary has a body portion adapted to be cradled, and wherein said means includes an induction coil on said body portion of each said luminary and an induction coil on said cradle cooperative with said induction coil on said body portion of each said luminary.

15. The rechargeable lamp system of claim 12, wherein each luminary includes a diffusor mounted to a self-standing base member.

16. The rechargeable lamp system of claim 12, wherein said cradle is a platter.

17. A rechargeable lamp system, comprising:

a platter removably receiving a set of luminaries including a charge circuit providing a charge signal to each luminary of said set of luminaries received on said platter;

a set of luminaries each including a lamp and a rechargeable battery pack connected to said lamp; and

means responsive to said charge signal for lighting said lamp of each luminary in response to interruption of said charge signal.

18. The rechargeable lamp system of claim 17, wherein said set includes one or more luminaries.

19. The rechargeable lamp system of claim 18, wherein said means includes a manually actuated switch coupled to said cradle.

20. The rechargeable lamp system of claim 18, wherein said means includes a circuit coupled to each luminary including a charge signal sensing switch responsive to interruption of said charge signal to light each luminary.

* * * * *